



## INSTALLATION INSTRUCTIONS



# ENGINE MODIFICATIONS FOR O-RING DISTRIBUTORS

### GENERAL INFORMATION

Some distributors for Chevrolet engines have two o-ring grooves on the lower shank. These distributors require the engine block's distributor hole and oil gallery holes chamfered approximately 0.060" x 30°. This is to remove the sharp (cutting) edges of the distributor hole and oil gallery holes.

**DO NOT USE O-RINGS IF THE ENGINE IS NOT MODIFIED.**

The o-rings will be damaged during the installation of the distributor and debris from the o-rings will fall into the crankcase or lodge in the oil gallery. If the engine is not modified install the distributor without o-rings.

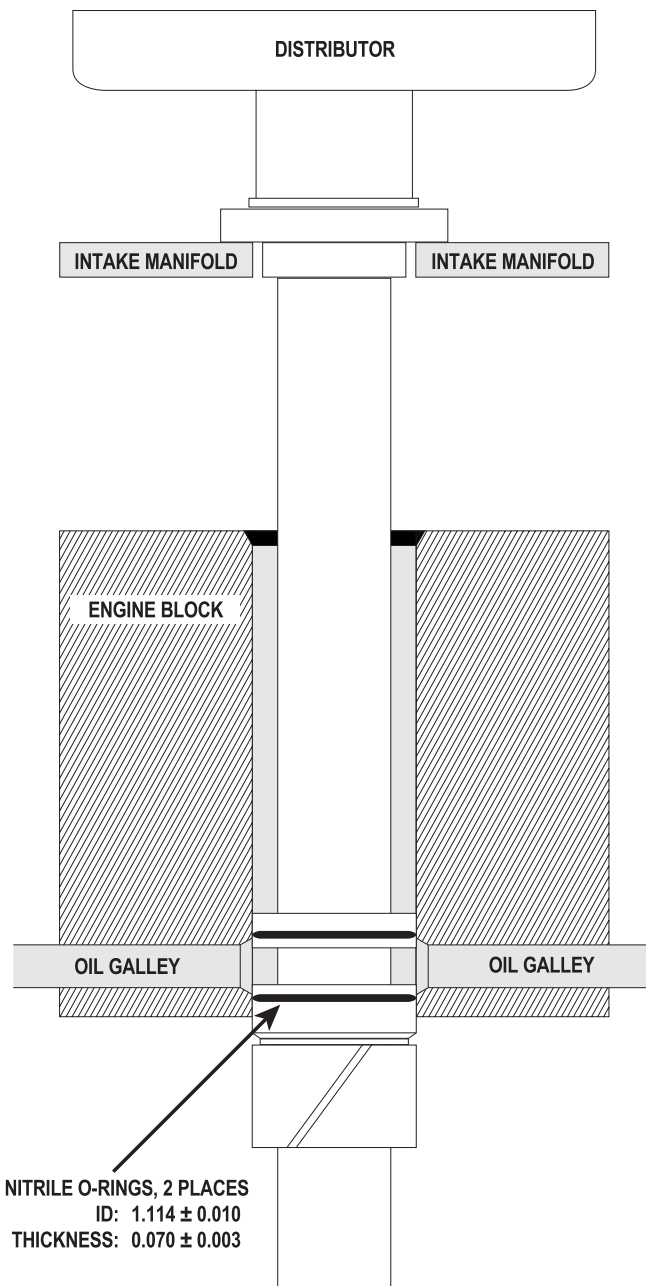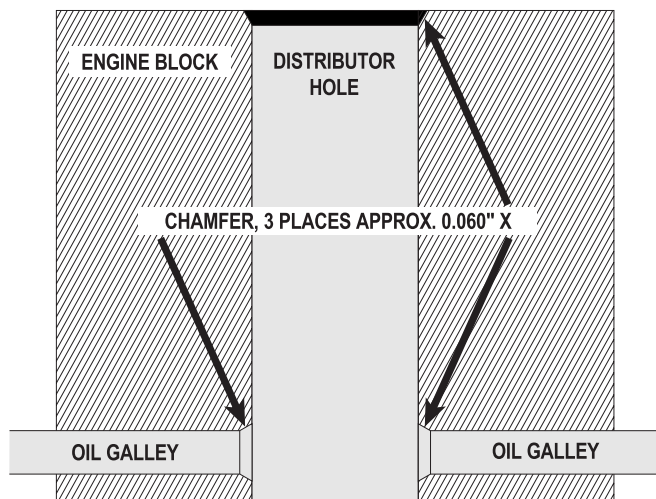

MALLORY IS A DIVISION OF THE MR. GASKET PERFORMANCE GROUP  
10601 MEMPHIS AVE. #12, CLEVELAND, OH 44144  
216.688.8300 FAX 216.688.8306  
www.mrgasket.com

FORM 1361  
(REV. B) 02/03  
Made in U.S.A.  
Printed in U.S.A.