

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0003092151](#)
Status: **Active**
Overview: [standard_093](#)
Description: 2.36mm (.093") Diameter Standard .093 Pin and Socket Plug Housing, 15 Circuits, 3 Rows, without Panel Mount Ears, with Pull Tabs, without Passive Lock Windows

Documents:

3D Model	Product Specification PS-1375-001 (PDF)
Packaging Specification (PDF)	Product Specification PS-1375-002 (PDF)
Drawing (PDF)	Product Specification PS-42477 (PDF)
Product Specification PS-02-09 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Crimp Housings
Series	1375
Comments	12.5A max. can be achieved when housing is used with 42477 or 42478 terminals
Overview	standard_093
Product Name	Standard .093"

Physical

Circuits (maximum)	15
Color - Resin	Natural
Flammability	94V-2
Gender	Dual
Glow-Wire Compliant	No
Lock to Mating Part	None
Material - Resin	Nylon
Number of Rows	3
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.198 In
Pitch - Mating Interface (mm)	5.03 mm
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical


Current - Maximum per Contact	9.5A
-------------------------------	------

Material Info

Old Part Number	1375-P
-----------------	--------

Reference - Drawing Numbers

Packaging Specification	PK-1375-001
Product Specification	PS-02-09, PS-1375-001, PS-1375-002, PS-42477
Sales Drawing	SD-1375-*



Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No
Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[1375Series](#)

Mates With

[03091151](#) , [03091152](#)

Use With

[1189](#) Crimp Terminals, [1190](#) Crimp Terminals, [1376](#) Male PC Tail Terminals, [1377](#) Female PC Tail Terminals, [1380](#) Male Crimp Terminals, [1381](#) Female Crimp Terminals, [1433](#) Crimp Terminals, [1434](#) Male Crimp Terminals, [1973](#) , [2151](#) , [2273](#) , [2870](#) , [2871](#) , [4272](#) , [4550](#) , [6271](#) , [6310](#) , [42477](#) , [42478](#)

13

12

11

10

9

8

7

6

5

4

3

2

1

J

I

H

G

F


E

D

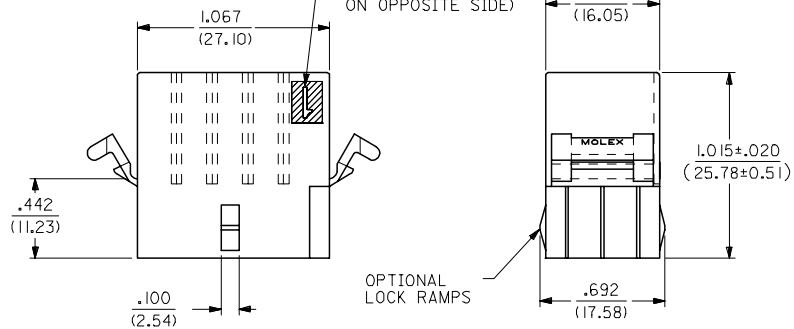
C

B



A

OPTIONAL
MOUNTING EARS

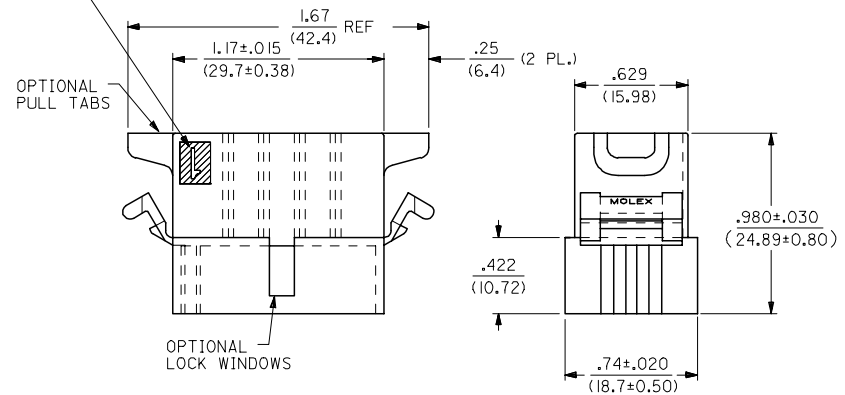
CIRCUIT NUMBERS

CIRCUIT I.D. NUMBERS
(NOS. 3 & 15 SHOWN
ON OPPOSITE SIDE)OPTIONAL
LOCK RAMPs.198
(5.03) TYP..563
(14.30).198
(5.03) TYP.


RECEPTACLE

OPTIONAL
MOUNTING EARS

CIRCUIT NUMBERS

CIRCUIT I.D. NUMBERS
(NOS. 3 & 15 SHOWN
ON OPPOSITE SIDE)OPTIONAL
PULL TABsOPTIONAL
LOCK WINDOWS.198
(5.03) TYP..563
(14.30).198
(5.03) TYP.

PLUG



UPDATE TITLE BLOCK EC NO: UCP2007-2415 DRAWN: AELHAG CHKD: LSHMIDT APPR: FSM TH	2007/04/17 2007/05/03 2007/05/03	DESCRIPTION REV AE	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .014 1 PLACE ± 0.35 ± --- ANGULAR ±1/2°	DIMENSION STYLE IN/MM DRAWN BY KBW CHECKED BY RW APPROVED BY RAS MATERIAL NO. SEE CHART	SCALE 2:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION	.093/(2.36) HOUSINGS PLUG & RECEPTACLE 15 CIRCUIT, .198/(5.03) CL	mox MOLEX INCORPORATED	SHEET NO. 1 OF 2

12

11

10

9

8

7

6

5

4

3

2

1

[illegible]