


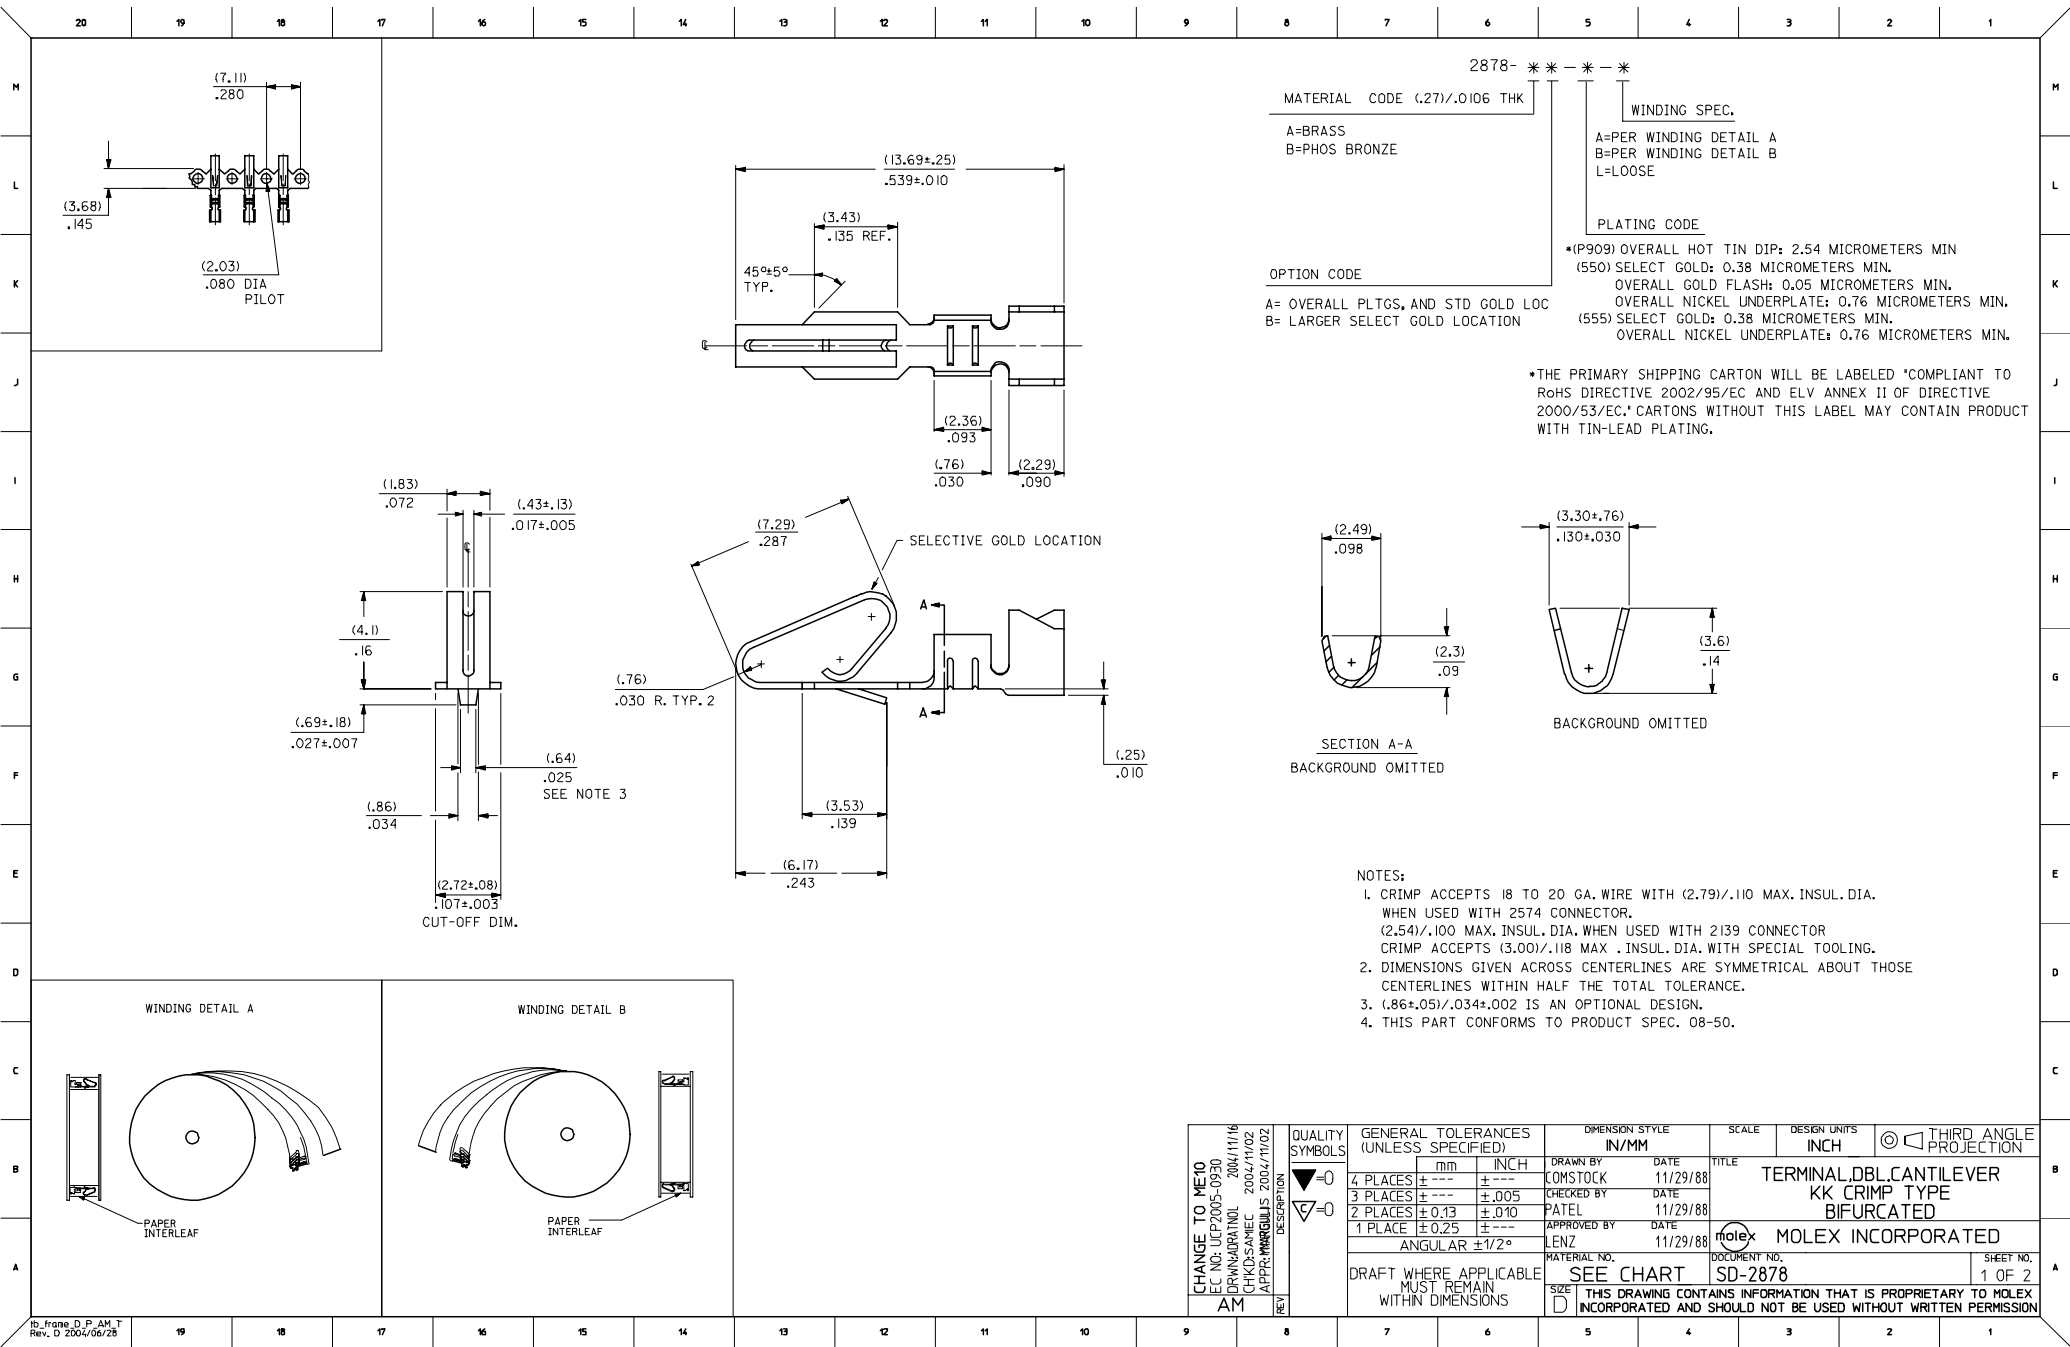

NOTES:

1. CRIMP ACCEPTS 18 TO 20 GA. WIRE WITH (2.79)/.110 MAX. INSUL. DIA. WHEN USED WITH 2574 CONNECTOR. (2.54)/.100 MAX. INSUL. DIA. WHEN USED WITH 2139 CONNECTOR. CRIMP ACCEPTS (3.00)/.118 MAX. INSUL. DIA. WITH SPECIAL TOOLING.
2. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
3. (.86+.05)/.034+.002 IS AN OPTIONAL DESIGN.
4. THIS PART CONFORMS TO PRODUCT SPEC. 08-50.

CHANGE TO ME10 EC NO: UCP2005-0930 DRAWN: R. RATNOL 2004/11/16 CHKD: S. ANEC 2004/11/02 APPR: M. MARGULIS 2004/11/02 REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE DESIGN UNITS INCH		THIRD ANGLE PROJECTION	
		mm INCH		DRAWN BY DATE COMSTOCK 11/29/88		TITLE TERMINAL, DBL. CANTILEVER KK CRIMP TYPE BIFURCATED MOLEX INCORPORATED			
		3 PLACES ± --- ± .005		CHECKED BY DATE PATEL 11/29/88					
		2 PLACES ± 0.13 ± .010		APPROVED BY DATE LENZ 11/29/88					
		1 PLACE ± 0.25 ± 1°		ANGULAR ± 1/2°		DOCUMENT NO. SD-2878		SHEET NO. 1 OF 2	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
M	2878-A-A(*)*			2878-B-A(*)*			2878-A-B(*)*														
	PART NO.	ENG. NO.		PART NO.	ENG. NO.		PART NO.	ENG. NO.		PART NO.	ENG. NO.		PART NO.	ENG. NO.		PART NO.	ENG. NO.		PART NO.	ENG. NO.	
	08-50-0115	2878-A-A(P909)B																			
	08-50-0116	2878-A-A(P909)L																			
				08-52-0126	2878-B-A(P909)B																
				08-52-0127	2878-B-A(P909)L																
				08-65-0118	2878-B-A(555)B																
				08-65-0119	2878-B-A(555)L																
				08-58-0127	2878-B-A(550)B																
				08-58-0128	2878-B-A(550)L																
							</														