KR Electronics, Inc.


General Description

KR Electronics part number 3360+ is a 60 MHz Bandpass filter. The filter has a minimum 1 dB bandwidth of 40 MHz. Other center frequencies and bandwidths are available. Please consult the factory.

Features

- 60 MHz Bandpass Filter
- 1 dB BW 40 MHz min,
- 60 dB BW 92 MHz max
- Selective Elliptic Response
- 50 Ω Source and Load
- Other frequencies available
- Surface Mount
- SMA also available

Typical Performance

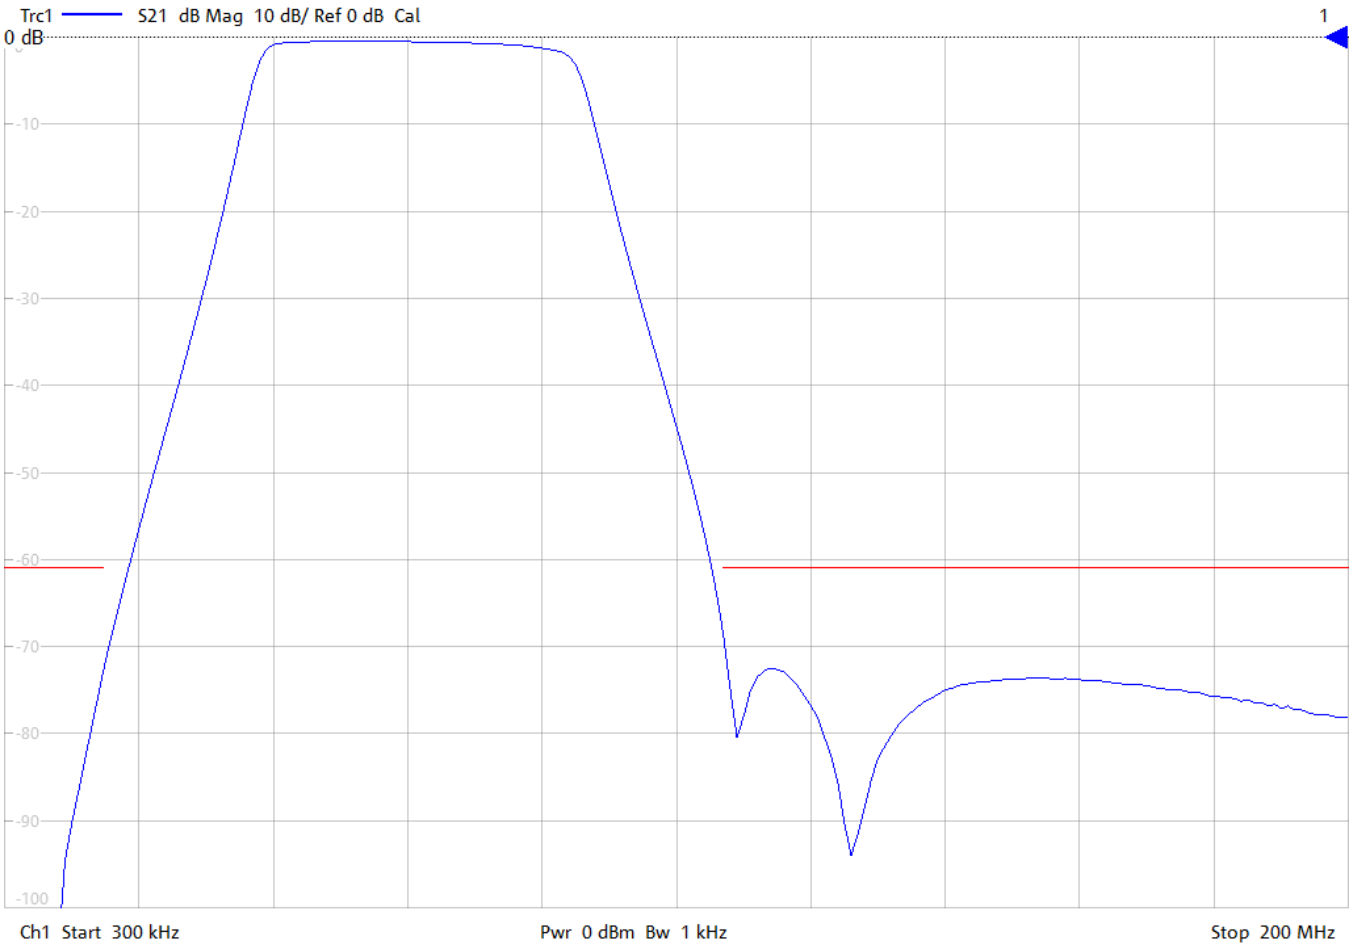


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*

© 2018 KR Electronics, Inc.

KR Electronics 3360+



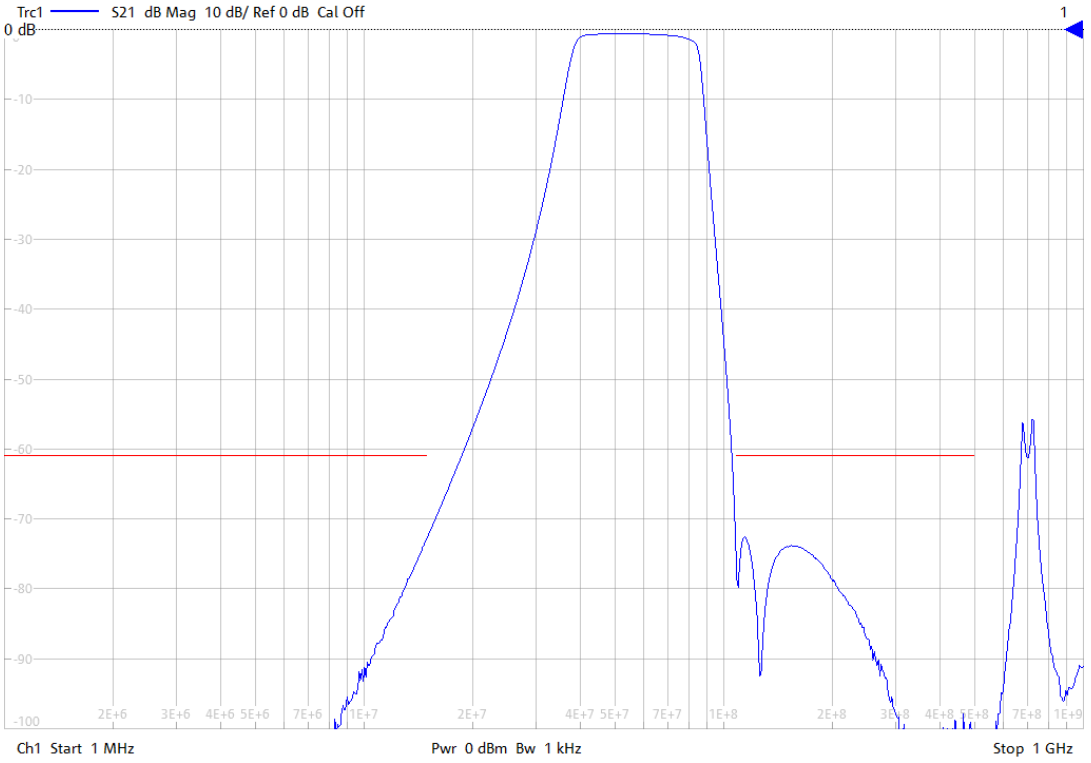

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*


© 2018 KR Electronics, Inc.


KR Electronics 3360+


Specifications

Parameter	Specification	Notes
Filter type	Bandpass	
Center Frequency	60 MHz	
Insertion Loss at Fc	1 dBa max	0.6 dBa typical
1 dBc Bandwidth	40 MHz min	42.6 MHz typical
3 dBc Bandwidth	47 MHz typical	
40 dBc Bandwidth	73 MHz typical	
60 dBc Bandwidth	92 MHz max	87 MHz typical
Source and Load	50 Ω	

Physical Dimensions

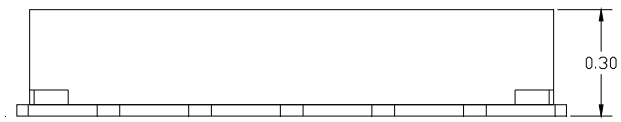



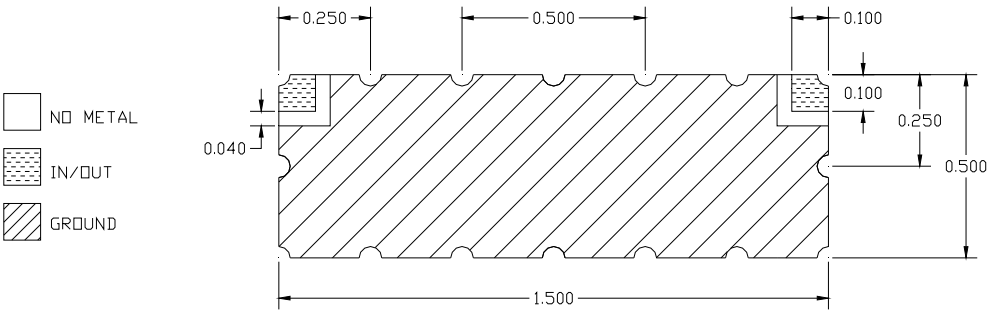

Notes:

1. Surface mount package — Metal cover open frame
2. Dimensions in inches
3. Maximum reflow temperature is 230° C for 10 sec maximum.
4. If boards are cleaned after installation, units must be completely dried.
5. Also available in a case with SMA connectors

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*

© 2018 KR Electronics, Inc.