

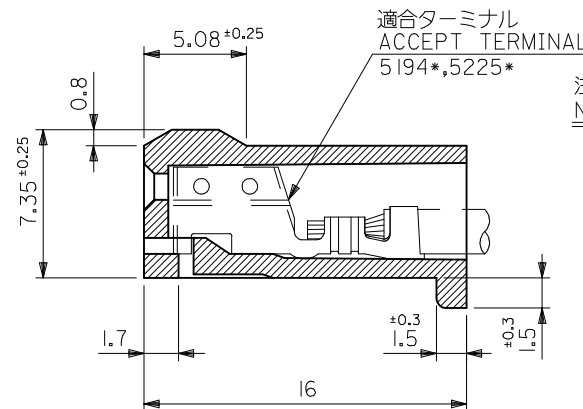


10 9 8 7 6 5 4 3 2 1

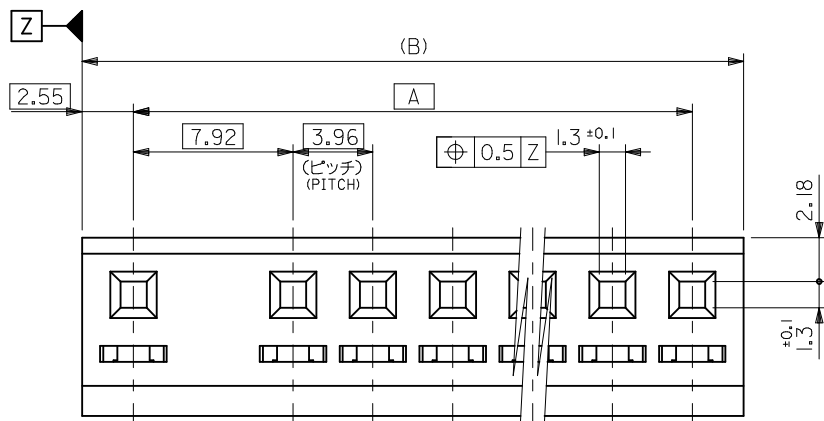

注記
NOTES

1. 各部の反りは0.5最大。
WARPING : 0.5 MAX.
2. サークットNO.はNO."I"のみ表示。
CIRCUIT NO. : I ONLY.
3. ELV及びRoHS適合品。
ELV AND RoHS COMPLIANT.

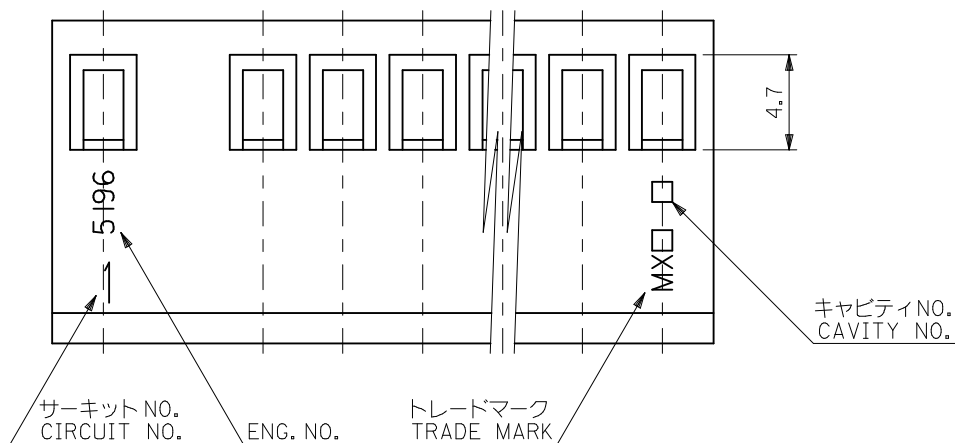

52.62	47.52	09-50-1123	5196-12	12
48.66	43.56	↑ -1113	↑ -11	11
44.7	39.6	-1103	-10	10
40.74	35.64	-1093	-09	9
36.78	31.68	-1083	-08	8
32.82	27.72	-1073	-07	7
28.86	23.76	-1063	-06	6
24.9	19.8	-1053	-05	5
20.94	15.84	-1043	-04	4
16.98	11.88	↓ -1033	↓ -03	3
13.02	7.92	09-50-1023	5196-02	2
B	A	EDP. NO.	ENG. NO.	極致 NO. OF CKTS.

材料
MATERIAL
ナイロン66, UL94V-2
色: オフホワイト
NYLON66, UL94V-2
COLOR : OFFWHITE

REVISED
EC NO: J2009-2074
DRWN: CARIZONO 2009/04/15
CHKD: T. HIRUYAMA 2009/04/16
APPR: NUKITA 2009/04/16
K

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
M. FUJIKURA	1992/09/07
CHECKED BY	DATE
H. HIRAMOTO	1992/09/08
APPROVED BY	DATE
M. FUKUSHIMA	1992/09/08
MATERIAL NO.	
SEE TABLE	
SIZE	A3

SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
TITLE SPOX 7.92/3.96 REC HSG		
MOLEX INCORPORATED		
DOCUMENT NO. SD-5196-001		SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		