

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0014562022

Status:

Active

Overview:

SL™ Modular Connectors

Description:

2.54mm Pitch SL™ Insulation Displacement Connector Assembly, Female, Single Row, Version G, Positive Lock, Wire Size 24 AWG, 0.38µm Gold (Au), 2 Circuits

Documents:

3D Model

Drawing (PDF)

Product Specification PS-70400-001 (PDF)

Packaging Specification PK-70873-0001 (PDF)


RoHS Certificate of Compliance (PDF)

Agency Certification		
CSA		LR19980
UL		E29179
General		
Product Family		Ribbon Cable / Wire Trap Connectors
Series		70400
Comments		Terminals Preloaded
Component Type		Housing
Glow-Wire Compliant		No
Overview		SL™ Modular Connectors
Product Name		SL™
UPC		800753605824

Physical		
Circuits (Loaded)		2
Color - Resin		Black
Durability (mating cycles max)		50
Entry Angle		Vertical
Flammability		94V-0
Lock to Mating Part		Yes
Material - Metal		Phosphor Bronze
Material - Plating Mating		Gold
Material - Plating Termination		Tin
Material - Resin		Polyester Alloy
Net Weight		0.364/g
Number of Rows		1
PCB Retention		None
Packaging Type		Tube
Pitch - Mating Interface		2.54mm
Plating min - Mating		0.381µm
Plating min - Termination		1.905µm
Polarized to Mating Part		Yes
Stackable		Yes
Surface Mount Compatible (SMC)		N/A
Temperature Range - Operating		-40°C to +105°C
Termination Interface: Style		IDT or Pierce
Wire Insulation Diameter		1.35mm max.
Wire Size AWG		24
Wire/Cable Type		Discrete Wire, Ribbon Cable

Electrical		
Current - Maximum per Contact		3.0A
Voltage - Maximum		250V

Solder Process Data		
Lead-freeProcess Capability		N/A

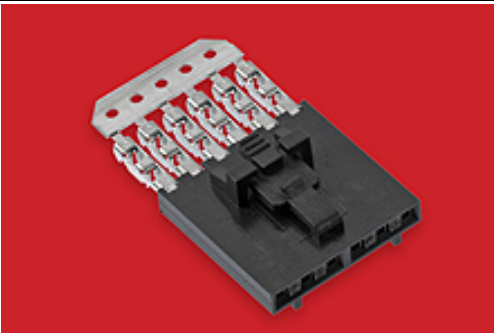

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per - ED/30/2017 (7 July 2017)

Halogen-Free Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

70400 Series

Mates With

Single Row Housing [70018](#) , [70107](#) Version A, [70107](#) Version B, [70543](#) , [70545](#) , [70553](#) , [70555](#)

Use With

[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG

Material Info

Engineering Number

A-70400-0666

Reference - Drawing Numbers

Packaging Specification

PK-70873-0001

Product Specification

PS-70400-001

Sales Drawing

SDA-70400-0666-0689

This document was generated on 07/31/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION