PRECISION ULTRA MICROPOWER CMOS OPERATIONAL AMPLIFIER

GENERAL DESCRIPTION

The ALD1736A/ALD1736 is a precision low-cost ultra micropower high slew-rate high performance monolithic CMOS operational amplifier intended for a broad range of analog applications using ±1V to ±5V dual power supply systems, as well as +2V to +10V battery operated systems. All device characteristics are specified for +5V single supply or ±2.5V dual supply systems. Typical supply current is 20μA at 5V supply voltage. It is manufactured with Advanced Linear Devices' enhanced EPAD® silicon gate CMOS process.

The ALD1736A/ALD1736 is designed to offer high performance for a wide range of applications requiring very low power dissipation. It has been developed specifically for the +5V single battery or ±1V to ±5V dual battery user and offers the popular industry standard single operational amplifier pin configuration.

Several important characteristics of the device make application easier to implement at those voltages. First, the operational amplifier can operate with rail to rail input and output voltages. This means the signal input voltage and output voltage can be close to or equal to the positive and negative supply voltages. This feature allows numerous analog serial stages and flexibility in input signal bias levels. Second, the device was designed to accommodate mixed applications where digital and analog circuits may operate off the same power supply or battery. Third, the output stage can typically drive up to 25pF capacitive and 20KΩ resistive loads.

These features, combined with extremely low input currents, high open loop voltage gain of 100V/mV, useful bandwidth of 400KHz, a slew rate of 0.17V/μs, low offset voltage and temperature drift, make the ALD1736A/ALD1736 a versatile, ultra micropower operational amplifier.

The ALD1736A/ALD1736, designed and fabricated with silicon gate CMOS technology, offers on-chip offset voltage trimming, allowing the device to be used without nulling in most applications. It is also designed to offer tolerance to over-voltage input spikes of 300mV beyond supply rails, high open loop voltage gain, and robust operation at temperature extremes. Additionally, robust design and rigorous screening make this device especially suitable for operation in temperature-extreme environments and rugged conditions.

ORDERING INFORMATION ("L" suffix denotes lead-free (RoHS))

Operating Temperature Range		
0°C to +70°C	0°C to +70°C	-55°C to +125°C
8-Pin Small Outline Package (SOIC)	8-Pin Plastic Dip Package	8-Pin CERDIP Package
ALD1736ASAL ALD1736SAL ALD1736ASA ALD1736SA	ALD1736APAL ALD1736PAL	 ALD1736ADA ALD1736DA

* Contact factory for leaded (non-RoHS) or high temperature versions.


FEATURES & BENEFITS

- 20μA supply current
- All parameters specified for +5V single supply or ± 2.5V dual supply systems
- Rail to rail input and output voltage ranges
- No frequency compensation required -- unity gain stable
- Extremely low input bias currents -- 0.01pA typical
- Ideal for high source impedance applications
- Dual power supplies ±1.0V to ±5.0V
- Single power supply +2.0V to +10.0V
- High voltage gain -- typically 100V/mV @ ±2.5V (100dB)
- Drive as low as a 20KΩ load
- Output short circuit protected
- Unity gain bandwidth of 0.4MHz
- Slew rate of 0.17V/μs
- Ultra Micropower dissipation
- Suitable for rugged, temperature-extreme environments

APPLICATIONS

- Voltage amplifier
- Voltage follower/buffer
- Charge integrator
- Photodiode amplifier
- Data acquisition systems
- High performance portable instruments
- Biochemical probe interface
- Signal conditioning circuits
- Sensor and transducer amplifiers
- Low leakage amplifiers
- Precision Sample and Hold amplifiers
- Active filters
- Picoammeter
- Current to voltage converter

PIN CONFIGURATION

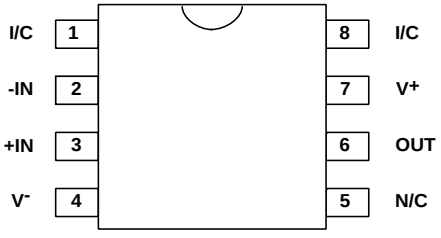

TOP VIEW
SAL, PAL, SA, DA PACKAGES

* I/C pins are internally connected. Do not connect externally.

ABSOLUTE MAXIMUM RATINGS

Supply voltage, V^+ ____ 10.6V
Differential input voltage range ____ -0.3V to V^+ +0.3V
Power dissipation ____ 600mW
Operating temperature range SAL, PAL, SA packages ____ 0°C to +70°C
DA package ____ -55°C to +125°C
Storage temperature range ____ -65°C to +150°C
Lead temperature, 10 seconds ____ +260°C
CAUTION: ESD Sensitive Device. Use static control procedures in ESD controlled environment.

OPERATING ELECTRICAL CHARACTERISTICS
T_A = 25°C V_S = ±2.5V unless otherwise specified

Parameter	Symbol	ALD1736A Min	ALD1736A Typ	ALD1736A Max	ALD1736 Min	ALD1736 Typ	ALD1736 Max	Unit	Test Conditions
Supply Voltage	V_S V^+	±1.0 2.0		±5.0 10.0	±1.0 2.0		±5.0 10.0	V V	Dual Supply Single Supply
Input Offset Voltage	V_{OS}			0.15 0.8			0.4 1.5	mV mV	$R_S \le 100K\Omega$ $0°C \le T_A \le +70°C$
Input Offset Current	I_{OS}		0.01	10 240		0.01	10 240	pA pA	T_A = 25°C $0°C \le T_A \le +70°C$
Input Bias Current	I_B		0.01	10 300		0.01	10 300	pA pA	T_A = 25°C $0°C \le T_A \le +70°C$
Input Voltage Range	V_{IR}	-0.3 -2.8		+5.3 +2.8	-0.3 -2.8		+5.3 +2.8	V V	V^+ = +5V V_S = ±2.5V
Input Resistance	R_{IN}		10^{14}			10^{14}		Ω	
Input Offset Voltage Drift	TCV_{OS}		5			5		µV/°C	$R_S \le 100K\Omega$
Power Supply Rejection Ratio	PSRR		80 80			80 80		dB dB	$R_S \le 100K\Omega$ $0°C \le T_A \le +70°C$
Common Mode Rejection Ratio	CMRR		83 83			83 83		dB dB	$R_S \le 100K\Omega$ $0°C \le T_A \le +70°C$
Large Signal Voltage Gain	A_V		100			100		V/mV	R_L = 1MΩ
Output Voltage Range	V_O low V_O high	 4.99	0.001 4.999	0.01	 4.99	0.001 4.999	0.01	V V	R_L = 1MΩ $0°C \le T_A \le +70°C$
	V_O low V_O high	 2.40	-2.48 2.48	-2.40	 2.40	-2.48 2.40	-2.40	V V	R_L =100KΩ $0°C \le T_A \le +70°C$
Output Short Circuit Current	I_{SC}		200			200		µA	
Supply Current	I_S		20	40		20	50	µA	V_{IN} = 0V, No Load
Power Dissipation	P_D			200			250	µW	V_S = ±2.5V
Input Capacitance	C_{IN}		1			1		pF	
Bandwidth	B_W		400			400		KHz	
Slew Rate	S_R		.17			.17		V/µs	A_V = +1, R_L = 1MΩ

OPERATING ELECTRICAL CHARACTERISTICS (cont'd)

T_A = 25°C V_S = ±2.5V unless otherwise specified (cont'd)

Parameter	Symbol	ALD1736A			ALD1736			Unit	Test Conditions
		Min	Typ	Max	Min	Typ	Max		
Rise time	t_r		1.0			1.0		µs	R_L = 1MΩ
Overshoot Factor			20			20		%	R_L = 1MΩ, C_L = 25pF
Settling Time	t_S		10.0			10.0		µs	0.1%, A_V = -1, R_L= 1MΩ C_L = 25pF

T_A = 25°C V_S = ±1.0V unless otherwise specified

Parameter	Symbol	ALD1736A			ALD1736			Unit	Test Conditions
		Min	Typ	Max	Min	Typ	Max		
Power Supply Rejection Ratio	PSRR		70			70		dB	R_S ≤ 1MΩ
Common Mode Rejection Ratio	CMRR		70			70		dB	R_S ≤ 1MΩ
Large Signal Voltage Gain	A_V		50			50		V/mV	R_L = 1MΩ
Output Voltage Range	V_O low V_O high	 0.9	-0.95 0.95	-0.9	 0.9	-0.95 0.95	-0.9	V	R_L = 1MΩ
Bandwidth	B_W		0.3			0.3		MHz	
Slew Rate	S_R		0.17			0.17		V/µs	A_V = +1, C_L = 50pF

V_S = ±2.5V -55°C ≤ T_A ≤ +125°C unless otherwise specified

Parameter	Symbol	ALD1736A			ALD1736			Unit	Test Conditions
		Min	Typ	Max	Min	Typ	Max		
Input Offset Voltage	V_{OS}			2.0			3.0	mV	R_S ≤ 100KΩ
Input Offset Current	I_{OS}			2.0			2.0	nA	
Input Bias Current	I_B			2.0			2.0	nA	
Power Supply Rejection Ratio	PSRR		75			75		dB	R_S ≤ 1MΩ
Common Mode Rejection Ratio	CMRR		83			83		dB	R_S ≤ 1MΩ
Large Signal Voltage Gain	A_V		50			50		V/mV	R_L = 1MΩ
Output Voltage Range	V_O low V_O high	 2.30	-2.40 2.40	-2.30	 2.30	-2.40 2.40	-2.30	V V	R_L = 1MΩ

Design & Operating Notes:

1. The ALD1736A/ALD1736 CMOS operational amplifier uses a 3 gain stage architecture and an improved frequency compensation scheme to achieve large voltage gain, high output driving capability, and better frequency stability. In a conventional CMOS operational amplifier design, compensation is achieved with a pole splitting capacitor together with a nulling resistor. This method is, however, very bias dependent and thus cannot accommodate the large range of supply voltage operation as is required from a stand alone CMOS operational amplifier. The ALD1736A/ALD1736 is internally compensated for unity gain stability using a novel scheme that does not use a nulling resistor. This scheme produces a clean single pole roll off in the gain characteristics while providing for more than 70 degrees of phase margin at the unity gain frequency.

2. The ALD1736A/ALD1736 has complementary p-channel and n-channel input differential stages connected in parallel to accomplish rail to rail common mode input voltage ranges. This means that with the ranges of common mode input voltage close to the power supplies, one of the two differential stages is switched off internally. To maintain compatibility with other operational amplifiers, this switching point has been selected to be about 1.5V below the positive supply voltage. Since offset voltage trimming on the ALD1736A/ALD1736 is made when the input voltage is symmetrical to the supply voltages, this internal switching does not affect a large variety of applications such as an inverting amplifier or non-inverting amplifier with a gain larger than 2.5 (5V operation), where the common mode voltage does not make excursions below this switching point. The user should, however, be aware that this switching does take place if the operational amplifier is connected as a unity gain buffer and should make provisions in the design to allow for input offset voltage variations.

3. The input bias and offset currents are essentially input protection diode reverse bias leakage currents, and are typically 0.01pA at room temperature. This low input bias current assures that the analog signal from the source will not be distorted by input bias currents. Normally, this extremely high input impedance of greater than $10^{14}\Omega$ would not be a problem as the source impedance would limit the node impedance. However, for applications where source impedance is very high, it may be necessary to limit noise and hum pickup through proper shielding.

4. The output stage consists of class AB complementary output drivers, capable of driving a low resistance load. The output voltage swing is limited by the drain to source on-resistance of the output transistors as determined by the bias circuitry, and the value of the load resistor. When connected in the voltage follower configuration, the oscillation resistant feature, combined with the rail to rail input and output feature, makes an effective analog signal buffer for medium to high source impedance sensors, transducers, and other circuit networks.


5. The ALD1736A/ALD1736 operational amplifier has been designed to provide full static discharge protection. Internally, the design has been carefully implemented to minimize latch up. However, care must be exercised when handling the device to avoid strong static fields that may degrade a diode junction, causing increased input leakage currents. In using the operational amplifier, the user is advised to power up the circuit before, or simultaneously with, any input voltages applied and to limit input voltages to not exceed 0.3V of the power supply voltage levels.

6. The ALD1736A/ALD1736, with its ultra micropower operation, offers numerous benefits in reduced power supply requirements, less noise coupling and current spikes, less thermally induced drift, better overall reliability due to lower self heating, and lower input bias current. It requires practically no warm up time as the chip junction heats up to less than 0.1°C above ambient temperature under most operating conditions.


7. The ALD1736A/ALD1736 has an internal design architecture that provides robust high temperature operation. Contact factory for custom screening versions.

TYPICAL PERFORMANCE CHARACTERISTICS


SUPPLY CURRENT AS A FUNCTION OF SUPPLY VOLTAGE

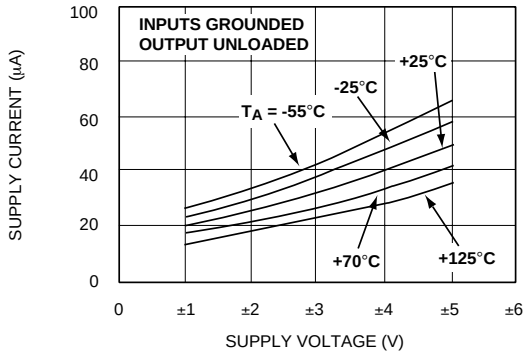


COMMON MODE INPUT VOLTAGE RANGE AS A FUNCTION OF SUPPLY VOLTAGE

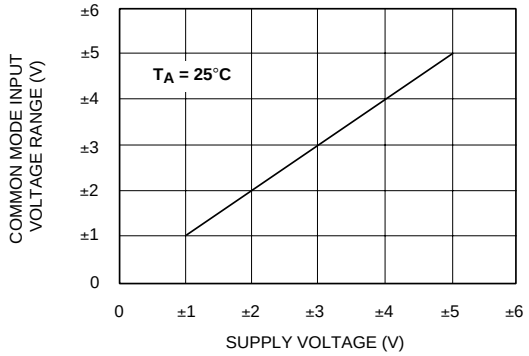

OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF LOAD RESISTANCE

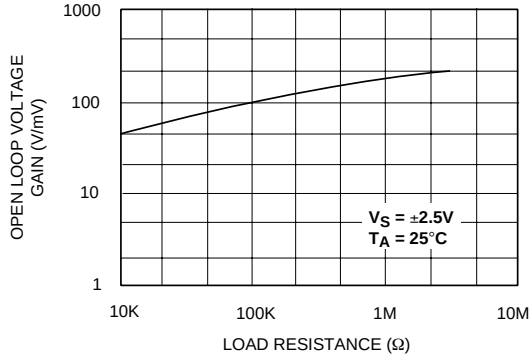


INPUT BIAS CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE

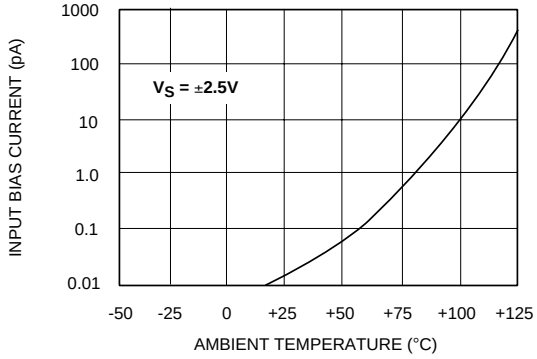


TYPICAL PERFORMANCE CHARACTERISTICS (cont'd)


OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF SUPPLY VOLTAGE AND TEMPERATURE

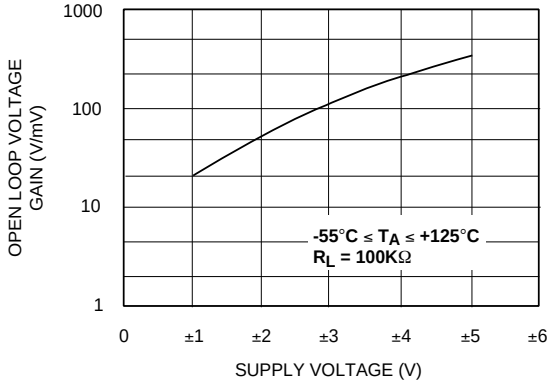


OUTPUT VOLTAGE SWING AS A FUNCTION OF SUPPLY VOLTAGE

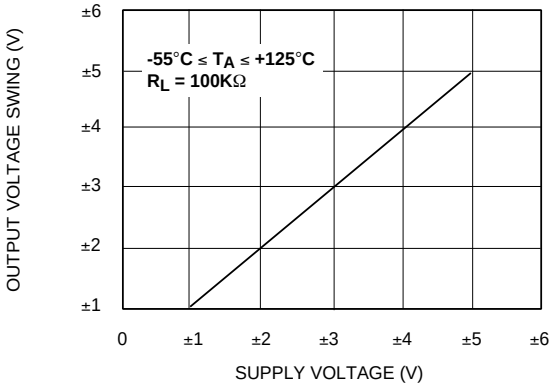


OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF FREQUENCY

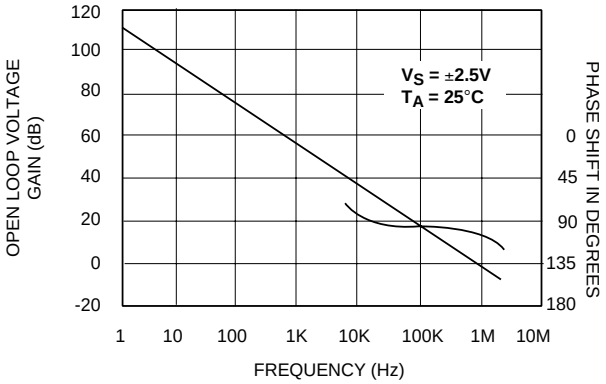


LARGE-SIGNAL TRANSIENT RESPONSE

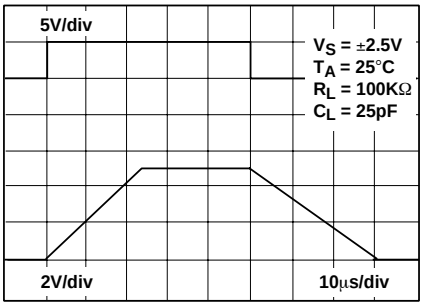

LARGE-SIGNAL TRANSIENT RESPONSE

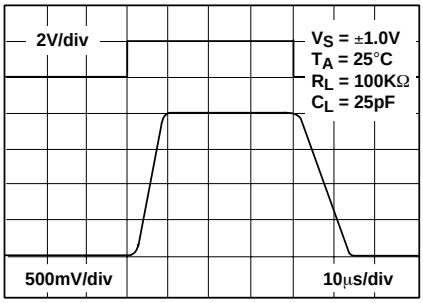


SMALL-SIGNAL TRANSIENT RESPONSE

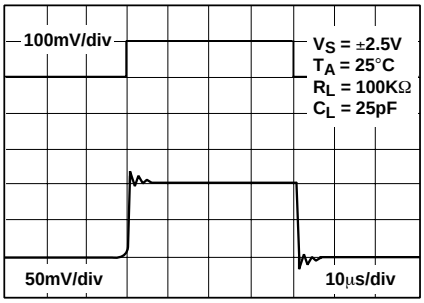


TYPICAL APPLICATIONS

RAIL-TO-RAIL VOLTAGE FOLLOWER/BUFFER

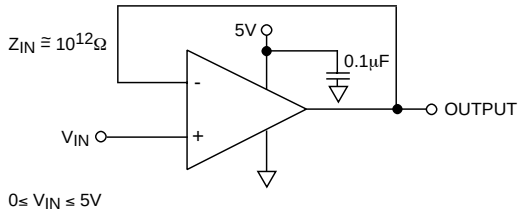


* See Rail to Rail Waveform

CHARGE INTEGRATOR

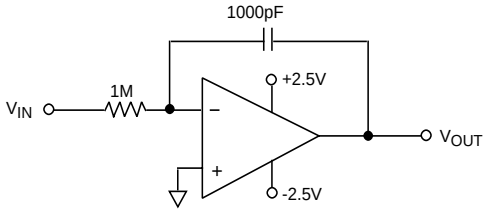


HIGH INPUT IMPEDANCE RAIL-TO-RAIL PRECISION DC SUMMING AMPLIFIER

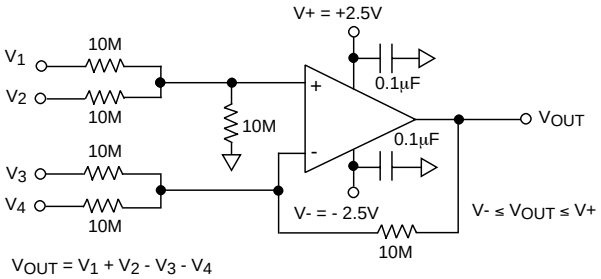

$V_{OUT} = V_1 + V_2 - V_3 - V_4$

$R_{IN} = 10M\Omega$ Accuracy limited by resistor tolerances and input offset voltage

RAIL-TO-RAIL VOLTAGE COMPARATOR

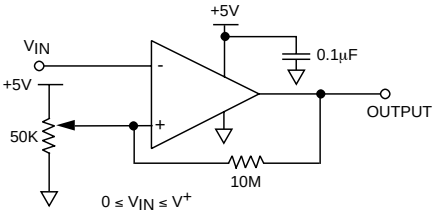

HIGH IMPEDANCE NON-INVERTING AMPLIFIER



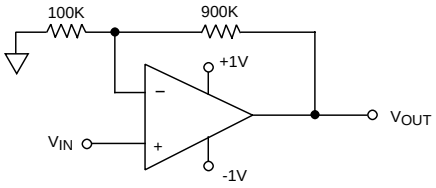


PHOTO DETECTOR CURRENT TO VOLTAGE CONVERTER

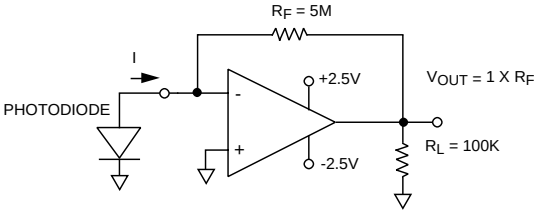


WIEN BRIDGE OSCILLATOR

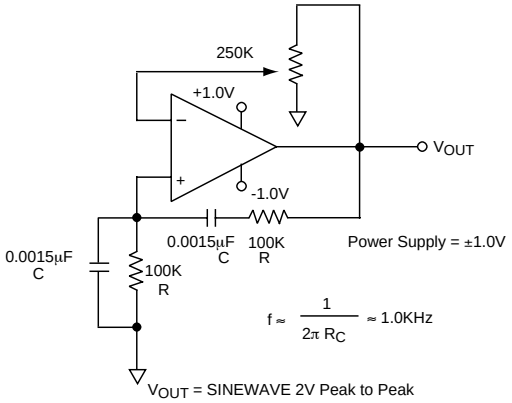

V_{OUT} = SINEWAVE 2V Peak to Peak


MICROPOWER BUFFERED VARIABLE VOLTAGE SOURCE

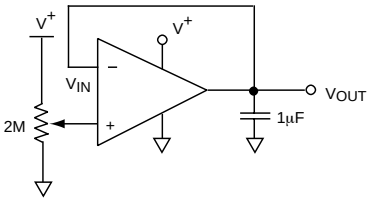



$2.0V \leq V^+ \leq 12.0V$
$0.1 \leq V_{OUT} \leq (V^+ - 0.1)$ V
OUPUT CURRENT ±200µA

SOIC-8 PACKAGE DRAWING

8 Pin Plastic SOIC Package

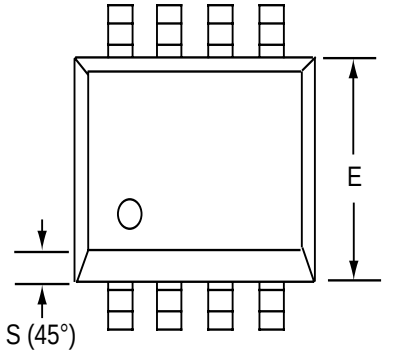




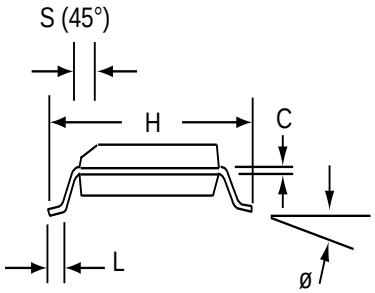



Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	1.35	1.75	0.053	0.069
A_1	0.10	0.25	0.004	0.010
b	0.35	0.45	0.014	0.018
C	0.18	0.25	0.007	0.010
D-8	4.69	5.00	0.185	0.196
E	3.50	4.05	0.140	0.160
e	1.27 BSC		0.050 BSC	
H	5.70	6.30	0.224	0.248
L	0.60	0.937	0.024	0.037
Ø	0°	8°	0°	8°
S	0.25	0.50	0.010	0.020

PDIP-8 PACKAGE DRAWING

8 Pin Plastic DIP Package

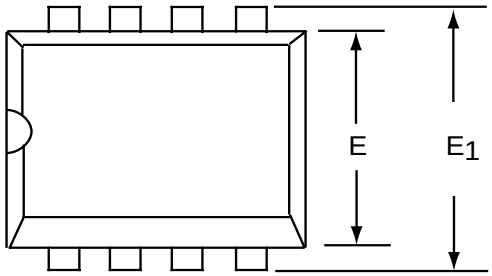

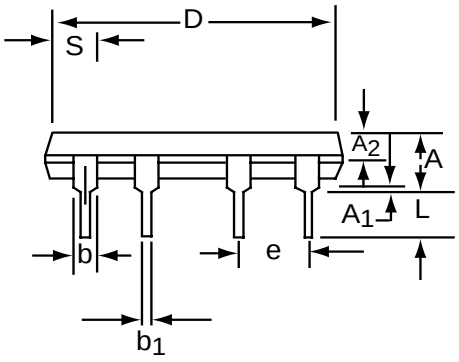




Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	3.81	5.08	0.105	0.200
A_1	0.38	1.27	0.015	0.050
A_2	1.27	2.03	0.050	0.080
b	0.89	1.65	0.035	0.065
b_1	0.38	0.51	0.015	0.020
c	0.20	0.30	0.008	0.012
D-8	9.40	11.68	0.370	0.460
E	5.59	7.11	0.220	0.280
E_1	7.62	8.26	0.300	0.325
e	2.29	2.79	0.090	0.110
e_1	7.37	7.87	0.290	0.310
L	2.79	3.81	0.110	0.150
S-8	1.02	2.03	0.040	0.080
ø	0°	15°	0°	15°

CERDIP-8 PACKAGE DRAWING

8 Pin CERDIP Package

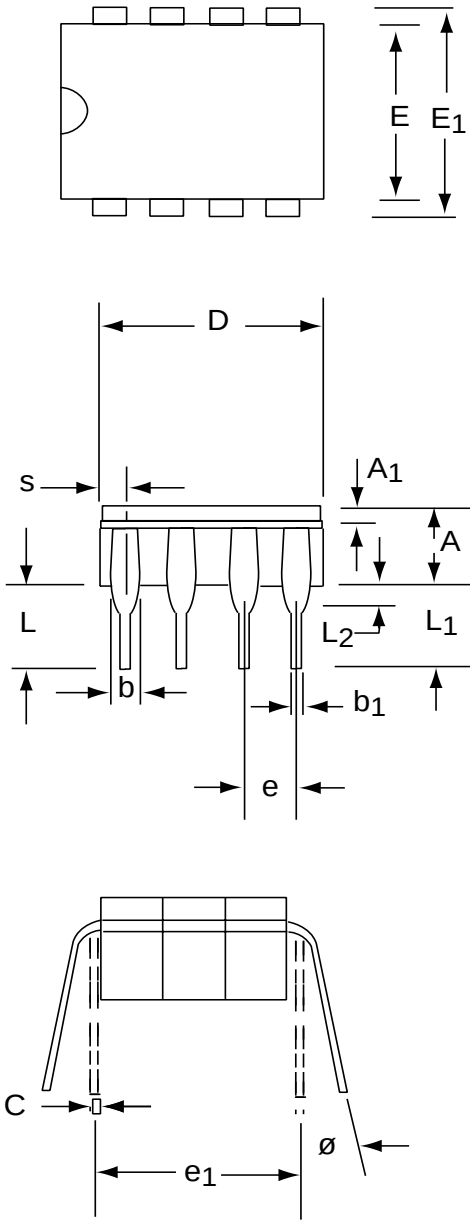

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	3.55	5.08	0.140	0.200
A_1	1.27	2.16	0.050	0.085
b	0.97	1.65	0.038	0.065
b_1	0.36	0.58	0.014	0.023
C	0.20	0.38	0.008	0.015
D-8	--	10.29	--	0.405
E	5.59	7.87	0.220	0.310
E_1	7.73	8.26	0.290	0.325
e	2.54 BSC		0.100 BSC	
e_1	7.62 BSC		0.300 BSC	
L	3.81	5.08	0.150	0.200
L_1	3.18	--	0.125	--
L_2	0.38	1.78	0.015	0.070
S	--	2.49	--	0.098
Ø	0°	15°	0°	15°