

## Features

- High Performance, Low Power AVR<sup>®</sup> 8-Bit Microcontroller
- Advanced RISC Architecture
  - 120 Powerful Instructions – Most Single Clock Cycle Execution
  - 32 x 8 General Purpose Working Registers
  - Fully Static Operation
  - Up to 20 MIPS Throughput at 20 MHz
- Data and Non-volatile Program and Data Memories
  - 2/4K Bytes of In-System Self Programmable Flash
    - Endurance 10,000 Write/Erase Cycles
  - 128/256 Bytes In-System Programmable EEPROM
    - Endurance: 100,000 Write/Erase Cycles
  - 128/256 Bytes Internal SRAM
  - Programming Lock for Flash Program and EEPROM Data Security
- Peripheral Features
  - One 8-bit Timer/Counter with Separate Prescaler and Compare Mode
  - One 16-bit Timer/Counter with Separate Prescaler, Compare and Capture Modes
  - Four PWM Channels
  - On-chip Analog Comparator
  - Programmable Watchdog Timer with On-chip Oscillator
  - USI – Universal Serial Interface
  - Full Duplex USART
- Special Microcontroller Features
  - debugWIRE On-chip Debugging
  - In-System Programmable via SPI Port
  - External and Internal Interrupt Sources
  - Low-power Idle, Power-down, and Standby Modes
  - Enhanced Power-on Reset Circuit
  - Programmable Brown-out Detection Circuit
  - Internal Calibrated Oscillator
- I/O and Packages
  - 18 Programmable I/O Lines
  - 20-pin PDIP, 20-pin SOIC, 20-pad MLF/VQFN
- Operating Voltage
  - 1.8 – 5.5V
- Speed Grades
  - 0 – 4 MHz @ 1.8 – 5.5V
  - 0 – 10 MHz @ 2.7 – 5.5V
  - 0 – 20 MHz @ 4.5 – 5.5V
- Industrial Temperature Range: -40°C to +85°C
- Low Power Consumption
  - Active Mode
    - 190  $\mu$ A at 1.8V and 1MHz
  - Idle Mode
    - 24  $\mu$ A at 1.8V and 1MHz
  - Power-down Mode
    - 0.1  $\mu$ A at 1.8V and +25°C



**8-bit AVR<sup>®</sup>**  
**Microcontroller**  
**with 2/4K Bytes**  
**In-System**  
**Programmable**  
**Flash**

**ATtiny2313A**  
**ATtiny4313**


**Summary**

Rev. 8246BS-AVR-09/11



## 1. Pin Configurations

Figure 1-1. Pinout ATtiny2313A/4313

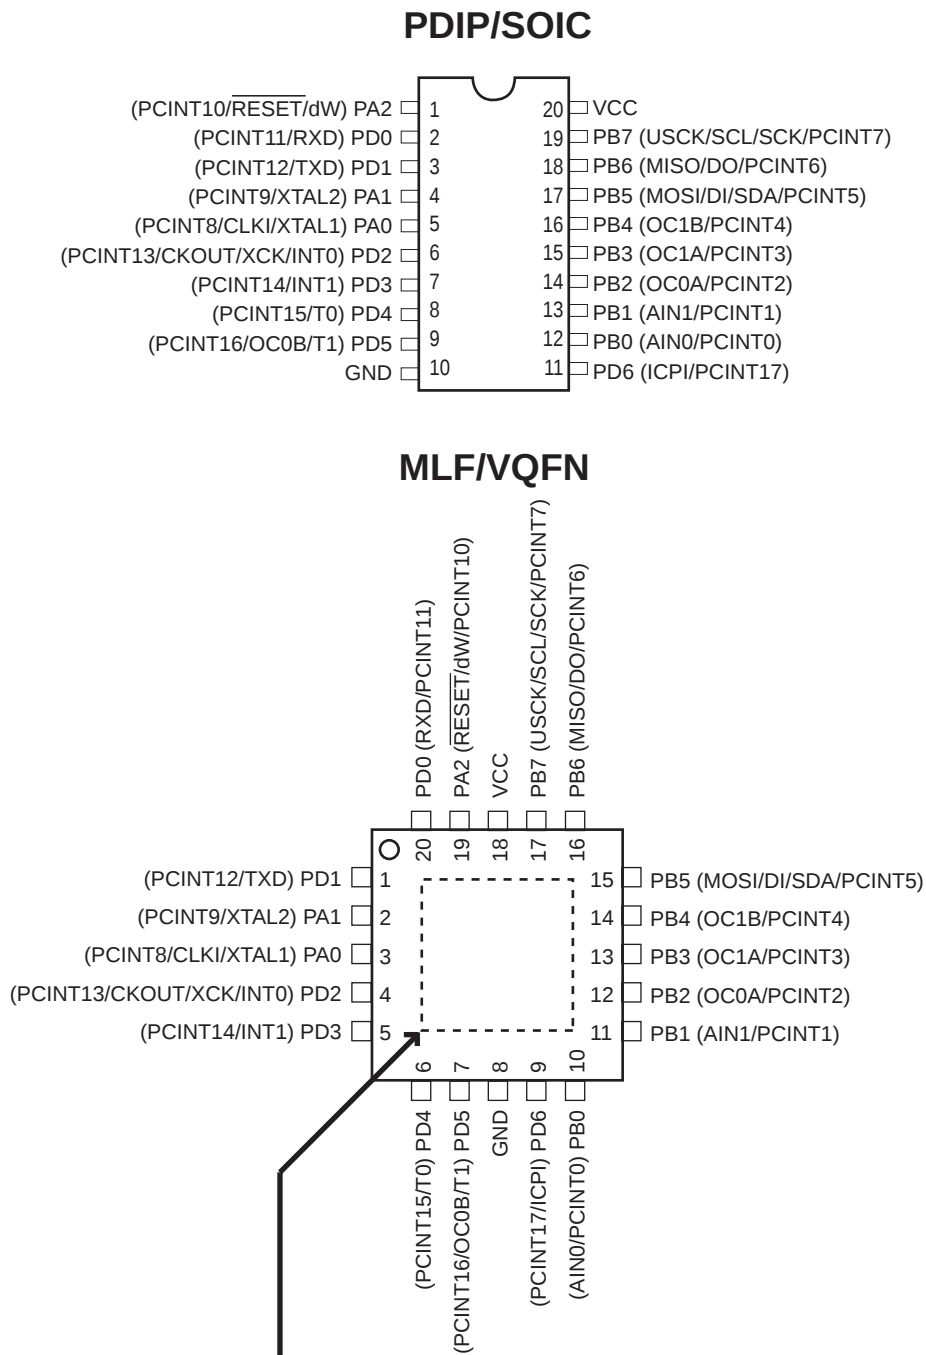

## 1.1 Pin Descriptions

### 1.1.1 VCC

Digital supply voltage.

### 1.1.2 GND

Ground.

### 1.1.3 Port A (PA2..PA0)

Port A is a 3-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port A output buffers have symmetrical drive characteristics with both high sink and source capability, except PA2 which has the  $\overline{\text{RESET}}$  capability. To use pin PA2 as I/O pin, instead of RESET pin, program ("0") RSTDISBL fuse. As inputs, Port A pins that are externally pulled low will source current if the pull-up resistors are activated. The Port A pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port A also serves the functions of various special features of the ATtiny2313A/4313 as listed on [page 61](#).

### 1.1.4 Port B (PB7..PB0)

Port B is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port B output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port B pins that are externally pulled low will source current if the pull-up resistors are activated. The Port B pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port B also serves the functions of various special features of the ATtiny2313A/4313 as listed on [page 62](#).

### 1.1.5 Port D (PD6..PD0)

Port D is a 7-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port D output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port D pins that are externally pulled low will source current if the pull-up resistors are activated. The Port D pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port D also serves the functions of various special features of the ATtiny2313A/4313 as listed on [page 66](#).

### 1.1.6 $\overline{\text{RESET}}$

Reset input. A low level on this pin for longer than the minimum pulse length will generate a reset, even if the clock is not running and provided that the reset pin has not been disabled. The minimum pulse length is given in [Table 22-3 on page 201](#). Shorter pulses are not guaranteed to generate a reset. The Reset Input is an alternate function for PA2 and dW.

The reset pin can also be used as a (weak) I/O pin.

### 1.1.7 XTAL1

Input to the inverting Oscillator amplifier and input to the internal clock operating circuit. XTAL1 is an alternate function for PA0.



#### **1.1.8 XTAL2**


Output from the inverting Oscillator amplifier. XTAL2 is an alternate function for PA1.

## 2. Overview

The ATtiny2313A/4313 is a low-power CMOS 8-bit microcontroller based on the AVR enhanced RISC architecture. By executing powerful instructions in a single clock cycle, the ATtiny2313A/4313 achieves throughputs approaching 1 MIPS per MHz allowing the system designer to optimize power consumption versus processing speed.

### 2.1 Block Diagram

Figure 2-1. Block Diagram

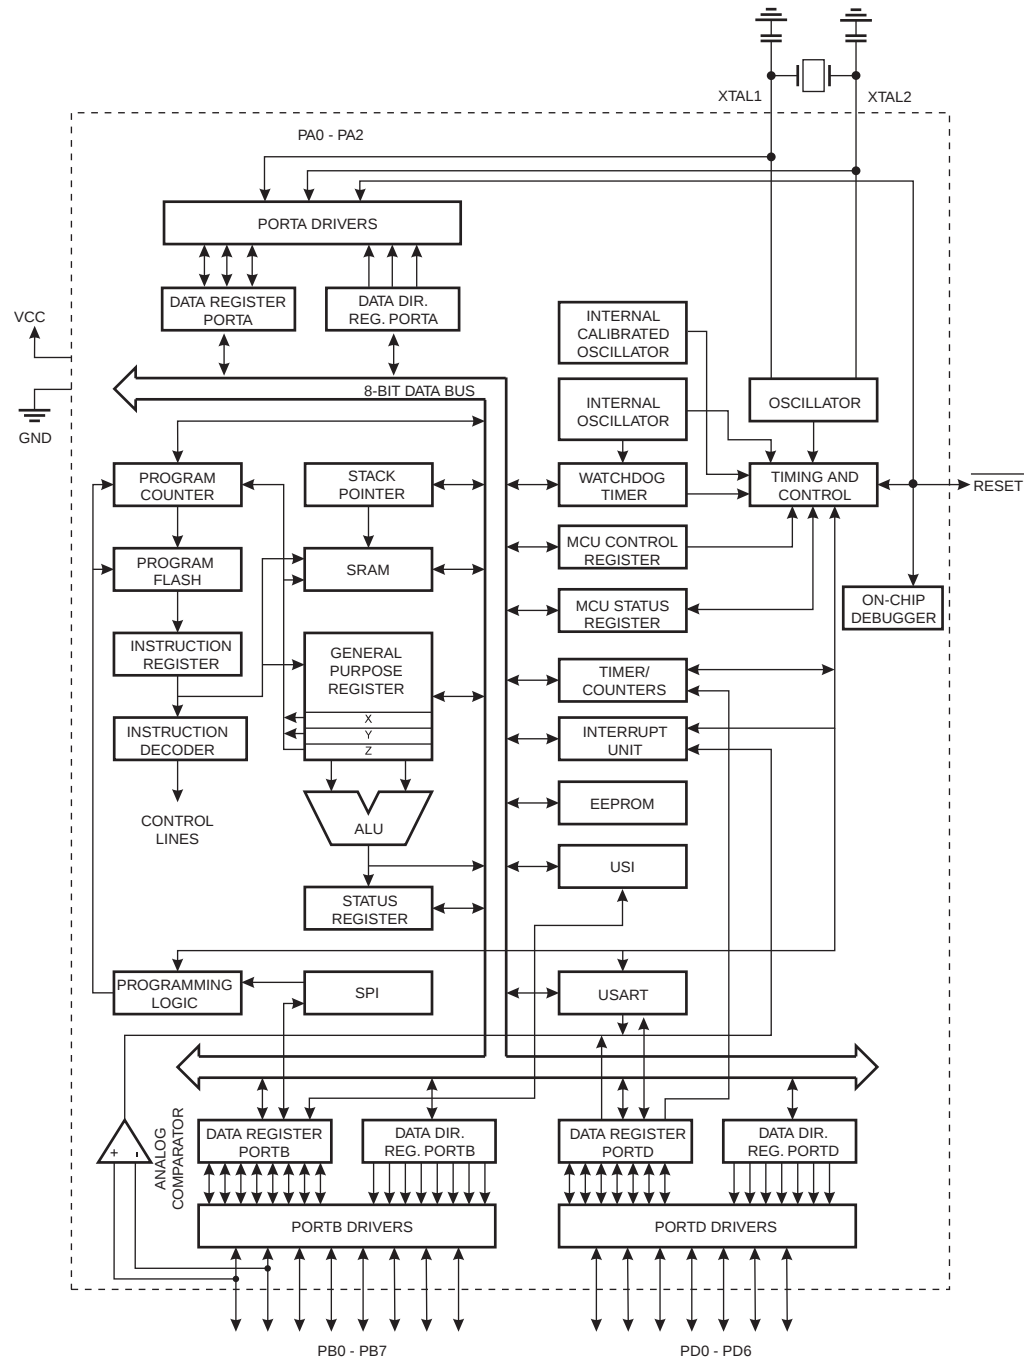

The AVR core combines a rich instruction set with 32 general purpose working registers. All the 32 registers are directly connected to the Arithmetic Logic Unit (ALU), allowing two independent registers to be accessed in one single instruction executed in one clock cycle. The resulting architecture is more code efficient while achieving throughputs up to ten times faster than conventional CISC microcontrollers.

The ATtiny2313A/4313 provides the following features: 2/4K bytes of In-System Programmable Flash, 128/256 bytes EEPROM, 128/256 bytes SRAM, 18 general purpose I/O lines, 32 general purpose working registers, a single-wire Interface for On-chip Debugging, two flexible Timer/Counters with compare modes, internal and external interrupts, a serial programmable USART, Universal Serial Interface with Start Condition Detector, a programmable Watchdog Timer with internal Oscillator, and three software selectable power saving modes. The Idle mode stops the CPU while allowing the SRAM, Timer/Counters, and interrupt system to continue functioning. The Power-down mode saves the register contents but freezes the Oscillator, disabling all other chip functions until the next interrupt or hardware reset. In Standby mode, the crystal/resonator Oscillator is running while the rest of the device is sleeping. This allows very fast start-up combined with low-power consumption.

The device is manufactured using Atmel's high density non-volatile memory technology. The On-chip ISP Flash allows the program memory to be reprogrammed In-System through an SPI serial interface, or by a conventional non-volatile memory programmer. By combining an 8-bit RISC CPU with In-System Self-Programmable Flash on a monolithic chip, the Atmel ATtiny2313A/4313 is a powerful microcontroller that provides a highly flexible and cost effective solution to many embedded control applications.

The ATtiny2313A/4313 AVR is supported with a full suite of program and system development tools including: C Compilers, Macro Assemblers, Program Debugger/Simulators, In-Circuit Emulators, and Evaluation kits.

## 2.2 Comparison Between ATtiny2313A and ATtiny4313

The ATtiny2313A and ATtiny4313 differ only in memory sizes. [Table 2-1](#) summarizes the different memory sizes for the two devices.

**Table 2-1.** Memory Size Summary

| Device      | Flash    | EEPROM    | RAM       |
|-------------|----------|-----------|-----------|
| ATtiny2313A | 2K Bytes | 128 Bytes | 128 Bytes |
| ATtiny4313  | 4K Bytes | 256 Bytes | 256 Bytes |

## **3. About**

### **3.1 Resources**

A comprehensive set of drivers, application notes, data sheets and descriptions on development tools are available for download at <http://www.atmel.com/avr>.

### **3.2 Code Examples**

This documentation contains simple code examples that briefly show how to use various parts of the device. These code examples assume that the part specific header file is included before compilation. Be aware that not all C compiler vendors include bit definitions in the header files and interrupt handling in C is compiler dependent. Please confirm with the C compiler documentation for more details.

For I/O Registers located in the extended I/O map, “IN”, “OUT”, “SBIS”, “SBIC”, “CBI”, and “SBI” instructions must be replaced with instructions that allow access to extended I/O. Typically, this means “LDS” and “STS” combined with “SBR”, “SBRC”, “SBR”, and “CBR”. Note that not all AVR devices include an extended I/O map.

### **3.3 Data Retention**

Reliability Qualification results show that the projected data retention failure rate is much less than 1 PPM over 20 years at 85°C or 100 years at 25°C.

## 4. Register Summary

| Address     | Name     | Bit 7                                             | Bit 6                   | Bit 5   | Bit 4   | Bit 3       | Bit 2   | Bit 1   | Bit 0   | Page       |
|-------------|----------|---------------------------------------------------|-------------------------|---------|---------|-------------|---------|---------|---------|------------|
| 0x3F (0x5F) | SREG     | I                                                 | T                       | H       | S       | V           | N       | Z       | C       | 9          |
| 0x3E (0x5E) | Reserved | –                                                 | –                       | –       | –       | –           | –       | –       | –       |            |
| 0x3D (0x5D) | SPL      | SP7                                               | SP6                     | SP5     | SP4     | SP3         | SP2     | SP1     | SP0     | 12         |
| 0x3C (0x5C) | OCR0B    | Timer/Counter0 – Compare Register B               |                         |         |         |             |         |         |         | 85         |
| 0x3B (0x5B) | GIMSK    | INT1                                              | INT0                    | PCIE0   | PCIE2   | PCIE1       | –       | –       | –       | 50         |
| 0x3A (0x5A) | GIFR     | INTF1                                             | INTF0                   | PCIF0   | PCIF2   | PCIF1       | –       | –       | –       | 51         |
| 0x39 (0x59) | TIMSK    | TOIE1                                             | OCIE1A                  | OCIE1B  | –       | ICIE1       | OCIE0B  | TOIE0   | OCIE0A  | 86, 115    |
| 0x38 (0x58) | TIFR     | TOV1                                              | OCF1A                   | OCF1B   | –       | ICF1        | OCF0B   | TOV0    | OCF0A   | 86, 115    |
| 0x37 (0x57) | SPMCSR   | –                                                 | –                       | RSIG    | CTPB    | RFLB        | PGWRT   | PGERS   | SPMEN   | 175        |
| 0x36 (0x56) | OCR0A    | Timer/Counter0 – Compare Register A               |                         |         |         |             |         |         |         | 85         |
| 0x35 (0x55) | MCUCR    | PUD                                               | SM1                     | SE      | SM0     | ISC11       | ISC10   | ISC01   | ISC00   | 36, 50, 68 |
| 0x34 (0x54) | MCUSR    | –                                                 | –                       | –       | –       | WDRF        | BORF    | EXTRF   | PORF    | 44         |
| 0x33 (0x53) | TCCR0B   | FOC0A                                             | FOC0B                   | –       | –       | WGM02       | CS02    | CS01    | CS00    | 84         |
| 0x32 (0x52) | TCNT0    | Timer/Counter0 (8-bit)                            |                         |         |         |             |         |         |         | 85         |
| 0x31 (0x51) | OSCCAL   | –                                                 | CAL6                    | CAL5    | CAL4    | CAL3        | CAL2    | CAL1    | CAL0    | 31         |
| 0x30 (0x50) | TCCR0A   | COM0A1                                            | COM0A0                  | COM0B1  | COM0B0  | –           | –       | WGM01   | WGM00   | 81         |
| 0x2F (0x4F) | TCCR1A   | COM1A1                                            | COM1A0                  | COM1B1  | COM1B0  | –           | –       | WGM11   | WGM10   | 110        |
| 0x2E (0x4E) | TCCR1B   | ICNC1                                             | ICES1                   | –       | WGM13   | WGM12       | CS12    | CS11    | CS10    | 112        |
| 0x2D (0x4D) | TCNT1H   | Timer/Counter1 – Counter Register High Byte       |                         |         |         |             |         |         |         | 114        |
| 0x2C (0x4C) | TCNT1L   | Timer/Counter1 – Counter Register Low Byte        |                         |         |         |             |         |         |         | 114        |
| 0x2B (0x4B) | OCR1AH   | Timer/Counter1 – Compare Register A High Byte     |                         |         |         |             |         |         |         | 114        |
| 0x2A (0x4A) | OCR1AL   | Timer/Counter1 – Compare Register A Low Byte      |                         |         |         |             |         |         |         | 114        |
| 0x29 (0x49) | OCR1BH   | Timer/Counter1 – Compare Register B High Byte     |                         |         |         |             |         |         |         | 114        |
| 0x28 (0x48) | OCR1BL   | Timer/Counter1 – Compare Register B Low Byte      |                         |         |         |             |         |         |         | 114        |
| 0x27 (0x47) | Reserved | –                                                 | –                       | –       | –       | –           | –       | –       | –       |            |
| 0x26 (0x46) | CLKPR    | CLKPCE                                            | –                       | –       | –       | CLKPS3      | CLKPS2  | CLKPS1  | CLKPS0  | 31         |
| 0x25 (0x45) | ICR1H    | Timer/Counter1 - Input Capture Register High Byte |                         |         |         |             |         |         |         | 114        |
| 0x24 (0x44) | ICR1L    | Timer/Counter1 - Input Capture Register Low Byte  |                         |         |         |             |         |         |         | 114        |
| 0x23 (0x43) | GTCCR    | –                                                 | –                       | –       | –       | –           | –       | –       | PSR10   | 118        |
| 0x22 (0x42) | TCCR1C   | FOC1A                                             | FOC1B                   | –       | –       | –           | –       | –       | –       | 113        |
| 0x21 (0x41) | WDTCR    | WDIF                                              | WDIE                    | WDP3    | WDCE    | WDE         | WDP2    | WDP1    | WDP0    | 44         |
| 0x20 (0x40) | PCMSK0   | PCINT7                                            | PCINT6                  | PCINT5  | PCINT4  | PCINT3      | PCINT2  | PCINT1  | PCINT0  | 53         |
| 0x1F (0x3F) | Reserved | –                                                 | –                       | –       | –       | –           | –       | –       | –       |            |
| 0x1E (0x3E) | EEAR     | –                                                 | EEPROM Address Register |         |         |             |         |         |         | 23         |
| 0x1D (0x3D) | EEDR     | EEPROM Data Register                              |                         |         |         |             |         |         |         | 23         |
| 0x1C (0x3C) | EECR     | –                                                 | –                       | EEP1    | EEP0    | EERIE       | EEMPE   | EEPE    | EERE    | 23         |
| 0x1B (0x3B) | PORTA    | –                                                 | –                       | –       | –       | –           | PORTA2  | PORTA1  | PORTA0  | 68         |
| 0x1A (0x3A) | DDRA     | –                                                 | –                       | –       | –       | –           | DDA2    | DDA1    | DDA0    | 68         |
| 0x19 (0x39) | PINA     | –                                                 | –                       | –       | –       | –           | PINA2   | PINA1   | PINA0   | 69         |
| 0x18 (0x38) | PORTB    | PORTB7                                            | PORTB6                  | PORTB5  | PORTB4  | PORTB3      | PORTB2  | PORTB1  | PORTB0  | 69         |
| 0x17 (0x37) | DDRB     | DDB7                                              | DDB6                    | DDB5    | DDB4    | DDB3        | DDB2    | DDB1    | DDB0    | 69         |
| 0x16 (0x36) | PINB     | PINB7                                             | PINB6                   | PINB5   | PINB4   | PINB3       | PINB2   | PINB1   | PINB0   | 69         |
| 0x15 (0x35) | GPOR2    | General Purpose I/O Register 2                    |                         |         |         |             |         |         |         | 24         |
| 0x14 (0x34) | GPOR1    | General Purpose I/O Register 1                    |                         |         |         |             |         |         |         | 24         |
| 0x13 (0x33) | GPOR0    | General Purpose I/O Register 0                    |                         |         |         |             |         |         |         | 24         |
| 0x12 (0x32) | PORTD    | –                                                 | PORTD6                  | PORTD5  | PORTD4  | PORTD3      | PORTD2  | PORTD1  | PORTD0  | 69         |
| 0x11 (0x31) | DDRD     | –                                                 | DDD6                    | DDD5    | DDD4    | DDD3        | DDD2    | DDD1    | DDD0    | 69         |
| 0x10 (0x30) | PIND     | –                                                 | PIND6                   | PIND5   | PIND4   | PIND3       | PIND2   | PIND1   | PIND0   | 69         |
| 0x0F (0x2F) | USIDR    | USI Data Register                                 |                         |         |         |             |         |         |         | 165        |
| 0x0E (0x2E) | USISR    | USISIF                                            | USIOIF                  | USIPF   | USIDC   | USICNT3     | USICNT2 | USICNT1 | USICNT0 | 164        |
| 0x0D (0x2D) | USICR    | USISIE                                            | USIOIE                  | USIWM1  | USIWM0  | USICS1      | USICS0  | USICLK  | USITC   | 162        |
| 0x0C (0x2C) | UDR      | UART Data Register (8-bit)                        |                         |         |         |             |         |         |         | 136        |
| 0x0B (0x2B) | UCSRA    | RXC                                               | TXC                     | UDRE    | FE      | DOR         | UPE     | U2X     | MPCM    | 137        |
| 0x0A (0x2A) | UCSRB    | RXCIE                                             | TXCIE                   | UDRIE   | RXEN    | TXEN        | UCSZ2   | RXB8    | TXB8    | 138        |
| 0x09 (0x29) | UBRRH    | UBRRH[7:0]                                        |                         |         |         |             |         |         |         | 140        |
| 0x08 (0x28) | ACSR     | ACD                                               | ACBG                    | ACO     | ACI     | ACIE        | ACIC    | ACIS1   | ACIS0   | 167        |
| 0x07 (0x27) | BODCR    | –                                                 | –                       | –       | –       | –           | –       | BODS    | BODSE   | 37         |
| 0x06 (0x26) | PRR      | –                                                 | –                       | –       | –       | PRTIM1      | PRTIM0  | PRUSI   | PRUSART | 36         |
| 0x05 (0x25) | PCMSK2   | –                                                 | PCINT17                 | PCINT16 | PCINT15 | PCINT14     | PCINT13 | PCINT12 | PCINT11 | 52         |
| 0x04 (0x24) | PCMSK1   | –                                                 | –                       | –       | –       | –           | PCINT10 | PCINT9  | PCINT8  | 52         |
| 0x03 (0x23) | UCSRC    | UMSEL1                                            | UMSEL0                  | UPM1    | UPM0    | USBS        | UCSZ1   | UCSZ0   | UCPOL   | 139        |
| 0x02 (0x22) | UBRRH    | –                                                 | –                       | –       | –       | UBRRH[11:8] |         |         |         | 140        |
| 0x01 (0x21) | DIDR     | –                                                 | –                       | –       | –       | –           | –       | AIN1D   | AIN0D   | 168        |
| 0x00 (0x20) | USIBR    | USI Buffer Register                               |                         |         |         |             |         |         |         | 166        |

- Notes:
1. For compatibility with future devices, reserved bits should be written to zero if accessed. Reserved I/O memory addresses should never be written.
  2. I/O Registers within the address range 0x00 - 0x1F are directly bit-accessible using the SBI and CBI instructions. In these registers, the value of single bits can be checked by using the SBIS and SBIC instructions.
  3. Some of the status flags are cleared by writing a logical one to them. Note that, unlike most other AVRs, the CBI and SBI instructions will only operate on the specified bit, and can therefore be used on registers containing such status flags. The CBI and SBI instructions work with registers 0x00 to 0x1F only.
  4. When using the I/O specific commands IN and OUT, the I/O addresses 0x00 - 0x3F must be used. When addressing I/O Registers as data space using LD and ST instructions, 0x20 must be added to these addresses.

## 5. Instruction Set Summary

| Mnemonics                                | Operands | Description                            | Operation                                                          | Flags      | #Clocks |
|------------------------------------------|----------|----------------------------------------|--------------------------------------------------------------------|------------|---------|
| <b>ARITHMETIC AND LOGIC INSTRUCTIONS</b> |          |                                        |                                                                    |            |         |
| ADD                                      | Rd, Rr   | Add two Registers                      | $Rd \leftarrow Rd + Rr$                                            | Z,C,N,V,H  | 1       |
| ADC                                      | Rd, Rr   | Add with Carry two Registers           | $Rd \leftarrow Rd + Rr + C$                                        | Z,C,N,V,H  | 1       |
| ADIW                                     | RdL,K    | Add Immediate to Word                  | $RdH:RdL \leftarrow RdH:RdL + K$                                   | Z,C,N,V,S  | 2       |
| SUB                                      | Rd, Rr   | Subtract two Registers                 | $Rd \leftarrow Rd - Rr$                                            | Z,C,N,V,H  | 1       |
| SUBI                                     | Rd, K    | Subtract Constant from Register        | $Rd \leftarrow Rd - K$                                             | Z,C,N,V,H  | 1       |
| SBC                                      | Rd, Rr   | Subtract with Carry two Registers      | $Rd \leftarrow Rd - Rr - C$                                        | Z,C,N,V,H  | 1       |
| SBCI                                     | Rd, K    | Subtract with Carry Constant from Reg. | $Rd \leftarrow Rd - K - C$                                         | Z,C,N,V,H  | 1       |
| SBIW                                     | RdL,K    | Subtract Immediate from Word           | $RdH:RdL \leftarrow RdH:RdL - K$                                   | Z,C,N,V,S  | 2       |
| AND                                      | Rd, Rr   | Logical AND Registers                  | $Rd \leftarrow Rd \bullet Rr$                                      | Z,N,V      | 1       |
| ANDI                                     | Rd, K    | Logical AND Register and Constant      | $Rd \leftarrow Rd \bullet K$                                       | Z,N,V      | 1       |
| OR                                       | Rd, Rr   | Logical OR Registers                   | $Rd \leftarrow Rd \vee Rr$                                         | Z,N,V      | 1       |
| ORI                                      | Rd, K    | Logical OR Register and Constant       | $Rd \leftarrow Rd \vee K$                                          | Z,N,V      | 1       |
| EOR                                      | Rd, Rr   | Exclusive OR Registers                 | $Rd \leftarrow Rd \oplus Rr$                                       | Z,N,V      | 1       |
| COM                                      | Rd       | One's Complement                       | $Rd \leftarrow 0xFF - Rd$                                          | Z,C,N,V    | 1       |
| NEG                                      | Rd       | Two's Complement                       | $Rd \leftarrow 0x00 - Rd$                                          | Z,C,N,V,H  | 1       |
| SBR                                      | Rd,K     | Set Bit(s) in Register                 | $Rd \leftarrow Rd \vee K$                                          | Z,N,V      | 1       |
| CBR                                      | Rd,K     | Clear Bit(s) in Register               | $Rd \leftarrow Rd \bullet (0xFF - K)$                              | Z,N,V      | 1       |
| INC                                      | Rd       | Increment                              | $Rd \leftarrow Rd + 1$                                             | Z,N,V      | 1       |
| DEC                                      | Rd       | Decrement                              | $Rd \leftarrow Rd - 1$                                             | Z,N,V      | 1       |
| TST                                      | Rd       | Test for Zero or Minus                 | $Rd \leftarrow Rd \bullet Rd$                                      | Z,N,V      | 1       |
| CLR                                      | Rd       | Clear Register                         | $Rd \leftarrow Rd \oplus Rd$                                       | Z,N,V      | 1       |
| SER                                      | Rd       | Set Register                           | $Rd \leftarrow 0xFF$                                               | None       | 1       |
| <b>BRANCH INSTRUCTIONS</b>               |          |                                        |                                                                    |            |         |
| RJMP                                     | k        | Relative Jump                          | $PC \leftarrow PC + k + 1$                                         | None       | 2       |
| IJMP                                     |          | Indirect Jump to (Z)                   | $PC \leftarrow Z$                                                  | None       | 2       |
| RCALL                                    | k        | Relative Subroutine Call               | $PC \leftarrow PC + k + 1$                                         | None       | 3       |
| ICALL                                    |          | Indirect Call to (Z)                   | $PC \leftarrow Z$                                                  | None       | 3       |
| RET                                      |          | Subroutine Return                      | $PC \leftarrow STACK$                                              | None       | 4       |
| RETI                                     |          | Interrupt Return                       | $PC \leftarrow STACK$                                              | I          | 4       |
| CPSE                                     | Rd,Rr    | Compare, Skip if Equal                 | if (Rd = Rr) $PC \leftarrow PC + 2$ or 3                           | None       | 1/2/3   |
| CP                                       | Rd,Rr    | Compare                                | $Rd - Rr$                                                          | Z, N,V,C,H | 1       |
| CPC                                      | Rd,Rr    | Compare with Carry                     | $Rd - Rr - C$                                                      | Z, N,V,C,H | 1       |
| CPI                                      | Rd,K     | Compare Register with Immediate        | $Rd - K$                                                           | Z, N,V,C,H | 1       |
| SBRC                                     | Rr, b    | Skip if Bit in Register Cleared        | if (Rr(b)=0) $PC \leftarrow PC + 2$ or 3                           | None       | 1/2/3   |
| SBRs                                     | Rr, b    | Skip if Bit in Register is Set         | if (Rr(b)=1) $PC \leftarrow PC + 2$ or 3                           | None       | 1/2/3   |
| SBIC                                     | P, b     | Skip if Bit in I/O Register Cleared    | if (P(b)=0) $PC \leftarrow PC + 2$ or 3                            | None       | 1/2/3   |
| SBIS                                     | P, b     | Skip if Bit in I/O Register is Set     | if (P(b)=1) $PC \leftarrow PC + 2$ or 3                            | None       | 1/2/3   |
| BRBS                                     | s, k     | Branch if Status Flag Set              | if (SREG(s) = 1) then $PC \leftarrow PC + k + 1$                   | None       | 1/2     |
| BRBC                                     | s, k     | Branch if Status Flag Cleared          | if (SREG(s) = 0) then $PC \leftarrow PC + k + 1$                   | None       | 1/2     |
| BREQ                                     | k        | Branch if Equal                        | if (Z = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRNE                                     | k        | Branch if Not Equal                    | if (Z = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRCS                                     | k        | Branch if Carry Set                    | if (C = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRCC                                     | k        | Branch if Carry Cleared                | if (C = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRSH                                     | k        | Branch if Same or Higher               | if (C = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRLO                                     | k        | Branch if Lower                        | if (C = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRMI                                     | k        | Branch if Minus                        | if (N = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRPL                                     | k        | Branch if Plus                         | if (N = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRGE                                     | k        | Branch if Greater or Equal, Signed     | if (N $\oplus$ V = 0) then $PC \leftarrow PC + k + 1$              | None       | 1/2     |
| BRLT                                     | k        | Branch if Less Than Zero, Signed       | if (N $\oplus$ V = 1) then $PC \leftarrow PC + k + 1$              | None       | 1/2     |
| BRHS                                     | k        | Branch if Half Carry Flag Set          | if (H = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRHC                                     | k        | Branch if Half Carry Flag Cleared      | if (H = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRTS                                     | k        | Branch if T Flag Set                   | if (T = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRTC                                     | k        | Branch if T Flag Cleared               | if (T = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRVS                                     | k        | Branch if Overflow Flag is Set         | if (V = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRVC                                     | k        | Branch if Overflow Flag is Cleared     | if (V = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRIE                                     | k        | Branch if Interrupt Enabled            | if (I = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRID                                     | k        | Branch if Interrupt Disabled           | if (I = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| <b>BIT AND BIT-TEST INSTRUCTIONS</b>     |          |                                        |                                                                    |            |         |
| SBI                                      | P,b      | Set Bit in I/O Register                | $I/O(P,b) \leftarrow 1$                                            | None       | 2       |
| CBI                                      | P,b      | Clear Bit in I/O Register              | $I/O(P,b) \leftarrow 0$                                            | None       | 2       |
| LSL                                      | Rd       | Logical Shift Left                     | $Rd(n+1) \leftarrow Rd(n), Rd(0) \leftarrow 0$                     | Z,C,N,V    | 1       |
| LSR                                      | Rd       | Logical Shift Right                    | $Rd(n) \leftarrow Rd(n+1), Rd(7) \leftarrow 0$                     | Z,C,N,V    | 1       |
| ROL                                      | Rd       | Rotate Left Through Carry              | $Rd(0) \leftarrow C, Rd(n+1) \leftarrow Rd(n), C \leftarrow Rd(7)$ | Z,C,N,V    | 1       |

| Mnemonics                         | Operands | Description                      | Operation                                                          | Flags   | #Clocks |
|-----------------------------------|----------|----------------------------------|--------------------------------------------------------------------|---------|---------|
| ROR                               | Rd       | Rotate Right Through Carry       | $Rd(7) \leftarrow C, Rd(n) \leftarrow Rd(n+1), C \leftarrow Rd(0)$ | Z,C,N,V | 1       |
| ASR                               | Rd       | Arithmetic Shift Right           | $Rd(n) \leftarrow Rd(n+1), n=0..6$                                 | Z,C,N,V | 1       |
| SWAP                              | Rd       | Swap Nibbles                     | $Rd(3..0) \leftarrow Rd(7..4), Rd(7..4) \leftarrow Rd(3..0)$       | None    | 1       |
| BSET                              | s        | Flag Set                         | $SREG(s) \leftarrow 1$                                             | SREG(s) | 1       |
| BCLR                              | s        | Flag Clear                       | $SREG(s) \leftarrow 0$                                             | SREG(s) | 1       |
| BST                               | Rr, b    | Bit Store from Register to T     | $T \leftarrow Rr(b)$                                               | T       | 1       |
| BLD                               | Rd, b    | Bit load from T to Register      | $Rd(b) \leftarrow T$                                               | None    | 1       |
| SEC                               |          | Set Carry                        | $C \leftarrow 1$                                                   | C       | 1       |
| CLC                               |          | Clear Carry                      | $C \leftarrow 0$                                                   | C       | 1       |
| SEN                               |          | Set Negative Flag                | $N \leftarrow 1$                                                   | N       | 1       |
| CLN                               |          | Clear Negative Flag              | $N \leftarrow 0$                                                   | N       | 1       |
| SEZ                               |          | Set Zero Flag                    | $Z \leftarrow 1$                                                   | Z       | 1       |
| CLZ                               |          | Clear Zero Flag                  | $Z \leftarrow 0$                                                   | Z       | 1       |
| SEI                               |          | Global Interrupt Enable          | $I \leftarrow 1$                                                   | I       | 1       |
| CLI                               |          | Global Interrupt Disable         | $I \leftarrow 0$                                                   | I       | 1       |
| SES                               |          | Set Signed Test Flag             | $S \leftarrow 1$                                                   | S       | 1       |
| CLS                               |          | Clear Signed Test Flag           | $S \leftarrow 0$                                                   | S       | 1       |
| SEV                               |          | Set Twos Complement Overflow     | $V \leftarrow 1$                                                   | V       | 1       |
| CLV                               |          | Clear Twos Complement Overflow   | $V \leftarrow 0$                                                   | V       | 1       |
| SET                               |          | Set T in SREG                    | $T \leftarrow 1$                                                   | T       | 1       |
| CLT                               |          | Clear T in SREG                  | $T \leftarrow 0$                                                   | T       | 1       |
| SEH                               |          | Set Half Carry Flag in SREG      | $H \leftarrow 1$                                                   | H       | 1       |
| CLH                               |          | Clear Half Carry Flag in SREG    | $H \leftarrow 0$                                                   | H       | 1       |
| <b>DATA TRANSFER INSTRUCTIONS</b> |          |                                  |                                                                    |         |         |
| MOV                               | Rd, Rr   | Move Between Registers           | $Rd \leftarrow Rr$                                                 | None    | 1       |
| MOVW                              | Rd, Rr   | Copy Register Word               | $Rd+1:Rd \leftarrow Rr+1:Rr$                                       | None    | 1       |
| LDI                               | Rd, K    | Load Immediate                   | $Rd \leftarrow K$                                                  | None    | 1       |
| LD                                | Rd, X    | Load Indirect                    | $Rd \leftarrow (X)$                                                | None    | 2       |
| LD                                | Rd, X+   | Load Indirect and Post-Inc.      | $Rd \leftarrow (X), X \leftarrow X + 1$                            | None    | 2       |
| LD                                | Rd, -X   | Load Indirect and Pre-Dec.       | $X \leftarrow X - 1, Rd \leftarrow (X)$                            | None    | 2       |
| LD                                | Rd, Y    | Load Indirect                    | $Rd \leftarrow (Y)$                                                | None    | 2       |
| LD                                | Rd, Y+   | Load Indirect and Post-Inc.      | $Rd \leftarrow (Y), Y \leftarrow Y + 1$                            | None    | 2       |
| LD                                | Rd, -Y   | Load Indirect and Pre-Dec.       | $Y \leftarrow Y - 1, Rd \leftarrow (Y)$                            | None    | 2       |
| LDD                               | Rd, Y+q  | Load Indirect with Displacement  | $Rd \leftarrow (Y + q)$                                            | None    | 2       |
| LD                                | Rd, Z    | Load Indirect                    | $Rd \leftarrow (Z)$                                                | None    | 2       |
| LD                                | Rd, Z+   | Load Indirect and Post-Inc.      | $Rd \leftarrow (Z), Z \leftarrow Z + 1$                            | None    | 2       |
| LD                                | Rd, -Z   | Load Indirect and Pre-Dec.       | $Z \leftarrow Z - 1, Rd \leftarrow (Z)$                            | None    | 2       |
| LDD                               | Rd, Z+q  | Load Indirect with Displacement  | $Rd \leftarrow (Z + q)$                                            | None    | 2       |
| LDS                               | Rd, k    | Load Direct from SRAM            | $Rd \leftarrow (k)$                                                | None    | 2       |
| ST                                | X, Rr    | Store Indirect                   | $(X) \leftarrow Rr$                                                | None    | 2       |
| ST                                | X+, Rr   | Store Indirect and Post-Inc.     | $(X) \leftarrow Rr, X \leftarrow X + 1$                            | None    | 2       |
| ST                                | -X, Rr   | Store Indirect and Pre-Dec.      | $X \leftarrow X - 1, (X) \leftarrow Rr$                            | None    | 2       |
| ST                                | Y, Rr    | Store Indirect                   | $(Y) \leftarrow Rr$                                                | None    | 2       |
| ST                                | Y+, Rr   | Store Indirect and Post-Inc.     | $(Y) \leftarrow Rr, Y \leftarrow Y + 1$                            | None    | 2       |
| ST                                | -Y, Rr   | Store Indirect and Pre-Dec.      | $Y \leftarrow Y - 1, (Y) \leftarrow Rr$                            | None    | 2       |
| STD                               | Y+q, Rr  | Store Indirect with Displacement | $(Y + q) \leftarrow Rr$                                            | None    | 2       |
| ST                                | Z, Rr    | Store Indirect                   | $(Z) \leftarrow Rr$                                                | None    | 2       |
| ST                                | Z+, Rr   | Store Indirect and Post-Inc.     | $(Z) \leftarrow Rr, Z \leftarrow Z + 1$                            | None    | 2       |
| ST                                | -Z, Rr   | Store Indirect and Pre-Dec.      | $Z \leftarrow Z - 1, (Z) \leftarrow Rr$                            | None    | 2       |
| STD                               | Z+q, Rr  | Store Indirect with Displacement | $(Z + q) \leftarrow Rr$                                            | None    | 2       |
| STS                               | k, Rr    | Store Direct to SRAM             | $(k) \leftarrow Rr$                                                | None    | 2       |
| LPM                               |          | Load Program Memory              | $R0 \leftarrow (Z)$                                                | None    | 3       |
| LPM                               | Rd, Z    | Load Program Memory              | $Rd \leftarrow (Z)$                                                | None    | 3       |
| LPM                               | Rd, Z+   | Load Program Memory and Post-Inc | $Rd \leftarrow (Z), Z \leftarrow Z + 1$                            | None    | 3       |
| SPM                               |          | Store Program Memory             | $(Z) \leftarrow R1:R0$                                             | None    | -       |
| IN                                | Rd, P    | In Port                          | $Rd \leftarrow P$                                                  | None    | 1       |
| OUT                               | P, Rr    | Out Port                         | $P \leftarrow Rr$                                                  | None    | 1       |
| PUSH                              | Rr       | Push Register on Stack           | $STACK \leftarrow Rr$                                              | None    | 2       |
| POP                               | Rd       | Pop Register from Stack          | $Rd \leftarrow STACK$                                              | None    | 2       |
| <b>MCU CONTROL INSTRUCTIONS</b>   |          |                                  |                                                                    |         |         |
| NOP                               |          | No Operation                     |                                                                    | None    | 1       |
| SLEEP                             |          | Sleep                            | (see specific descr. for Sleep function)                           | None    | 1       |
| WDR                               |          | Watchdog Reset                   | (see specific descr. for WDR/timer)                                | None    | 1       |
| BREAK                             |          | Break                            | For On-chip Debug Only                                             | None    | N/A     |

## 6. Ordering Information

### 6.1 ATtiny2313A

| Speed (MHz) <sup>(1)</sup> | Supply Voltage (V) | Temperature Range                             | Package <sup>(2)</sup> | Ordering Code <sup>(3)</sup> |
|----------------------------|--------------------|-----------------------------------------------|------------------------|------------------------------|
| 20                         | 1.8 – 5.5          | Industrial<br>(-40°C to +85°C) <sup>(4)</sup> | 20P3                   | ATtiny2313A-PU               |
|                            |                    |                                               | 20S                    | ATtiny2313A-SU               |
|                            |                    |                                               |                        | ATtiny2313A-SUR              |
|                            |                    |                                               | 20M1                   | ATtiny2313A-MU               |
|                            |                    |                                               |                        | ATtiny2313A-MUR              |
|                            |                    |                                               | 20M2 <sup>(5)(6)</sup> | ATtiny2313A-MMH              |
|                            |                    |                                               |                        | ATtiny2313A-MMHR             |

- Notes:
- For speed vs. supply voltage, see section [22.3 "Speed" on page 199](#).
  - All packages are Pb-free, halide-free and fully green, and they comply with the European directive for Restriction of Hazardous Substances (RoHS).
  - Code indicators:
    - H: NiPdAu lead finish
    - U or N: matte tin
    - R: tape & reel
  - Can also be supplied in wafer form. Contact your local Atmel sales office for ordering information and minimum quantities.
  - NiPdAu finish
  - Topside markings :
    - 1st Line: T2313
    - 2nd Line: Axx
    - 3rd Line: xxx

| Package Type |                                                                                 |
|--------------|---------------------------------------------------------------------------------|
| <b>20P3</b>  | 20-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP)                        |
| <b>20S</b>   | 20-lead, 0.300" Wide, Plastic Gull Wing Small Outline Package (SOIC)            |
| <b>20M1</b>  | 20-pad, 4 x 4 x 0.8 mm Body, Quad Flat No-Lead / Micro Lead Frame Package (MLF) |
| <b>20M2</b>  | 20-pad, 3 x 3 x 0.85 mm Body, Very Thin Quad Flat No Lead Package (VQFN)        |

## 6.2 ATtiny4313

| Speed (MHz) <sup>(1)</sup> | Supply Voltage (V) | Temperature Range                             | Package <sup>(2)</sup> | Ordering Code <sup>(3)</sup> |
|----------------------------|--------------------|-----------------------------------------------|------------------------|------------------------------|
| 20                         | 1.8 – 5.5          | Industrial<br>(-40°C to +85°C) <sup>(4)</sup> | 20P3                   | ATtiny4313-PU                |
|                            |                    |                                               | 20S                    | ATtiny4313-SU                |
|                            |                    |                                               |                        | ATtiny4313-SUR               |
|                            |                    |                                               | 20M1                   | ATtiny4313-MU                |
|                            |                    |                                               |                        | ATtiny4313-MUR               |
|                            |                    |                                               | 20M2 <sup>(5)(6)</sup> | ATtiny4313-MMH               |
|                            |                    |                                               |                        | ATtiny4313-MMHR              |


- Notes:
- For speed vs. supply voltage, see section [22.3 “Speed” on page 199](#).
  - All packages are Pb-free, halide-free and fully green, and they comply with the European directive for Restriction of Hazardous Substances (RoHS).
  - Code indicators:
    - H: NiPdAu lead finish
    - U or N: matte tin
    - R: tape & reel
  - Can also be supplied in wafer form. Contact your local Atmel sales office for ordering information and minimum quantities.
  - NiPdAu finish
  - Topside markings:
    - 1st Line: T4313
    - 2nd Line: Axx
    - 3rd Line: xxx

| Package Type |                                                                               |
|--------------|-------------------------------------------------------------------------------|
| <b>20P3</b>  | 20-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP)                      |
| <b>20S</b>   | 20-lead, 0.300" Wide, Plastic Gull Wing Small Outline Package (SOIC)          |
| <b>20M1</b>  | 20-pad, 4 x 4 x 0.8 mm Body, Quad Flat No-Lead/Micro Lead Frame Package (MLF) |
| <b>20M2</b>  | 20-pad, 3 x 3 x 0.85 mm Body, Very Thin Quad Flat No Lead Package (VQFN)      |



## 7. Packaging Information

### 7.1 20P3

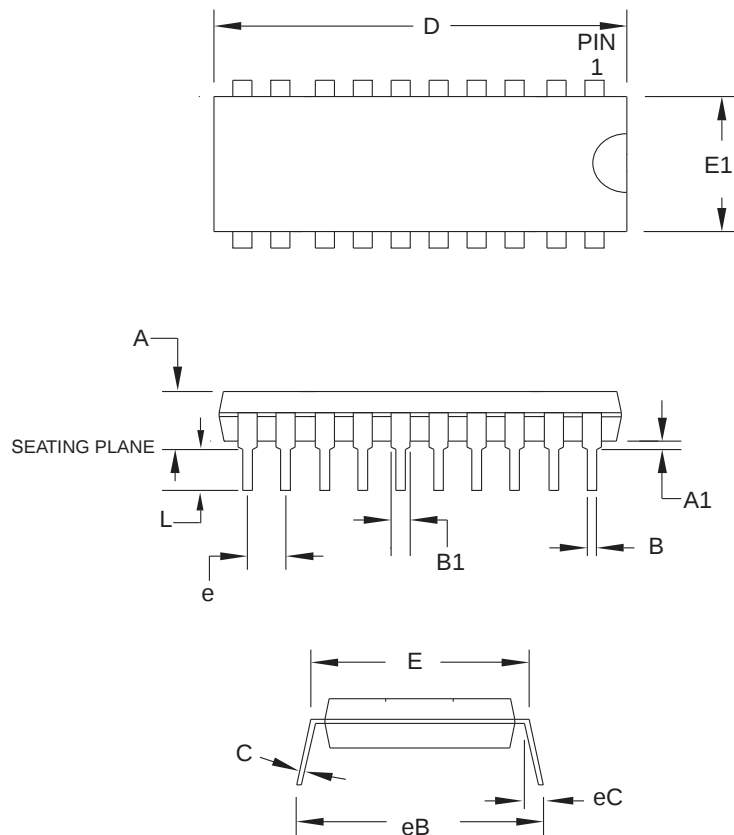

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN       | NOM | MAX    | NOTE   |
|--------|-----------|-----|--------|--------|
| A      | –         | –   | 5.334  |        |
| A1     | 0.381     | –   | –      |        |
| D      | 25.493    | –   | 25.984 | Note 2 |
| E      | 7.620     | –   | 8.255  |        |
| E1     | 6.096     | –   | 7.112  | Note 2 |
| B      | 0.356     | –   | 0.559  |        |
| B1     | 1.270     | –   | 1.551  |        |
| L      | 2.921     | –   | 3.810  |        |
| C      | 0.203     | –   | 0.356  |        |
| eB     | –         | –   | 10.922 |        |
| eC     | 0.000     | –   | 1.524  |        |
| e      | 2.540 TYP |     |        |        |

**Notes:**

1. This package conforms to JEDEC reference MS-001, Variation AD.
2. Dimensions D and E1 do not include mold Flash or Protrusion.  
Mold Flash or Protrusion shall not exceed 0.25 mm (0.010").

2010-10-19



2325 Orchard Parkway  
San Jose, CA 95131

**TITLE**

**20P3**, 20-lead (0.300"/7.62 mm Wide) Plastic Dual  
Inline Package (PDIP)


**DRAWING NO.**

20P3


**REV.**

D

## 7.2 20S

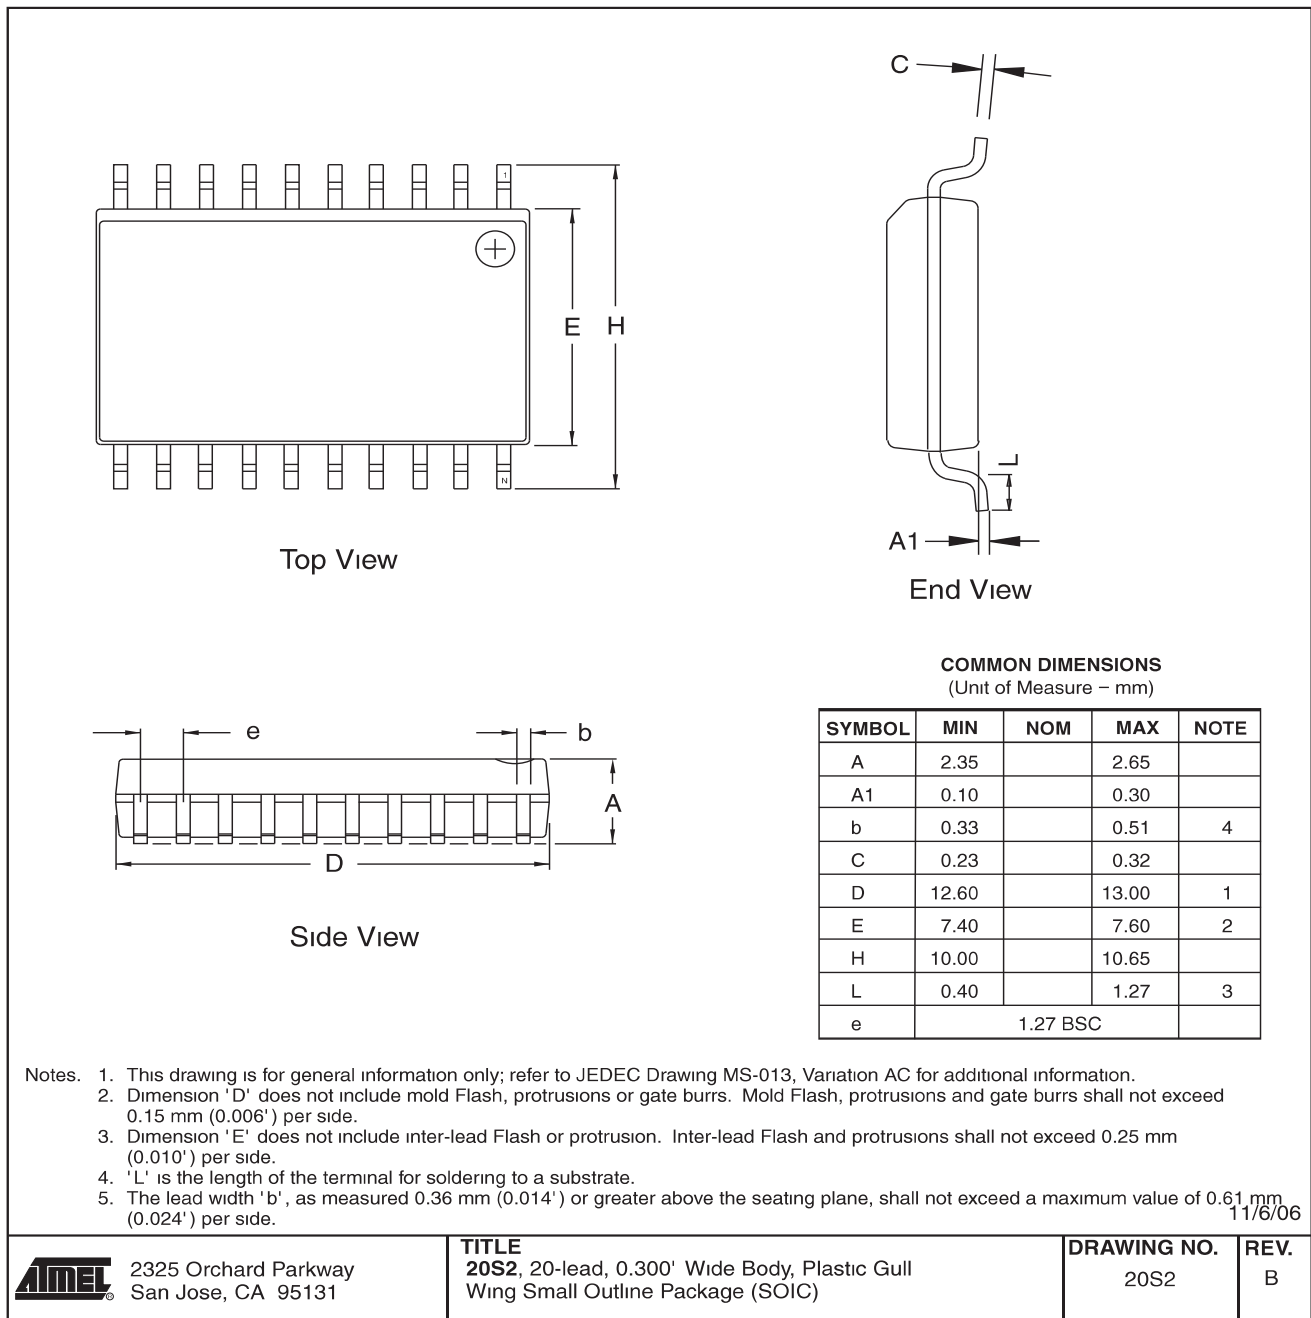

## 7.3 20M1

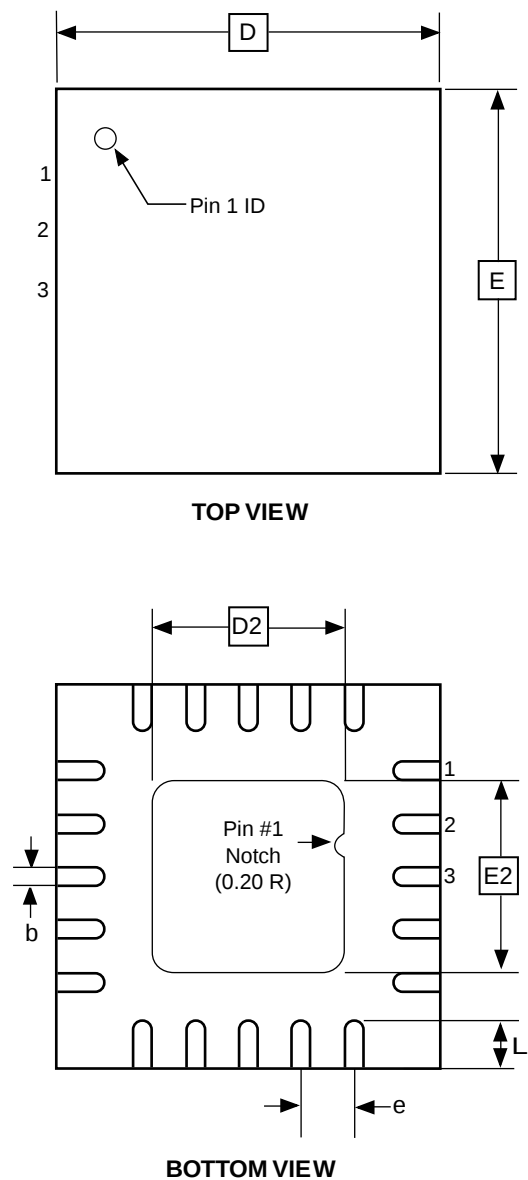

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN      | NOM  | MAX  | NOTE |
|--------|----------|------|------|------|
| A      | 0.70     | 0.75 | 0.80 |      |
| A1     | —        | 0.01 | 0.05 |      |
| A2     | 0.20 REF |      |      |      |
| b      | 0.18     | 0.23 | 0.30 |      |
| D      | 4.00 BSC |      |      |      |
| D2     | 2.45     | 2.60 | 2.75 |      |
| E      | 4.00 BSC |      |      |      |
| E2     | 2.45     | 2.60 | 2.75 |      |
| e      | 0.50 BSC |      |      |      |
| L      | 0.35     | 0.40 | 0.55 |      |

Note: Reference JEDEC Standard MO-220, Fig. 1 (SAW Singulation) WGGD-5.

10/27/04



2325 Orchard Parkway  
San Jose, CA 95131

### TITLE

**20M1**, 20-pad, 4 x 4 x 0.8 mm Body, Lead Pitch 0.50 mm,  
2.6 mm Exposed Pad, Micro Lead Frame Package (MLF)


### DRAWING NO.

20M1


### REV.

A


## 7.4 20M2

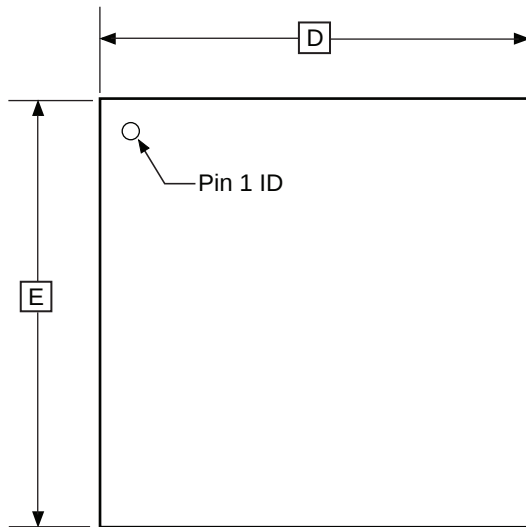

TOP VIEW

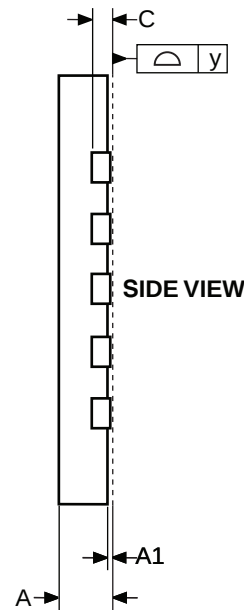

SIDE VIEW

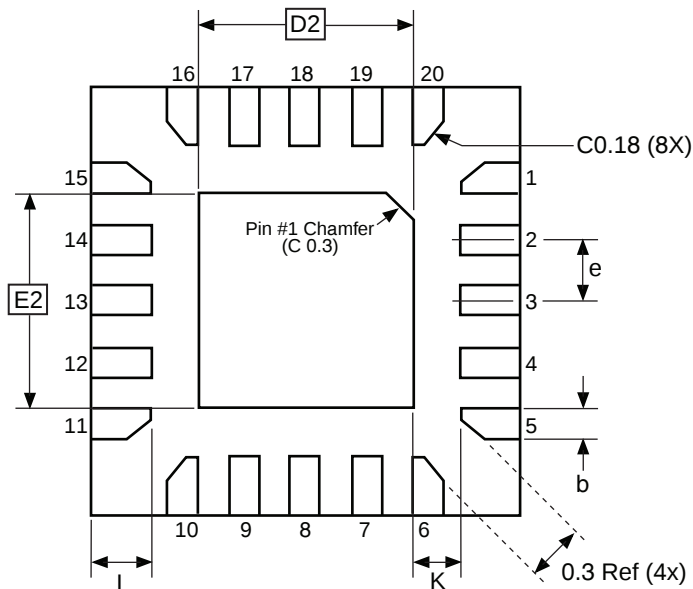

BOTTOM VIEW

COMMON DIMENSIONS  
(Unit of Measure = mm)

| SYMBOL | MIN   | NOM  | MAX  | NOTE |
|--------|-------|------|------|------|
| A      | 0.75  | 0.80 | 0.85 |      |
| A1     | 0.00  | 0.02 | 0.05 |      |
| b      | 0.17  | 0.22 | 0.27 |      |
| C      | 0.152 |      |      |      |
| D      | 2.90  | 3.00 | 3.10 |      |
| D2     | 1.40  | 1.55 | 1.70 |      |
| E      | 2.90  | 3.00 | 3.10 |      |
| E2     | 1.40  | 1.55 | 1.70 |      |
| e      | –     | 0.45 | –    |      |
| L      | 0.35  | 0.40 | 0.45 |      |
| K      | 0.20  | –    | –    |      |
| y      | 0.00  | –    | 0.08 |      |

10/24/08



**Package Drawing Contact:**  
packagedrawings@atmel.com

**TITLE**  
**20M2**, 20-pad, 3 x 3 x 0.85 mm Body, Lead Pitch 0.45 mm,  
1.55 x 1.55 mm Exposed Pad, Thermally Enhanced  
Plastic Very Thin Quad Flat No Lead Package (VQFN)

**GPC**  
ZFC

**DRAWING NO.**  
20M2

**REV.**  
B



## 8. Errata

The revision letters in this section refer to the revision of the corresponding ATtiny2313A/4313 device.

### 8.1 ATtiny2313A

#### 8.1.1 Rev. D

No known errata.

#### 8.1.2 Rev. A – C

These device revisions were referred to as ATtiny2313/ATtiny2313V.

### 8.2 ATtiny4313

#### 8.2.1 Rev. A

No known errata.

## 9. Datasheet Revision History

### 9.1 Rev. 8246B – 10/11

1. Updated device status from Preliminary to Final.
2. Updated document template.
3. Added order codes for tape&reel devices, on [page 259](#) and [page 260](#)
4. Updated figures:
  - [Figure 23-33 on page 223](#)
  - [Figure 23-44 on page 228](#)
  - [Figure 23-81 on page 247](#)
  - [Figure 23-92 on page 252](#)
5. Updated sections:
  - [Section 5. “Memories” on page 15](#)
  - [Section 19. “Self-Programming” on page 172](#)
  - [Section 20. “Lock Bits, Fuse Bits and Device Signature” on page 177](#)
  - [Section 21. “External Programming” on page 183](#)
  - [Section 26. “Ordering Information” on page 259](#)

### 9.2 Rev. 8246A – 11/09

1. Initial revision. Created from document 2543\_t2313.
2. Updated datasheet template.
3. Added VQFN in the Pinout [Figure 1-1 on page 2](#).
4. Added [Section 7.2 “Software BOD Disable” on page 34](#).
5. Added [Section 7.3 “Power Reduction Register” on page 34](#).
6. Updated [Table 7-2, “Sleep Mode Select,” on page 36](#).
7. Added [Section 7.5.3 “BODCR – Brown-Out Detector Control Register” on page 37](#).
8. Added reset disable function in [Figure 8-1 on page 38](#).
9. Added pin change interrupts PCINT1 and PCINT2 in [Table 9-1 on page 47](#).
10. Added PCINT17..8 and PCMSK2..1 in [Section 9.2 “External Interrupts” on page 48](#).
11. Added [Section 9.3.4 “PCMSK2 – Pin Change Mask Register 2” on page 52](#).
12. Added [Section 9.3.5 “PCMSK1 – Pin Change Mask Register 1” on page 52](#).
13. Updated [Section 10.2.1 “Alternate Functions of Port A” on page 61](#).
14. Updated [Section 10.2.2 “Alternate Functions of Port B” on page 62](#).
15. Updated [Section 10.2.3 “Alternate Functions of Port D” on page 66](#).
16. Added UMSEL1 and UMSEL0 in [Section 14.10.4 “UCSRC – USART Control and Status Register C” on page 139](#).
17. Added [Section 15. “USART in SPI Mode” on page 145](#).
18. Added USI Buffer Register (USIBR) in [Section 16.2 “Overview” on page 155](#) and in [Figure 16-1 on page 155](#).
19. Added [Section 16.5.4 “USIBR – USI Buffer Register” on page 166](#).
20. Updated [Section 19.6.3 “Reading Device Signature Imprint Table from Firmware” on page 175](#).

21. Updated [Section 19.7.1 “SPMCSR – Store Program Memory Control and Status Register”](#) on page 175.
22. Added [Section 20.3 “Device Signature Imprint Table”](#) on page 179.
23. Updated [Section 20.3.1 “Calibration Byte”](#) on page 180.
24. Changed BS to BS1 in [Section 20.6.13 “Reading the Signature Bytes”](#) on page 189.
25. Updated [Section 22.2 “DC Characteristics”](#) on page 198.
26. Added [Section 23.1 “Effect of Power Reduction”](#) on page 206.
27. Updated characteristic plots in [Section 23. “Typical Characteristics”](#) for ATtiny2313A (pages 207 - 230), and added plots for ATtiny4313 (pages 231 - 254).
28. Updated [Section 24. “Register Summary”](#) on page 255 .
29. Updated [Section 26. “Ordering Information”](#) on page 259, added the package type 20M2 and the ordering code -MMH (VQFN), and added the topside marking note.





## Headquarters

---

**Atmel Corporation**  
2325 Orchard Parkway  
San Jose, CA 95131  
USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## International

---

**Atmel Asia Limited**  
Unit 01-5 & 16, 19/F  
BEA Tower, Millennium City 5  
418 Kwun Tong Road  
Kwun Tong, Kowloon  
HONG KONG  
Tel: (852) 2245-6100  
Fax: (852) 2722-1369

**Atmel Munich GmbH**  
Business Campus  
Parkring 4  
D-85748 Garching b. Munich  
GERMANY  
Tel: (+49) 89-31970-0  
Fax: (+49) 89-3194621

**Atmel Japan**  
9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
JAPAN  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## Product Contact

---

**Web Site**  
[www.atmel.com](http://www.atmel.com)

**Technical Support**  
[avr@atmel.com](mailto:avr@atmel.com)

**Sales Contact**  
[www.atmel.com/contacts](http://www.atmel.com/contacts)

**Literature Requests**  
[www.atmel.com/literature](http://www.atmel.com/literature)

---

**Disclaimer:** The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© 2011 Atmel Corporation. All rights reserved. Atmel®, logo and combinations thereof, AVR® and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.