



# ATmega48PB/88PB/168PB

## AVR Microcontroller with Core Independent Peripherals and PicoPower technology

### Introduction

ATmega48PB/88PB/168PB is a low-power CMOS 8-bit microcontroller based on the AVR® enhanced RISC architecture. By executing powerful instructions in a single clock cycle, the ATmega48PB/88PB/168PB achieves throughputs approaching 1MIPS/MHz, allowing the system designer to optimize power consumption versus processing speed.

### Features

- Advanced RISC architecture
  - 131 instructions – most single clock cycle execution
  - 32 x 8 general purpose working registers
  - Fully static operation
  - Up to 20MIPS throughput at 20MHz
  - On-chip 2-cycle Multiplier
- High endurance non-volatile memory segments
  - 4/8/16KBytes of in-system self-programmable Flash program memory
  - 256/512/512Bytes EEPROM
  - 512/1K/1KBytes internal SRAM
  - Write/Erase cycles: 10,000 Flash/100,000 EEPROM
  - Data retention: 20 years at 85°C/100 years at 25°C
  - Optional boot code section with independent lock bits
    - In-system programming by on-chip boot program
    - True Read-While-Write (RWW) operation
  - Programming lock for software security
- QTouch® library support
  - Capacitive touch buttons, sliders and wheels
  - QTouch and QMatrix® acquisition
  - Up to 64 sense channels
- Peripheral Features
  - Two 8-bit Timer/Counters (TC) with separate prescaler and compare mode
  - 16-bit Timer/Counter with separate prescaler, compare mode, and capture mode
  - Real Time Counter (RTC) with separate oscillator
  - Six Pulse Width Modulation (PWM) channels
  - 8-channel 10-bit Analog-to-Digital converter (ADC) with temperature measurement
  - Programmable serial USART with start-of-frame detection

- Master/Slave Serial Interface (SPI)
- Byte-oriented Two-Wire serial Interface (TWI), Philips I<sup>2</sup>C compatible
- Programmable Watchdog Timer (WDT) with separate on-chip oscillator
- On-chip Analog Comparator (AC)
- Interrupt and Wake-up on pin change
  - 256-channel capacitive touch and proximity sensing
- Special microcontroller features
  - Power-On Reset (POR) and programmable brown-out detection (BOD)
  - Internal calibrated oscillator
  - External and internal interrupt sources
  - Six Sleep Modes: Idle, ADC Noise Reduction, Power-Save, Power-Down, Standby, and Extended Standby
  - Unique device ID
- I/O
  - 27 programmable I/O pins
- Packages
  - 32-pin TQFP, VFQFN
- Operating voltage
  - 1.8V – 5.5V
- Temperature range
  - -40°C to 105°C
- Speed grades
  - 0 - 4MHz at 1.8-5.5V
  - 0 - 10MHz at 2.7-5.5V
  - 0 - 20MHz at 4.5-5.5V
- Power consumption at 1MHz, 1.8V, 25°C
  - Active mode: 0.35mA
  - Power-down mode: 0.23µA
  - Power-save mode: <1.4µA (including 32kHz RTC)

## Table of Contents

---

|                                           |    |
|-------------------------------------------|----|
| Introduction.....                         | 1  |
| Features.....                             | 1  |
| 1. Description.....                       | 5  |
| 2. Configuration Summary.....             | 6  |
| 3. Ordering Information.....              | 7  |
| 3.1. ATmega48PB.....                      | 7  |
| 3.2. ATmega88PB.....                      | 7  |
| 3.3. ATmega168PB .....                    | 8  |
| 4. Block Diagram.....                     | 9  |
| 5. Pin Configurations.....                | 10 |
| 5.1. Pin Descriptions.....                | 11 |
| 6. I/O Multiplexing.....                  | 14 |
| 7. Comparison Between Processors.....     | 15 |
| 8. Resources.....                         | 16 |
| 9. Data Retention.....                    | 17 |
| 10. About Code Examples.....              | 18 |
| 11. Capacitive Touch Sensing.....         | 19 |
| 11.1. QTouch Library.....                 | 19 |
| 12. Packaging Information.....            | 20 |
| 12.1. 32-pin 32A.....                     | 20 |
| 12.2. 32-pin 32MS1.....                   | 21 |
| 13. Errata.....                           | 22 |
| 13.1. Errata ATmega48PB.....              | 22 |
| 13.2. Errata ATmega88PB.....              | 23 |
| 13.3. Errata ATmega168PB.....             | 25 |
| The Microchip Web Site.....               | 28 |
| Customer Change Notification Service..... | 28 |
| Customer Support.....                     | 28 |
| Product Identification System.....        | 29 |

|                                                 |    |
|-------------------------------------------------|----|
| Microchip Devices Code Protection Feature.....  | 29 |
| Legal Notice.....                               | 30 |
| Trademarks.....                                 | 30 |
| Quality Management System Certified by DNV..... | 31 |
| Worldwide Sales and Service.....                | 32 |

## 1. Description

The AVR core combines a rich instruction set with 32 general purpose working registers. All the 32 registers are directly connected to the Arithmetic Logic Unit (ALU), allowing two independent registers to be accessed in one single instruction executed in one clock cycle. The resulting architecture is more code efficient while achieving throughputs up to ten times faster than conventional CISC microcontrollers.

The ATmega48PB/88PB/168PB provides the following features: 4/8/16Kbytes of In-System Programmable Flash with Read-While-Write capabilities, 256/512/512 bytes EEPROM, 512/1K/1Kbytes SRAM, 27 general purpose I/O lines, 32 general purpose working registers, three flexible Timer/Counters with compare modes, internal and external interrupts, a serial programmable USART, a byte-oriented 2-wire Serial Interface (I<sup>2</sup>C), an SPI serial port, a 6-channel 10-bit ADC (8 channels in TQFP and VFQFN packages), a programmable Watchdog Timer with internal Oscillator, and six software selectable power saving modes. The Idle mode stops the CPU while allowing the SRAM, Timer/Counters, USART, 2-wire Serial Interface, SPI port, and interrupt system to continue functioning. The Power-down mode saves the register contents but freezes the Oscillator, disabling all other chip functions until the next interrupt or hardware reset. In Power-save mode, the asynchronous timer continues to run, allowing the user to maintain a timer base while the rest of the device is sleeping. The ADC Noise Reduction mode stops the CPU and all I/O modules except asynchronous timer and ADC, to minimize switching noise during ADC conversions. In Standby mode, the crystal/resonator Oscillator is running while the rest of the device is sleeping. This allows very fast start-up combined with low power consumption.

It offers the QTouch<sup>®</sup> library for embedding capacitive touch buttons, sliders and wheels functionality into AVR microcontrollers. The patented charge-transfer signal acquisition offers robust sensing and includes fully debounced reporting of touch keys and includes Adjacent Key Suppression<sup>®</sup> (AKS<sup>®</sup>) technology for unambiguous detection of key events. The easy-to-use QTouch Composer allows programmers to explore, develop and debug their touch applications.

The device is manufactured using high density non-volatile memory technology. The On-chip ISP Flash allows the program memory to be reprogrammed In-System through an SPI serial interface, by a conventional nonvolatile memory programmer, or by an On-chip Boot program running on the AVR core. The Boot program can use any interface to download the application program in the Application Flash memory. Software in the Boot Flash section will continue to run while the Application Flash section is updated, providing true Read-While-Write operation. By combining an 8-bit RISC CPU with In-System Self-Programmable Flash on a monolithic chip, the ATmega48PB/88PB/168PB is a powerful microcontroller that provides a highly flexible and cost effective solution to many embedded control applications.

The ATmega48PB/88PB/168PB is supported with a full suite of program and system development tools including: C Compilers, Macro Assemblers, Program Debugger/Simulators, and Evaluation kits.

## 2. Configuration Summary

**Table 2-1. Configuration Summary**

|                         | ATmega48PB      | ATmega88PB | ATmega168PB |
|-------------------------|-----------------|------------|-------------|
| Pin count               | 32              | 32         | 32          |
| Flash (KB)              | 4               | 8          | 16          |
| SRAM (Bytes)            | 512             | 1024       | 1024        |
| EEPROM (Bytes)          | 256             | 512        | 512         |
| Max I/O pins            | 27              |            |             |
| SPI                     | 1               |            |             |
| TWI (I <sup>2</sup> C)  | 1               |            |             |
| USART                   | 1               |            |             |
| ADC                     | 10-bit 15ksps   |            |             |
| ADC channels            | 8               |            |             |
| AC                      | 1               |            |             |
| 8-bit Timer/Counters    | 2               |            |             |
| 16-bit Timer/Counters   | 1               |            |             |
| PWM channels            | 6               |            |             |
| Operating voltage       | 1.8V - 5.5V     |            |             |
| Max operating frequency | 20MHz           |            |             |
| Temperature range       | -40°C to +105°C |            |             |

## 3. Ordering Information

### 3.1 ATmega48PB

| Speed [MHz] <sup>(3)</sup> | Power Supply [V] | Ordering Code <sup>(2)</sup>  | Package <sup>(1)</sup> | Operational Range               |
|----------------------------|------------------|-------------------------------|------------------------|---------------------------------|
| 20                         | 1.8 - 5.5        | ATmega48PB-AU                 | 32A                    | Industrial<br>(-40°C to +85°C)  |
|                            |                  | ATmega48PB-AUR <sup>(4)</sup> | 32A                    |                                 |
|                            |                  | ATmega48PB-MU                 | 32MS1                  |                                 |
|                            |                  | ATmega48PB-MUR <sup>(4)</sup> | 32MS1                  |                                 |
|                            |                  | ATmega48PB-AN                 | 32A                    | Industrial<br>(-40°C to +105°C) |
|                            |                  | ATmega48PB-ANR <sup>(4)</sup> | 32A                    |                                 |
|                            |                  | ATmega48PB-MN                 | 32MS1                  |                                 |
|                            |                  | ATmega48PB-MNR <sup>(4)</sup> | 32MS1                  |                                 |

**Note:**

1. This device can also be supplied in wafer form. Contact your local sales office for detailed ordering information and minimum quantities.
2. Pb-free packaging complies to the European Directive for Restriction of Hazardous Substances (RoHS directive). Also Halide free and fully Green.
3. See "Speed Grades" on page 304.
4. Tape & Reel.

| Package Type |                                                                                                        |
|--------------|--------------------------------------------------------------------------------------------------------|
| 32A          | 32-lead, Thin (1.0mm) Plastic Quad Flat Package (TQFP)                                                 |
| 32MS1        | 32-pad, 5.0x5.0x0.9mm body, Lead Pitch 0.50mm, Very-thin Fine pitch, Quad Flat No Lead Package (VFQFN) |

### 3.2 ATmega88PB

| Speed [MHz] <sup>(3)</sup> | Power Supply [V] | Ordering Code <sup>(2)</sup>  | Package <sup>(1)</sup> | Operational Range               |
|----------------------------|------------------|-------------------------------|------------------------|---------------------------------|
| 20                         | 1.8 - 5.5        | ATmega88PB-AU                 | 32A                    | Industrial<br>(-40°C to +85°C)  |
|                            |                  | ATmega88PB-AUR <sup>(4)</sup> | 32A                    |                                 |
|                            |                  | ATmega88PB-MU                 | 32MS1                  |                                 |
|                            |                  | ATmega88PB-MUR <sup>(4)</sup> | 32MS                   |                                 |
|                            |                  | ATmega88PB-AN                 | 32A                    | Industrial<br>(-40°C to +105°C) |
|                            |                  | ATmega88PB-ANR <sup>(4)</sup> | 32A                    |                                 |
|                            |                  | ATmega88PB-MN                 | 32MS1                  |                                 |
|                            |                  | ATmega88PB-MNR <sup>(4)</sup> | 32MS1                  |                                 |

**Note:**

1. This device can also be supplied in wafer form. Contact your local sales office for detailed ordering information and minimum quantities.

2. Pb-free packaging complies to the European Directive for Restriction of Hazardous Substances (RoHS directive).Also Halide free and fully Green.
3. See "Speed Grades" on page 304.
4. Tape & Reel.

| Package Type |                                                                                                        |
|--------------|--------------------------------------------------------------------------------------------------------|
| 32A          | 32-lead, Thin (1.0mm) Plastic Quad Flat Package (TQFP)                                                 |
| 32MS1        | 32-pad, 5.0x5.0x0.9mm body, Lead Pitch 0.50mm, Very-thin Fine pitch, Quad Flat No Lead Package (VFQFN) |

## 3.3 ATmega168PB

| Speed [MHz] | Power Supply [V] | Ordering Code <sup>(2)</sup>   | Package <sup>(1)</sup> | Operational Range               |
|-------------|------------------|--------------------------------|------------------------|---------------------------------|
| 20          | 1.8 - 5.5        | ATmega168PB-AU                 | 32A                    | Industrial<br>(-40°C to +85°C)  |
|             |                  | ATmega168PB-AUR <sup>(3)</sup> | 32A                    |                                 |
|             |                  | ATmega168PB-MU                 | 32MS1                  |                                 |
|             |                  | ATmega168PB-MUR <sup>(3)</sup> | 32MS1                  |                                 |
|             |                  | ATmega168PB-AN                 | 32A                    | Industrial<br>(-40°C to +105°C) |
|             |                  | ATmega168PB-ANR <sup>(3)</sup> | 32A                    |                                 |
|             |                  | ATmega168PB-MN                 | 32MS1                  |                                 |
|             |                  | ATmega168PB-MNR <sup>(3)</sup> | 32MS1                  |                                 |


### Note:

1. This device can also be supplied in wafer form. Contact your local Atmel sales office for detailed ordering information and minimum quantities.
2. Pb-free packaging complies to the European Directive for Restriction of Hazardous Substances (RoHS directive).Also Halide free and fully Green.
3. Tape & Reel.

| Package Type |                                                                                                        |
|--------------|--------------------------------------------------------------------------------------------------------|
| 32A          | 32-lead, Thin (1.0mm) Plastic Quad Flat Package (TQFP)                                                 |
| 32MS1        | 32-pad, 5.0x5.0x0.9mm body, Lead Pitch 0.50mm, Very-thin Fine pitch, Quad Flat No Lead Package (VFQFN) |

#### 4. Block Diagram

### Figure 4-1. Block Diagram

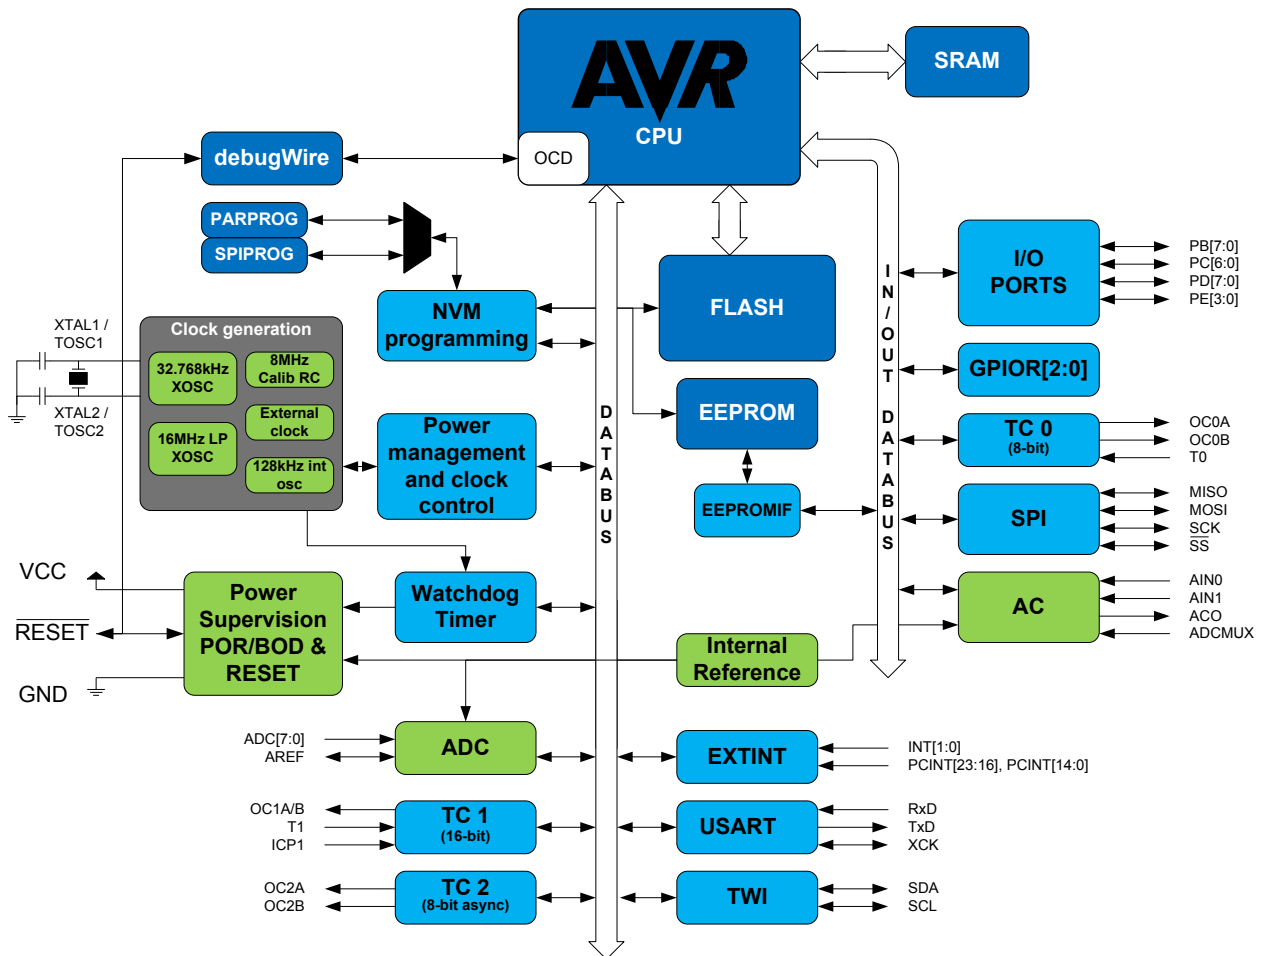

## 5. Pin Configurations

Figure 5-1. 32 TQFP Pinout ATmega48PB/88PB/168PB


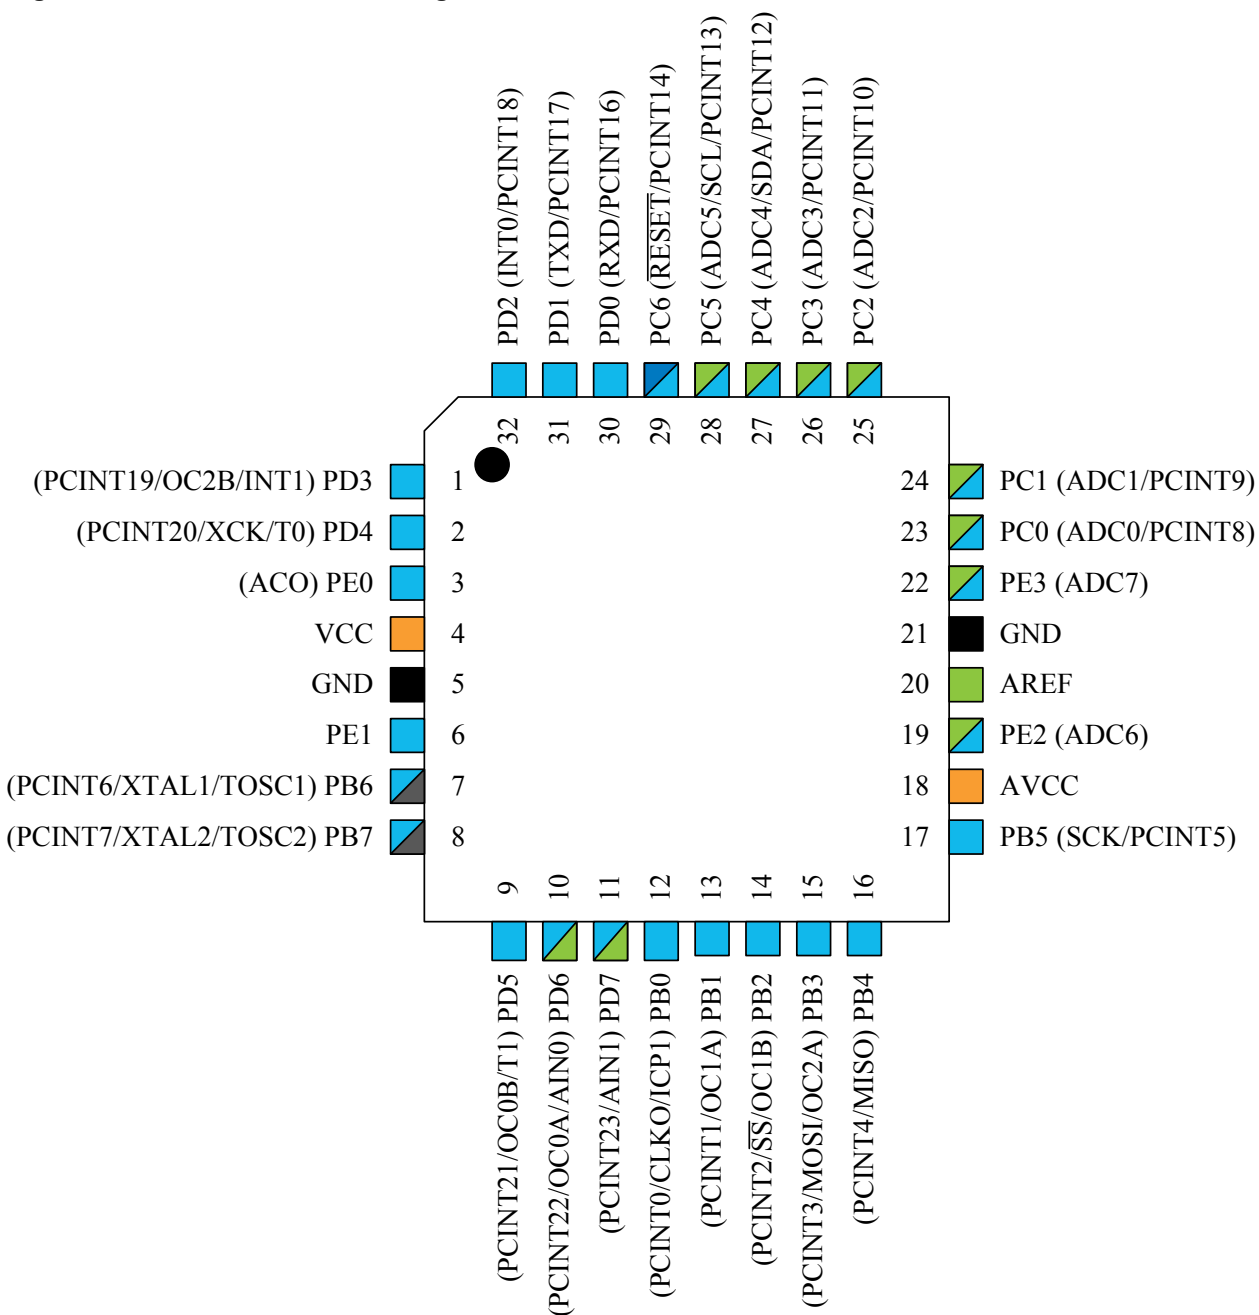


Figure 5-2. 32 VQFN Pinout ATmega48PB/88PB/168PB

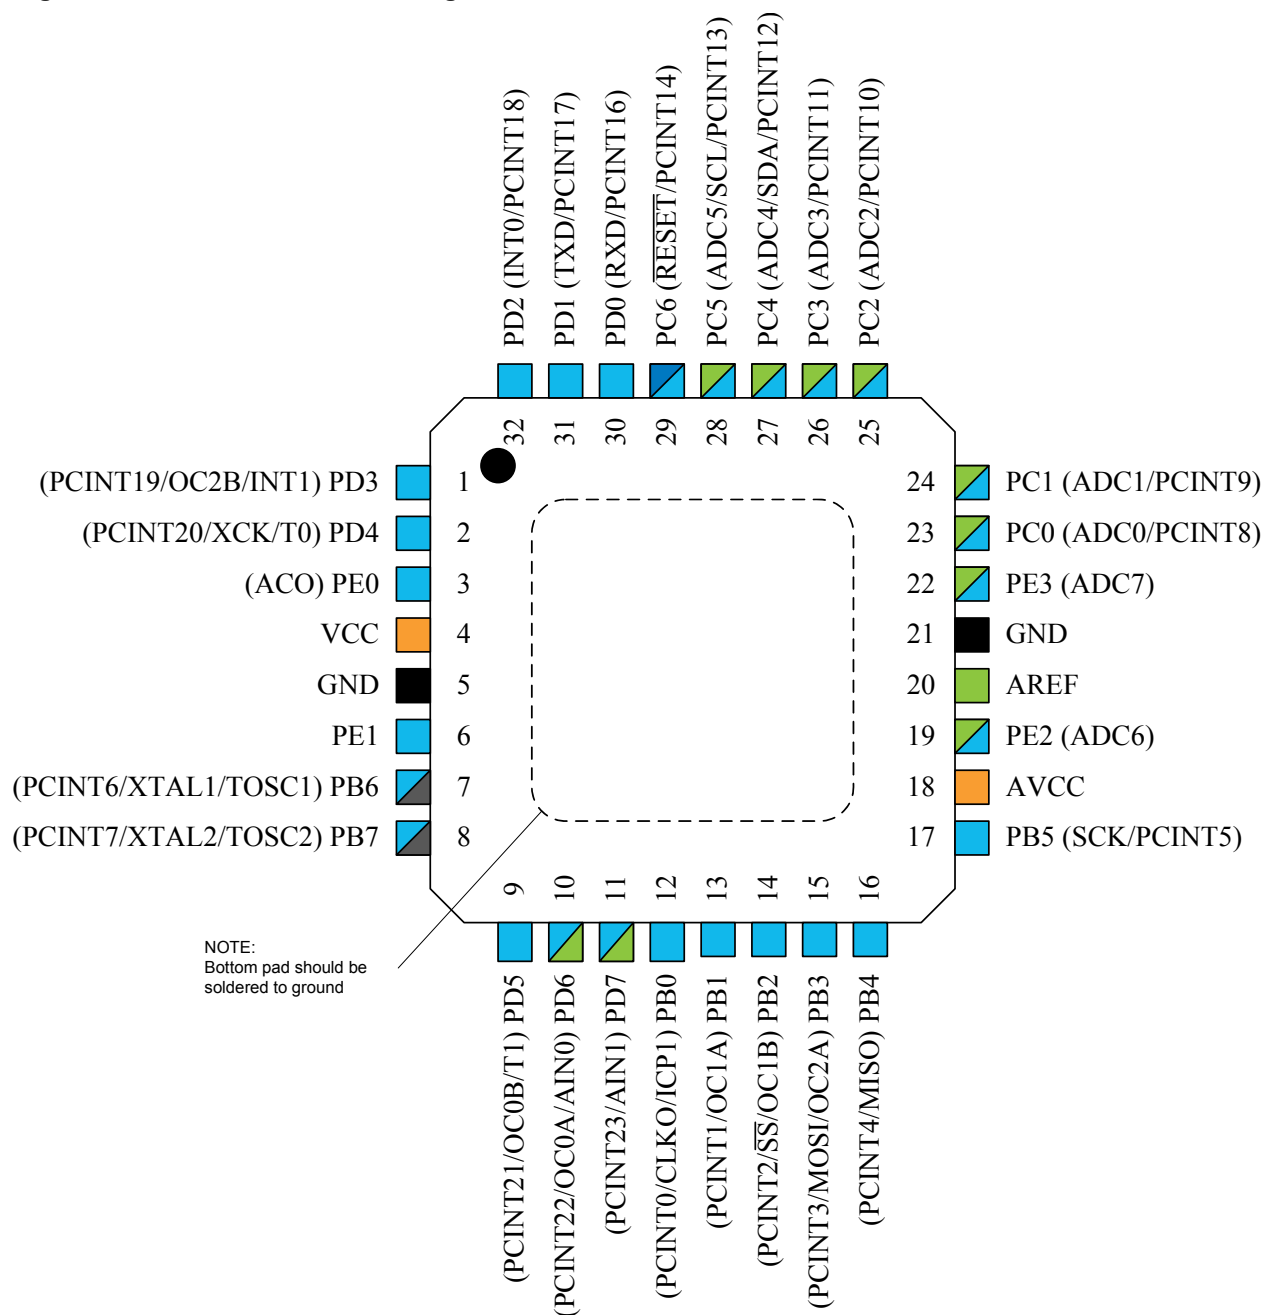

## 5.1 Pin Descriptions

### 5.1.1 VCC

Digital supply voltage.

### 5.1.2 GND

Ground.

**5.1.3 Port B (PB[7:0]) XTAL1/XTAL2/TOSC1/TOSC2**

Port B is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each pin). The Port B output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port B pins that are externally pulled low will source current if the pull-up resistors are activated. The Port B pins are tri-stated during a reset condition even if the clock is not running.

Depending on the clock selection fuse settings, PB6 can be used as input to the inverting Oscillator amplifier and input to the internal clock operating circuit.

Depending on the clock selection fuse settings, PB7 can be used as output from the inverting Oscillator amplifier.

If the Internal Calibrated RC Oscillator is used as chip clock source, PB[7:6] is used as TOSC[2:1] input for the Asynchronous Timer/Counter2 if the AS2 bit in ASSR is set.

**5.1.4 Port C (PC[5:0])**

Port C is a 7-bit bi-directional I/O port with internal pull-up resistors (selected for each pin). The PC[5:0] output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port C pins that are externally pulled low will source current if the pull-up resistors are activated. The Port C pins are tri-stated during a reset condition even if the clock is not running.

**5.1.5 PC6/RESET**

If the RSTDISBL Fuse is programmed, PC6 is used as an I/O pin. Note that the electrical characteristics of PC6 differ from those of the other pins of Port C.

If the RSTDISBL Fuse is unprogrammed, PC6 is used as a Reset input. A low level on this pin for longer than the minimum pulse length will generate a Reset, even if the clock is not running. Shorter pulses are not guaranteed to generate a Reset.

The various special features of Port C are elaborated in the *Alternate Functions of Port C* section.

**5.1.6 Port D (PD[7:0])**

Port D is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each pin). The Port D output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port D pins that are externally pulled low will source current if the pull-up resistors are activated. The Port D pins are tri-stated during a reset condition even if the clock is not running.

**5.1.7 Port E (PE[3:0])**

Port E is an 4-bit bi-directional I/O port with internal pull-up resistors (selected for each pin). The Port E output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port E pins that are externally pulled low will source current if the pull-up resistors are activated. The Port E pins are tri-stated during a reset condition even if the clock is not running.

**5.1.8 AV<sub>CC</sub>**

AV<sub>CC</sub> is the supply voltage pin for the A/D Converter, PC[3:0], and PE[3:2]. It should be externally connected to V<sub>CC</sub>, even if the ADC is not used. If the ADC is used, it should be connected to V<sub>CC</sub> through a low-pass filter. Note that PC[6:4] use digital supply voltage, V<sub>CC</sub>.

**5.1.9 AREF**

AREF is the analog reference pin for the A/D Converter.

## 5.1.10 ADC[7:6] (TQFP and VFQFN Package Only)

In the TQFP and VFQFN package, ADC[7:6] serve as analog inputs to the A/D converter. These pins are powered from the analog supply and serve as 10-bit ADC channels.

## 6. I/O Multiplexing

Each pin is by default controlled by the PORT as a general purpose I/O and alternatively it can be assigned to one of the peripheral functions.

The following table describes the peripheral signals multiplexed to the PORT I/O pins.

**Table 6-1. PORT Function Multiplexing**

| No | PAD         | EXTINT | PCINT   | ADC/AC | OSC         | T/C # 0 | T/C # 1 | USART | I2C | SPI  |
|----|-------------|--------|---------|--------|-------------|---------|---------|-------|-----|------|
| 1  | PD[3]       | INT1   | PCINT19 |        |             | OC2B    |         |       |     |      |
| 2  | PD[4]       |        | PCINT20 |        |             | T0      |         | XCK   |     |      |
| 3  | PE[0]       |        |         | ACO    |             |         |         |       |     |      |
| 4  | VCC         |        |         |        |             |         |         |       |     |      |
| 5  | GND         |        |         |        |             |         |         |       |     |      |
| 6  | PE[1]       |        |         |        |             |         |         |       |     |      |
| 7  | PB[6]       |        | PCINT6  |        | XTAL1/TOSC1 |         |         |       |     |      |
| 8  | PB[7]       |        | PCINT7  |        | XTAL2/TOSC2 |         |         |       |     |      |
| 9  | PD[5]       |        | PCINT21 |        |             | OC0B    | T1      |       |     |      |
| 10 | PD[6]       |        | PCINT22 | AIN0   |             | OC0A    |         |       |     |      |
| 11 | PD[7]       |        | PCINT23 | AIN1   |             |         |         |       |     |      |
| 12 | PB[0]       |        | PCINT0  |        | CLKO        | ICP1    |         |       |     |      |
| 13 | PB[1]       |        | PCINT1  |        |             | OC1A    |         |       |     |      |
| 14 | PB[2]       |        | PCINT2  |        |             | OC1B    |         |       |     | SS   |
| 15 | PB[3]       |        | PCINT3  |        |             | OC2A    |         |       |     | MOSI |
| 16 | PB[4]       |        | PCINT4  |        |             |         |         |       |     | MISO |
| 17 | PB[5]       |        | PCINT5  |        |             |         |         |       |     | SCK  |
| 18 | AVCC        |        |         |        |             |         |         |       |     |      |
| 19 | PE[2]       |        |         | ADC6   |             |         |         |       |     |      |
| 20 | AREF        |        |         |        |             |         |         |       |     |      |
| 21 | GND         |        |         |        |             |         |         |       |     |      |
| 22 | PE[3]       |        |         | ADC7   |             |         |         |       |     |      |
| 23 | PC[0]       |        | PCINT8  | ADC0   |             |         |         |       |     |      |
| 24 | PC[1]       |        | PCINT9  | ADC1   |             |         |         |       |     |      |
| 25 | PC[2]       |        | PCINT10 | ADC2   |             |         |         |       |     |      |
| 26 | PC[3]       |        | PCINT11 | ADC3   |             |         |         |       |     |      |
| 27 | PC[4]       |        | PCINT12 | ADC4   |             |         |         |       | SDA |      |
| 28 | PC[5]       |        | PCINT13 | ADC5   |             |         |         |       | SCL |      |
| 29 | PC[6]/RESET |        | PCINT14 |        |             |         |         |       |     |      |
| 30 | PD[0]       |        | PCINT16 |        |             |         |         | RXD   |     |      |
| 31 | PD[1]       |        | PCINT17 |        |             |         |         | TXD   |     |      |
| 32 | PD[2]       | INT0   | PCINT18 |        |             |         |         |       |     |      |

## 7. Comparison Between Processors

The ATmega48PB/88PB/168PB differ only in memory sizes, boot loader support, and interrupt vector sizes. The table below summarizes the different memory and interrupt vector sizes for the devices.

**Table 7-1. Memory Size Summary**

| Device      | Flash    | EEPROM   | RAM      | Interrupt Vector Size      |
|-------------|----------|----------|----------|----------------------------|
| ATmega48PB  | 4KBytes  | 256Bytes | 512Bytes | 1 instruction word/vector  |
| ATmega88PB  | 8KBytes  | 512Bytes | 1KBytes  | 1 instruction word/vector  |
| ATmega168PB | 16KBytes | 512Bytes | 1KBytes  | 2 instruction words/vector |

ATmega88PB/168PB support a real Read-While-Write Self-Programming Mechanism (SPM). The SPM instruction can only execute from the separate Boot Loader Section. In ATmega48PB there is no Read-While-Write support and no separate Boot Loader Section. The SPM instruction can execute from the entire Flash.

## 8. Resources

A comprehensive set of development tools, application notes and datasheets are available for download on <http://www.microchip.com/design-centers/8-bit/microchip-avr-mcus>.

## 9. Data Retention

Reliability Qualification results show that the projected data retention failure rate is much less than 1 PPM over 20 years at 85°C or 100 years at 25°C.

## 10. About Code Examples

This documentation contains simple code examples that briefly show how to use various parts of the device. These code examples assume that the part specific header file is included before compilation. Be aware that not all C compiler vendors include bit definitions in the header files and interrupt handling in C is compiler dependent. Confirm with the C compiler documentation for more details.

For I/O Registers located in extended I/O map, “IN”, “OUT”, “SBIS”, “SBIC”, “CBI”, and “SBI” instructions must be replaced with instructions that allow access to extended I/O. Typically “LDS” and “STS” combined with “SBR”, “SBRC”, “SBR”, and “CBR”.

## 11. Capacitive Touch Sensing

### 11.1 QTouch Library


The QTouch<sup>®</sup> Library provides a simple to use solution to realize touch sensitive interfaces on most AVR<sup>®</sup> microcontrollers. The QTouch Library includes support for the Touch and QMatrix<sup>®</sup> acquisition methods.

Touch sensing can be added to any application by linking the appropriate QTouch Library for the AVR Microcontroller. This is done by using a simple set of APIs to define the touch channels and sensors, and then calling the touch sensing API's to retrieve the channel information and determine the touch sensor states.

The QTouch Library is FREE and down-loadable from [QTouch Library](#) . For implementation details and other information, refer to the [QTouch Library User Guide](#) - also available for download from the website.

## 12. Packaging Information

### 12.1 32-pin 32A

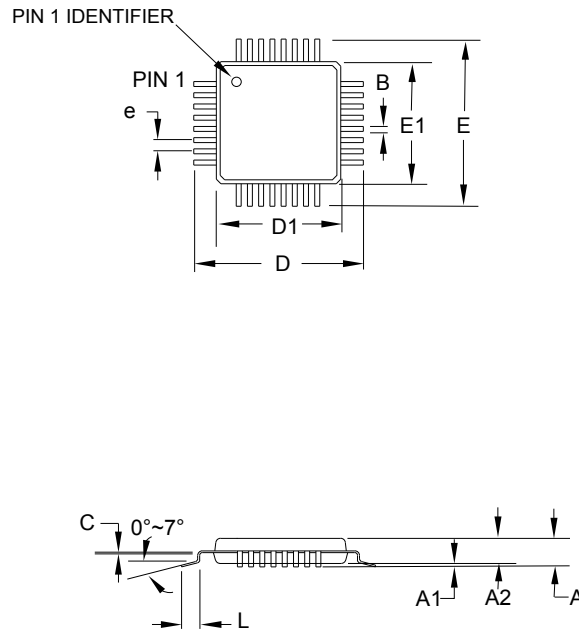

**COMMON DIMENSIONS**  
(Unit of measure = mm)

| SYMBOL | MIN      | NOM  | MAX  | NOTE   |
|--------|----------|------|------|--------|
| A      | —        | —    | 1.20 |        |
| A1     | 0.05     | —    | 0.15 |        |
| A2     | 0.95     | 1.00 | 1.05 |        |
| D      | 8.75     | 9.00 | 9.25 |        |
| D1     | 6.90     | 7.00 | 7.10 | Note 2 |
| E      | 8.75     | 9.00 | 9.25 |        |
| E1     | 6.90     | 7.00 | 7.10 | Note 2 |
| B      | 0.30     | —    | 0.45 |        |
| C      | 0.09     | —    | 0.20 |        |
| L      | 0.45     | —    | 0.75 |        |
| e      | 0.80 TYP |      |      |        |


**Notes:**

1. This package conforms to JEDEC reference MS-026, Variation ABA.
2. Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is 0.25mm per side. Dimensions D1 and E1 are maximum plastic body size dimensions including mold mismatch.
3. Lead coplanarity is 0.10mm maximum.

2010-10-20

|                                                                                     |                                                                                                                           |                    |             |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------------|-------------|
|  | <b>TITLE</b>                                                                                                              | <b>DRAWING NO.</b> | <b>REV.</b> |
|                                                                                     | <b>32A</b> , 32-lead, 7 x 7mm body size, 1.0mm body thickness,<br>0.8mm lead pitch, thin profile quad flat package (TQFP) | 32A                | C           |

## 12.2 32-pin 32MS1

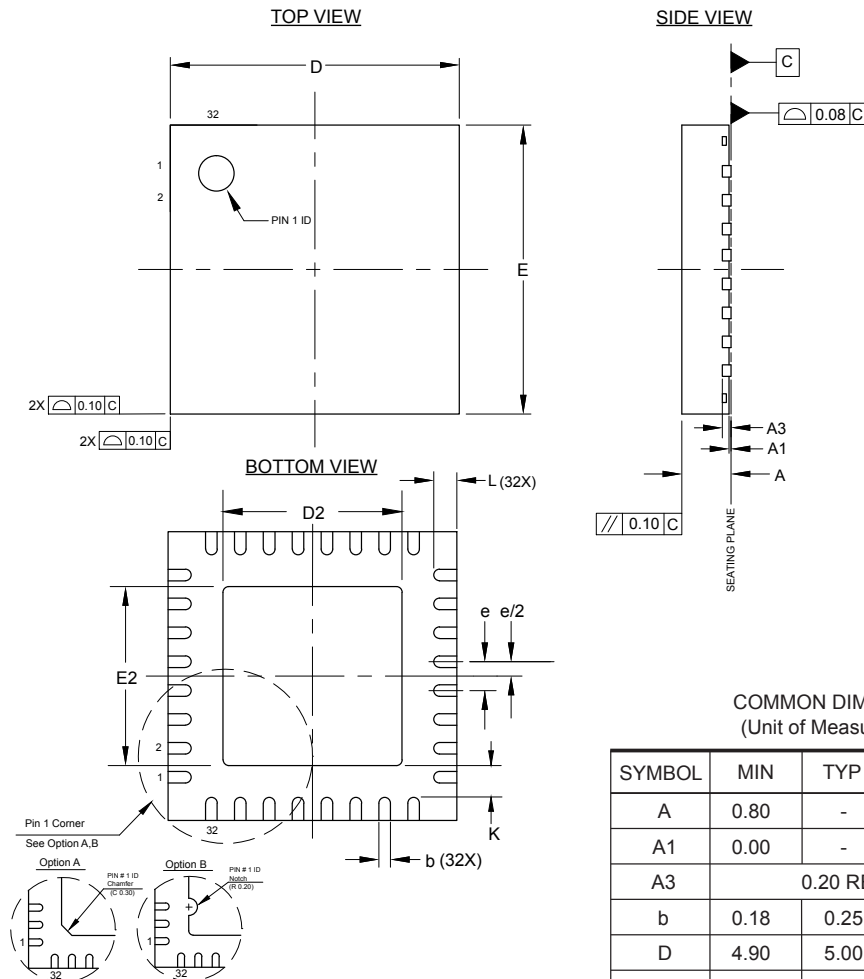

### NOTE:

1. Refer to JEDEC Drawing MO-220, Variation VHHD-2 (Figure 1/Saw Singulation)
2. Dimension "b" applies to metalized terminal and is measured between 0.15mm and 0.30mm from the terminal tip. If the terminal has the optional radius on the other end of the terminal, the dimensions should not be measured in that radius area.

12/4/13



Package Drawing Contact:  
packagedrawings@atmel.com

### TITLE

32MS1, 32-pad 5.0x5.0x0.9 mm Body, 0.50mm pitch, 3.1x3.1 mm Exposed pad, Saw Singulated Thermally Enhanced Plastic Very-thin Fine pitch, Quad Flat No Lead package (VFQFN)

### GPC

ZMF

### DRAWING NO.

32MS1

### REV.

A

## 13. Errata

### 13.1 Errata ATmega48PB

The revision letter in this section refers to the revision of the ATmega48PB device.

#### 13.1.1 Rev. A

- Wrong device ID when using debugWire
- Power consumption in power save modes
- USART start-up functionality not working
- External capacitor on AREF pin
- Increased power consumption when using voltage reference other than AVCC

##### 1.) Wrong device ID when using debugWire

The device ID returned using debugWire is incorrect.

Problem Fix/Workaround

None.

##### 2.) Power consumption in power save modes

Power consumption in power save modes will be higher due to improper control of internal power management.

Problem Fix/Workaround

None.

##### 3.) USART start-up functionality not working

While in power save modes, the USART start bit detection logic fails to wake up the device.

Problem Fix/Workaround

None.

##### 4.) External capacitor on AREF pin

If an external capacitor is used on the analog reference pin (AREF), it should be equal to or larger than 100nF. Smaller capacitor value can make the AREF buffer unstable with large ringing which will reduce the accuracy of the ADC.

Problem Fix/Workaround

None.

##### 5.) Increased power consumption when using voltage reference other than AVCC

Power consumption is higher when using internal or external voltage reference that is not equal to AVCC. The increased current consumption will be the same for active and all sleep modes, but the largest impact will be in low power sleep modes.

Problem Fix/Workaround

Select AVCC as ADC voltage reference before entering sleep mode to avoid extra power consumption during sleep. If no internal or external reference to the ADC is used, an external pull-down resistor should be added to the AREF pin.

## 13.1.2 Rev. B

- External capacitor on AREF pin
- Power consumption in power save modes
- Increased power consumption when using voltage reference other than AVCC

### 1.) External capacitor on AREF pin

If an external capacitor is used on the analog reference pin (AREF), it should be equal to or larger than 100nF. Smaller capacitor value can make the AREF buffer unstable with large ringing which will reduce the accuracy of the ADC.

Problem Fix/Workaround

None.

### 2.) Power consumption in power save modes

Power consumption in power save modes will be higher due to improper control of internal power management.

Problem Fix/Workaround

None.

### 3. ) Increased power consumption when using voltage reference other than AVCC

Power consumption is higher when using internal or external voltage reference that is not equal to AVCC. The increased current consumption will be the same for active and all sleep modes, but the largest impact will be in low power sleep modes.

Problem Fix/Workaround

Select AVCC as ADC voltage reference before entering sleep mode to avoid extra power consumption during sleep. If no internal or external reference to the ADC is used, an external pull-down resistor should be added to the AREF pin.

## 13.1.3 Rev. C

No known errata.

## 13.1.4 Rev. D to J

Not sampled.

## 13.1.5 Rev. K

No known errata.

## 13.2 Errata ATmega88PB

The revision letter in this section refers to the revision of the ATmega88PB device.

### 13.2.1 Rev. A

- Wrong device ID when using debugWire
- Power consumption in power save modes

- USART start-up functionality not working
- External capacitor on AREF pin
- Increased power consumption when using voltage reference other than AVCC

## 1.) Wrong device ID when using debugWire

The device ID returned using debugWire is incorrect.

Problem Fix/Workaround

None.

## 2.) Power consumption in power save modes

Power consumption in power save modes will be higher due to improper control of internal power management.

Problem Fix/Workaround

None.

## 3.) USART start-up functionality not working

While in power save modes, the USART start bit detection logic fails to wake up the device.

Problem Fix/Workaround

None.

## 4.) External capacitor on AREF pin

If an external capacitor is used on the analog reference pin (AREF), it should be equal to or larger than 100nF. Smaller capacitor value can make the AREF buffer unstable with large ringing which will reduce the accuracy of the ADC.

Problem Fix/Workaround

None.

## 5.) Increased power consumption when using voltage reference other than AVCC

Power consumption is higher when using internal or external voltage reference that is not equal to AVCC. The increased current consumption will be the same for active and all sleep modes, but the largest impact will be in low power sleep modes.

Problem Fix/Workaround

Select AVCC as ADC voltage reference before entering sleep mode to avoid extra power consumption during sleep. If no internal or external reference to the ADC is used, an external pull-down resistor should be added to the AREF pin.

### 13.2.2 Rev. B

- External capacitor on AREF pin
- Increased power consumption when using voltage reference other than AVCC

## 1.) External capacitor on AREF pin

If an external capacitor is used on the analog reference pin (AREF), it should be equal to or larger than 100nF. Smaller capacitor value can make the AREF buffer unstable with large ringing which will reduce the accuracy of the ADC.

Problem Fix/Workaround

None.

2. ) Increased power consumption when using voltage reference other than AVCC

Power consumption is higher when using internal or external voltage reference that is not equal to AVCC. The increased current consumption will be the same for active and all sleep modes, but the largest impact will be in low power sleep modes.

Problem Fix/Workaround

Select AVCC as ADC voltage reference before entering sleep mode to avoid extra power consumption during sleep. If no internal or external reference to the ADC is used, an external pull-down resistor should be added to the AREF pin.

## 13.2.3 Rev. C

No known errata.

## 13.2.4 Rev. D to J

Not sampled.

## 13.2.5 Rev. K

No known errata.

## 13.3 Errata ATmega168PB

The revision letter in this section refers to the revision of the ATmega168PB device.

### 13.3.1 Rev. A

- Wrong device ID when using debugWire
- Power consumption in power save modes
- USART start-up functionality not working
- External capacitor on AREF pin
- Increased power consumption when using voltage reference other than AVCC

1.) Wrong device ID when using debugWire

The device ID returned using debugWire is incorrect.

Problem Fix/Workaround

None.

2.) Power consumption in power save modes

Power consumption in power save modes will be higher due to improper control of internal power management.

Problem Fix/Workaround

None

3.) USART start-up functionality not working

While in power save modes, the USART start bit detection logic fails to wakeup the device.

Problem Fix/Workaround

None.

4.) External capacitor on AREF pin

If an external capacitor is used on the analog reference pin (AREF), it should be equal to or larger than 100nF. Smaller capacitor value can make the AREF buffer unstable with large ringing which will reduce the accuracy of the ADC.

Problem Fix/Workaround

None.

5. ) Increased power consumption when using voltage reference other than AVCC

Power consumption is higher when using internal or external voltage reference that is not equal to AVCC. The increased current consumption will be the same for active and all sleep modes, but the largest impact will be in low power sleep modes.

Problem Fix/Workaround

Select AVCC as ADC voltage reference before entering sleep mode to avoid extra power consumption during sleep. If no internal or external reference to the ADC is used, an external pull-down resistor should be added to the AREF pin.

### **13.3.2 Rev. B**

– Power consumption in power save modes

– External capacitor on AREF pin

– Increased power consumption when using voltage reference other than AVCC

1.) Power consumption in power save modes

Power consumption in power save modes will be higher due to improper control of internal power management.

Problem Fix/Workaround

None

2.) External capacitor on AREF pin

If an external capacitor is used on the analog reference pin (AREF), it should be equal to or larger than 100nF. Smaller capacitor value can make the AREF buffer unstable with large ringing which will reduce the accuracy of the ADC.

Problem Fix/Workaround

None.

3. ) Increased power consumption when using voltage reference other than AVCC

Power consumption is higher when using internal or external voltage reference that is not equal to AVCC. The increased current consumption will be the same for active and all sleep modes, but the largest impact will be in low power sleep modes.

Problem Fix/Workaround

Select AVCC as ADC voltage reference before entering sleep mode to avoid extra power consumption during sleep. If no internal or external reference to the ADC is used, an external pull-down resistor should be added to the AREF pin.

## 13.3.3 Rev. C

– External capacitor on AREF pin

1.) External capacitor on AREF pin

If an external capacitor is used on the analog reference pin (AREF), it should be equal to or larger than 100nF. Smaller capacitor value can make the AREF buffer unstable with large ringing which will reduce the accuracy of the ADC.

Problem Fix/Workaround

None.

## 13.3.4 Rev. D to M

Not sampled.

## 13.3.5 Rev. N to O

No known errata.

## The Microchip Web Site

---

Microchip provides online support via our web site at <http://www.microchip.com/>. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## Customer Change Notification Service

---

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at <http://www.microchip.com/>. Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## Customer Support

---

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at: <http://www.microchip.com/support>

## Product Identification System

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

**PART NO.**      **[X]<sup>(1)</sup>**    -    **X**      **/XX**      **XXX**  
 Device    Tape and Reel    Temperature    Package    Pattern  
                  Option                   Range

|                         |                                                           |                                     |
|-------------------------|-----------------------------------------------------------|-------------------------------------|
| Device:                 | PIC16F18313, PIC16LF18313, PIC16F18323, PIC16LF18323      |                                     |
| Tape and Reel Option:   | Blank                                                     | = Standard packaging (tube or tray) |
|                         | T                                                         | = Tape and Reel <sup>(1)</sup>      |
| Temperature Range:      | I                                                         | = -40°C to +85°C (Industrial)       |
|                         | E                                                         | = -40°C to +125°C (Extended)        |
| Package: <sup>(2)</sup> | JQ                                                        | = UQFN                              |
|                         | P                                                         | = PDIP                              |
|                         | ST                                                        | = TSSOP                             |
|                         | SL                                                        | = SOIC-14                           |
|                         | SN                                                        | = SOIC-8                            |
|                         | RF                                                        | = UDFN                              |
| Pattern:                | QTP, SQTP, Code or Special Requirements (blank otherwise) |                                     |

- PIC16LF18313- I/P Industrial temperature, PDIP package
- PIC16F18313- E/SS Extended temperature, SSOP package

### Note:

1.

## Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a

violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

## Legal Notice

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

## Trademarks

---

The Microchip name and logo, the Microchip logo, AnyRate, AVR, AVR logo, AVR Freaks, BeaconThings, BitCloud, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, Helder, JukeBlox, KeeLoq, KeeLoq logo, Klear, LANCheck, LINK MD, maXStylus, maXTouch, MediaLB, megaAVR, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, Prochip Designer, QTouch, RightTouch, SAM-BA, SpyNIC, SST, SST Logo, SuperFlash, tinyAVR, UNI/O, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, EtherSynch, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and Quiet-Wire are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, chipKIT, chipKIT logo, CodeGuard, CryptoAuthentication, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, Mindi, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PureSilicon, QMatrix, RightTouch logo, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2017, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-5224-1686-9

## Quality Management System Certified by DNV

---

### ISO/TS 16949

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC<sup>®</sup> MCUs and dsPIC<sup>®</sup> DSCs, KEELOQ<sup>®</sup> code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

## Worldwide Sales and Service

| AMERICAS                                                                                                                                                                                                                                                                                                      | ASIA/PACIFIC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | ASIA/PACIFIC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | EUROPE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Corporate Office</b><br>2355 West Chandler Blvd.<br>Chandler, AZ 85224-6199<br>Tel: 480-792-7200<br>Fax: 480-792-7277<br>Technical Support:<br><a href="http://www.microchip.com/support">http://www.microchip.com/support</a><br>Web Address:<br><a href="http://www.microchip.com">www.microchip.com</a> | <b>Asia Pacific Office</b><br>Suites 3707-14, 37th Floor<br>Tower 6, The Gateway<br>Harbour City, Kowloon<br><b>Hong Kong</b><br>Tel: 852-2943-5100<br>Fax: 852-2401-3431<br><b>Australia - Sydney</b><br>Tel: 61-2-9868-6733<br>Fax: 61-2-9868-6755<br><b>China - Beijing</b><br>Tel: 86-10-8569-7000<br>Fax: 86-10-8528-2104<br><b>China - Chengdu</b><br>Tel: 86-28-8665-5511<br>Fax: 86-28-8665-7889<br><b>China - Chongqing</b><br>Tel: 86-23-8980-9588<br>Fax: 86-23-8980-9500<br><b>China - Dongguan</b><br>Tel: 86-769-8702-9880<br><b>China - Guangzhou</b><br>Tel: 86-20-8755-8029<br><b>China - Hangzhou</b><br>Tel: 86-571-8792-8115<br>Fax: 86-571-8792-8116<br><b>China - Hong Kong SAR</b><br>Tel: 852-2943-5100<br>Fax: 852-2401-3431<br><b>China - Nanjing</b><br>Tel: 86-25-8473-2460<br>Fax: 86-25-8473-2470<br><b>China - Qingdao</b><br>Tel: 86-532-8502-7355<br>Fax: 86-532-8502-7205<br><b>China - Shanghai</b><br>Tel: 86-21-3326-8000<br>Fax: 86-21-3326-8021<br><b>China - Shenyang</b><br>Tel: 86-24-2334-2829<br>Fax: 86-24-2334-2393<br><b>China - Shenzhen</b><br>Tel: 86-755-8864-2200<br>Fax: 86-755-8203-1760<br><b>China - Wuhan</b><br>Tel: 86-27-5980-5300<br>Fax: 86-27-5980-5118<br><b>China - Xian</b><br>Tel: 86-29-8833-7252<br>Fax: 86-29-8833-7256 | <b>China - Xiamen</b><br>Tel: 86-592-2388138<br>Fax: 86-592-2388130<br><b>China - Zhuhai</b><br>Tel: 86-756-3210040<br>Fax: 86-756-3210049<br><b>India - Bangalore</b><br>Tel: 91-80-3090-4444<br>Fax: 91-80-3090-4123<br><b>India - New Delhi</b><br>Tel: 91-11-4160-8631<br>Fax: 91-11-4160-8632<br><b>India - Pune</b><br>Tel: 91-20-3019-1500<br><b>Japan - Osaka</b><br>Tel: 81-6-6152-7160<br>Fax: 81-6-6152-9310<br><b>Japan - Tokyo</b><br>Tel: 81-3-6880-3770<br>Fax: 81-3-6880-3771<br><b>Korea - Daegu</b><br>Tel: 82-53-744-4301<br>Fax: 82-53-744-4302<br><b>Korea - Seoul</b><br>Tel: 82-2-554-7200<br>Fax: 82-2-558-5932 or<br>82-2-558-5934<br><b>Malaysia - Kuala Lumpur</b><br>Tel: 60-3-6201-9857<br>Fax: 60-3-6201-9859<br><b>Malaysia - Penang</b><br>Tel: 60-4-227-8870<br>Fax: 60-4-227-4068<br><b>Philippines - Manila</b><br>Tel: 63-2-634-9065<br>Fax: 63-2-634-9069<br><b>Singapore</b><br>Tel: 65-6334-8870<br>Fax: 65-6334-8850<br><b>Taiwan - Hsin Chu</b><br>Tel: 886-3-5778-366<br>Fax: 886-3-5770-955<br><b>Taiwan - Kaohsiung</b><br>Tel: 886-7-213-7830<br><b>Taiwan - Taipei</b><br>Tel: 886-2-2508-8600<br>Fax: 886-2-2508-0102<br><b>Thailand - Bangkok</b><br>Tel: 66-2-694-1351<br>Fax: 66-2-694-1350 | <b>Austria - Wels</b><br>Tel: 43-7242-2244-39<br>Fax: 43-7242-2244-393<br><b>Denmark - Copenhagen</b><br>Tel: 45-4450-2828<br>Fax: 45-4485-2829<br><b>Finland - Espoo</b><br>Tel: 358-9-4520-820<br><b>France - Paris</b><br>Tel: 33-1-69-53-63-20<br>Fax: 33-1-69-30-90-79<br><b>France - Saint Cloud</b><br>Tel: 33-1-30-60-70-00<br><b>Germany - Garching</b><br>Tel: 49-8931-9700<br><b>Germany - Haan</b><br>Tel: 49-2129-3766400<br><b>Germany - Heilbronn</b><br>Tel: 49-7131-67-3636<br><b>Germany - Karlsruhe</b><br>Tel: 49-721-625370<br><b>Germany - Munich</b><br>Tel: 49-89-627-144-0<br>Fax: 49-89-627-144-44<br><b>Germany - Rosenheim</b><br>Tel: 49-8031-354-560<br><b>Israel - Ra'anana</b><br>Tel: 972-9-744-7705<br><b>Italy - Milan</b><br>Tel: 39-0331-742611<br>Fax: 39-0331-466781<br><b>Italy - Padova</b><br>Tel: 39-049-7625286<br><b>Netherlands - Druenen</b><br>Tel: 31-416-690399<br>Fax: 31-416-690340<br><b>Norway - Trondheim</b><br>Tel: 47-7289-7561<br><b>Poland - Warsaw</b><br>Tel: 48-22-3325737<br><b>Romania - Bucharest</b><br>Tel: 40-21-407-87-50<br><b>Spain - Madrid</b><br>Tel: 34-91-708-08-90<br>Fax: 34-91-708-08-91<br><b>Sweden - Gothenberg</b><br>Tel: 46-31-704-60-40<br><b>Sweden - Stockholm</b><br>Tel: 46-8-5090-4654<br><b>UK - Wokingham</b><br>Tel: 44-118-921-5800<br>Fax: 44-118-921-5820 |