

CCD multichannel detector head C7043, C7044

Designed for back-thinned CCD area image sensor



C7043 and C7044 are high sensitivity multichannel detector heads for use with back-thinned FFT-CCD area image sensors (S7033/S7034 series) that offer large full well capacity. C7043 is designed for the non-cooled back-thinned CCD image sensor (S7033 series), while C7044 for the one-stage TE-cooled CCD area image sensors (S7034 series) for detection at even lower light levels. Both C7043 and C7044 incorporate a low-noise driver/amplifier circuit that provides reliable operation from simple external signals. C7044 also includes a highly stable temperature controller that cools the sensor to a preset temperature level ($T_s = -10\text{ }^{\circ}\text{C}$) as soon as the power is turned on. If the cooler fails and causes internal circuitry to overheat, the built-in protection circuit automatically turns off the power to the thermoelectric cooler. Despite its compact size, the housing configuration is designed for good heat dissipation, and threaded mounting holes on the front panel allow connections to other devices such as monochrometers. The table below shows back-thinned CCD image sensors for C7043 and C7044. C7043 and C7044 do not come with a CCD image sensor, so select the desired sensor and order it separately.

Controller for multichannel detector head C7557 is also available. The software supplied with the C7557 allows easy control of the multichannel detector head and data acquisition.

Features

- Designed for back-thinned CCD area image sensor *1
C7043: for non-cooled type, C7044: for TE-cooled type
- Line binning operation *2/area scanning operation
- Driver/amplifier circuit for low noise CCD operation
- Highly stable temperature controller (C7044)
Cooling temperature: $-10 \pm 0.05\text{ }^{\circ}\text{C}$
- Simple signal input operation
- Compact configuration

Applications

- Fluorescence spectroscopy
- Raman spectroscopy
- Other low-light-level detection

■ Selection guide

The table below shows CCD area image sensors applicable for C7043, C7044.

Since C7043, C7044 do not include a CCD area image sensor, so select the desired sensor and order it separately.

Type No.	CCD Area image sensor			
	Type No.	Number of pixels	Number of active pixels	Active area [mm (H) × mm (V)]
C7043	S7033-0907	532 × 128	512 × 122	12.288 × 2.928
	S7033-1007	1044 × 128	1024 × 122	24.576 × 2.928
C7044	S7034-0907	532 × 128	512 × 122	12.288 × 2.928
	S7034-1007	1044 × 128	1024 × 122	24.576 × 2.928

*1: In normal CCD image sensors that receive light from the front surface, the active area is covered with electrodes for charge transfer. These electrodes cut off UV radiation incident on the image sensor and also reduce the quantum efficiency. In contrast, back-thinned CCD image sensors have a unique structure in which the back of the active area is finely ground to allow light to enter from the back surface. This structure ensures high UV sensitivity and quantum efficiency because incident light need not pass through the electrodes.

*2: The FFT-CCD was originally designed as a two-dimensional image sensor. However, it can be operated like a linear image sensor having a large active area by transferring all the pixel signals in the vertical direction to the horizontal register (this is referred to as line binning).

■ Absolute maximum ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage (for digital circuitry)	VD1, VD2	-0.5	-	+7	V
Supply voltage (for analog circuitry)	VA1+	-	-	+18	
	VA1-	-	-	-18	
	VA2	-	-	+30	
Supply voltage	Vp	-	-	+8	
	VF	-	-	+14	
Digital input voltage	-	-	-	VD1	
Operating temperature	C7043	Topr	0	+50	°C
	C7044		+10	+35 *3	
Storage temperature	C7043	Tstg	-20	+70	
	C7044		0	+50	

■ Electrical characteristics

(Ta=25 °C, VD1=+5 V, VA1+=+15 V, VA1=- -15 V, VA2=+24 V, VD2=+5 V, Vp=+5 V, VF=+12 V, unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Digital input	High level	VIH	+2.0	-	VD (1, 2) V
	Low level	VIL	-0.5	-	+0.8 V
CLK frequency	fCLK	-	-	1	MHz
Data video readout frequency	fv	-	-	fCLK/4	Hz
Start pulse width	tst	1/fCLK	-	-	s
Digital output	High level (Io= -6 mA)	VIH	+2.0	-	V
	Low level (Io=+6 mA)	VIL	-	-	+0.8 V
Power supply operating conditions					
Voltage	Digital circuitry	VD1	+4.75	+5.0	+5.25 V
	Analog circuitry	VA1+	+14.5	+15.0	+15.5 V
		VA1-	-14.5	-15.0	-15.5 V
		VA2	+23.5	+24.0	+24.5 V
	Other *4	VD2	+4.75	+5.0	+5.25 V
		Vp	+4.75	+5.0	+5.25 V
		VF	+11.75	+12.0	+12.75 V
Current	VD1 (+5 VDC)	-	-	-	+200 mA
	VA1+ (+15 VDC)	-	-	-	+100 mA
	VA1- (-15 VDC)	-	-	-	-100 mA
	VA2 (+24 VDC)	-	-	-	+30 mA
	VD2 (+6 VDC) *4	-	-	-	+30 mA
	Vp (+6 VDC) *4	-	-	-	+2.5 A
	VF (+12 VDC) *4	-	-	+100	- mA

■ Electrical and optical characteristics

(Ta=25 °C, Ts= -10 °C, VD1=+5 V, VA1+=+15 V, VA1=- -15 V, VA2=+24 V, VD2=+5 V, Vp=+5 V, VF=+12 V)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Spectral response range	SR	-	200 to 1100	-	nm
Full well capacity	Vertical	Fw	300000	-	e ⁻
	Horizontal		2700000	-	
Conversion gain *5	Sv	-	3	-	μV/e ⁻
Dark current *6	C7043	DS	4000	12000	e ⁻ /pixel/s
	C7044	DS	50	300	e ⁻ /pixel/s
Readout noise	Nr	-	60	-	e ⁻ rms
Dynamic range	DR	-	45000	-	-
Photo response non-uniformity *7	PRNU	-	-	±10	%

*3: The maximum value may be lower, depending on the drive frequency and the number of sensor pixels.

*4: C7044

*5: Including the circuit gain.

*6: Horizontal register value.

*7: Measured at 50 % of the full well capacity.

■ Specifications for temperature controller (C7044)


($T_a=25\text{ }^{\circ}\text{C}$, $V_{D1}=+5\text{ V}$, $V_{A1}=+15\text{ V}$, $V_{A1}=-15\text{ V}$, $V_{A2}=+24\text{ V}$, $V_{D2}=+5\text{ V}$, $V_p=+5\text{ V}$, $V_F=+12\text{ V}$)

Parameter *8	Symbol	Min.	Typ.	Max.	Unit
Cooling temperature	T_s	-11	-10	-9	$^{\circ}\text{C}$
Temperature control range	ΔT_s	-0.05	-	+0.05	$^{\circ}\text{C}$
Power dissipation of TE-cooler element	P_p	-	-	7	W
Cool down time to reset temperature	t_o	-	-	5	min.
Setting temperature for overheat protection *9	T_o	-	+45	-	$^{\circ}\text{C}$

*8: Other functions include error display, automatic power off, and detection of electrical opens and shorts by the thermosensor.


*9: Temperature of rear-side of housing (part to fix fan)

■ Spectral response

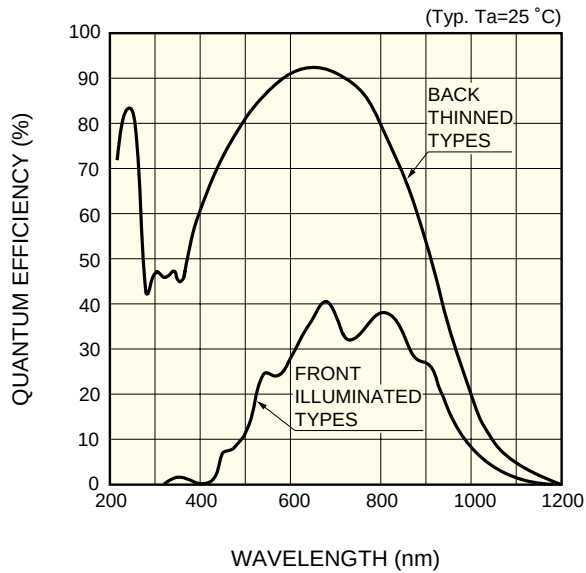


KMPDB0038EA

■ Dark signal vs. temperature

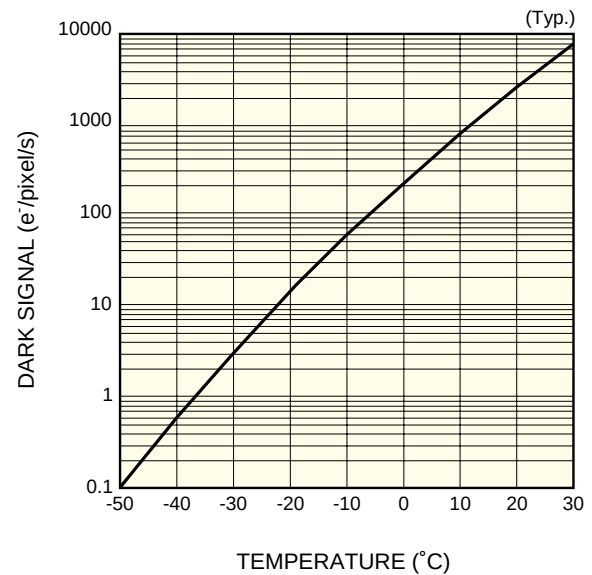


KMPDB0037EB

■ Block diagram (back-thinned CCD area image sensor)

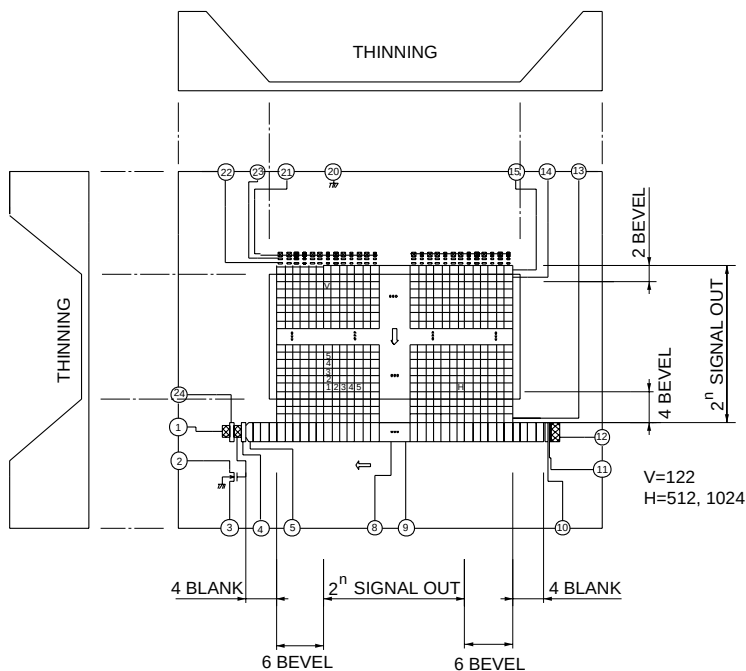

KMPDC0076EA



■ Block diagram (C7044)

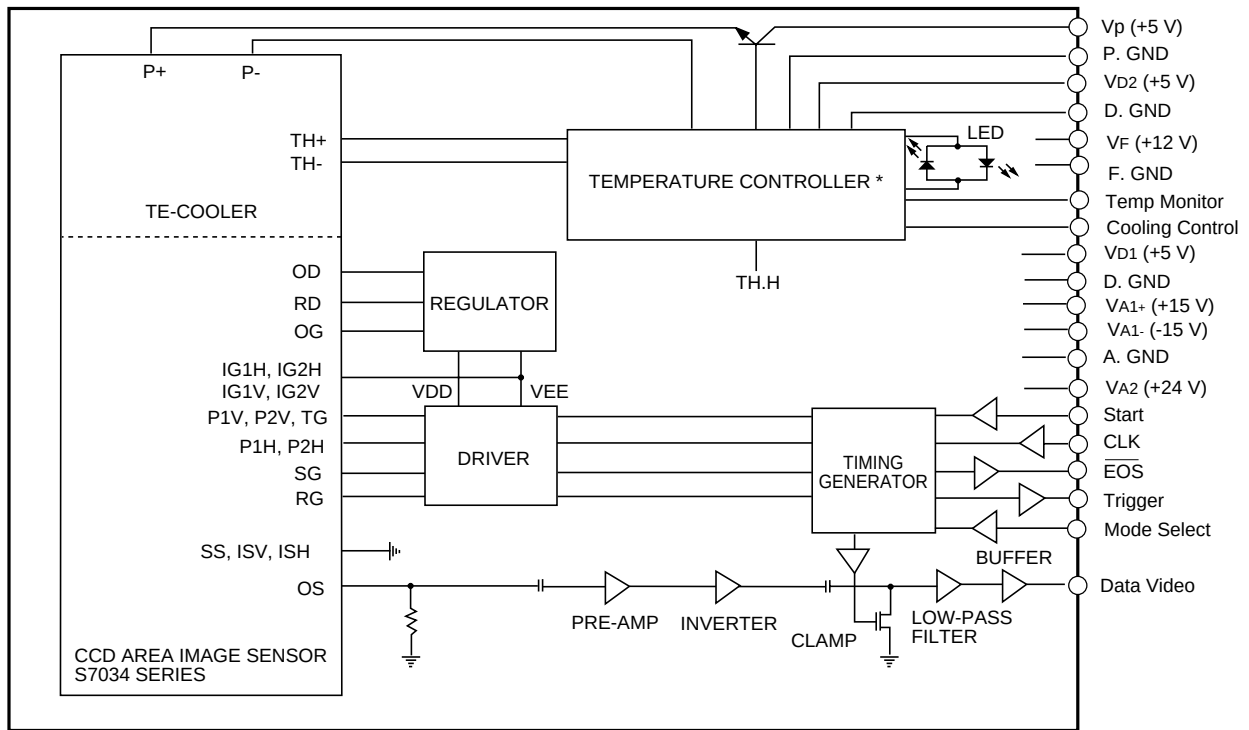

* C7043 does not include the temperature controller and TE-cooler.

KACCC0114EB

■ Timing chart (line binning operation)

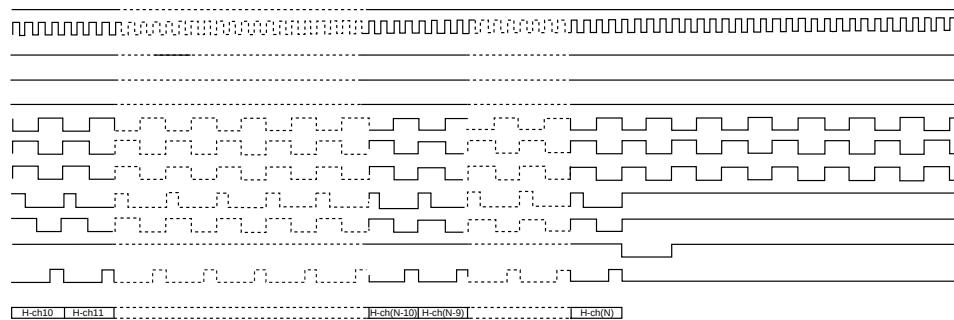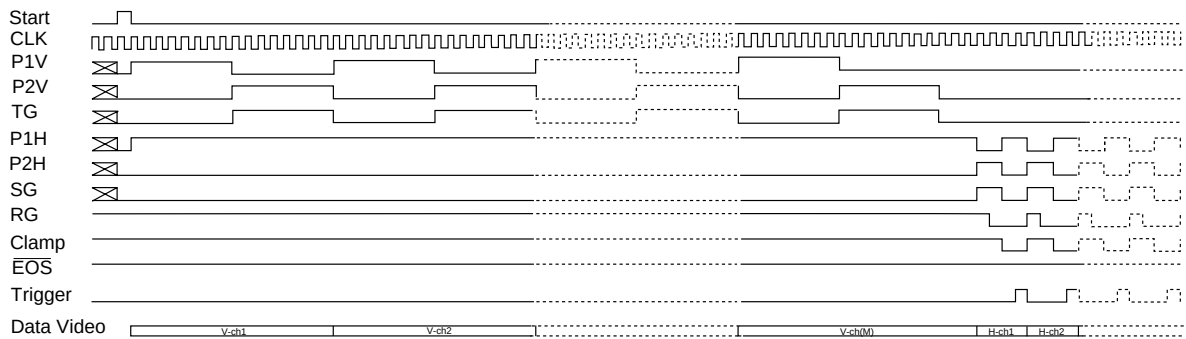


M=128 N=532, 1044
V-ch1--V-ch2, V-ch (M-3)--V-ch (M): ISOLATION PIXELS
H-ch1--H-ch4, H-ch (N-3)--H-ch (N): BLANK PIXELS

KACCC0115EC

■ Pin connection of "SIGNAL I/O" connector

15-pin D-sub connector

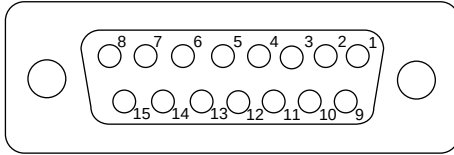


KACCC0069EA

Pin No.	Terminal name	Description
1	Mode select	Digital input signal used to select between the line binning operation and area scanning operation. HCMOS compatible. High level or left open: line binning operation Low level: area scanning operation
2	Data video	Analog video output. Positive polarity
3	VA1+ (+15 V)	Analog power supply
4	VA1- (-15 V)	Analog power supply
5	VD1 (+5 V)	Digital power supply
6	Start	Digital input signal for initializing the circuit. HCMOS compatible. Positive logic. The interval of the Start pulses determines the integration time of the CCD image sensor.
7	CLK	Digital input signal for operating the circuit. HCMOS compatible. Rising edge operation.
8	$\overline{\text{EOS}}$	Digital input signal for indicating end-of-scan of the image sensor. HCMOS compatible. Negative logic.
9	A. GND	Analog ground
10	A. GND	Analog ground
11	VA2 (+24 V)	Analog power supply
12	D. GND	Digital ground
13	D. GND	Digital ground
14	D. GND	Digital ground
15	Trigger	Digital output signal for A/D conversion. HCMOS compatible. Positive logic.

■ Pin connection of "TE CONTROL I/O" connector (C7044)

9-pin D-sub connector



KACCC0075EA

Pin No.	Terminal name	Description
1	VD2 (+5 V)	Digital power supply
2	Temp monitor	Analog output signal of the temperature of the CCD image sensor
3	Cooling control	Digital input signal for starting to cool down. HCMOS compatible. High level or left open: cooling Low level: stand-by
4	Vp (+5 V)	Power supply for the thermoelectric cooler in the CCD image sensor.
5	Vf (+12 V)	Power supply for cooling fan
6	D. GND	Ground for temperature control circuit
7	D. GND	Ground for temperature control circuit
8	P. GND	Power supply return of the thermoelectric cooler mounted in the CCD image sensor.
9	F. GND	Power supply return for cooling fan


Available for using same power supply (+5 V) for "+VD2" and "+Vp".

Caution) Do not connect "VD2" and "Vp" together on the backside of the 9-pin D-sub connector.


These may be connected (shorted) at the power supply end, not 9-pin D-sub connector.

■ Dimensional outlines (unit: mm)

C7043

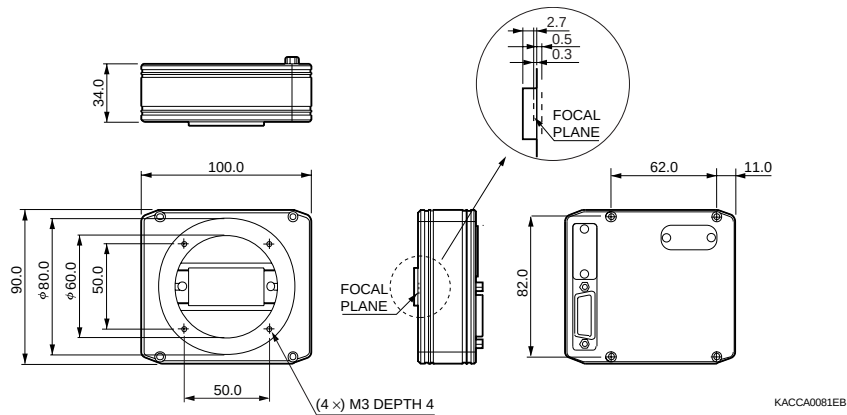


C7044

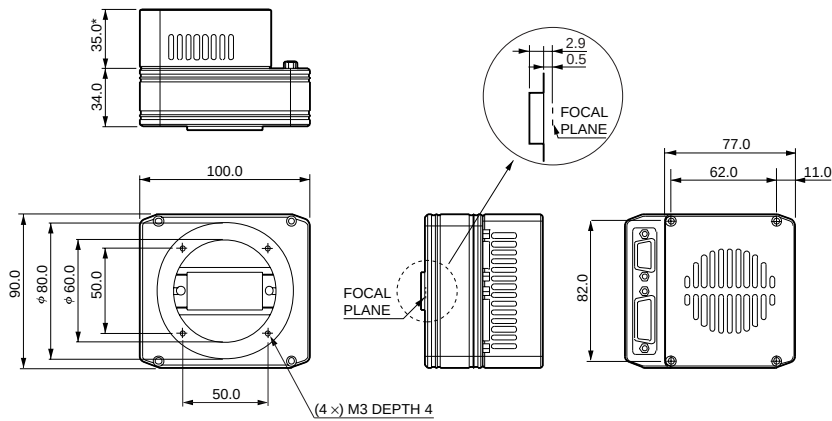

*The part is removable.

■ Connection example

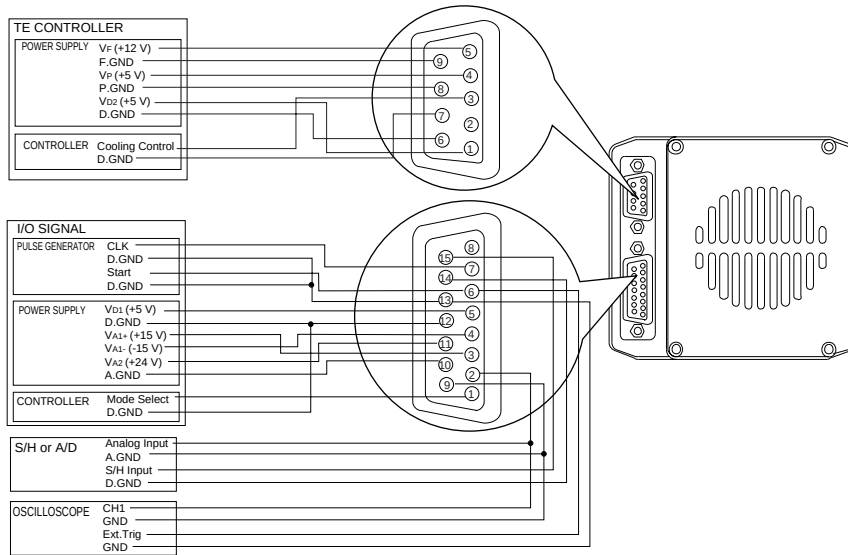

Multichannel detector head controller C7557

When connected to a HAMAMATSU multichannel detector head and a personal computer, C7557 allows easy control of the detector head and data acquisition by using dedicated software that comes with the unit.

Suitable multichannel detector head

C7020/-02, C7021/-02, C7025/-02,
C7040, C7041, C7043, C7044, C7180,
C7181, C8061-01, C8062-01, C10150, C10151


■ Accessories

- SCSI terminator
- Fuse (2.5 A)
- Detector head connection cables
- AC cable
- Software (Compatible OS: Windows 98/ME *)
- Operation manual

* This software may be run on Windows 2000/NT/XP with a simple task. For information on how to do this, please consult with our sales office.



■ Connection

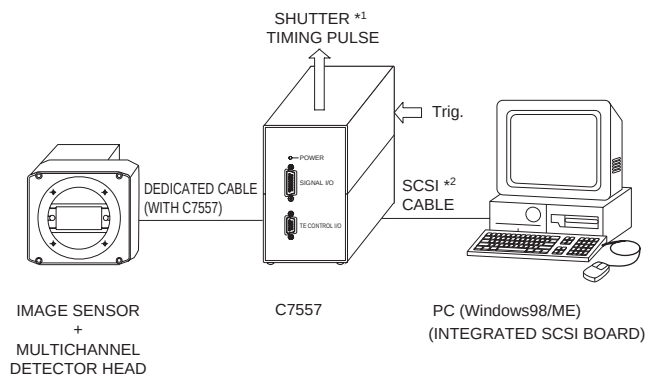

*1: Shutter, etc. are not available.

*2: SCSI cable and SCSI board (card) are not supplied with C7557.

KACCC0077ED

HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2007 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, www.hamamatsu.com

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat. No. KACC1049E05
May 2007 DN