

DLP® LightCrafter™ Display 4710 EVM User's Guide

Topic	Page
1 Introduction	2
2 Safety Instructions	3
3 What is in the LightCrafter Display 4710 EVM.....	4
4 Light Engine.....	5
5 Quick-Start Procedure	5
6 Connectors, Headers, and Switch Description.....	6
7 EVM Setup	7
8 Applicable Documents.....	8

1 Introduction

This user's guide presents an overview of the DLP LightCrafter Display 4710 evaluation module (EVM) and a general description of the main features and functions. It explains the first steps to get started and shows a detailed description of the onboard LEDs and the main connectors. It gives the user a successful start with their first DLP LightCrafter Display 4710 EVM.

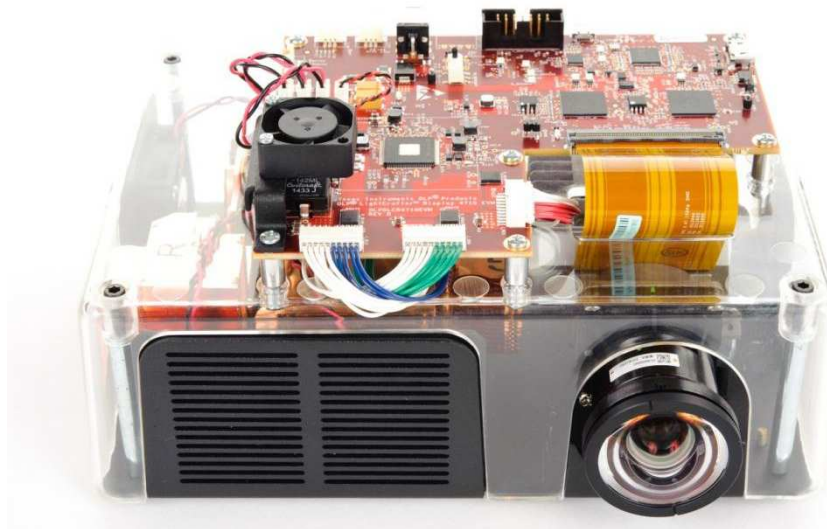


Figure 1. DLP LightCrafter Display 4710 EVM

See [Section 8](#) for additional documentation.

LightCrafter is a trademark of Texas Instruments.
DLP is a registered trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

2 Safety Instructions

WARNING




Internal components may be hot. No user-serviceable parts are inside housing. To minimize risk of personal injury, do not remove cover. Contact TI if internal repairs are required.

WARNING



Caution hot surface. Contact may cause burns. Do not touch.

WARNING



Possibly hazardous optical radiation emitted from this product. Do not stare at the operating lamp. May be harmful to the eye.

CAUTION



Observe handling precautions. Electrostatic sensitive devices.

4 Light Engine

The optical engine in the EVM is developed by Qisda and is production ready.

The light engine consists of the following components:

- 0.47-inch 1080p DMD (DLP4710)
- OSRAM P1W red, green, and blue LED

Table 1. Optical Engine Specifications

PARAMETER	MIN	TYP	MAX	UNIT
Brightness at 12-A LED current		456		lm
LED current		12		A
Brightness uniformity	73%			
Offset		100%		
Throw Ratio		1.108		
Focus range	30		100	inch

5 Quick-Start Procedure

This quick-start assumes default conditions as shipped.

1. Power up the DLP LightCrafter Display 4710 EVM by applying an external DC power supply (12-V DC, 6.67 A) to the J_PWR connector.

External power supply requirements:

- Nominal output voltage: 12 VDC
- Max output current: 6.67 A
- Efficiency Level V

NOTE: TI recommends using an external power supply that complies with applicable regional safety standards such as (by example) UL, CSA, VDE, CCC, PSE, and so forth. The D_12ON LED indicates that 12-V power is applied.

2. Move the SW_MSPONOFF switch to the *on* position to turn the DLP LightCrafter Display 4710 EVM on. D_PROJON LED indicates that the LightCrafter Display 4710 EVM is turned on.
3. After the DLP LightCrafter Display 4710 EVM is turned on; the projector will display a DLP LightCrafter Display splash image by default.
4. The focus of the image can be adjusted on the optical engine.

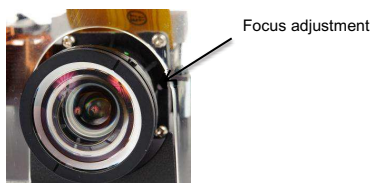


Figure 3. Optical Engine With Focus Adjustment

5. Connect USB to the LightCrafter Display 3010 EVM and open the GUI on your computer. If needed, connect an HDMI source to the EVM and communicate to the EVM through the GUI software.
6. When turning off the projector, turn off the SW_MSPONOFF switch prior to removing the power cable.

CAUTION

To avoid potential damage to the DMD, TI recommends to turn off the projector with the SW_ONOFF before disconnecting the power.

7. The DLP LightCrafter has 12 indicator LEDs (see [Table 2](#)).

Table 2. LEDs on the DLP LightCrafter Display 4710 EVM

LED	INDICATOR DESCRIPTION
D_PROJON	On when projector is turned via switch
D_12ON	12-V power applied
D_MSP	On when HDMI cable plugged in and external video detected. Off when external video is not detected.
D_IRQS	On during DLPC3439_Slave boots Off when projector is running. Indication of DLPC3439_Slave boot-up completed and ready to receive commands
D_IRQM	On during DLPC3439_Master boots Off when projector is running. Indication of DLPC3439_Master boot-up completed and ready to receive commands
D_USBTX	Blinking when PC is communicating to DLPC3439 over I ² C
D_USBRX	Blinking when PC is communicating to flash over SPI
D_MSPACK	On when Cypress CY3420 is I ² C master Off when MSP430 is I ² C master
D_MSPREQ	On when Cypress CY3420 requests the MSP430 to give Cypress master control of the I ² C bus
D_GPIO5	Status indication of DLPC3439_Master GPIO5
D_GP5V	On when DLPA3005 applies 5 V
D_RSTZ	On when DLPC3439 is in RESET

6 Connectors, Headers, and Switch Description

Table 3. List of Installed Connectors on the 4710 EVM Board

INSTALLED CONNECTORS/HEADERS	DESCRIPTION
J_PEDID	Header to program the EDID
J_RST	Header to set DLPC3439 in RESET
J_RED	Connector for RED LED cable
J_GRN	Connector for GREEN LED cable
J_BLU	Connector for BLUE LED cable
J_DEV	Connector for the I ² C interface (DevaSys box)
J_FAN1,J_FAN2,J_FAN3,J_FAN4	Connector for 12-V DC power
J_FLEX	Connector for flex cable
J_HDMI	Connector for Mini_HDMI input
J_MSPJTAG	MSP430 JTAG programming interface connector
J_MSPONOFF	Projector ON/OFF switch
SW1	Push-button to request I ² C
J_WPC	Unsupported
J_TMP	Unsupported
J_LABB	Unsupported
J_3DG	Unsupported

7 EVM Setup

The DLP LightCrafter Display 4710 EVM has the DLP4710 chipset comprising of DLP4710 (.47 1080p) DMD, DLPC3439 display controller, DLPA3005 PMIC/LED driver, and supporting components as the Cypress chip, MSP430, and ITE controller all included on one board. [Figure 4](#) shows the locations of these parts. The MSP430 is placed on the bottom of the board and is not shown in [Figure 4](#).

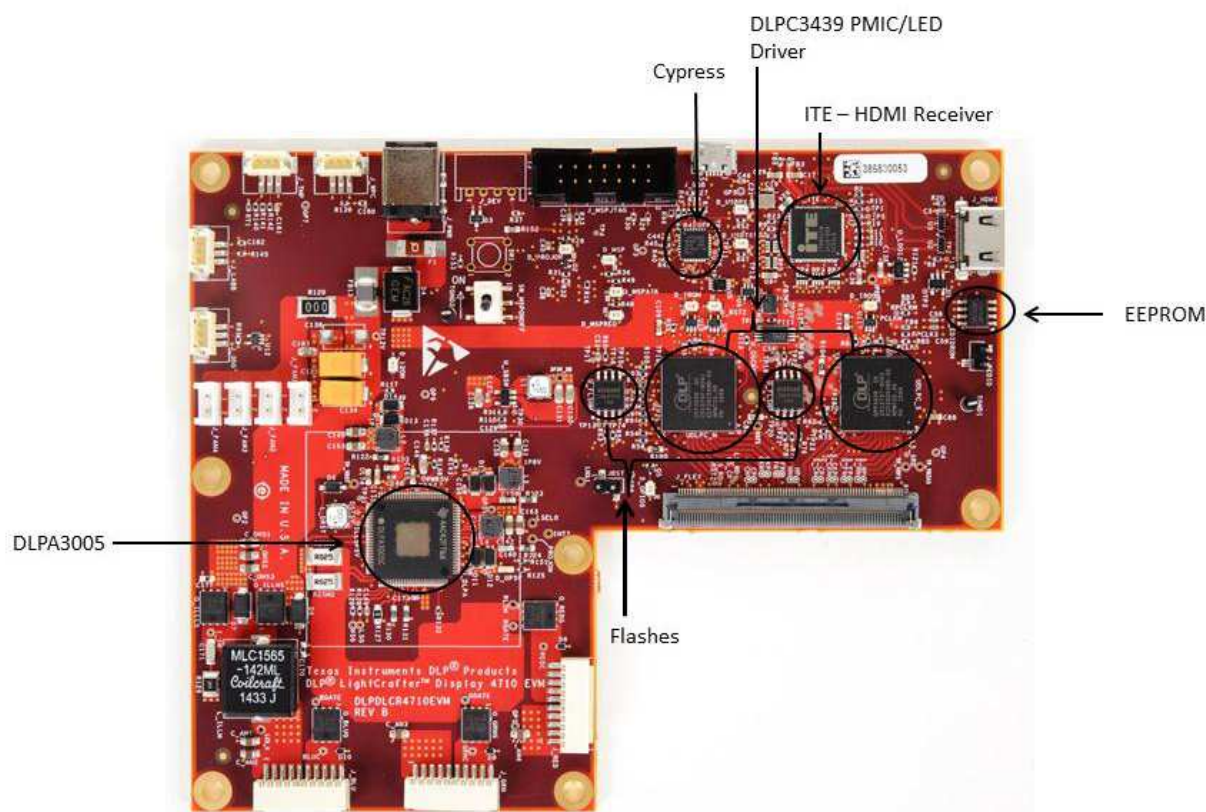


Figure 4. DLP LightCrafter Display 4710 Board

The DLP LightCrafter Display 4710 board has three LED connectors for red, blue, and green, and one connector for the flex cable to the 0.47-inch 1080p DMD. The connectors for each LED are named on the board as well as on the light engine. Refer to [Figure 5](#) to see the proper setup.

NOTE: Ensure a good connection of the flex cable to the DLP LightCrafter Display 4710 board.

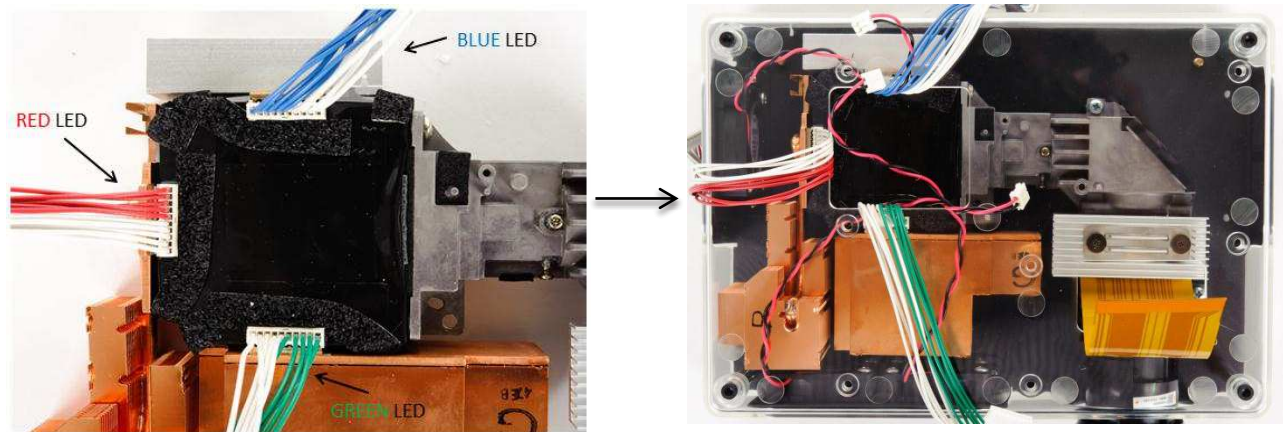


Figure 5. LED Connection

Figure 6 shows the final setup of all parts.

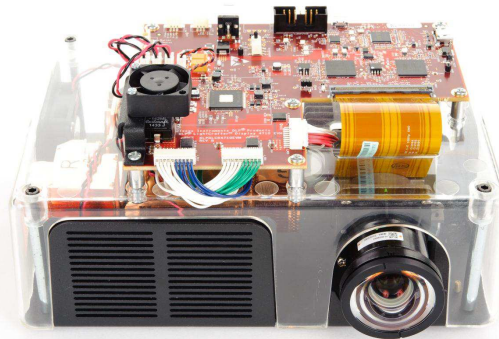


Figure 6. DLP LightCrafter Display 4710 EVM

NOTE: Make sure that everything is setup correctly before continuing. Verify that the flex cable is connected correctly to the LightCrafter Display 4710 board.

8 Applicable Documents

The following documents are applicable to the DLP LightCrafter Display 4710 EVM and are available at www.ti.com.

- DLP4710 (.47 1080p) DMD data sheet, [DLPS056](#)
- DLPC3439 controller data sheet, [DLPS057](#)
- DLPA3005 PMIC data sheet, [DLPS055](#)
- DLPC3439 Software Programmer's Guide, [DLPU035](#)
- DLP LightCrafter Display EVM GUI Tool User's Guide, [DLPU021](#)

If you need assistance, refer to the [DLP and MEMS TI E2E community support forums](#).

Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from B Revision (July 2016) to C Revision Page

- Removed image diagonal size and updated focus range from 5 - 120 inches to 30 - 100 inches in [Table 1](#) 5

Changes from A Revision (May 2016) to B Revision Page

- Corrected DMD resolution to 1080p in [Section 4](#) 5

Changes from Original (June 2015) to A Revision Page

- Updated EVM block diagram in [Figure 2](#) 4
- Added Throw Ratio in [Table 1](#) 5

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com