THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

LTR.	DESCRIPTION		DATE	APP'D.
1	RELEASED PER ECO #2212	JW	10/11/90	BJR
2	REVISED PER E910258	JW	5/14/91	BJR

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE:	250 VAC, 50/60 Hz
CAPACITANCE:	1500 pF ± 20%
DISSIPATION FACTOR:	≤1.3 MEASURED AT 1 KHZ
MAXIMUN PULSE RISE TIME:	du/dt 2000V / uSEC
DIELECTRIC:	METALLIZED PAPER
TEST VOLTAGE:	(ELECTRODE/ELECTRODE) 2700 VDC 1 SEC
INSULATION RESISTANCE:	120000 MΩ 500 VDC 1 MIN.
COATING	PLASTIC CAN, EPOXY RESIN SEALED, FLAME RETARDANT

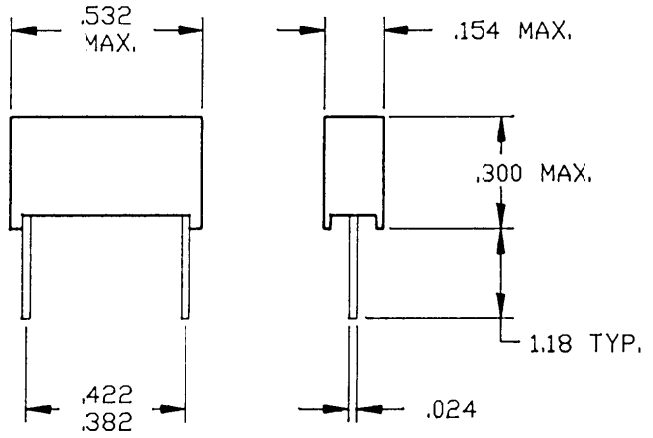

NOTES:
1. APPROVALS INCLUDE VDE, SEV, DEMKO, SEMKO, NEMKO, UL, IMQ, OVE, DEMKO, EL, CSA.

COPY

VICOR ANDOVER, MA. U.S.A.

DRAWN: J. WITEK	9/90	AC-PAPER-CAPACITOR 1500pF, 250 VAC, (Y)
CHECKED:		
APP'D:	5/91	

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) DO NOT SCALE DRAWING	TOLERANCES (EXCEPT AS NOTED) .XX ± .01 .XXX ± .005 FRACT ± 1/64 ANGLES ± 1°0	DRAWING NO. 00770 REV. 2
NEXT ASSY:	SCALE 2X	SHEET 1 OF 1