


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0082244412](#)
Status: **Active**
Description: 2.00mm (.079") Pitch Round Conductor Flat Cable - 24 AWG (7 x 32) Stranded, Topcoat, 12 Circuits, Reel 30.48m (100.0') Length

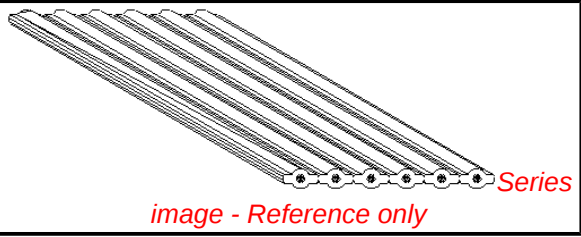

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR61126
UL	E61522

General

Product Family	Cable
Series	24472
Crimp Quality Equipment	Yes
Geographic Area	Asia
Product Name	Ribbon

Physical

Cable Length	30.48m (100.0')
Circuits (Loaded)	12
Insulation	PVC
Packaging Type	Reel
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Temperature Range - Operating	-20°C to +105°C
Wire Size AWG	24
Wire/Cable Type	(7x32) Stranded, Topcoat

Electrical

Current - Maximum per Contact	N/A
Voltage - Maximum	300V

Material Info

Old Part Number	24472-12-100B
-----------------	---------------

Reference - Drawing Numbers

Sales Drawing	SD-24472-001
---------------	--------------

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Not Reviewed**
**Halogen-Free
Status
Not Reviewed**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)


Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[24472Series](#)

Use With

[52484](#) Wire-to-Board, IDT Receptacle
Housing

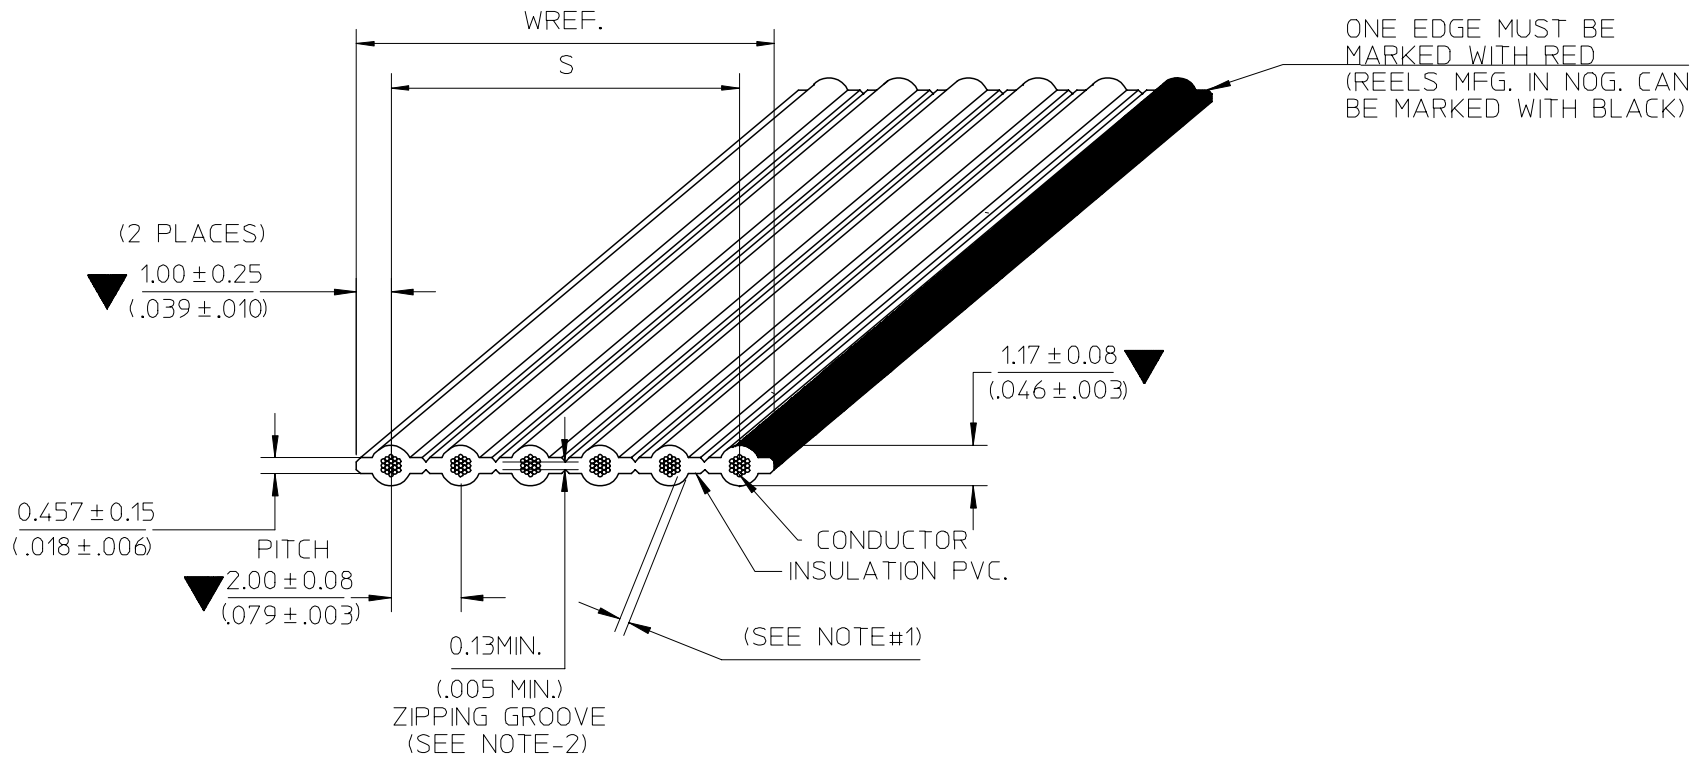

- NOTE :
1. THE CABLE SHALL HAVE A MINIMUM OF 0.178mm. (.007") THICKNESS INSULATION AT ANY POINT
 2. RIP TEST:
 - THE 0.13mm. (.005") ZIPPING GROOVE SHALL BE CAPABLE OF BEING RIPPED BY HAND WITHIN THE RECESS, WITHOUT EXPOSING THE ADJACENT CONDUCTORS
 3. RoHS AND LEAD FREE COMPLIANT
 4. SPECIAL REQUIREMENT: N/A

B	E-07-0748	B ₂ : ADD NON-OPERATING TEMP. B ₃ : ADD SOLDERING CONDITION	07/10/01
A	N/A	NEW RELEASE	06/08/09
REV. HISTORY	EC NO.	DETAIL	DATE

SEE CHANGE DETAIL
EC NO: THL2008-0015
DRWN: CPANSAKHOM 2007/11/28
CHKD: DNARINTARA 2007/11/29
APPR: SVIRATJAPOL 2007/12/04

QUALITY SYMBOLS	DESCRIPTION
▽=3	
▽=0	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm
4 PLACES	± ---
3 PLACES	± ---
2 PLACES	± ---
1 PLACE	± ---
ANGULAR ± ---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
CPANSAKHOM	2006/08/09
CHECKED BY	DATE
PMEECHAI	2006/08/09
APPROVED BY	DATE
SVIRATJAPOL	2006/08/09
MATERIAL NO.	
SEE CHART	
SIZE	
A4	

SCALE NTS	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
TITLE		
FCB ROUND CONDUCTOR 2.00MM(.079)CENTERS PVC. 24AWG STRANDED TOPCOATED		
 MOLEX INCORPORATED		
DOCUMENT NO.		SHEET NO.
SD-24472-001		1 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

D

1.

B

A

ELECTRICAL

CONDUCTOR RESISTANCE (D.C.)	24.0 m OHMS/FT. MAX.
CHARACTERISTIC IMPEDANCE	148 OHMS NOM. (GS)
	106 OHMS NOM. (GSG)
CAPACITANCE	8.5 pF/FT. NOM. (GS)
	13.4 pF/FT. NOM. (GSG)
PROPAGATION DELAY	1.4 ns/FT. NOM.
INSULATION RESISTANCE	10M OHMS (10FT. SAMPLE)
DIELECTRIC WITHSTAND VOLTAGE	2000 VRMS/MINUTE

GENERAL

B₂ NON-OPERATING TEMPERATURE _____ 20°C TO 105°C
 FAULTS AND/OR SPLICES _____ 1/REEL MAX. 100⁺³₋₀ FT. (30.48^{+0.914}₋₀ M.)/REEL
 20 FT. (6.096 M.) MIN. LENGTH

 SOLDERING CONDITION

SOLDER TEMPERATURE _____ 260°C. MAX.
SOLDERING TIME _____ 3 SECOND, MAX.
INSULATION SHRINK _____ 2MM, NOM

tb_frame_A4_P_ME_T
Rev. E 2006/04/15

7		6		5		4		3		2		1		
E	CHART A													E
	DIMENSIONS MM. (INCHES)													
	DIM. W (REF.)	DIMENSION S	NO. OF CONDUCTOR	ORDER NO.	ENGINEERING NO.									
	4.00 (.157)	2.00±0.08 (.079±.003)	2	82-24-4402	24472-02-100B									
	6.00 (.236)	4.00±0.15 (.157±.006)	3	03	-03-									
	8.00 (.315)	6.00±0.23 (.236±.009)	4	04	-04-									
	10.00 (.394)	8.00±0.28 (.315±.011)	5	05	-05-									
	12.00 (.472)	10.00±0.28 (.394±.011)	6	06	-06-									
	14.00 (.551)	12.00±0.28 (.472±.011)	7	07	-07-									
	16.00 (.630)	14.00±0.28 (.551±.011)	8	08	-08-									
D	18.00 (.709)	16.00±0.28 (.630±.011)	9	09	-09-									
	20.00 (.787)	18.00±0.28 (.709±.011)	10	10	-10-									
	22.00 (.866)	20.00±0.28 (.787±.011)	11	11	-11-									
	24.00 (.945)	22.00±0.28 (.866±.011)	12	12	-12-									
	26.00 (1.024)	24.00±0.28 (.945±.011)	13	13	-13-									
	28.00 (1.102)	26.00±0.28 (1.024±.011)	14	14	-14-									
	30.00 (1.181)	28.00±0.28 (1.102±.011)	15	15	-15-									
	32.00 (1.260)	30.00±0.28 (1.181±.011)	16	16	-16-									
	34.00 (1.339)	32.00±0.28 (1.260±.011)	17	17	-17-									
	36.00 (1.417)	34.00±0.28 (1.339±.011)	18	18	-18-									
C	38.00 (1.496)	36.00±0.28 (1.417±.011)	19	19	-19-									
	40.00 (1.575)	38.00±0.28 (1.496±.011)	20	20	-20-									
	42.00 (1.654)	40.00±0.28 (1.575±.011)	21	21	-21-									
	44.00 (1.732)	42.00±0.28 (1.654±.011)	22	22	-22-									
	46.00 (1.811)	44.00±0.28 (1.732±.011)	23	23	-23-									
	48.00 (1.890)	46.00±0.28 (1.811±.011)	24	24	-24-									
	50.00 (1.969)	48.00±0.28 (1.890±.011)	25	25	-25-									
	52.00 (2.047)	50.00±0.28 (1.969±.011)	26	26	-26-									
	54.00 (2.126)	52.00±0.28 (2.047±.011)	27	27	-27-									
	56.00 (2.205)	54.00±0.28 (2.126±.011)	28	82-24-4428	24472-28-100B									
B														B
A														A

ENGINEERING NO.

24472-XX-XXXX

A B C D

A : CABLE 2.00mm. (.079") CENTERS 24AWG STRANDED TOPCOATED

B : CONDUCTOR SIZE (AVAILABILITY 2 THROUGH 28)

C : CABLE LENGTH (100FT.)

D : A = INCHES

B = FEET

SEE CHANGE DETAIL

EC NO: THL2008-0015

DRWN:CPANSAKHOM 2007/11/28

CHKD:DNARINTARA 2007/11/29

APPR:SVIRATJAPOL 2007/12/04

QUALITY SYMBOLS

▼ =

▽ =

DESCRIPTION

REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

mm

INCH

4 PLACES ± --- ± ---

3 PLACES ± --- ± ---

2 PLACES ± --- ± ---

1 PLACE ± --- ± ---

ANGULAR ± ---°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

MM/IN

DRAWN BY

DATE

CHECKED BY

DATE

APPROVED BY

DATE

MATERIAL NO.

SIZE

SCALE

NTS

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

TITLE

FCB ROUND CONDUCTOR

2.00MM(.079)CENTERS PVC.

24AWG STRANDED TOPCOATED

MOLEX INCORPORATED

DOCUMENT NO.

SD-24472-001

SHEET NO.

3 OF 3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

tb_frame_A4_P_ME_T

Rev. E 2006/04/15

6

5

4

3

2

1

ENGINEERING NO.

24472-XX-XXXX
A B C D

- A : CABLE 2.00mm. (.079") CENTERS 24AWG STRANDED TOPCOATED
B : CONDUCTOR SIZE (AVAILABILITY 2 THROUGH 28)
C : CABLE LENGTH (100FT.)
D : A = INCHES
B = FEET