
01 0122

DIN circular connectors




DIN socket, straight version, shielded, with bayonet lock, metal housing, bend protection and solder terminals


01 0122

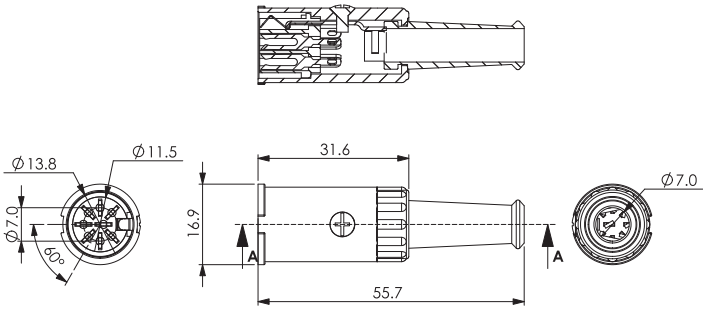

DIN 41524




0122 03




0122 04

DIN 41524




0122 05

DIN 45322




0122 05-1




0122 06

DIN 45329



0122 07-1

DIN 45326



0122 08-1

Environmental conditions

Temperature range	-20 °C/+85 °C

Materials

Insulating body	ABS, V-0 according to UL94
Contact spring	CuZn, silver-plated
Strain relief	steel, nickel-plated
Housing	Zn alloy, nickel-plated
Bend protection sleeve	PVC
Screw	steel, nickel-plated

Connectable conductors for solder area

Section	≤ AWG 18 (0,75 mm²)
Cable diameter	7,0 mm

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 30 mΩ (contact spring) ≤ 50 mΩ (housing)
Rated current	≤ 4 A
Rated voltage	60 V AC
Rated impulse voltage	250 V AC RMS/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts

0131 0132 0134

01 0122

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
0122 03	3	50	150
0122 04	4	50	150
0122 05	5	50	150
0122 05-1	5	50	150
0122 06	6	50	150
0122 07-1	7	50	150
0122 08-1	8	50	150

Packaging:
in individual plastic bags, in a cardboard box