


| REV | DESCRIPTION | BY DATE | APPD |
|---|---|---|---|
| B | REVISED PER ER7306 | CWB 04/14/08 | CWB |

NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD74-0000.
2. MATERIAL SPECIFICATIONS:
   B05 PER UNS 53800
3. FINISH SPECIFICATIONS:
   .000030 MIN. GOLD OER ASTM B488 OVER .000050 MIN. NICKEL PER AMS QQ-N-290.
4. ELECTRICAL SPECIFICATIONS:
   CURRENT RATING: 20 AMP.
5. FOR USE WITH 14 GA WIRE OR EQUIVALENT.
6. REFER TO CAP10-01 FOR CABLE ASSEMBLY PROCEDURE.

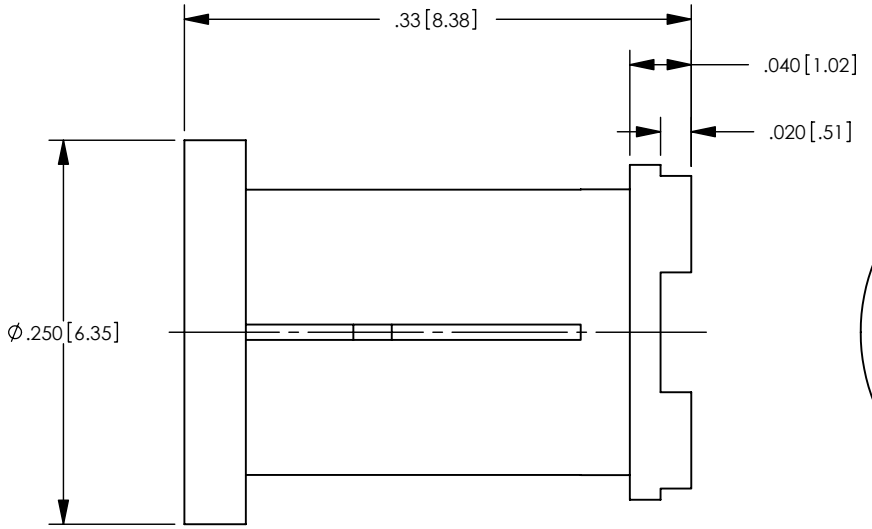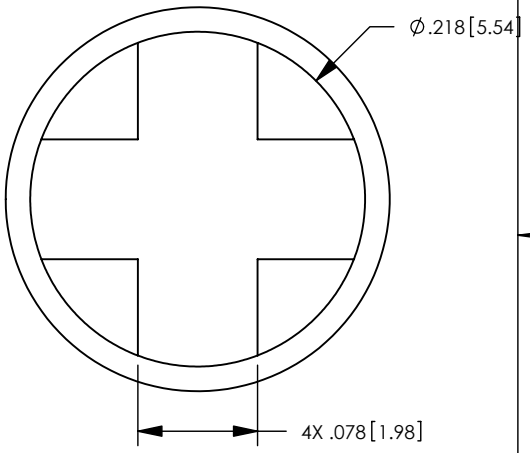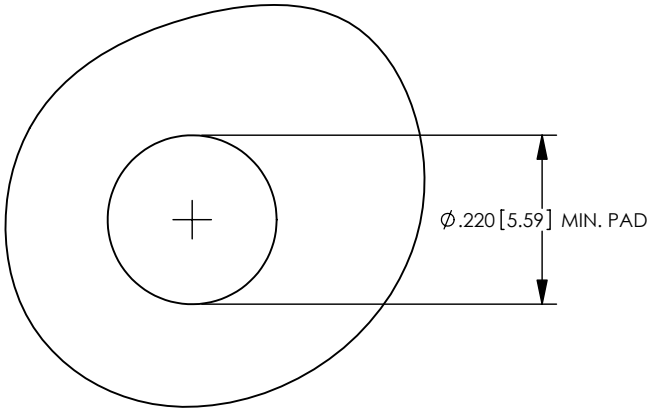


RECCOMENDED P.C. BOARD LAYOUT
SCALE 4:1

CATALOG P/N: 01307

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMAL: .XX [X.X] ± .01 [0.3]
.XXX [X.XX] ± .005 [0.13]
.XXXX [X.XXX] ± .XXXX
ANGLES: ± 2° SCALE: 8:1

CUSTOMER DRAWING

| DRAWN | DATE | APPROVED | DATE |
|---|---|---|---|
| JWH | 10/16/00 | JED | 10/18/00 |
| APPROVED | DATE | APPROVED | DATE |
| JMC | 10/18/00 | KJT | 10/18/00 |


WinchesterElectronics
Winchester Electronics Corporation
62 Barnes Industrial Road North
Wallingford, Connecticut 06492


40 AMP POWER RECEPTACLE

| A | SD01307 | SHT 1 OF 1 | REV B |
|---|---|---|---|