

# HEF4046B

## Phase-locked loop

Rev. 5 — 18 November 2011

Product data sheet

### 1. General description

The HEF4046B is a phase-locked loop circuit that consists of a linear Voltage Controlled Oscillator (VCO) and two different phase comparators with a common signal input amplifier and a common comparator input. A 7 V regulator (Zener) diode is provided for supply voltage regulation if necessary. For a functional description see [Section 6](#).

It operates over a recommended  $V_{DD}$  power supply range of 3 V to 15 V referenced to  $V_{SS}$  (usually ground). Unused inputs must be connected to  $V_{DD}$ ,  $V_{SS}$ , or another input.

### 2. Features and benefits

- Fully static operation
- 5 V, 10 V, and 15 V parametric ratings
- Standardized symmetrical output characteristics
- Specified from  $-40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$
- Complies with JEDEC standard JESD 13-B

### 3. Ordering information

**Table 1.** Ordering information

All types operate from  $-40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ .

| Type number | Package |                                                            |          |
|-------------|---------|------------------------------------------------------------|----------|
|             | Name    | Description                                                | Version  |
| HEF4046BP   | DIP16   | plastic dual in-line package; 16 leads (300 mil)           | SOT38-4  |
| HEF4046BT   | SO16    | plastic small outline package; 16 leads; body width 3.9 mm | SOT109-1 |



4. Functional diagram

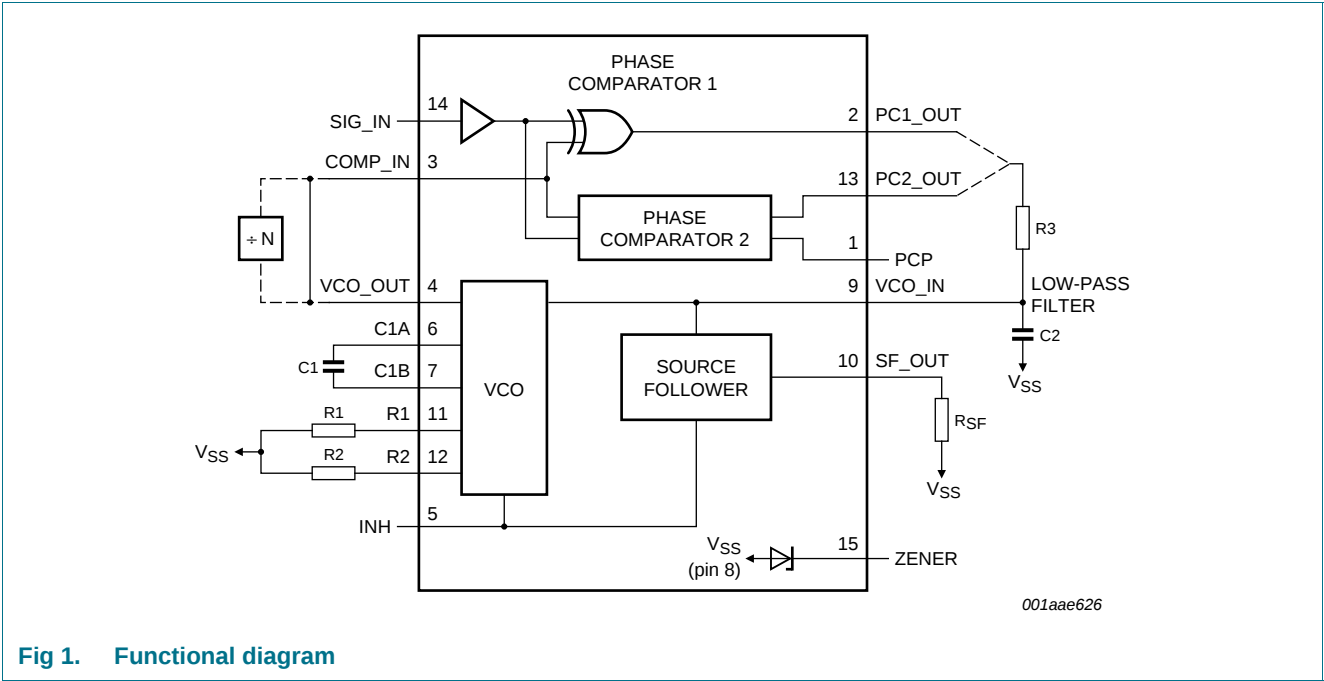


Fig 1. Functional diagram

5. Pinning information

5.1 Pinning

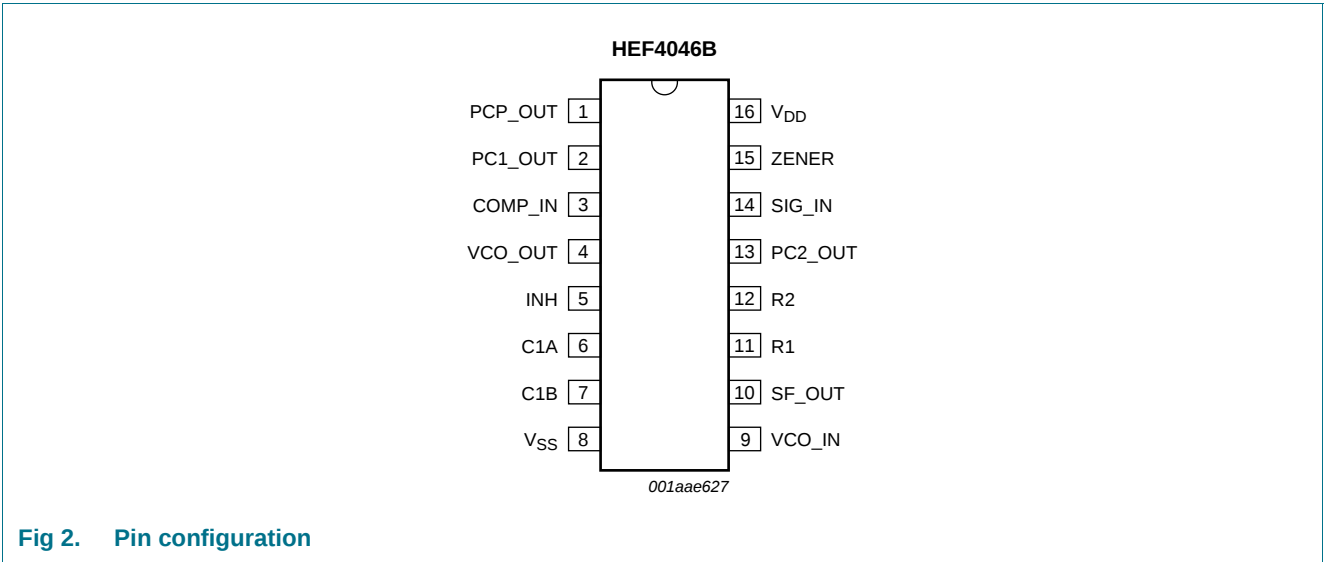


Fig 2. Pin configuration

## 5.2 Pin description

Table 2. Pin description

| Symbol          | Pin | Description                            |
|-----------------|-----|----------------------------------------|
| PCP_OUT         | 1   | phase comparator pulse output          |
| PC1_OUT         | 2   | phase comparator 1 output              |
| COMP_IN         | 3   | comparator input                       |
| VCO_OUT         | 4   | VCO output                             |
| INH             | 5   | inhibit input                          |
| C1A             | 6   | capacitor C1 connection A              |
| C1B             | 7   | capacitor C1 connection B              |
| V <sub>SS</sub> | 8   | ground supply voltage                  |
| VCO_IN          | 9   | VCO input                              |
| SF_OUT          | 10  | source-follower output                 |
| R1              | 11  | resistor R1 connection                 |
| R2              | 12  | resistor R2 connection                 |
| PC2_OUT         | 13  | phase comparator 2 output              |
| SIG_IN          | 14  | signal input                           |
| ZENER           | 15  | Zener diode input for regulated supply |
| V <sub>DD</sub> | 16  | supply voltage                         |

## 6. Functional description

### 6.1 VCO control

The VCO requires an external capacitor (C1) and resistor (R1) with an optional resistor (R2). Resistor R1 and capacitor C1 determine the frequency range of the VCO, while resistor R2 enables the VCO to have a frequency off-set if required. The high input impedance of the VCO simplifies the design of low-pass filters; it permits the designer a wide choice of resistor/capacitor ranges. In order not to load the low-pass filter, a source-follower output of the VCO input voltage is provided at SF\_OUT (pin 10). If this is used, a load resistor ( $R_L$ ) should be connected from SF\_OUT to V<sub>SS</sub>; if unused, SF\_OUT should be left open. The VCO output (pin 4) can either be connected directly to the comparator input COMP\_IN (pin 3) or via a frequency divider. A LOW-level at the inhibit input INH\_IN (pin 5) enables the VCO and the source follower, while a HIGH-level turns both off to minimize standby power consumption.


### 6.2 Phase comparators

The phase-comparator signal input SIG\_IN (pin 14) can be direct-coupled, provided the signal swing is between the standard HE4000B family input logic levels. The signal must be capacitively coupled to the self-biasing amplifier at the signal input with smaller swings. Phase comparator 1 is an EXCLUSIVE-OR network. The signal and comparator input frequencies must have a 50 % duty factor to obtain the maximum lock range. The average output voltage of the phase comparator is equal to  $0.5V_{DD}$  when there is no signal or noise at the signal input. The average voltage to the VCO input VCO\_IN is supplied by the low-pass filter connected to the output of phase comparator 1. This also causes the VCO to oscillate at the center frequency ( $f_0$ ). The frequency capture range ( $2f_c$ ) is defined as

the frequency range of input signals on which the PLL will lock if it was initially out of lock. The frequency lock range ( $2f_L$ ) is defined as the frequency range of input signals on which the loop will stay locked if it was initially in lock. The capture range is smaller or equal to the lock range.


With phase comparator 1, the range of frequencies over which the PLL can acquire lock (capture range) depends on the low-pass filter characteristics and this range can be made as large as the lock range. Phase comparator 1 enables the PLL system to remain in lock in spite of high amounts of noise in the input signal. A typical behavior of this type of phase comparator is that it may lock onto input frequencies that are close to harmonics of the VCO center frequency. Another typical behavior is that the phase angle between the signal and comparator input varies between  $0^\circ$  and  $180^\circ$ , and is  $90^\circ$  at the center frequency. [Figure 3](#) shows the typical phase-to-output response characteristic.

[Figure 4](#) shows the typical waveforms for a PLL with a  $f_0$  locked phase comparator 1.



(1) Average output voltage.

**Fig 3. Signal-to-comparator inputs phase difference for comparator 1**

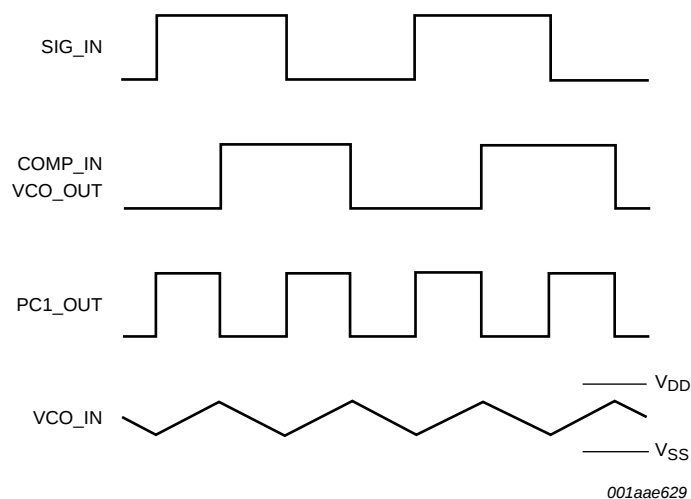


**Fig 4. Typical waveforms for phase-locked loop with a  $f_0$  locked phase comparator 1**

Phase comparator 2 is an edge-controlled digital memory network. It consists of four flip-flops, control gating and a 3-state output circuit comprising p and n-type drivers with a common output node. When the p-type or n-type drivers are ON, they pull the output up to  $V_{DD}$  or down to  $V_{SS}$  respectively. This type of phase comparator only acts on the positive-going edges of the signals at SIG\_IN and COMP\_IN. Therefore, the duty factors of these signals are not of importance.

If the signal input frequency is higher than the comparator input frequency, the p-type output driver is maintained ON most of the time, and both the n and p-type drivers are OFF (3-state) the remainder of the time. If the signal input frequency is lower than the comparator input frequency, the n-type output driver is maintained ON most of the time, and both the n and p-type drivers are OFF the remainder of the time. If the signal input and comparator input frequencies are equal, but the signal input lags the comparator input in phase, the n-type output driver is maintained ON for a time corresponding to the phase difference. If the comparator input lags the signal input in phase, the p-type output driver is maintained ON for a time corresponding to the phase difference. Subsequently, the voltage at the capacitor of the low-pass filter connected to this phase comparator is adjusted until the signal and comparator inputs are equal in both phase and frequency. At this stable point, both p and n-type drivers remain OFF and thus the phase comparator output becomes an open circuit and keeps the voltage at the capacitor of the low-pass filter constant.

Moreover, the signal at the phase comparator pulse output (PCP\_OUT) is a HIGH level, which can be used for indicating a locked condition. Thus, for phase comparator 2, no phase difference exists between the signal and comparator inputs over the full VCO frequency range. Moreover, the power dissipation due to the low-pass filter is reduced when this type of phase comparator is used, because both p and n-type output drivers are OFF for most of the signal input cycle. It should be noted that the PLL lock range for this type of phase comparator is equal to the capture range, independent of the low-pass filter. With no signal present at the signal input, the VCO is adjusted to its lowest frequency for phase comparator 2. Figure 5 shows typical waveforms for a PLL employing this type of locked phase comparator.

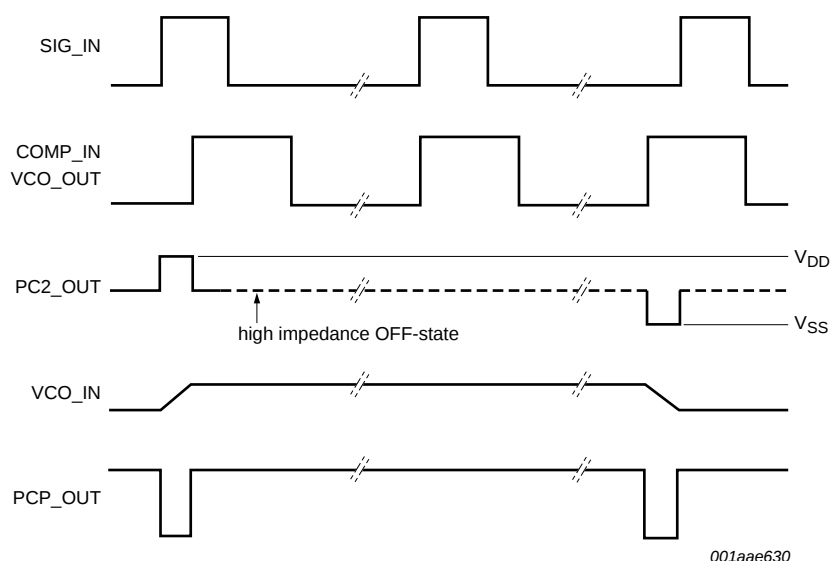


**Fig 5. Typical waveforms for phase-locked loop with a locked phase comparator 2**

Figure 6 shows the state diagram for phase comparator 2. Each circle represents a state of the comparator. The number at the top, inside each circle, represents the state of the comparator, while the logic state of the signal and comparator inputs are represented by a '0' for a logic LOW or a '1' for a logic HIGH, and they are shown in the left and right bottom of each circle.

The transitions from one to another result from either a logic change at the signal input (S representing SIG\_IN) or the comparator input (C representing COMP\_IN). A positive-going and a negative-going transition are shown by an arrow pointing up or down respectively.

The state diagram assumes, that only one transition on either the signal input or comparator input occurs at any instant.

- States 3, 5, 9 and 11 represent the output condition when the p-type driver is ON.
- States 2, 4, 10 and 12 determine the condition when the n-type driver is ON.
- States 1, 6, 7 and 8 represent the condition when the output is in its high-impedance OFF state; i.e. both p and n-type drivers are OFF, and the PCP\_OUT output is HIGH. The condition at output PCP\_OUT for all other states is LOW.

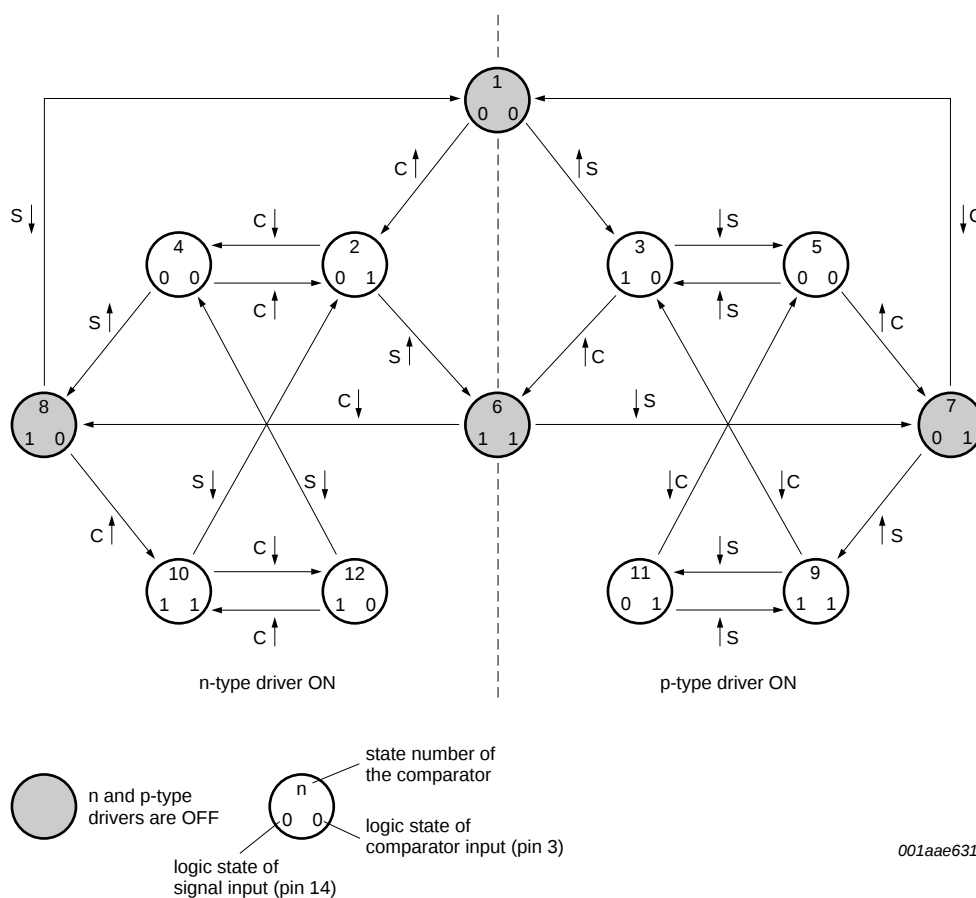

S ↑: 0 to 1 transition at the signal input SIG\_IN.

C ↓: 1 to 0 transition at the comparator input COMP\_IN.

Fig 6. State diagram for comparator 2

## 7. Limiting values

**Table 3. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol    | Parameter               | Conditions                                             | Min   | Max            | Unit |
|-----------|-------------------------|--------------------------------------------------------|-------|----------------|------|
| $V_{DD}$  | supply voltage          |                                                        | -0.5  | +18            | V    |
| $I_{IK}$  | input clamping current  | $V_I < -0.5\text{ V}$ or $V_I > V_{DD} + 0.5\text{ V}$ | -     | $\pm 10$       | mA   |
| $V_I$     | input voltage           |                                                        | -0.5  | $V_{DD} + 0.5$ | V    |
| $I_{OK}$  | output clamping current | $V_O < -0.5\text{ V}$ or $V_O > V_{DD} + 0.5\text{ V}$ | -     | $\pm 10$       | mA   |
| $I_{I/O}$ | input/output current    |                                                        | -     | $\pm 10$       | mA   |
| $I_{DD}$  | supply current          |                                                        | -     | 50             | mA   |
| $T_{stg}$ | storage temperature     |                                                        | -65   | +150           | °C   |
| $T_{amb}$ | ambient temperature     |                                                        | -40   | +85            | °C   |
| $P_{tot}$ | total power dissipation | DIP16 package                                          | [1] - | 750            | mW   |
|           |                         | SO16 package                                           | [2] - | 500            | mW   |
| $P$       | power dissipation       | per output                                             | -     | 100            | mW   |

[1] For DIP16 package:  $P_{tot}$  derates linearly with 12 mW/K above 70 °C.

[2] For SO16 package:  $P_{tot}$  derates linearly with 8 mW/K above 70 °C.

## 8. Recommended operating conditions

**Table 4. Recommended operating conditions**

| Symbol              | Parameter                           | Conditions                  | Min | Typ | Max      | Unit            |
|---------------------|-------------------------------------|-----------------------------|-----|-----|----------|-----------------|
| $V_{DD}$            | supply voltage                      |                             | 3   | -   | 15       | V               |
|                     |                                     | as fixed oscillator only    | 3   | -   | 15       | V               |
|                     |                                     | phase-locked loop operation | 5   | -   | 15       | V               |
| $V_I$               | input voltage                       |                             | 0   | -   | $V_{DD}$ | V               |
| $T_{amb}$           | ambient temperature                 | in free air                 | -40 | -   | +85      | °C              |
| $\Delta t/\Delta V$ | input transition rise and fall rate | for INH input               |     |     |          |                 |
|                     |                                     | $V_{DD} = 5\text{ V}$       | -   | -   | 3.75     | $\mu\text{s/V}$ |
|                     |                                     | $V_{DD} = 10\text{ V}$      | -   | -   | 0.5      | $\mu\text{s/V}$ |
|                     |                                     | $V_{DD} = 15\text{ V}$      | -   | -   | 0.08     | $\mu\text{s/V}$ |

## 9. Static characteristics

**Table 5. Static characteristics**

$V_{SS} = 0\text{ V}$ ;  $V_I = V_{SS}$  or  $V_{DD}$  unless otherwise specified.

| Symbol   | Parameter                 | Conditions                           | $V_{DD}$ | $T_{amb} = -40\text{ °C}$ |           | $T_{amb} = 25\text{ °C}$ |           | $T_{amb} = 85\text{ °C}$ |           | Unit              |
|----------|---------------------------|--------------------------------------|----------|---------------------------|-----------|--------------------------|-----------|--------------------------|-----------|-------------------|
|          |                           |                                      |          | Min                       | Max       | Min                      | Max       | Min                      | Max       |                   |
| $V_{IH}$ | HIGH-level input voltage  | $ I_O  < 1\text{ }\mu\text{A}$       | 5 V      | 3.5                       | -         | 3.5                      | -         | 3.5                      | -         | V                 |
|          |                           |                                      | 10 V     | 7.0                       | -         | 7.0                      | -         | 7.0                      | -         | V                 |
|          |                           |                                      | 15 V     | 11.0                      | -         | 11.0                     | -         | 11.0                     | -         | V                 |
| $V_{IL}$ | LOW-level input voltage   | $ I_O  < 1\text{ }\mu\text{A}$       | 5 V      | -                         | 1.5       | -                        | 1.5       | -                        | 1.5       | V                 |
|          |                           |                                      | 10 V     | -                         | 3.0       | -                        | 3.0       | -                        | 3.0       | V                 |
|          |                           |                                      | 15 V     | -                         | 4.0       | -                        | 4.0       | -                        | 4.0       | V                 |
| $V_{OH}$ | HIGH-level output voltage | $ I_O  < 1\text{ }\mu\text{A}$       | 5 V      | 4.95                      | -         | 4.95                     | -         | 4.95                     | -         | V                 |
|          |                           |                                      | 10 V     | 9.95                      | -         | 9.95                     | -         | 9.95                     | -         | V                 |
|          |                           |                                      | 15 V     | 14.95                     | -         | 14.95                    | -         | 14.95                    | -         | V                 |
| $V_{OL}$ | LOW-level output voltage  | $ I_O  < 1\text{ }\mu\text{A}$       | 5 V      | -                         | 0.05      | -                        | 0.05      | -                        | 0.05      | V                 |
|          |                           |                                      | 10 V     | -                         | 0.05      | -                        | 0.05      | -                        | 0.05      | V                 |
|          |                           |                                      | 15 V     | -                         | 0.05      | -                        | 0.05      | -                        | 0.05      | V                 |
| $I_{OH}$ | HIGH-level output current | $V_O = 2.5\text{ V}$                 | 5 V      | -                         | -1.7      | -                        | -1.4      | -                        | -1.1      | mA                |
|          |                           | $V_O = 4.6\text{ V}$                 | 5 V      | -                         | -0.52     | -                        | -0.44     | -                        | -0.36     | mA                |
|          |                           | $V_O = 9.5\text{ V}$                 | 10 V     | -                         | -1.3      | -                        | -1.1      | -                        | -0.9      | mA                |
|          |                           | $V_O = 13.5\text{ V}$                | 15 V     | -                         | -3.6      | -                        | -3.0      | -                        | -2.4      | mA                |
| $I_{OL}$ | LOW-level output current  | $V_O = 0.4\text{ V}$                 | 5 V      | 0.52                      | -         | 0.44                     | -         | 0.36                     | -         | mA                |
|          |                           | $V_O = 0.5\text{ V}$                 | 10 V     | 1.3                       | -         | 1.1                      | -         | 0.9                      | -         | mA                |
|          |                           | $V_O = 1.5\text{ V}$                 | 15 V     | 3.6                       | -         | 3.0                      | -         | 2.4                      | -         | mA                |
| $I_I$    | input leakage current     |                                      | 15 V     | -                         | $\pm 0.3$ | -                        | $\pm 0.3$ | -                        | $\pm 1.0$ | $\mu\text{A}$     |
| $I_{OZ}$ | OFF-state output current  | output HIGH and returned to $V_{DD}$ | 15 V     | -                         | 1.6       | -                        | 1.6       | -                        | 12.0      | $\mu\text{A}$     |
|          |                           | output LOW and returned to $V_{SS}$  | 15 V     | -                         | 1.6       | -                        | 1.6       | -                        | 12.0      | $\mu\text{A}$     |
| $I_{DD}$ | supply current            |                                      | 5 V      | [1]                       | -         | -                        | 20        | -                        | -         | $\mu\text{A}$     |
|          |                           |                                      | 10 V     | [1]                       | -         | -                        | 300       | -                        | -         | $\mu\text{A}$     |
|          |                           |                                      | 15 V     | [1]                       | -         | -                        | 750       | -                        | -         | $\mu\text{A}$     |
|          |                           | $I_O = 0\text{ A}$                   | 5 V      | [2]                       | -         | 20                       | -         | 20                       | -         | 150 $\mu\text{A}$ |
|          |                           |                                      | 10 V     | [2]                       | -         | 40                       | -         | 40                       | -         | 300 $\mu\text{A}$ |
|          |                           |                                      | 15 V     | [2]                       | -         | 80                       | -         | 80                       | -         | 600 $\mu\text{A}$ |
| $C_I$    | input capacitance         | for INH input                        |          | -                         | -         | -                        | 7.5       | -                        | -         | pF                |

[1] Pin 15 open; pin 5 at  $V_{DD}$ ; pins 3 and 9 at  $V_{SS}$ ; pin 14 open.

[2] Pin 15 open; pin 5 at  $V_{DD}$ ; pins 3 and 9 at  $V_{SS}$ ; pin 14 at  $V_{DD}$ ; input current pin 14 not included.

## 10. Dynamic characteristics

**Table 6. Dynamic characteristics**

$V_{SS} = 0\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $C_L = 50\text{ pF}$ ; input transition times  $\leq 20\text{ ns}$ .

| Symbol               | Parameter                            | Conditions                                                                                                                      | V <sub>DD</sub> | Min               | Typ  | Max          | Unit |         |
|----------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------|------|--------------|------|---------|
| Phase comparators    |                                      |                                                                                                                                 |                 |                   |      |              |      |         |
| R <sub>I</sub>       | input resistance                     | SIG_IN input; at self-bias operating point                                                                                      | 5 V             | -                 | 750  | -            | kΩ   |         |
|                      |                                      |                                                                                                                                 | 10 V            | -                 | 220  | -            | kΩ   |         |
|                      |                                      |                                                                                                                                 | 15 V            | -                 | 140  | -            | kΩ   |         |
| V <sub>i(sens)</sub> | input voltage sensitivity            | SIG_IN input A.C. coupled; peak-to-peak values; R1 = 10 kΩ; R2 = ∞; C1 = 100 pF; independent of the lock range                  | 5 V             | -                 | 150  | -            | mV   |         |
|                      |                                      |                                                                                                                                 | 10 V            | -                 | 150  | -            | mV   |         |
|                      |                                      |                                                                                                                                 | 15 V            | -                 | 200  | -            | mV   |         |
| V <sub>IL</sub>      | LOW-level input voltage              | SIG_IN and COMP_IN inputs, DC coupled LOW; full temperature range                                                               | 5 V             | -                 | -    | 1.5          | V    |         |
|                      |                                      |                                                                                                                                 | 10 V            | -                 | -    | 3.0          | V    |         |
|                      |                                      |                                                                                                                                 | 15 V            | -                 | -    | 4.0          | V    |         |
| V <sub>IH</sub>      | HIGH-level input voltage             | SIG_IN and COMP_IN inputs, D.C. coupled HIGH; full temperature range                                                            | 5 V             | 3.5               | -    | -            | V    |         |
|                      |                                      |                                                                                                                                 | 10 V            | 7.0               | -    | -            | V    |         |
|                      |                                      |                                                                                                                                 | 15 V            | 11.0              | -    | -            | V    |         |
| I <sub>IH</sub>      | HIGH-level input current             | SIG_IN input; at V <sub>DD</sub>                                                                                                | 5 V             | -                 | 7    | -            | μA   |         |
|                      |                                      |                                                                                                                                 | 10 V            | -                 | 30   | -            | μA   |         |
|                      |                                      |                                                                                                                                 | 15 V            | -                 | 70   | -            | μA   |         |
| I <sub>IL</sub>      | LOW-level input current              | SIG_IN input; at V <sub>SS</sub>                                                                                                | 5 V             | -                 | -3   | -            | μA   |         |
|                      |                                      |                                                                                                                                 | 10 V            | -                 | -18  | -            | μA   |         |
|                      |                                      |                                                                                                                                 | 15 V            | -                 | -45  | -            | μA   |         |
| VCO                  |                                      |                                                                                                                                 |                 |                   |      |              |      |         |
| P                    | power dissipation                    | f <sub>0</sub> = 10 kHz; R1 = 1 MΩ; R2 = ∞; VCO_IN at 0.5 V <sub>DD</sub> ; see <a href="#">Figure 10</a> to <a href="#">12</a> | 5 V             | -                 | 150  | -            | μW   |         |
|                      |                                      |                                                                                                                                 | 10 V            | -                 | 2500 | -            | μW   |         |
|                      |                                      |                                                                                                                                 | 15 V            | -                 | 9000 | -            | μW   |         |
| f <sub>max</sub>     | maximum frequency                    | VCO_IN at V <sub>DD</sub> ; R1 = 10 kΩ; R2 = ∞; C1 = 50 pF                                                                      | 5 V             | 0.5               | 1.0  | -            | MHz  |         |
|                      |                                      |                                                                                                                                 | 10 V            | 1.0               | 2.0  | -            | MHz  |         |
|                      |                                      |                                                                                                                                 | 15 V            | 1.3               | 2.7  | -            | MHz  |         |
| Δf/ΔT                | frequency variation with temperature | no frequency offset (f <sub>min</sub> = 0 Hz)                                                                                   | 5 V             | <a href="#">1</a> | -    | 0.22 to 0.30 | -    | % Hz/°C |
|                      |                                      |                                                                                                                                 | 10 V            | <a href="#">1</a> | -    | 0.04 to 0.05 | -    | % Hz/°C |
|                      |                                      |                                                                                                                                 | 15 V            | <a href="#">1</a> | -    | 0.01 to 0.05 | -    | % Hz/°C |
|                      |                                      | with frequency offset (f <sub>min</sub> > 0 Hz)                                                                                 | 5 V             | <a href="#">1</a> | -    | 0 to 0.22    | -    | % Hz/°C |
|                      |                                      |                                                                                                                                 | 10 V            | <a href="#">1</a> | -    | 0 to 0.04    | -    | % Hz/°C |
|                      |                                      |                                                                                                                                 | 15 V            | <a href="#">1</a> | -    | 0 to 0.01    | -    | % Hz/°C |

**Table 6.** Dynamic characteristics ...continued $V_{SS} = 0\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $C_L = 50\text{ pF}$ ; input transition times  $\leq 20\text{ ns}$ .

| Symbol              | Parameter                    | Conditions                                                        | V <sub>DD</sub>         | Min | Typ  | Max | Unit |
|---------------------|------------------------------|-------------------------------------------------------------------|-------------------------|-----|------|-----|------|
| Δf/f                | relative frequency variation | for VCO see <a href="#">Figure 13</a> and <a href="#">14</a>      |                         |     |      |     |      |
|                     |                              | R1 > 10 kΩ                                                        | 5 V                     | -   | 0.50 | -   | % Hz |
|                     |                              | R1 > 400 kΩ                                                       | 10 V                    | -   | 0.25 | -   | % Hz |
|                     |                              | R1 = MΩ                                                           | 15 V                    | -   | 0.25 | -   | % Hz |
| δ                   | duty factor                  | VCO _OUT output                                                   | 5 V                     | -   | 50   | -   | %    |
|                     |                              |                                                                   | 10 V                    | -   | 50   | -   | %    |
|                     |                              |                                                                   | 15 V                    | -   | 50   | -   | %    |
| R <sub>in</sub>     | input resistance             | for pin VCO_IN                                                    |                         |     | 10   |     | MΩ   |
| Source follower     |                              |                                                                   |                         |     |      |     |      |
| V <sub>offset</sub> | offset voltage               | R <sub>L</sub> = 10 kΩ; VCO_IN at 0.5V <sub>DD</sub>              | 5 V <a href="#">[2]</a> | -   | 1.7  | -   | V    |
|                     |                              |                                                                   | 10 V                    | -   | 2.0  | -   | V    |
|                     |                              |                                                                   | 15 V                    | -   | 2.1  | -   | V    |
|                     |                              | R <sub>L</sub> = 50 kΩ; VCO_IN at 0.5V <sub>DD</sub>              | 5 V                     | -   | 1.5  | -   | V    |
|                     |                              |                                                                   | 10 V                    | -   | 1.7  | -   | V    |
|                     |                              |                                                                   | 15 V                    | -   | 1.8  | -   | V    |
| Δf/f                | relative frequency variation | VCO output; R <sub>L</sub> > 50 kΩ; see <a href="#">Figure 13</a> | 5 V                     | -   | 0.3  | -   | %    |
|                     |                              |                                                                   | 10 V                    | -   | 1.0  | -   | %    |
|                     |                              |                                                                   | 15 V                    | -   | 1.3  | -   | %    |
| Zener diode         |                              |                                                                   |                         |     |      |     |      |
| V <sub>Z</sub>      | working voltage              | I <sub>Z</sub> = 50 μA                                            | -                       | -   | 7.3  | -   | V    |
| R <sub>dyn</sub>    | dynamic resistance           | For internal Zener diode; I <sub>Z</sub> = 1 mA                   | -                       | -   | 25   | -   | Ω    |

[1] Over the recommended component range.

[2] The offset voltage is equal to the input voltage on pin VCO\_IN minus the output voltage on pin SF\_OUT.

## 11. Design information

**Table 7.** Design information

| Test                                   | Using phase comparator 1                                                                                                                                             | Using phase comparator 2                                     |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|
| VCO adjusts with no signal on SIG_IN   | VCO in PLL system adjusts to center frequency ( $f_0$ )                                                                                                              | VCO in PLL system adjusts to minimum frequency ( $f_{min}$ ) |
| Phase angle between SIG_IN and COMP_IN | 90° at center frequency ( $f_0$ ), approaching 0° and 180° at the ends of the lock range ( $2f_L$ )                                                                  | always 0° in lock (positive-going edges)                     |
| Locks on harmonics of center frequency | yes                                                                                                                                                                  | no                                                           |
| Signal input noise rejection           | high                                                                                                                                                                 | low                                                          |
| Lock frequency range ( $2f_L$ )        | the frequency range of the input signal on which the loop will stay locked if it was initially in lock; $2f_L = \text{full VCO frequency range} = f_{max} - f_{min}$ |                                                              |
| Capture frequency range ( $2f_c$ )     | the frequency range of the input signal on which the loop will lock if it was initially out of lock                                                                  |                                                              |
|                                        | depends on low-pass filter characteristics; $2f_c < 2f_L$                                                                                                            | $2f_c = 2f_L$                                                |
| Center frequency ( $f_0$ )             | the frequency of the VCO when VCO_IN at $0.5V_{DD}$                                                                                                                  |                                                              |

## 11.1 VCO component selection

Recommended range for R1 and R2: 10 kΩ to 1 MΩ; for C1: 50 pF to any practical value.

### 1. VCO without frequency offset ( $R2 = \infty$ ). 0

- Given  $f_0$ : use  $f_0$  with [Figure 7](#) to determine R1 and C1.
- Given  $f_{max}$ : calculate  $f_0 = 0.5f_{max}$ ; use  $f_0$  with [Figure 7](#) to determine R1 and C1.

### 2. VCO with frequency offset.


- Given  $f_0$  and  $2f_L$ : calculate  $f_{min}$  from the equation  $f_{min} = f_0 - 2f_L$ ; use  $f_{min}$  with

[Figure 8](#) to determine R2 and C1; calculate  $\frac{f_{max}}{f_{min}}$  from the equation

$$\frac{f_{max}}{f_{min}} = \frac{f_0 + 2f_L}{f_0 - 2f_L}; \text{ use } \frac{f_{max}}{f_{min}} \text{ with } \text{Figure 9 to determine the ratio } R2/R1 \text{ to obtain } R1.$$

- Given  $f_{min}$  and  $f_{max}$ : use  $f_{min}$  with [Figure 8](#) to determine R2 and C1; calculate  $\frac{f_{max}}{f_{min}}$ ;


use  $\frac{f_{max}}{f_{min}}$  with [Figure 9](#) to determine R2/R1 to obtain R1.

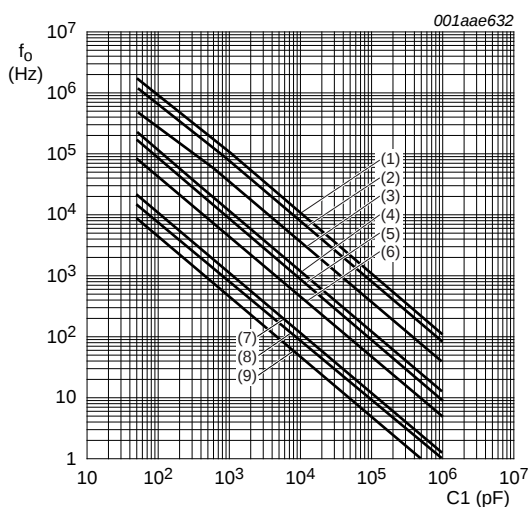

$T_{amb} = 25^\circ\text{C}$ ; VCO\_IN at  $0.5V_{DD}$ ;  
INH\_IN at  $V_{SS}$ ;  $R2 = \infty$ .

Lines (1), (4), and (7):  $V_{DD} = 15\text{ V}$ ;  
Lines (2), (5), and (8):  $V_{DD} = 10\text{ V}$ ;  
Lines (3), (6), and (9):  $V_{DD} = 5\text{ V}$ ;  
Lines (1), (2), and (3):  $R1 = 10\text{ k}\Omega$ ;  
Lines (4), (5), and (6):  $R1 = 100\text{ k}\Omega$ ;  
Lines (7), (8), and (9):  $R1 = 1\text{ M}\Omega$ .


**Fig 7.** Typical center frequency as a function of capacitor C1

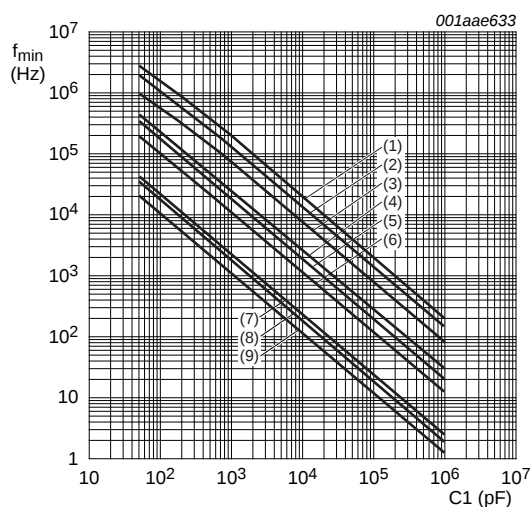

$T_{amb} = 25^\circ\text{C}$ ; VCO\_IN at  $V_{SS}$ ; INH\_IN at  $V_{SS}$ ;  $R1 = \infty$ .


Lines (1), (4), and (7):  $V_{DD} = 15\text{ V}$ ;  
Lines (2), (5), and (8):  $V_{DD} = 10\text{ V}$ ;  
Lines (3), (6), and (9):  $V_{DD} = 5\text{ V}$ ;  
Lines (1), (2), and (3):  $R2 = 10\text{ k}\Omega$ ;  
Lines (4), (5), and (6):  $R2 = 100\text{ k}\Omega$ ;  
Lines (7), (8), and (9):  $R2 = 1\text{ M}\Omega$ .

**Fig 8.** Typical frequency offset as a function of capacitor C1

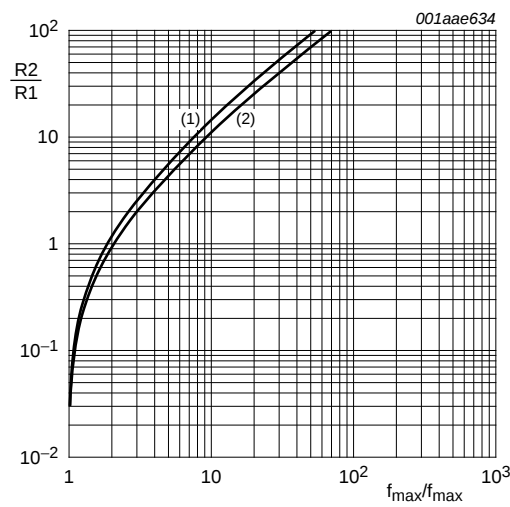


Line (1):  $V_{DD} = 5\text{ V}$ ;  
Line (2):  $V_{DD} = 10\text{ V}, 15\text{ V}$ .

Fig 9. Typical ratio of  $R2/R1$  as a function of the ratio  $f_{max}/f_{min}$

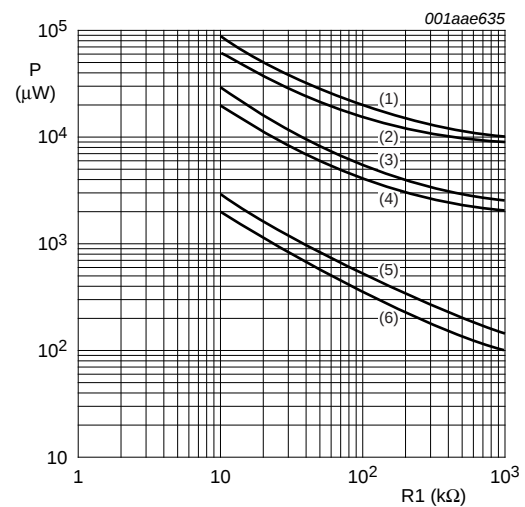


$R2 = \infty$ ; VCO\_IN at  $0.5V_{DD}$ ;  $C_L = 50\text{ pF}$ .  
Lines (1) and (2):  $V_{DD} = 15\text{ V}$ ;  
Lines (3) and (4):  $V_{DD} = 10\text{ V}$ ;  
Lines (5) and (6):  $V_{DD} = 5\text{ V}$ ;  
Lines (1), (3), and (5):  $C1 = 50\text{ pF}$ ;  
Lines (2), (4), and (6):  $C1 = 1\text{ }\mu\text{F}$ .

Fig 10. Power dissipation as a function of  $R1$

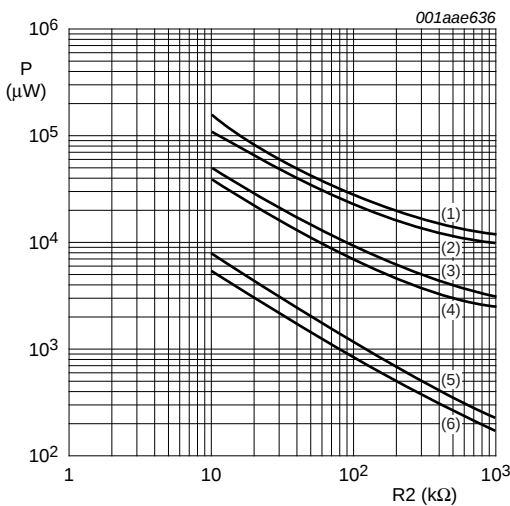


$R1 = \infty$ ; VCO\_IN at  $V_{SS} (0\text{ V})$ ;  $C_L = 50\text{ pF}$ .  
Lines (1) and (2):  $V_{DD} = 15\text{ V}$ ;  
Lines (3) and (4):  $V_{DD} = 10\text{ V}$ ;  
Lines (5) and (6):  $V_{DD} = 5\text{ V}$ ;  
Lines (1), (3), and (5):  $C1 = 50\text{ pF}$ ;  
Lines (2), (4), and (6):  $C1 = 1\text{ }\mu\text{F}$ .

Fig 11. Power dissipation as a function of  $R2$

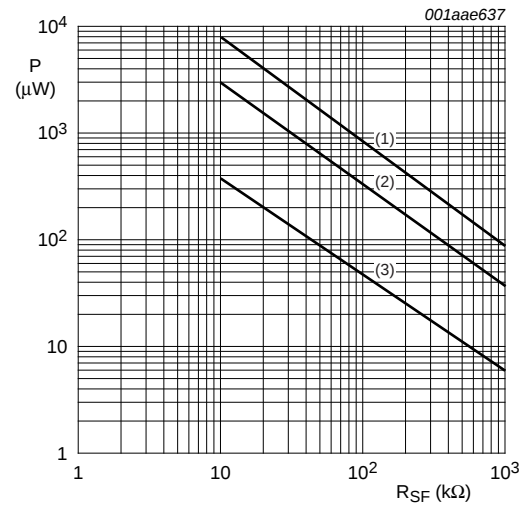

VCO\_IN at  $0.5V_{DD}$ ;  $R1 = \infty$ ;  $R2 = \infty$ .  
Line (1):  $V_{DD} = 15\text{ V}$ ;  
Line (2):  $V_{DD} = 10\text{ V}$ ;  
Line (3):  $V_{DD} = 5\text{ V}$ .

Fig 12. Power dissipation of source follower as a function of  $R_L$

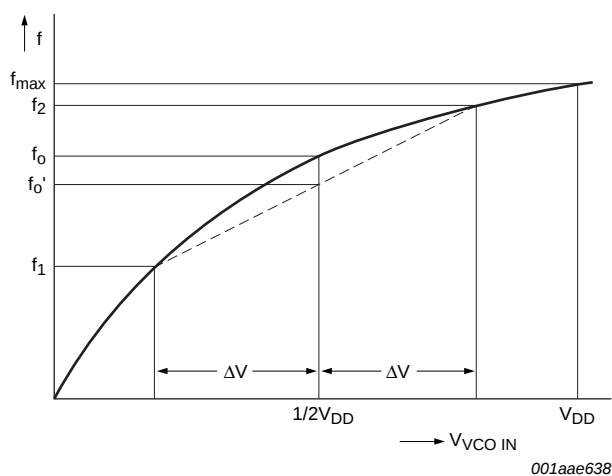

See [Section 10](#).

For VCO linearity:

$$f'_0 = \frac{f_1 + f_2}{2}$$

$$linearity = \frac{f'_0 - f_0}{f'_0} \times 100\%$$


This figure and the above formula also apply to source follower linearity: substitute  $V_O$  at SF\_OUT for  $f$ .

$\Delta V = 0.3\text{ V}$  at  $V_{DD} = 5\text{ V}$ ;


$\Delta V = 2.5\text{ V}$  at  $V_{DD} = 10\text{ V}$ ;

$\Delta V = 5.0\text{ V}$  at  $V_{DD} = 15\text{ V}$ .


**Fig 13. Definition of linearity**

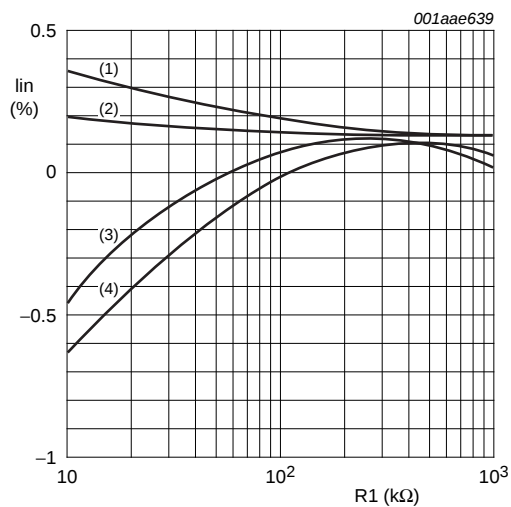

a.  $V_{DD} = 5\text{ V}$

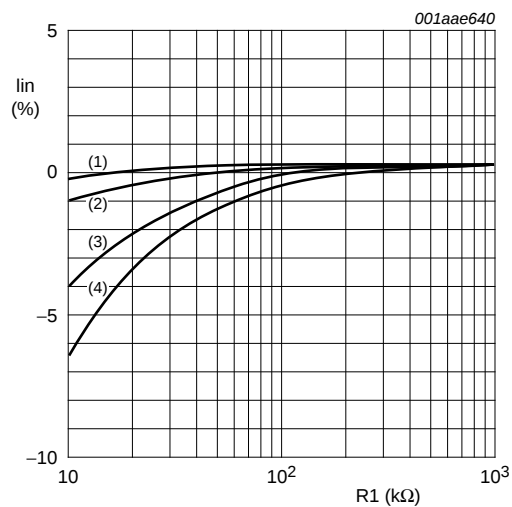

b.  $V_{DD} = 10\text{ V}$

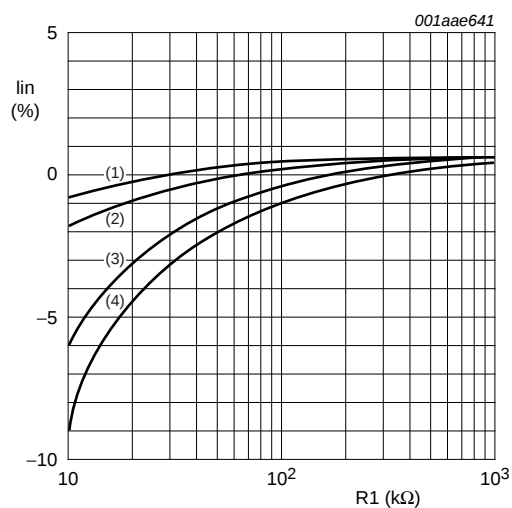

c.  $V_{DD} = 15\text{ V}$

$R2 = \infty$ ;

Line (1):  $C1 = 1\text{ }\mu\text{F}$ ;

Line (2):  $C1 = 1\text{ nF}$ ;

Line (3):  $C1 = 100\text{ pF}$ ;

Line (4):  $C1 = 50\text{ pF}$ .

**Fig 14. VCO frequency linearity as a function of  $R1$**

12. Package outline

DIP16: plastic dual in-line package; 16 leads (300 mil)

SOT38-4


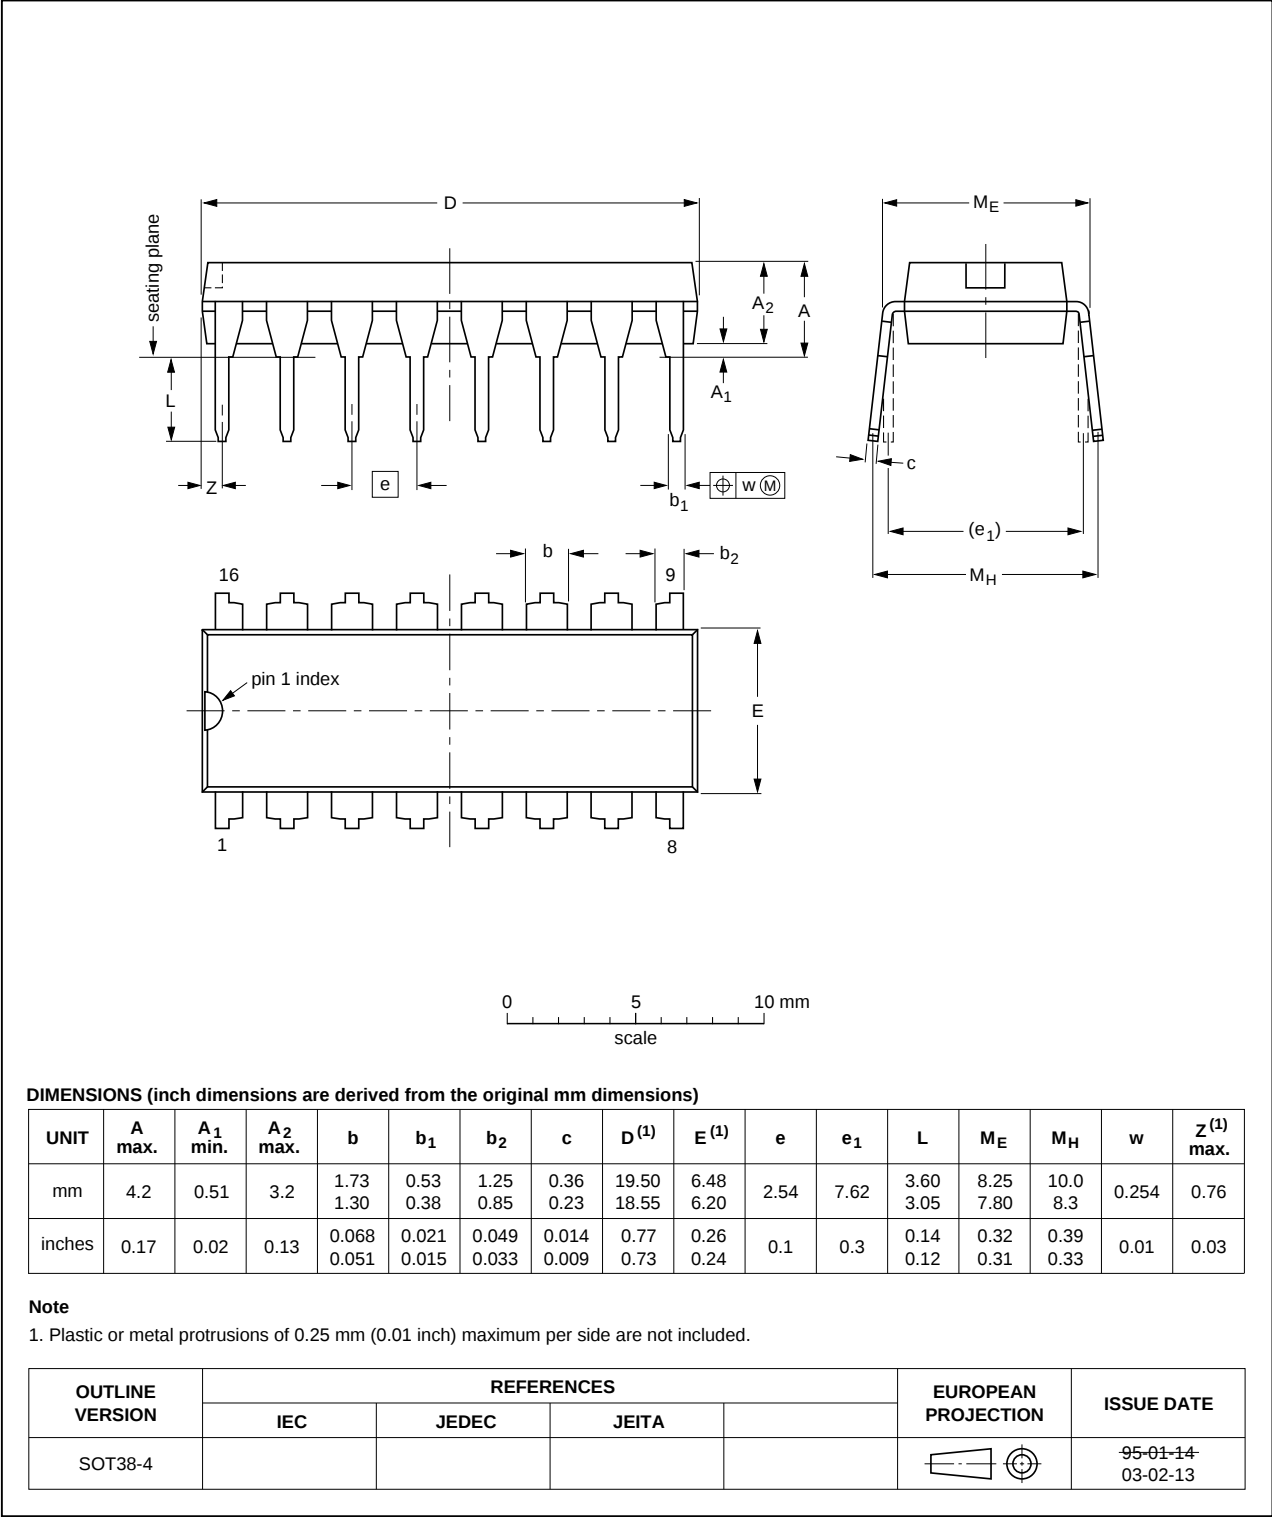


Fig 15. Package outline SOT38-4 (DIP16)

SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

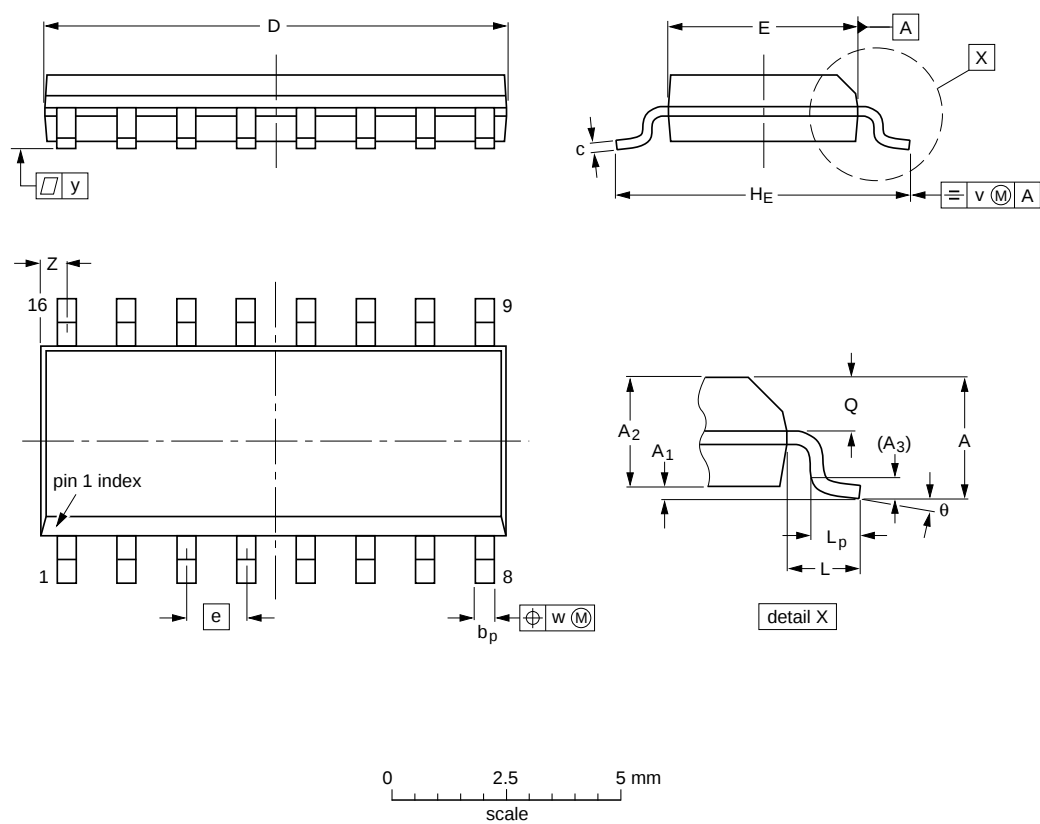

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

| UNIT   | A<br>max. | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | b <sub>p</sub> | c                | D <sup>(1)</sup> | E <sup>(1)</sup> | e    | H <sub>E</sub> | L     | L <sub>p</sub> | Q              | v    | w    | y     | z <sup>(1)</sup> | θ        |
|--------|-----------|----------------|----------------|----------------|----------------|------------------|------------------|------------------|------|----------------|-------|----------------|----------------|------|------|-------|------------------|----------|
| mm     | 1.75      | 0.25<br>0.10   | 1.45<br>1.25   | 0.25           | 0.49<br>0.36   | 0.25<br>0.19     | 10.0<br>9.8      | 4.0<br>3.8       | 1.27 | 6.2<br>5.8     | 1.05  | 1.0<br>0.4     | 0.7<br>0.6     | 0.25 | 0.25 | 0.1   | 0.7<br>0.3       | 8°<br>0° |
| inches | 0.069     | 0.010<br>0.004 | 0.057<br>0.049 | 0.01           | 0.019<br>0.014 | 0.0100<br>0.0075 | 0.39<br>0.38     | 0.16<br>0.15     | 0.05 | 0.244<br>0.228 | 0.041 | 0.039<br>0.016 | 0.028<br>0.020 | 0.01 | 0.01 | 0.004 | 0.028<br>0.012   |          |

Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

| OUTLINE<br>VERSION | REFERENCES |        |       |  | EUROPEAN<br>PROJECTION | ISSUE DATE           |
|--------------------|------------|--------|-------|--|------------------------|----------------------|
|                    | IEC        | JEDEC  | JEITA |  |                        |                      |
| SOT109-1           | 076E07     | MS-012 |       |  |                        | 99-12-27<br>03-02-19 |

## 13. Revision history

Table 8. Revision history

| Document ID      | Release date                                                                                                                                                                                                                                                                                                                   | Data sheet status     | Change notice | Supersedes       |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------|------------------|
| HEF4046B v.5     | 20111118                                                                                                                                                                                                                                                                                                                       | Product data sheet    | -             | HEF4046B v.4     |
| Modifications:   | <ul style="list-style-type: none"><li>• Section Applications removed</li><li>• <a href="#">Table 5</a>: <math>I_{OH}</math> minimum values changed to maximum</li><li>• <a href="#">Table 6</a>: <math>R_{in}</math> typical value changed from <math>10^6 \text{ M}\Omega</math> to <math>10 \text{ M}\Omega</math></li></ul> |                       |               |                  |
| HEF4046B v.4     | 20100105                                                                                                                                                                                                                                                                                                                       | Product data sheet    | -             | HEF4046B_CNV v.3 |
| HEF4046B_CNV v.3 | 19950101                                                                                                                                                                                                                                                                                                                       | Product specification | -             | HEF4046B_CNV v.2 |
| HEF4046B_CNV v.2 | 19950101                                                                                                                                                                                                                                                                                                                       | Product specification | -             | -                |

## 14. Legal information

### 14.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition                                                                            |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 14.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 14.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or

malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

## 14.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 15. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 16. Contents

---

|           |                                               |           |
|-----------|-----------------------------------------------|-----------|
| <b>1</b>  | <b>General description</b> .....              | <b>1</b>  |
| <b>2</b>  | <b>Features and benefits</b> .....            | <b>1</b>  |
| <b>3</b>  | <b>Ordering information</b> .....             | <b>1</b>  |
| <b>4</b>  | <b>Functional diagram</b> .....               | <b>2</b>  |
| <b>5</b>  | <b>Pinning information</b> .....              | <b>2</b>  |
| 5.1       | Pinning .....                                 | 2         |
| 5.2       | Pin description .....                         | 3         |
| <b>6</b>  | <b>Functional description</b> .....           | <b>3</b>  |
| 6.1       | VCO control .....                             | 3         |
| 6.2       | Phase comparators .....                       | 3         |
| <b>7</b>  | <b>Limiting values</b> .....                  | <b>7</b>  |
| <b>8</b>  | <b>Recommended operating conditions</b> ..... | <b>7</b>  |
| <b>9</b>  | <b>Static characteristics</b> .....           | <b>8</b>  |
| <b>10</b> | <b>Dynamic characteristics</b> .....          | <b>9</b>  |
| <b>11</b> | <b>Design information</b> .....               | <b>10</b> |
| 11.1      | VCO component selection .....                 | 11        |
| <b>12</b> | <b>Package outline</b> .....                  | <b>15</b> |
| <b>13</b> | <b>Revision history</b> .....                 | <b>17</b> |
| <b>14</b> | <b>Legal information</b> .....                | <b>18</b> |
| 14.1      | Data sheet status .....                       | 18        |
| 14.2      | Definitions .....                             | 18        |
| 14.3      | Disclaimers .....                             | 18        |
| 14.4      | Trademarks .....                              | 19        |
| <b>15</b> | <b>Contact information</b> .....              | <b>19</b> |
| <b>16</b> | <b>Contents</b> .....                         | <b>20</b> |

---

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

---

© NXP B.V. 2011.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 18 November 2011

Document identifier: HEF4046B