



# INA131

## Precision $G = 100$ INSTRUMENTATION AMPLIFIER

### FEATURES

- **LOW OFFSET VOLTAGE:**  $50\mu\text{V}$  max
- **LOW DRIFT:**  $0.25\mu\text{V}/^\circ\text{C}$  max
- **LOW INPUT BIAS CURRENT:**  $2\text{nA}$  max
- **HIGH COMMON-MODE REJECTION:**  $110\text{dB}$  min
- **INPUT OVERVOLTAGE PROTECTION:**  $\pm 40\text{V}$
- **WIDE SUPPLY RANGE:**  $\pm 2.25$  to  $\pm 18\text{V}$
- **LOW QUIESCENT CURRENT:**  $3\text{mA}$
- **8-PIN PLASTIC DIP**

### DESCRIPTION


The INA131 is a low cost, general purpose  $G = 100$  instrumentation amplifier offering excellent accuracy. Its 3-op amp design and small size make it ideal for a wide range of applications.

On-chip laser trimmed resistors accurately set a fixed gain of 100. The INA131 is laser trimmed to achieve very low offset voltage ( $50\mu\text{V}$  max), drift ( $0.25\mu\text{V}/^\circ\text{C}$  max), and high CMR ( $110\text{dB}$  min). Internal input protection can withstand up to  $\pm 40\text{V}$  inputs without damage.

The INA131 is available in a 8-pin plastic DIP. They are specified over the  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$  temperature range.

### APPLICATIONS

- **BRIDGE AMPLIFIER**
- **THERMOCOUPLE AMPLIFIER**
- **RTD SENSOR AMPLIFIER**
- **MEDICAL INSTRUMENTATION**
- **DATA ACQUISITION**

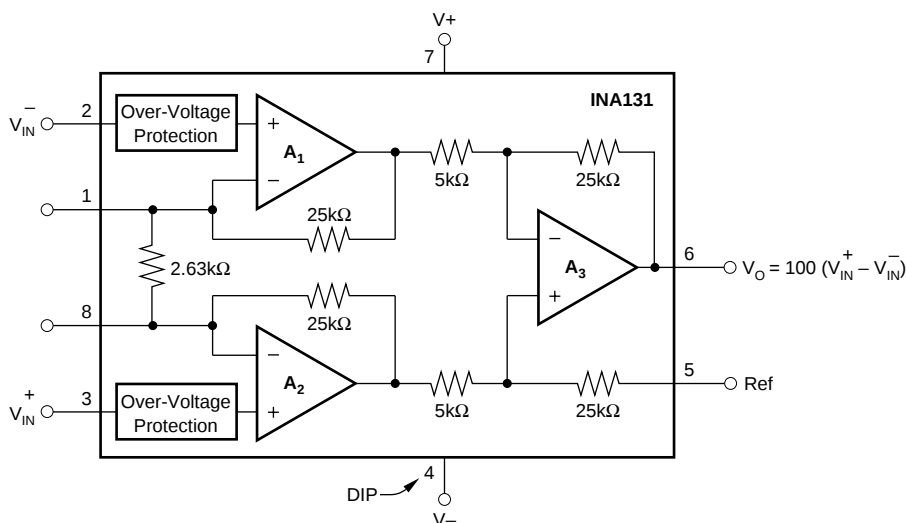

# SPECIFICATIONS

At  $T_A = +25^{\circ}\text{C}$ ,  $V_S = \pm 15\text{V}$ ,  $R_L = 2\text{k}\Omega$ , unless otherwise noted.


| PARAMETER                                                                                                                                                                                                                                                     | CONDITIONS                                                                                                                                                                                         | INA131BP                          |                                                                                                     |                                                     | INA131AP    |                                                 |                                            | UNITS                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------|-------------|-------------------------------------------------|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                               |                                                                                                                                                                                                    | MIN                               | TYP                                                                                                 | MAX                                                 | MIN         | TYP                                             | MAX                                        |                                                                                                                                                                                                                                        |
| <b>INPUT</b><br>Offset Voltage, RTI<br>Initial<br>vs Temperature<br>vs Power Supply<br>Long-Term Stability<br>Impedance, Differential<br>Common-Mode<br>Input Common-Mode Range<br>Safe Input Voltage<br>Common-Mode Rejection                                | $T_A = +25^{\circ}\text{C}$<br>$T_A = T_{\text{MIN}}$ to $T_{\text{MAX}}$<br>$V_S = \pm 2.25\text{V}$ to $\pm 18\text{V}$<br><br>$V_{\text{CM}} = \pm 10\text{V}$ , $\Delta R_S = 1\text{k}\Omega$ |                                   | $\pm 10$<br>$\pm 0.1$<br>0.5<br>0.2<br>$10^{10} \parallel 6$<br>$10^{10} \parallel 6$<br>$\pm 13.5$ | $\pm 50$<br>$\pm 0.25$<br>3<br><br><br><br>$\pm 40$ |             | $\pm 25$<br>$\pm 0.25$<br>*<br>*<br>*<br>*<br>* | $\pm 125$<br>$\pm 1$<br>*<br><br><br><br>* | $\mu\text{V}$<br>$\mu\text{V}/^{\circ}\text{C}$<br>$\mu\text{V/V}$<br>$\mu\text{V}/\text{mo}$<br>$\Omega \parallel \text{pF}$<br>$\Omega \parallel \text{pF}$<br>V<br>V<br>dB                                                          |
| <b>BIAS CURRENT</b><br>vs Temperature                                                                                                                                                                                                                         |                                                                                                                                                                                                    |                                   | $\pm 0.5$<br>$\pm 8$                                                                                | $\pm 2$                                             |             | *<br>*                                          | $\pm 5$                                    | nA<br>$\text{pA}/^{\circ}\text{C}$                                                                                                                                                                                                     |
| <b>OFFSET CURRENT</b><br>vs Temperature                                                                                                                                                                                                                       |                                                                                                                                                                                                    |                                   | $\pm 0.5$<br>$\pm 8$                                                                                | $\pm 2$                                             |             | *<br>*                                          | $\pm 5$                                    | nA<br>$\text{pA}/^{\circ}\text{C}$                                                                                                                                                                                                     |
| <b>NOISE VOLTAGE, RTI</b><br>$f = 10\text{Hz}$<br>$f = 100\text{Hz}$<br>$f = 1\text{kHz}$<br>$f = 10\text{kHz}$<br>$f_B = 0.1\text{Hz}$ to $10\text{Hz}$<br>Noise Current<br>$f = 10\text{Hz}$<br>$f = 1\text{kHz}$<br>$f_B = 0.1\text{Hz}$ to $100\text{Hz}$ | $R_S = 0\Omega$                                                                                                                                                                                    |                                   | 16<br>12<br>12<br>12<br>0.4<br><br>0.4<br>0.2<br>18                                                 |                                                     |             | *<br>*<br>*<br>*<br>*<br><br>*<br>*<br>*        |                                            | $\text{nV}/\sqrt{\text{Hz}}$<br>$\text{nV}/\sqrt{\text{Hz}}$<br>$\text{nV}/\sqrt{\text{Hz}}$<br>$\text{nV}/\sqrt{\text{Hz}}$<br>$\mu\text{Vp-p}$<br><br>$\text{pA}/\sqrt{\text{Hz}}$<br>$\text{pA}/\sqrt{\text{Hz}}$<br>$\text{pAp-p}$ |
| <b>GAIN</b><br>Gain Error <sup>(1)</sup><br>Resistor Value <sup>(2)</sup><br>Gain vs Temperature<br>Nonlinearity                                                                                                                                              |                                                                                                                                                                                                    |                                   | $\pm 0.01$<br>$\pm 10$<br>$\pm 5$<br>$\pm 0.0003$                                                   | $\pm 0.024$<br>$\pm 40$<br>$\pm 10$<br>$\pm 0.002$  |             | *<br>*<br>*<br>*                                | $\pm 0.1$<br>*<br>$\pm 20$<br>$\pm 0.004$  | %<br>%<br>$\text{ppm}/^{\circ}\text{C}$<br>% of FSR                                                                                                                                                                                    |
| <b>OUTPUT</b><br>Voltage<br><br>Load Capacitance, max<br>Short Circuit Current                                                                                                                                                                                | $I_O = 5\text{mA}$ , $T_{\text{MIN}}$ to $T_{\text{MAX}}$<br>$V_S = \pm 11.4\text{V}$ , $R_L = 2\text{k}\Omega$<br>$V_S = \pm 2.25\text{V}$ , $R_L = 2\text{k}\Omega$<br>Stable Operation          | $\pm 13.5$<br>$\pm 10$<br>$\pm 1$ | $\pm 13.7$<br>10.5<br>1.5<br>1000<br>$+20/-15$                                                      |                                                     | *<br>*<br>* | *<br>*<br>*<br>*<br>*                           |                                            | V<br>V<br>V<br>pF<br>mA                                                                                                                                                                                                                |
| <b>FREQUENCY RESPONSE</b><br>Bandwidth, -3dB<br>Slew Rate<br>Settling Time, 0.01%<br>Overload Recovery                                                                                                                                                        | $V_O = \pm 10\text{V}$<br><br>50% Overdrive                                                                                                                                                        | 0.3                               | 70<br>0.7<br>100<br>20                                                                              |                                                     | *           | *<br>*<br>*<br>*                                |                                            | kHz<br>V/ $\mu\text{s}$<br>$\mu\text{s}$<br>$\mu\text{s}$                                                                                                                                                                              |
| <b>POWER SUPPLY</b><br>Voltage Range<br>Current                                                                                                                                                                                                               | $V_{\text{IN}} = 0\text{V}$                                                                                                                                                                        | $\pm 2.25$                        | $\pm 15$<br>$\pm 2.2$                                                                               | $\pm 18$<br>$\pm 3$                                 | *           | *<br>*                                          | *<br>*                                     | V<br>mA                                                                                                                                                                                                                                |
| <b>TEMPERATURE RANGE</b><br>Specification<br>Operating<br>$\theta_{\text{JA}}$                                                                                                                                                                                |                                                                                                                                                                                                    | -40<br>-40                        | <br>100                                                                                             | 85<br>125                                           | *<br>*      | <br>*                                           | *<br>*                                     | $^{\circ}\text{C}$<br>$^{\circ}\text{C}$<br>$^{\circ}\text{C/W}$                                                                                                                                                                       |

\* Specification same as INA131BP.

NOTES: (1)  $R_L = 10\text{k}\Omega$ . (2) Absolute value of internal gain-setting resistors. (Gain depends on resistor ratios.)

The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices and/or systems.

## PIN CONFIGURATION

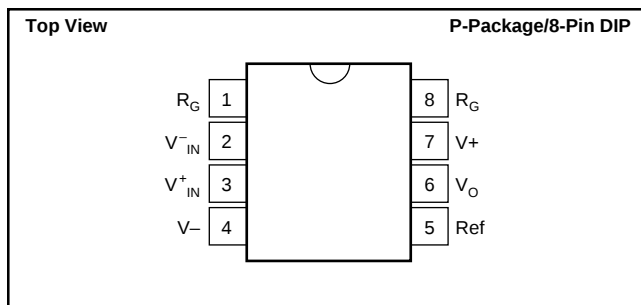

## PACKAGE/ORDERING INFORMATION

| PRODUCT  | PACKAGE           | PACKAGE<br>DRAWING<br>NUMBER <sup>(1)</sup> | TEMPERATURE<br>RANGE |
|----------|-------------------|---------------------------------------------|----------------------|
| INA131AP | 8-Pin Plastic DIP | 006                                         | –40°C to +85°C       |
| INA131BP | 8-Pin Plastic DIP | 006                                         | –40°C to +85°C       |

NOTE: (1) For detailed drawing and dimension table, please see end of data sheet, or Appendix C of Burr-Brown IC Data Book.

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

|                                         |                 |
|-----------------------------------------|-----------------|
| Supply Voltage .....                    | ±18V            |
| Input Voltage Range .....               | ±40V            |
| Output Short Circuit (to ground) .....  | Continuous      |
| Operating Temperature .....             | –40°C to +125°C |
| Storage Temperature .....               | –40°C to +125°C |
| Junction Temperature .....              | +150°C          |
| Lead Temperature (soldering –10s) ..... | +300°C          |

NOTE: (1) Stresses above these ratings may cause permanent damage.









## ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Burr-Brown recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.







# TYPICAL PERFORMANCE CURVES

At 25°C,  $V_S = \pm 15V$ , unless otherwise noted.

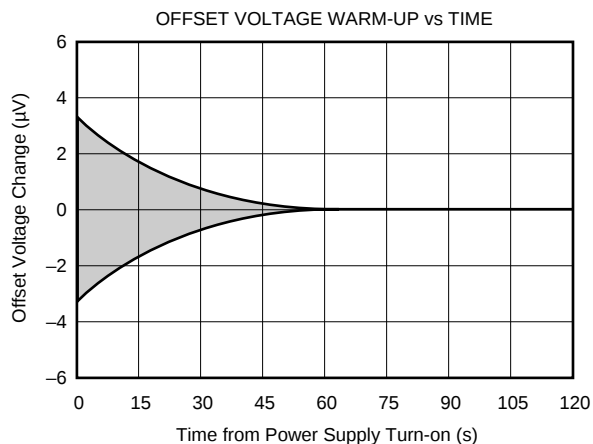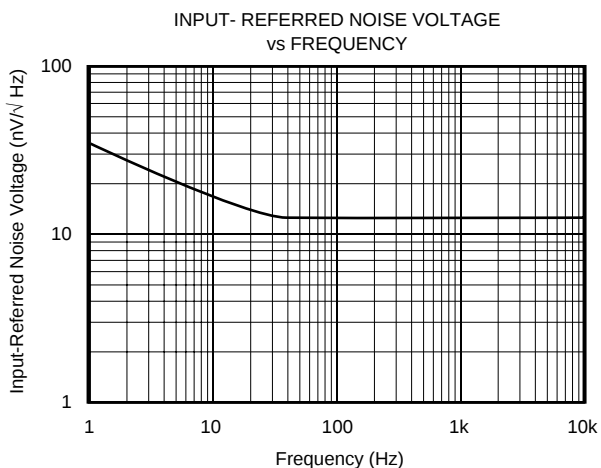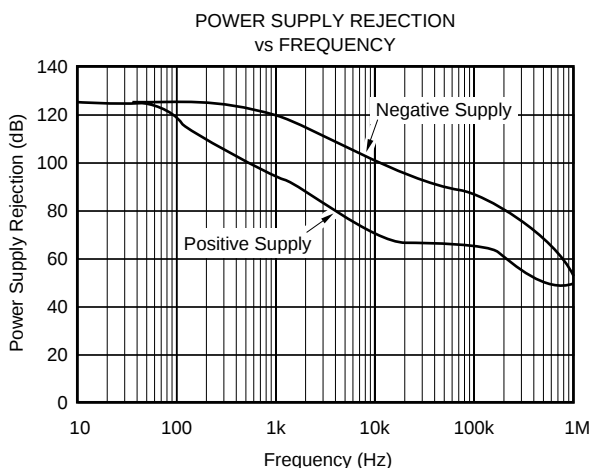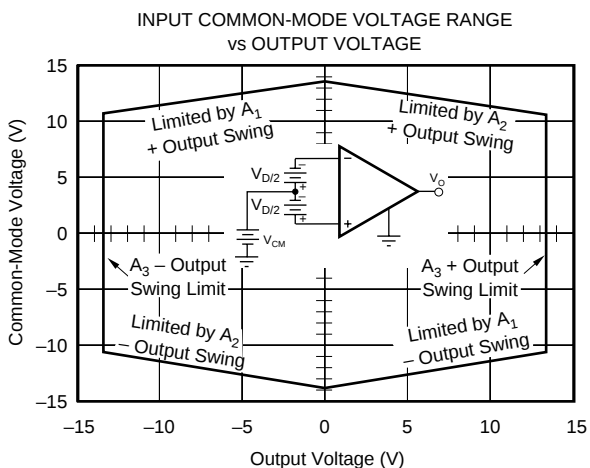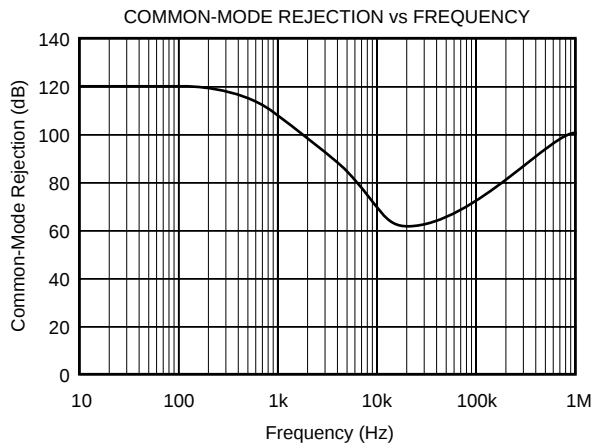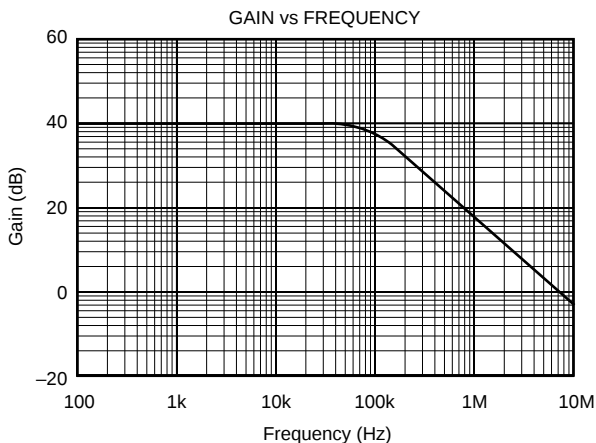

# TYPICAL PERFORMANCE CURVES (CONT)


At 25°C,  $V_s = \pm 15V$ , unless otherwise noted.

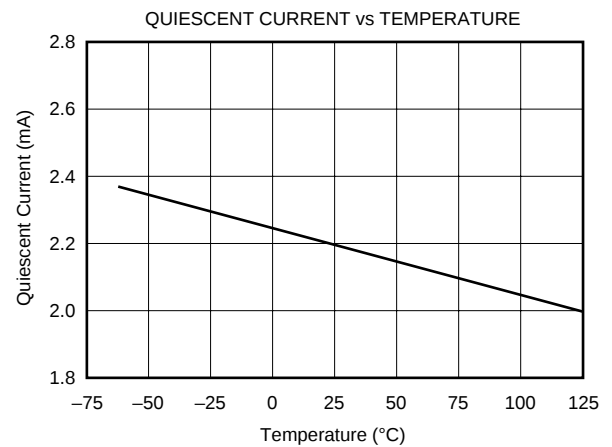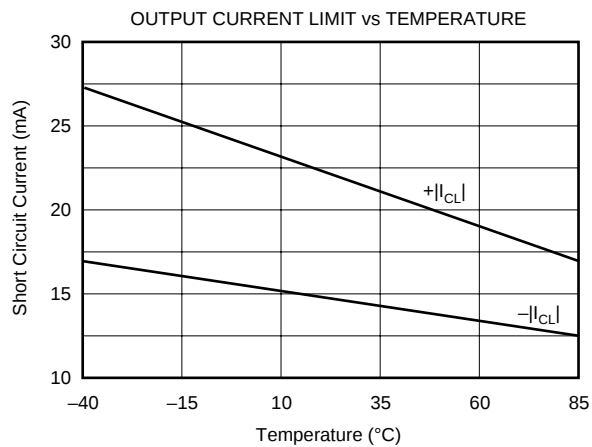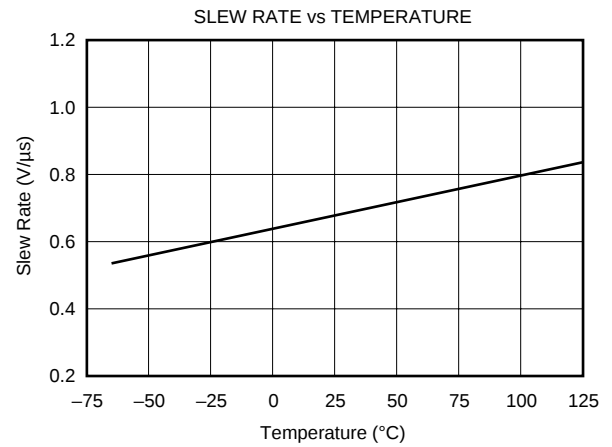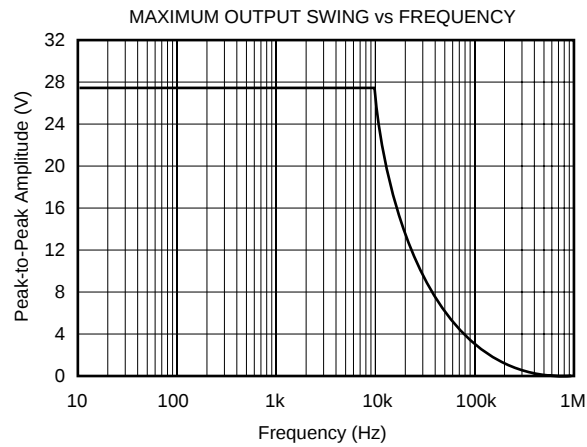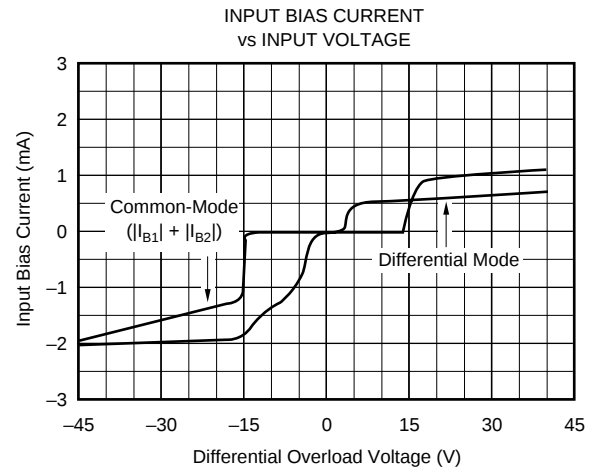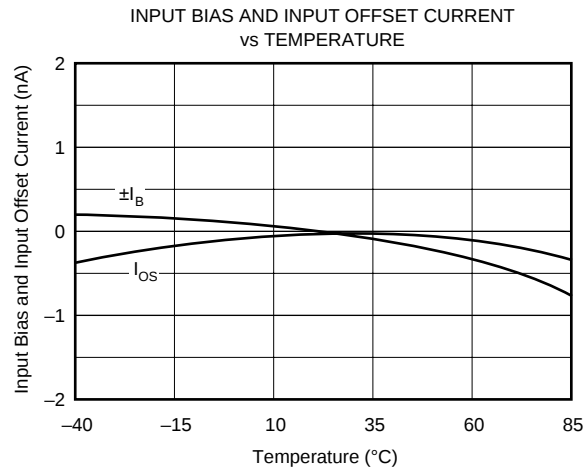


# TYPICAL PERFORMANCE CURVES (CONT)

At 25°C,  $V_S = \pm 15V$ , unless otherwise noted.


QUIESCENT CURRENT AND POWER DISSIPATION  
vs POWER SUPPLY VOLTAGE

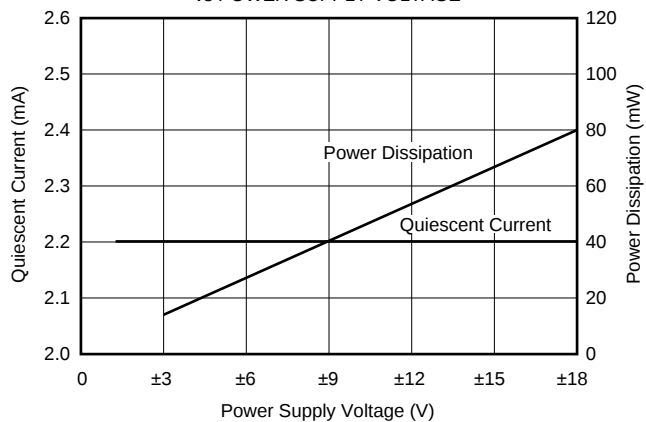


POSITIVE SIGNAL SWING vs TEMPERATURE ( $R_L = 2k\Omega$ )

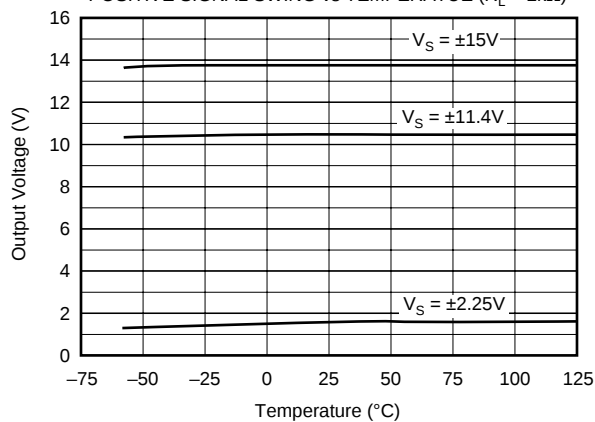


NEGATIVE SIGNAL SWING vs TEMPERATURE ( $R_L = 2k\Omega$ )

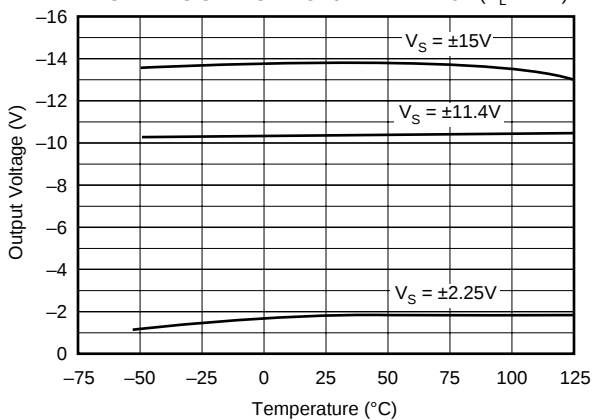


LARGE SIGNAL RESPONSE,  $G = 100$

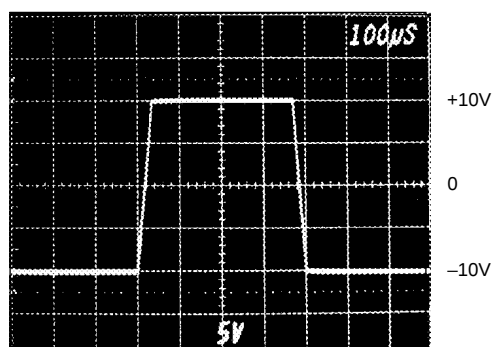

SMALL SIGNAL RESPONSE,  $G = 100$

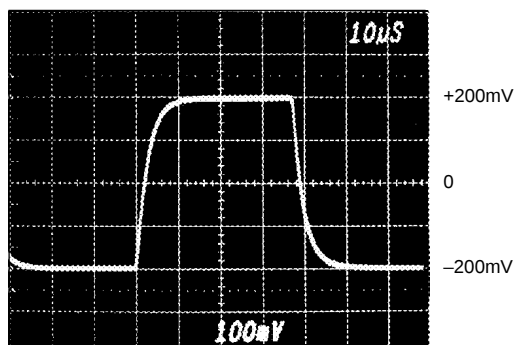

INPUT-REFERRED NOISE, 0.1 to 10Hz

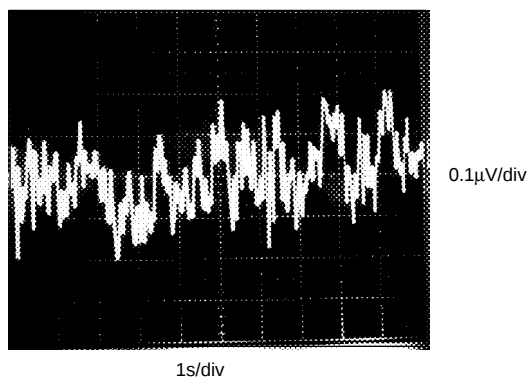

## APPLICATION INFORMATION

Figure 1 shows the basic connections required for operation of the INA131. Applications with noisy or high impedance power supplies may require decoupling capacitors close to the device pins as shown.

The output is referred to the output reference (Ref) terminal which is normally grounded. This must be a low-impedance connection to assure good common-mode rejection. A resistance of 5Ω in series with the Ref pin will cause a device with 110dB CMR to degrade to approximately 106dB CMR.

### SETTING THE GAIN

No external resistors are required for  $G = 100$ . On-chip laser-trimmed resistors set the gain, providing excellent gain accuracy and temperature stability. Gain is distributed between the input and output stages of the INA131. Bandwidth is increased by approximately five times (compared to the INA114 in  $G = 100$ ). Input common-mode range is also improved (see “Input Common-Mode Range”).

Although the INA131 is primarily intended for fixed  $G = 100$  applications, the gain can be increased by connecting an external resistor to the  $R_G$  pins. The internal resistors are trimmed for precise ratios, not to absolute values, so the influence of an external resistor will vary from device to

device. Absolute accuracy of the internal values is  $\pm 40\%$ . The nominal gain with an external  $R_G$  resistor can be calculated by:

$$G = 100 + \frac{250 \text{ k}\Omega}{R_G} \quad (1)$$

Where:  $R_G$  is the external gain resistor.

Accuracy of the 250kΩ term is  $\pm 40\%$ .

The stability and temperature drift of the external gain setting resistor,  $R_G$ , also affects gain.  $R_G$ 's contribution to gain accuracy and drift can be directly inferred from the gain equation (1).

### NOISE PERFORMANCE

The INA131 provides very low noise in most applications. For differential source impedances less than 1kΩ, the INA103 may provide lower noise. For source impedances greater than 50kΩ, the INA111 FET-Input Instrumentation Amplifier may provide lower noise.

Low frequency noise of the INA131 is approximately 0.4μVp-p measured from 0.1 to 10Hz. This is approximately one-tenth the noise of state-of-the-art chopper-stabilized amplifiers.

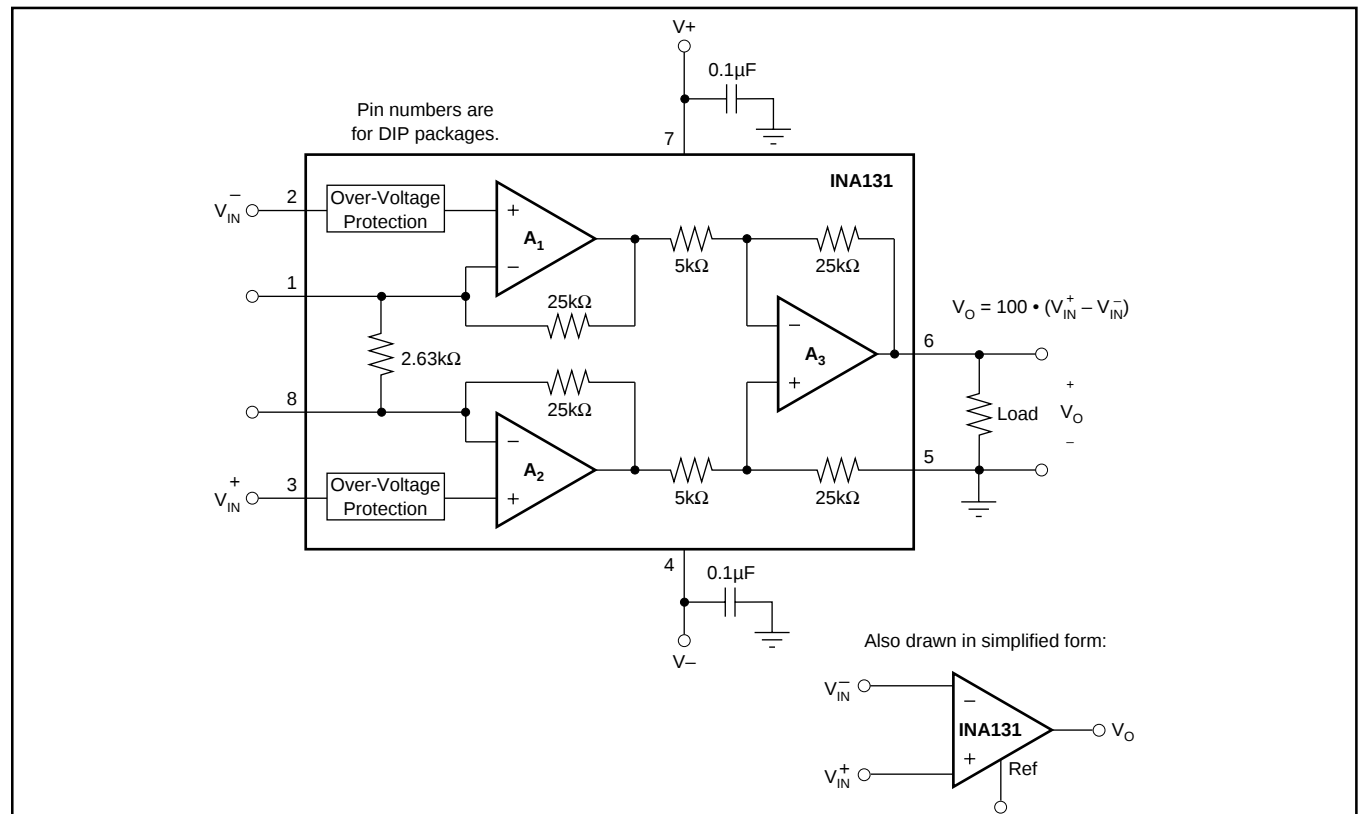


FIGURE 1. Basic Connections.

## OFFSET TRIMMING

The INA131 is laser trimmed for very low offset voltage and drift. Most applications require no external offset adjustment. Figure 2 shows an optional circuit for trimming the output offset voltage. The voltage applied to Ref terminal is summed at the output. Low impedance must be maintained at this node to assure good common-mode rejection. This is achieved by buffering trim voltage with an op amp as shown.

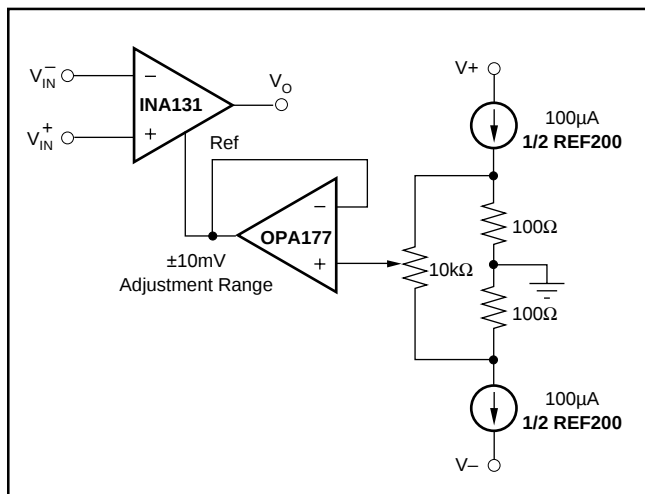


FIGURE 2. Optional Trimming of Output Offset Voltage.

## INPUT BIAS CURRENT RETURN PATH

The input impedance of the INA131 is extremely high—approximately  $10^{10}\Omega$ . However, a path must be provided for the input bias current of both inputs. This input bias current is typically less than  $\pm 1\text{nA}$  (it can be either polarity due to cancellation circuitry). High input impedance means that this input bias current changes very little with varying input voltage.

Input circuitry must provide a path for this input bias current if the INA131 is to operate properly. Figure 3 shows various provisions for an input bias current path. Without a bias current return path, the inputs will float to a potential which exceeds the common-mode range of the INA131 and the input amplifiers will saturate. If the differential source resistance is low, bias current return path can be connected to one input (see thermocouple example in Figure 3). With higher source impedance, using two resistors provides a balanced input with possible advantages of lower input offset voltage due to bias current and better common-mode rejection.

## INPUT COMMON-MODE RANGE

The linear common-mode range of the input op amps of the INA131 is approximately  $\pm 13.75\text{V}$  (or  $1.25\text{V}$  from the power supplies). As the output voltage increases, however, the linear input range is limited by the output voltage swing of the input amplifiers,  $A_1$  and  $A_2$ . The  $5\text{V/V}$  output stage gain of the INA131 reduces this effect. Compared to the

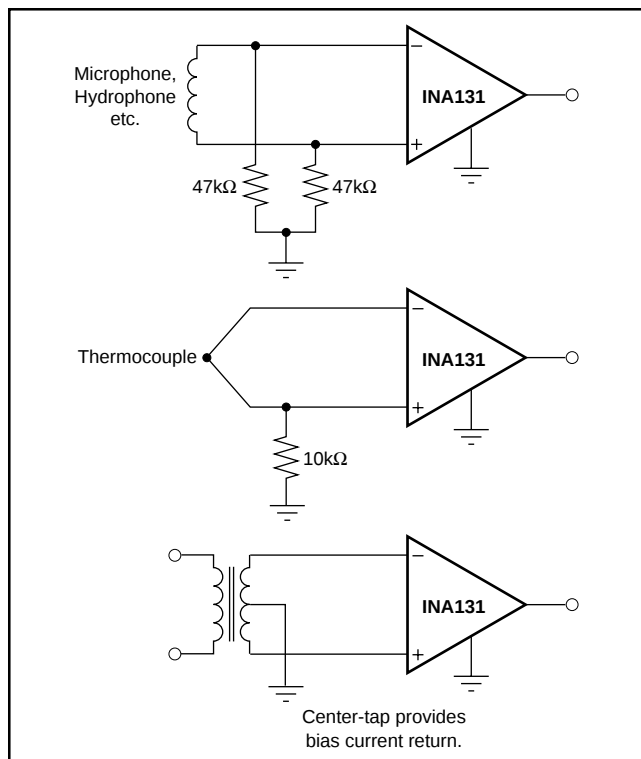


FIGURE 3. Providing an Input Common-Mode Current Path.

INA114 and other unity output gain instrumentation amplifiers, the INA131 provides several additional volts of input common-mode range with full output voltage swing. See the typical performance curve “Input Common-Mode Range vs Output Voltage”.

Input-overload often produces an output voltage that appears normal. For example, an input voltage of  $+20\text{V}$  on one input and  $+40\text{V}$  on the other input will obviously exceed the linear common-mode range of both input amplifiers. Since both input amplifiers are saturated to the nearly the same output voltage limit, the difference voltage measured by the output amplifier will be near zero. The output of the INA131 will be near  $0\text{V}$  even though both inputs are overloaded.

## INPUT PROTECTION

The inputs of the INA131 are individually protected for voltages up to  $\pm 40\text{V}$ . For example, a condition of  $-40\text{V}$  on one input and  $+40\text{V}$  on the other input will not cause damage. Internal circuitry on each input provides low series impedance under normal signal conditions. To provide equivalent protection, series input resistors would contribute excessive noise. If the input is overloaded, the protection circuitry limits the input current to a safe value (approximately  $1.5\text{mA}$ ). The typical performance curve “Input Bias Current vs Input Voltage” shows this input current limit behavior. The inputs are protected even if no power supply voltage is present.



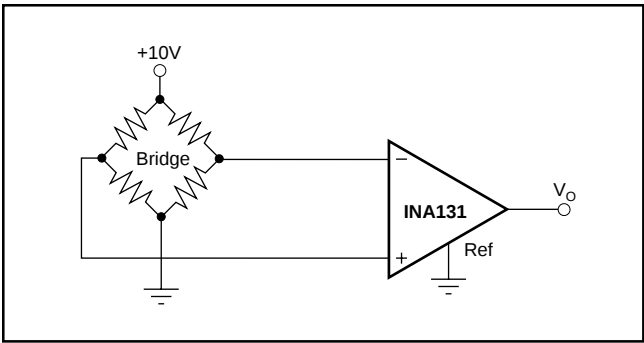


FIGURE 7. Bridge Transducer Amplifier.

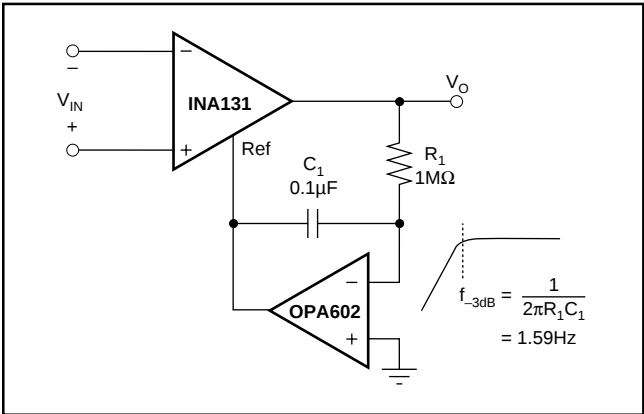


FIGURE 8. AC-Coupled Instrumentation Amplifier.

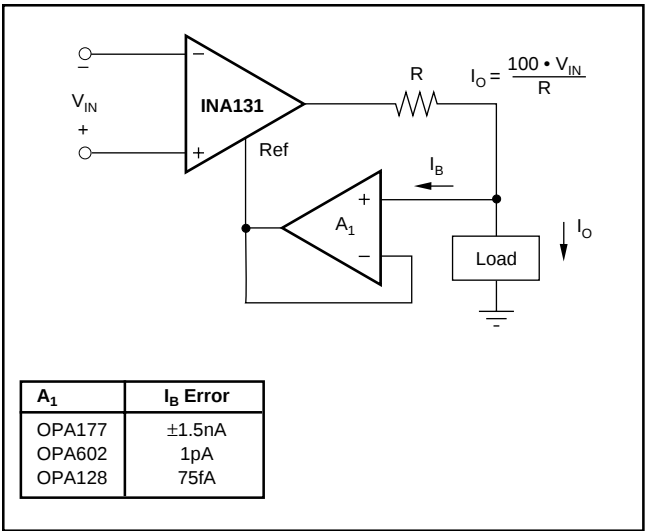


FIGURE 9. Differential Voltage to Current Converter.

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.