

Kintex-7 FPGA Connectivity Kit

Getting Started Guide

UG929 (v1.0) June 26, 2012



Notice of Disclaimer

The information disclosed to you hereunder (the "Materials") is provided solely for the selection and use of Xilinx products. To the maximum extent permitted by applicable law: (1) Materials are made available "AS IS" and with all faults, Xilinx hereby DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, OR FITNESS FOR ANY PARTICULAR PURPOSE; and (2) Xilinx shall not be liable (whether in contract or tort, including negligence, or under any other theory of liability) for any loss or damage of any kind or nature related to, arising under, or in connection with, the Materials (including your use of the Materials), including for any direct, indirect, special, incidental, or consequential loss or damage (including loss of data, profits, goodwill, or any type of loss or damage suffered as a result of any action brought by a third party) even if such damage or loss was reasonably foreseeable or Xilinx had been advised of the possibility of the same. Xilinx assumes no obligation to correct any errors contained in the Materials or to notify you of updates to the Materials or to product specifications. You may not reproduce, modify, distribute, or publicly display the Materials without prior written consent. Certain products are subject to the terms and conditions of the Limited Warranties which can be viewed at <http://www.xilinx.com/warranty.htm>; IP cores may be subject to warranty and support terms contained in a license issued to you by Xilinx. Xilinx products are not designed or intended to be fail-safe or for use in any application requiring fail-safe performance; you assume sole risk and liability for use of Xilinx products in Critical Applications: <http://www.xilinx.com/warranty.htm#critapps>.

Automotive Applications Disclaimer

XILINX PRODUCTS ARE NOT DESIGNED OR INTENDED TO BE FAIL-SAFE, OR FOR USE IN ANY APPLICATION REQUIRING FAIL-SAFE PERFORMANCE, SUCH AS APPLICATIONS RELATED TO: (I) THE DEPLOYMENT OF AIRBAGS, (II) CONTROL OF A VEHICLE, UNLESS THERE IS A FAIL-SAFE OR REDUNDANCY FEATURE (WHICH DOES NOT INCLUDE USE OF SOFTWARE IN THE XILINX DEVICE TO IMPLEMENT THE REDUNDANCY) AND A WARNING SIGNAL UPON FAILURE TO THE OPERATOR, OR (III) USES THAT COULD LEAD TO DEATH OR PERSONAL INJURY. CUSTOMER ASSUMES THE SOLE RISK AND LIABILITY OF ANY USE OF XILINX PRODUCTS IN SUCH APPLICATIONS.

© Copyright 2012 Xilinx, Inc. Xilinx, the Xilinx logo, Artix, ISE, Kintex, Spartan, Virtex, Zynq, and other designated brands included herein are trademarks of Xilinx in the United States and other countries. PCI, PCIe, and PCI Express are trademarks of PCI-SIG and used under license. All other trademarks are the property of their respective owners.

Fedora Information

Xilinx obtained the Fedora Linux software from Fedora (<http://fedoraproject.org/>), and you may too. Xilinx made no changes to the software obtained from Fedora. If you desire to use Fedora Linux software in your product, Xilinx encourages you to obtain Fedora Linux software directly from Fedora (<http://fedoraproject.org/>), even though we are providing to you a copy of the corresponding source code as provided to us by Fedora. Portions of the Fedora software may be covered by the GNU General Public license as well as many other applicable open source licenses. Please review the source code in detail for further information. To the maximum extent permitted by applicable law and if not prohibited by any such third-party licenses, (1) XILINX DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE; AND (2) IN NO EVENT SHALL XILINX BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Fedora software and technical information is subject to the U.S. Export Administration Regulations and other U.S. and foreign law, and may not be exported or re-exported to certain countries (currently Cuba, Iran, Iraq, North Korea, Sudan, and Syria) or to persons or entities prohibited from receiving U.S. exports (including those (a) on the Bureau of Industry and Security Denied Parties List or Entity List, (b) on the Office of Foreign Assets Control list of Specially Designated Nationals and Blocked Persons, and (c) involved with missile technology or nuclear, chemical or biological weapons). You may not download Fedora software or technical information if you are located in one of these countries, or otherwise affected by these restrictions. You may not provide Fedora software or technical information to individuals or entities located in one of these countries or otherwise affected by these restrictions. You are also responsible for compliance with foreign law requirements applicable to the import and use of Fedora software and technical information.

Revision History

The following table shows the revision history for this document.

Date	Version	Revision
06/26/2012	1.0	Initial Xilinx release.

Table of Contents

Revision History	2
Getting Started with the Kintex-7 FPGA Connectivity Kit	
Hardware Setup and Testing with the KC705 Built-in Self Test	6
Connectivity System Setup with the Targeted Reference Design	13
Appendix A: Additional Resources	
Xilinx Resources	33
References	33
Appendix B: Warranty	

Getting Started with the Kintex-7 FPGA Connectivity Kit

The Kintex™-7 FPGA Connectivity Kit provides a comprehensive, high-performance development and demonstration platform using the Kintex-7 FPGA family for high-bandwidth and high-performance applications in multiple market segments. The kit enables designing with DDR3, I/O expansion through FMC, and common serial standards, such as PCI Express® and 10GBASE-R through the FMC interface.

This Getting Started Guide is divided into two sections:

- [Hardware Setup and Testing with the KC705 Built-in Self Test](#)

This section on the built in self test (BIST) familiarizes users with the KC705 board, the various switch positions, the sequence to program the FPGA, and provides a sanity check on the board's hardware components.

- [Connectivity System Setup with the Targeted Reference Design](#)

This section provides the steps required to setup the connectivity TRD hardware, program the FPGA, load the application driver, and become familiar with the GUI.

Hardware Setup and Testing with the KC705 Built-in Self Test

The built-in self-test (BIST) tests many of the features offered by the Kintex-7 FPGA KC705 evaluation kit. The test is stored in the nonvolatile BPI Linear Flash memory, and configures the FPGA when the mode and upper flash address pins on the board are set for Master BPI.

Figure 1 provides an overview of the board features used by the BIST.

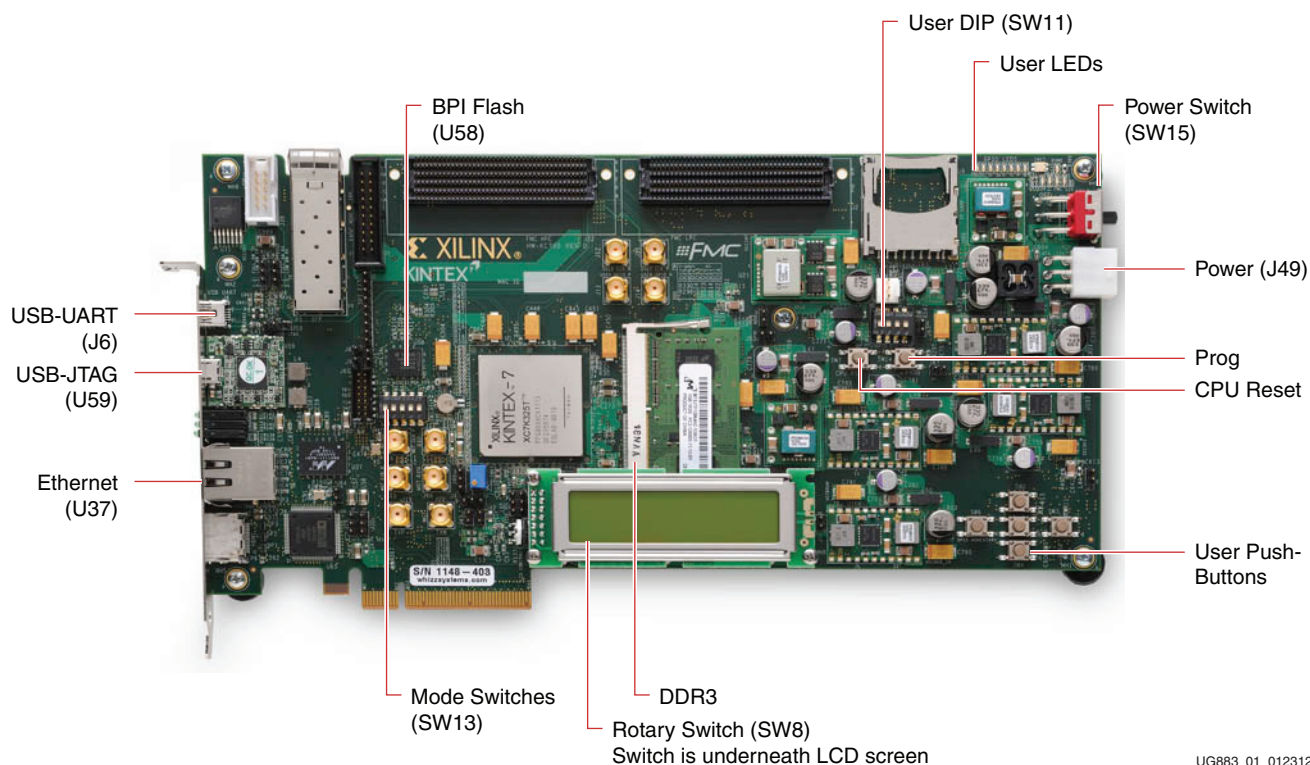


Figure 1: KC705 Board Features

Note: For a diagram of all the features on the KC705, see UG810, *KC705 Evaluation Board for the Kintex-7 FPGA User Guide* [Ref 2].

Hardware Test Setup Requirements

The prerequisites for testing the design in hardware are:

- KC705 Evaluation board with the Kintex-7 FPGA XC7K325T-2FFG900C device
- USB-to-Mini-B cable (for UART)
- AC power adapter (12 VDC)
- Tera Term Pro terminal program [Ref 16]

Note: The Tera Term Pro program is used for illustrative purposes. Other programs can be used.

- USB-UART drivers from SiLabs [Ref 17]

Hardware Test Board Setup Requirements

This section details the hardware setup and use of the terminal program for running the BIST application. It contains step-by-step instructions for board bring-up.


KC705 Evaluation Board Setup

1. Set the jumpers and switches on the KC705 board as follows:
 - The mode switches (SW13) are set for Master BPI mode 010.
 - The upper flash address switches (SW13) are set to 11.
2. Verify the switch and jumper settings are set as shown in [Table 1](#) and [Figure 2](#).

Note: For this application, the board should be set up as a stand-alone system, with power coming from the cord and brick that comes with the KC705 evaluation kit.

Table 1: Switch and Jumper Settings

Switch	Setting	
SW15	Board Power slide-switch	
	..	Off
SW11	User GPIO DIP switch	
	4	Off
	3	Off
	2	Off
	1	Off
SW13	Configuration Mode switch	
	5	Off
	4	On
	3	Off
	2	On
	1	On

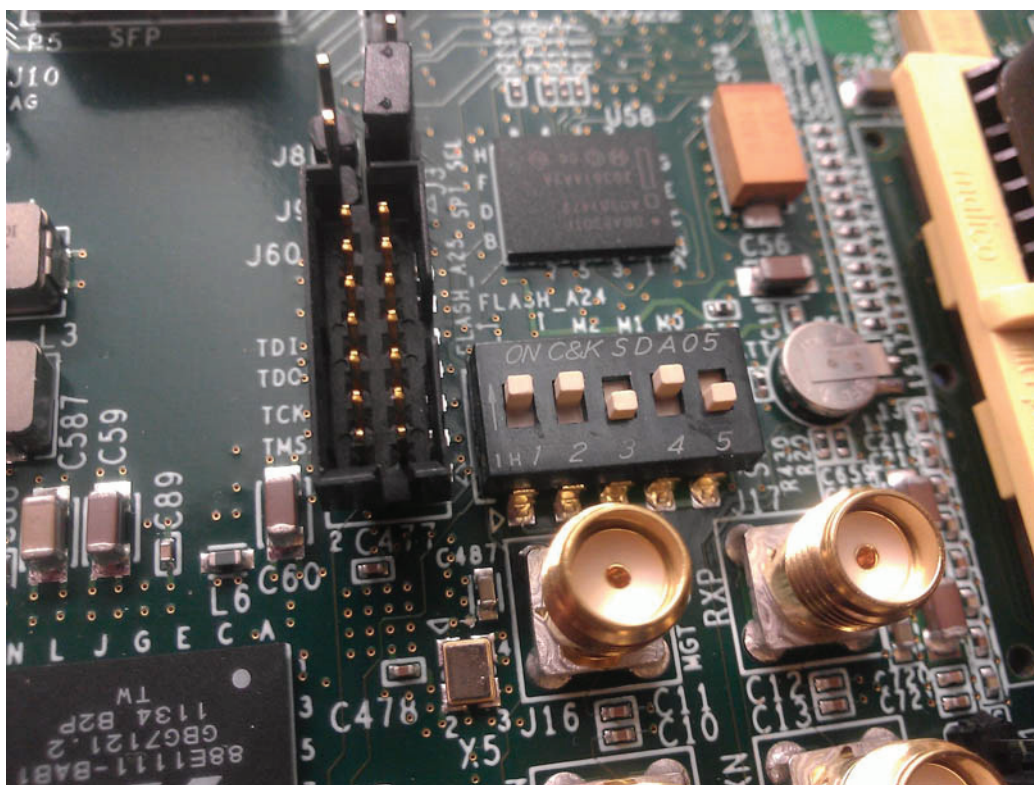


UG883_02_011912

Figure 2: BIST Switch and Jumper Settings

Hardware Bring-Up

This section details the steps for hardware bring-up:

1. With the board switched off, plug a USB-to-Mini-B cable into the UART port of the KC705 board and the PC (see [Figure 3](#)).
2. Install the power cable.
3. Switch the KC705 board power to ON.

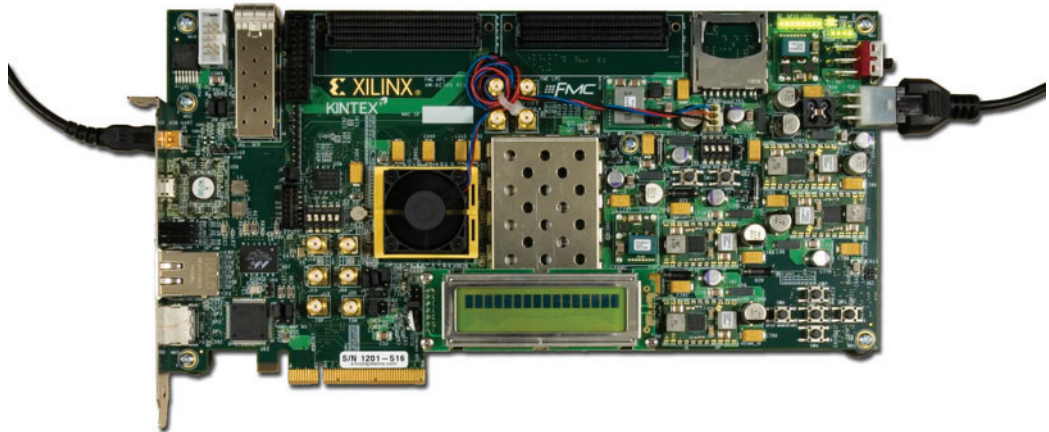


UG883_03_011912

Figure 3: KC705 with the UART and Power Cable Attached

Install the UART Driver

1. Run the downloaded executable UART-USB driver file listed in [Hardware Test Setup Requirements](#), page 6. This enables UART-USB communications with a host PC (see [Figure 4](#)).

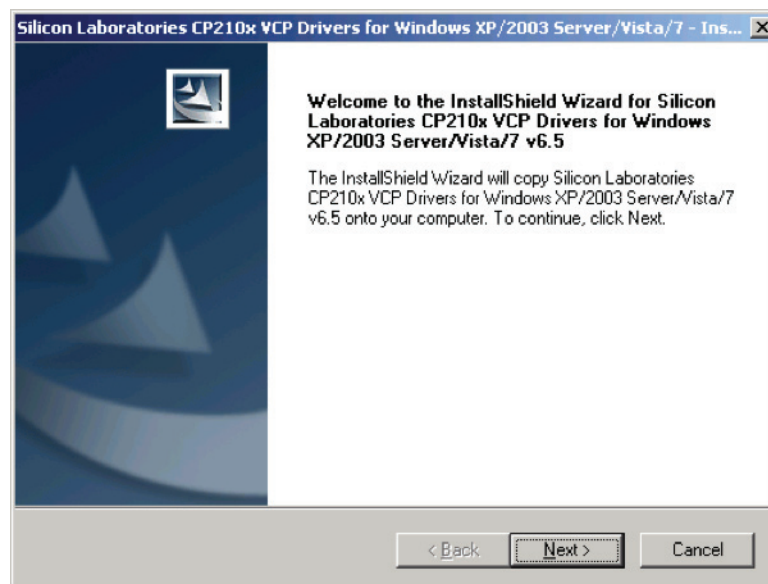


UG883_04_011512

Figure 4: UART Cable Driver Installation

2. Set the USB-UART connection to a known port in the Device Manager as follows:
 - Right-click **My Computer** and select **Properties**.
 - Select the **Hardware** tab, then click the **Device Manager** button.
 - Find and right-click the Silicon Labs device in the list. Then select **Properties**.
 - Click the **Port Settings** tab and the **Advanced...** button.
 - Select an open COM port between COM1 and COM4.

Figure 5 shows the steps needed to set the USB-UART port.

Note: Steps and diagrams refer to use with a Windows host PC with the Windows XP or Windows 7 operating system.

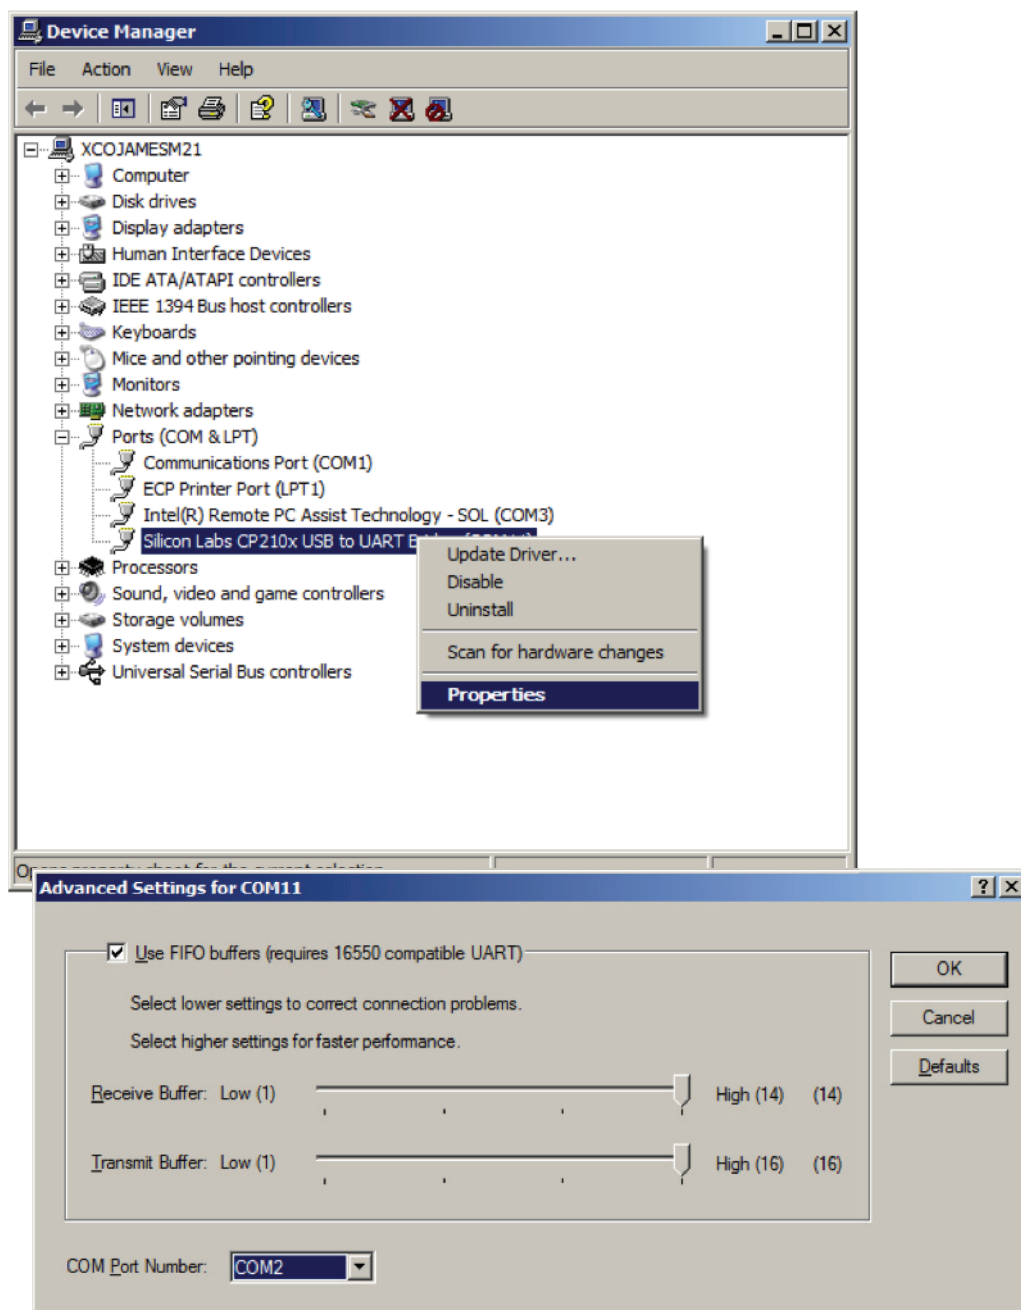


UG883_05_011512

Figure 5: Port Selection on the Device Manager Screen

Run the BIST Application

1. Start the installed terminal program.
2. Press PROG (SW14) on the KC705 board, and view the BIST output on the terminal window (see [Figure 6](#)).

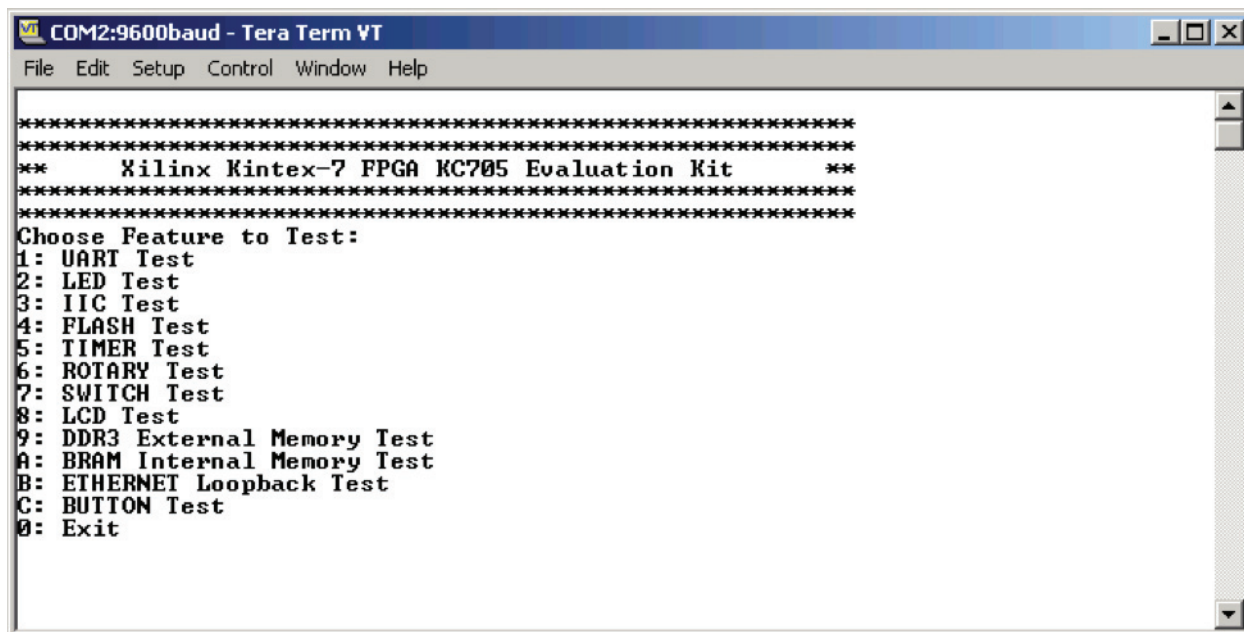

UG883_06_011612

Figure 6: BIST Main Menu

3. Select the relevant tests to run, and observe the results.

For more information on the BIST software and additional tutorials, including how to restore the default content of the onboard nonvolatile storage, see the KC705 board information references [\[Ref 15\]](#).

Introduction

For software, the design provides 32-bit Linux drivers for all modes of operation listed below and a graphical user interface (GUI) which controls the tests and monitors the status.



Figure 7: Kintex-7 Connectivity TRD Block Diagram

Note: The arrows in the diagram indicate AXI interface directions (from master to slave), it is not indicative of data flow directions.

Features

The Kintex-7 FPGA Connectivity Targeted Reference Design features these components:

- PCI Express v2.1 compliant GEN2 x8 Endpoint operating at 5 Gb/s per lane per direction
 - PCIe transaction interface utilization engine
 - MSI and legacy interrupt support
- Bus mastering scatter-gather DMA to offload processor
- Multi-channel DMA
- AXI4 streaming interface for data
- AXI4 interface for register space access
- DMA performance engine
- Full duplex operation
 - Independent transmit and receive channels
- 10 Gigabit Ethernet MAC with 10G BASE-R PHY
 - Address filtering
 - Inter-frame gap control
 - Jumbo frame support up to 16,383 bytes in size
 - Ethernet statistics engine
 - Management interface for configuration (MDIO)
- PicoBlaze based PVT monitoring
 - Engine in hardware to monitor power by reading TI's UCD9248 power controller chip on-board KC705
 - Engine in hardware to monitor die temperature via Xilinx analog-to-digital converter
- Application demand driven power management
 - Option to change PCIe link width and link speed for reduced power consumption in lean traffic scenario

Hardware Test Setup Requirements

The prerequisites for testing the design in hardware are:

- KC705 evaluation board with XC7K325K-2-FFG900CES FPGA
- Design zip file (available on the USB stick) with:
 - Design source files
 - Device driver files
 - Board design files
 - Documentation
- ISE Design Suite Logic Edition Tools v14.1
- 4-pin to 6-16 12V PCIe adapter cable
- Micro USB cable
- FM-S14 FMC card with 4 SFP+ cages [Ref 20]
- Two 10G MMF SFP+ SR optical transceivers [Ref 21]

- LC to LC OM3 10G fiber optic patch cable [\[Ref 22\]](#)
- Fedora 16 LiveCD [\[Ref 19\]](#)
- PC with PCIe v2.0 slot. Recommended PCI Express Gen2 PC system motherboards are ASUS P5E (Intel X38), ASUS Rampage II Gene (Intel X58) and Intel DX58SO (Intel X58). Note that the Intel X58 chipsets tend to show higher performance. This PC could also have Fedora Core 16 Linux OS installed on it. Note that the PC is not part of the Kintex-7 connectivity kit.

Hardware Demonstration Setup

This section details the hardware setup and use of provided application and control GUI to help the user get started quickly with the hardware. It provides a step-by-step explanation on hardware bring-up, software bring-up, and use of the application GUI.

All procedures listed in the following sections require super user access on a Linux machine. When using Fedora 16 LiveCD provided with the kit, super user access is granted by default due to the way the kernel image is built; if LiveCD is not used contact the system administrator for super user access.

1. With the power supply turned off, ensure that switches P1 and P2 on the FM-S14 FMC card are in the ON position, as shown in [Figure 8](#).


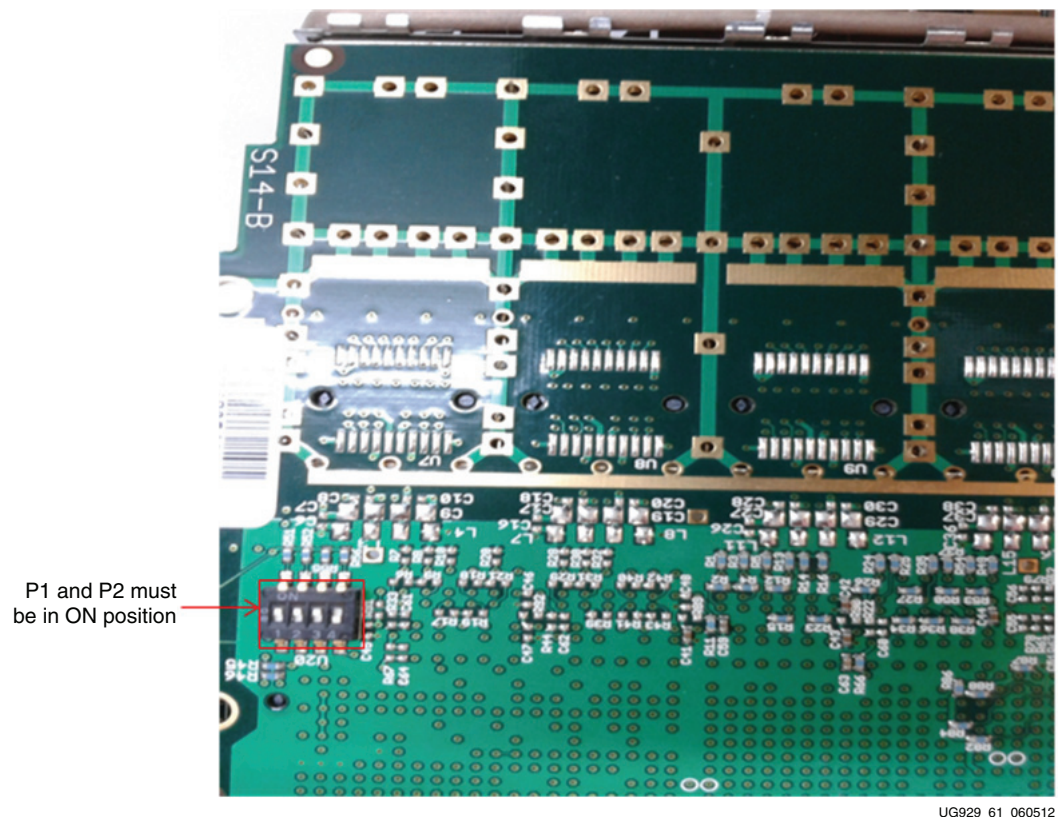


Figure 8: DIP Switch Position on FMC Card

2. Insert SFP+ connectors to channel 2 and channel 3 positions as shown in [Figure 9](#).

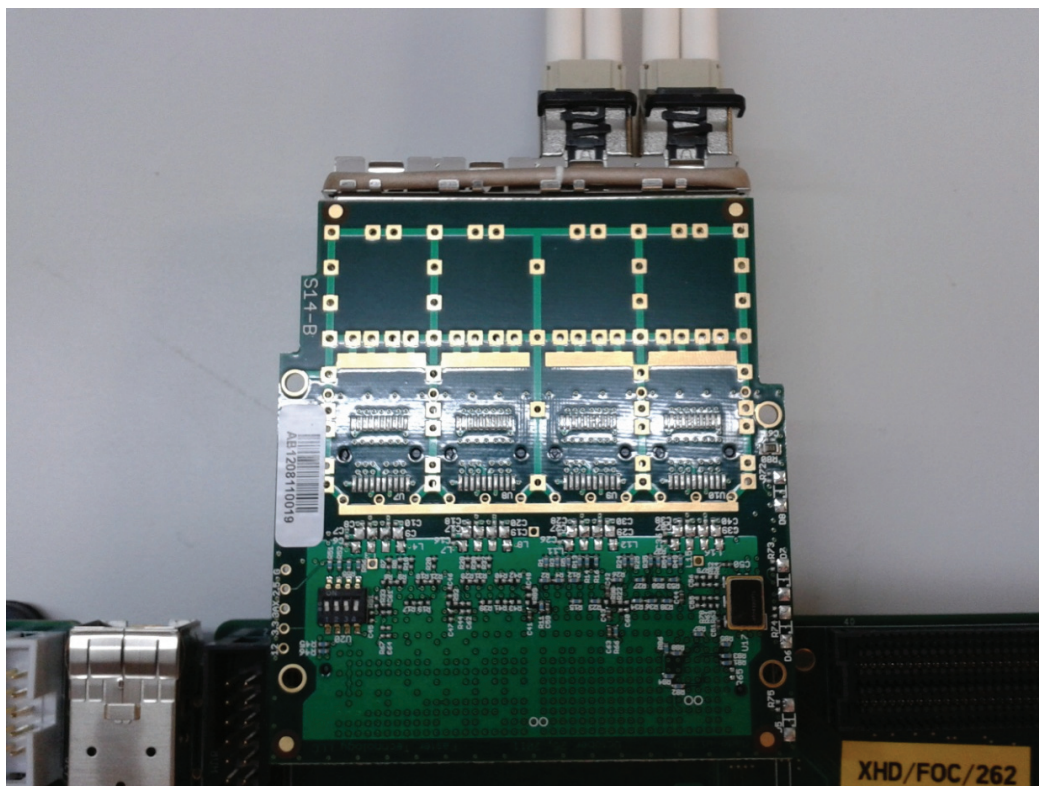

UG929_62_060512

Figure 9: **SFP+ Connector Position on FMC Card**

3. Insert the FM-S14 FMC card to the HPC slot of KC705 as shown in [Figure 10](#). Connect the fiber optic cables in a loopback fashion as shown in the figure.

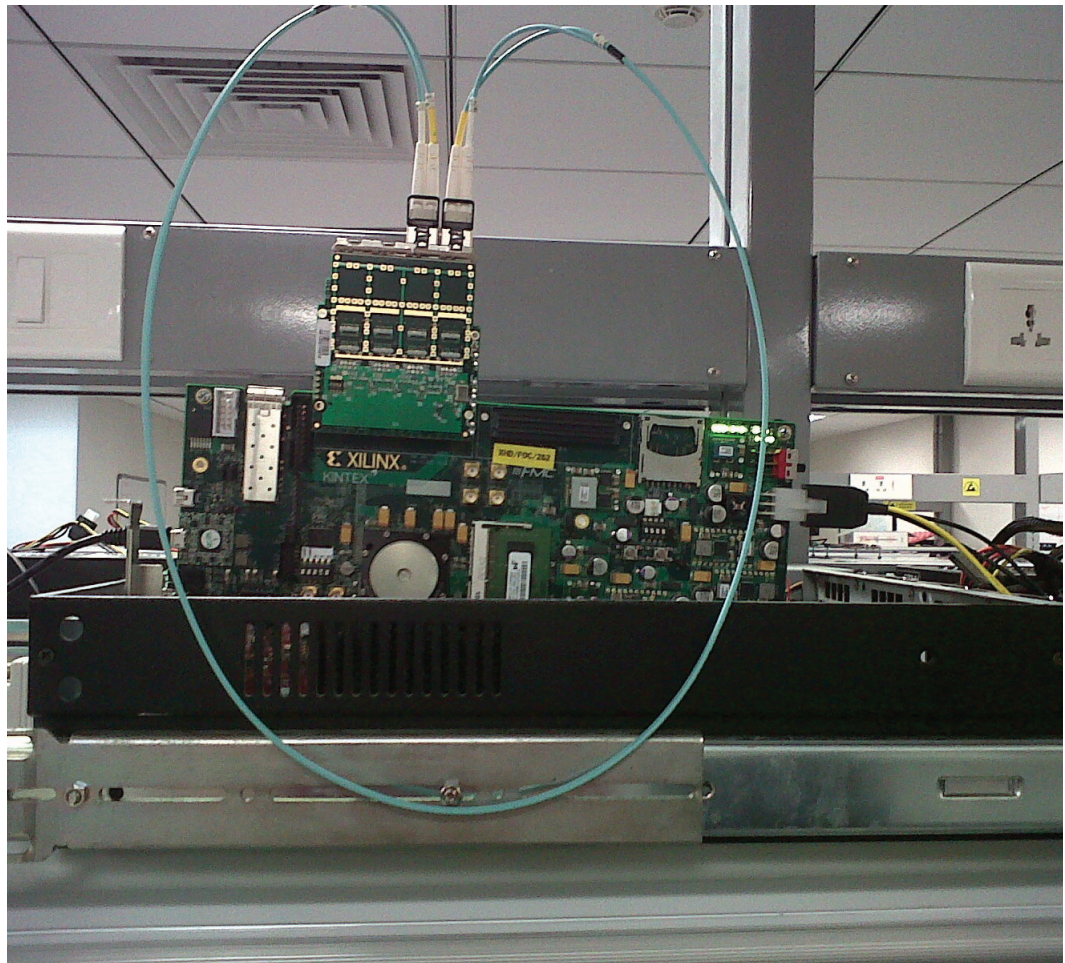


Figure 10: Setup with Fiber Optic Cable

4. With the host system powered off, insert the KC705 board in the PCI Express® slot through the PCI Express x8 edge connector.
5. Connect the 12V ATX power supply 4-pin disk drive type connector to the board. Note that the 6-pin ATX supply cannot be connected directly to the KC705 board and the 6-pin adapter is required.
Caution! The 6-pin ATX supply cannot be connected directly to the KC705 board and the 6-pin adapter is required.
6. Ensure that the connections are secure so as to avoid loose contact problems. Power on the system.
7. The GPIO LEDs are located in the top right corner of the KC705 board. These LED indicators illuminate to provide the following status (LED positions are marked from left to right):
 - LED position 1 – DDR3 link up
 - LED position 2 – 10GBASE-R link 1 ready
 - LED position 3 – 10GBASE-R link 2 ready

LED position 4 – 156.25 MHz clock heart beat LED


LED position 5 – PCIe x8 link stable

LED position 6 – PCIe 250 MHz clock

LED position 7 – PCIe link up

LED positions on the KC705 board are shown in [Figure 11](#).

LED-1: DDR3 Calibration

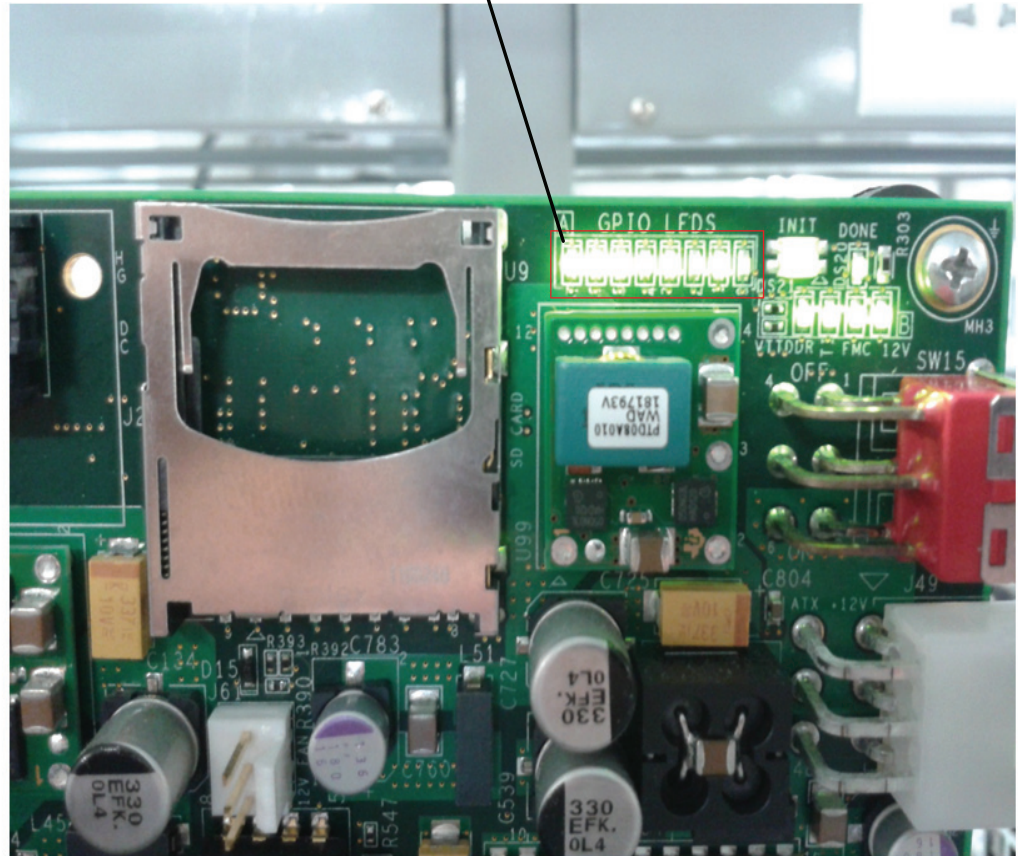

UG929_64_060512

Figure 11: LED Position on the FMC Card

8. The LEDs on the FMC card (note that these are on the bottom side) indicate the following status:

LED position top – FM-S14 is connected on the correct FMC connector on KC705 board

LED position bottom – indicates clock generator on FMC is programmed to generate 312.5 MHz as required by the TRD


Installing the Device Drivers

This section describes the steps to install the device drivers for the Kintex-7 Connectivity TRD after completion of the above hardware setup steps.

1. If Fedora 16 is installed on the PC system's hard disk, boot as a root-privileged user, proceed to step 3. Otherwise continue with step 2.
2. To boot from the Fedora 16 Live DVD provided in the kit, place the DVD in the PC's CD-ROM drive. The Fedora 16 Live Media is for Intel-compatible PCs. The DVD contains a complete, bootable 32-bit Fedora 16 environment with the proper packages installed for the TRD demonstration environment. The PC boots from the CD-ROM drive and logs into a liveuser account. This account has kernel development root privileges required to install and remove device driver modules.

Note: Users might have to adjust BIOS boot order settings to ensure that the CD-ROM drive is the first drive in the boot order. To enter the BIOS menu to set the boot order, press the DEL or F2 key when the system is powered on. Set the boot order and save the changes. (The DEL or F2 key is used by most PC systems to enter the BIOS setup. Some PCs might have a different way to enter the BIOS setup.)

The PC should boot from the CD-ROM drive. The images in Figure 12 are seen on the monitor during boot up.

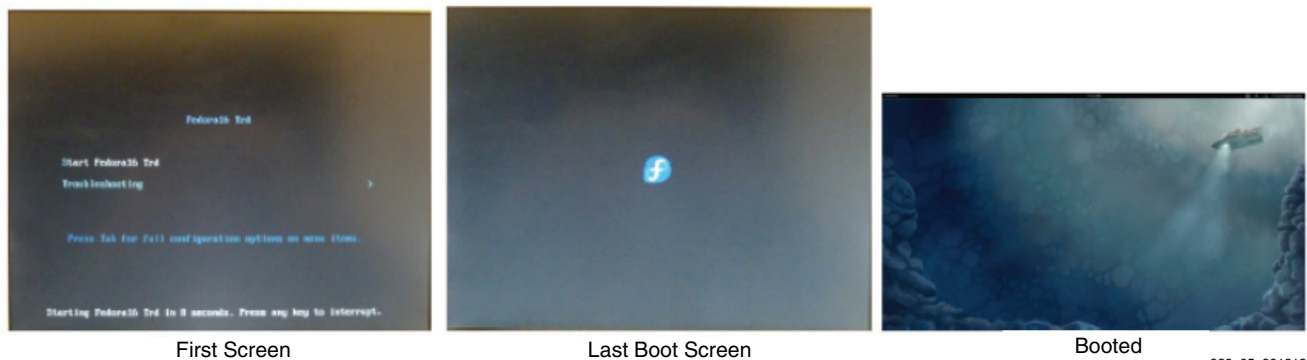


929_65_061212

Figure 12: Fedora 16 LiveCD Boot Sequence

3. Copy the `k7_connectivity_trd` folder from the USB flash drive provided in the Connectivity kit to the desktop (or a folder of choice). After the folder is copied, un-mount and disconnect the USB drive. Note that the user must be a root-privileged user.


Double-click the copied `k7_connectivity_trd` folder. The screen capture in [Figure 13](#) shows the content of the `k7_connectivity_trd` folder.

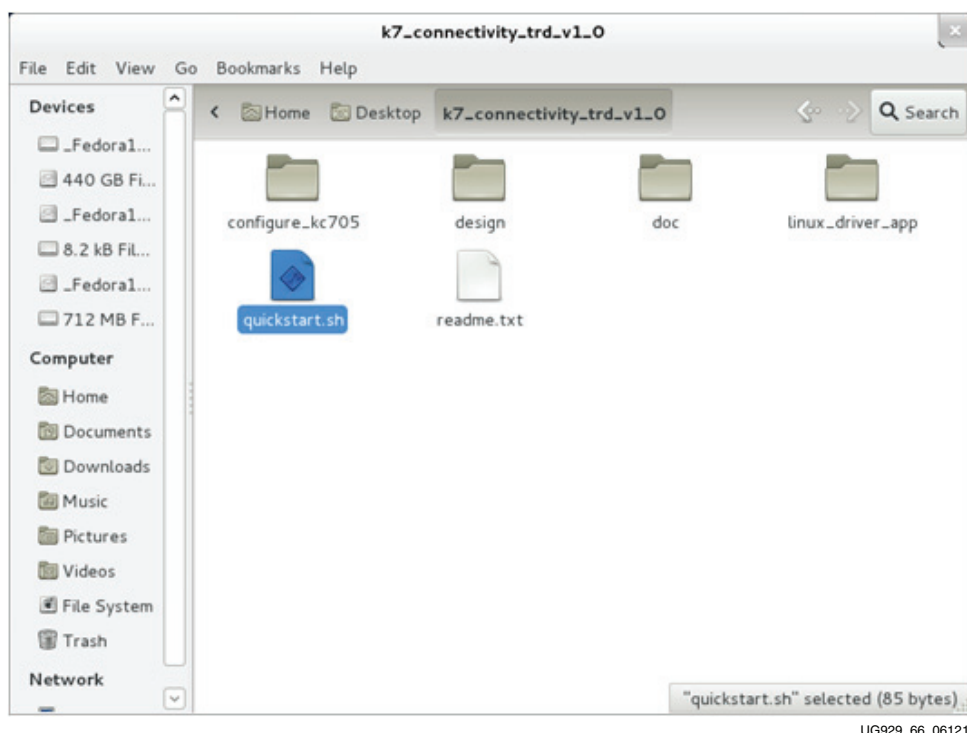

UG929_66_061212

Figure 13: Directory Structure of `k7_connectivity_trd`

4. Double click `quickstart.sh` script (see Figure 14). This script sets the proper permission and invokes the driver installation GUI. Click **Run in Terminal**.

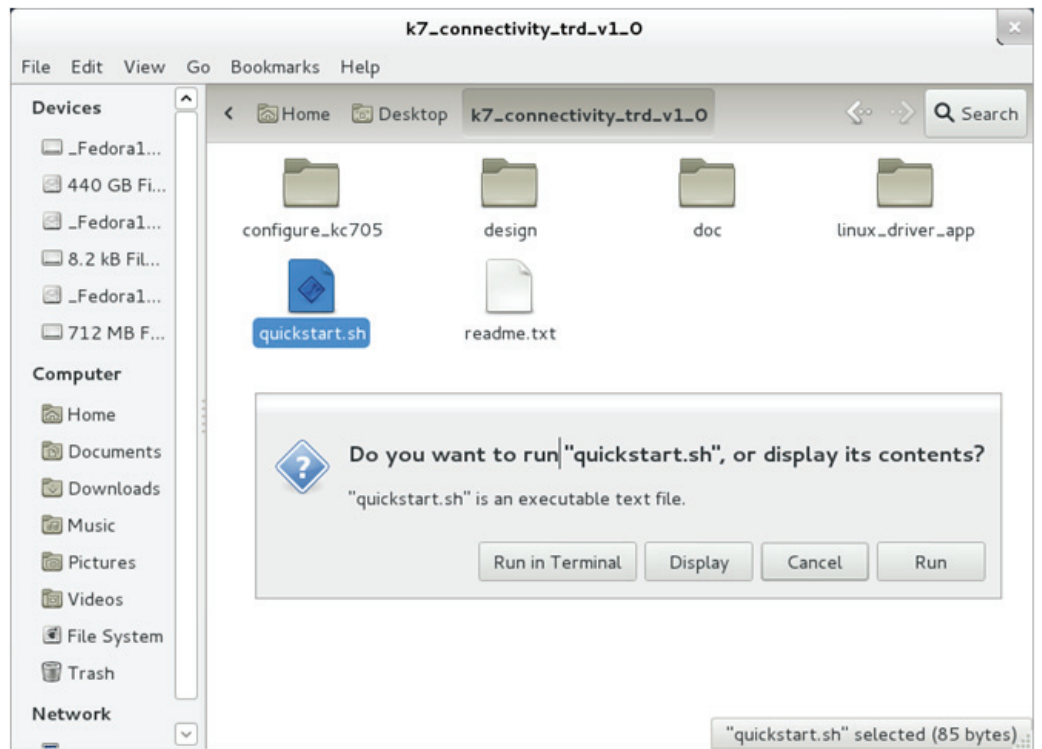


UG929_67_061212

Figure 14: Running the Quickstart Script

5. The GUI with driver installation option pops up as shown in Figure 15. The next steps demonstrate all modes of design operation by installing and un-installing various drivers.


Select **GEN/CHK** performance mode driver mode as shown in Figure 15 and click **Install**.

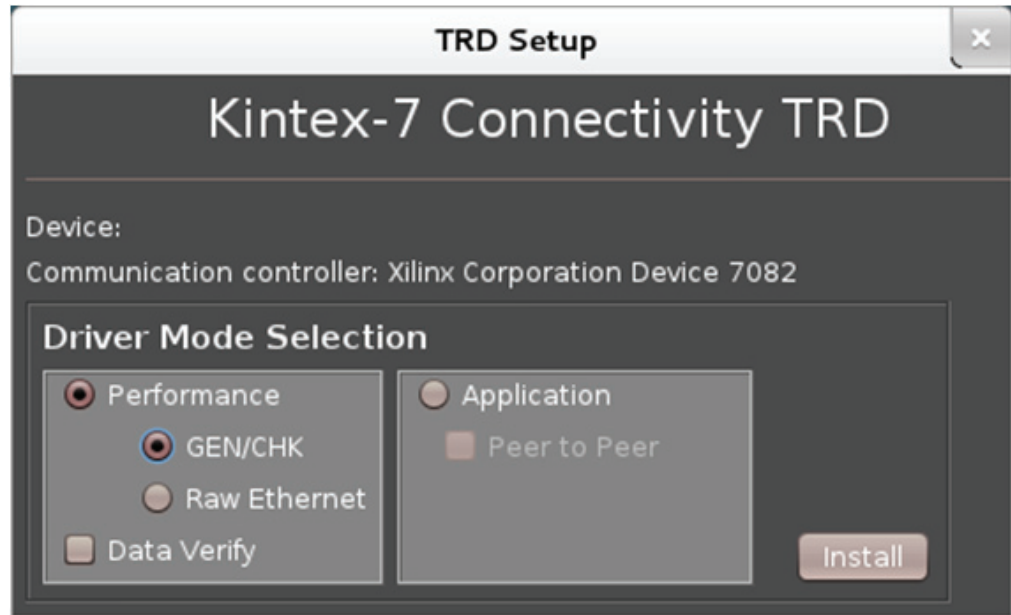

UG929_68_061212

Figure 15: Landing Page of Kintex-7 TRD

6. After installing the GEN/CHK performance mode driver, the control and monitor user interface pops up as shown in Figure 16. The control pane shows control parameters such as test mode (loopback, generator, or checker) and packet length. The user can select PCIe link width and speed while running a test if the host machine supports link width and speed configuration capability. The System Monitor tab in the GUI also shows system power and temperature. DDR3 ready status and 10GBASE-R link status are displayed on the top left corner of the GUI.

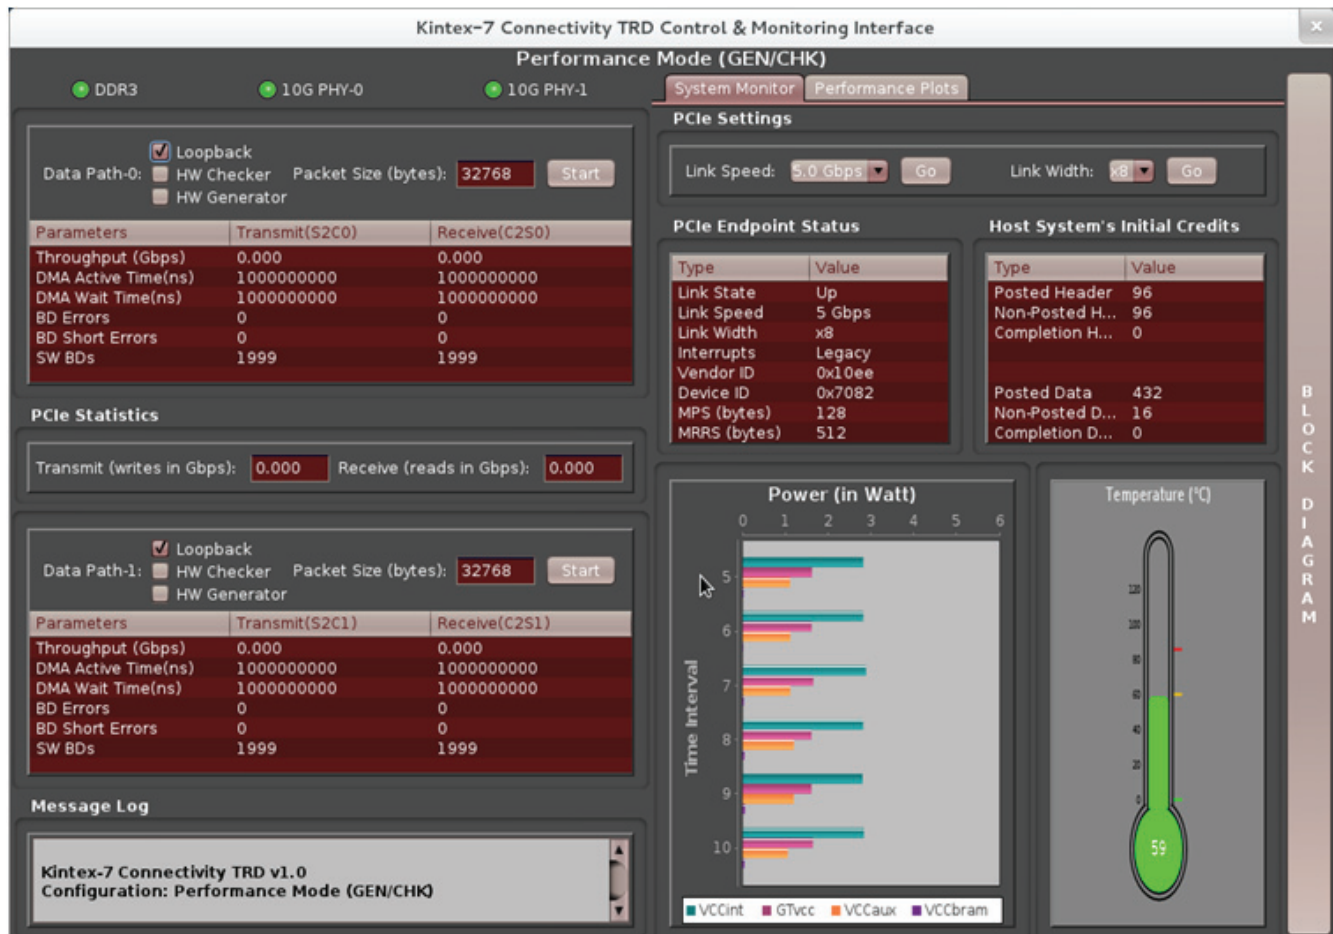

UG929_69_069212

Figure 16: GEN/CHK Performance Mode


- Click **Start** on both Data Path-0 and Data Path-1. Go to the Performance Plots tab. The Performance Plots tab shows the system-to-card and card-to-system performance numbers for a specific packet size. The user can vary packet size and see performance variation accordingly (see Figure 17).



UG929_70_061212

Figure 17: GEN/CHK Performance Mode Plots

8. Close the GUI – this process un-installs the driver and opens the landing page of the Kintex-7 Connectivity TRD. (Driver un-installation requires the GUI to be closed first.)
9. Select **Raw Ethernet** performance as shown in Figure 18. Click **Install**.

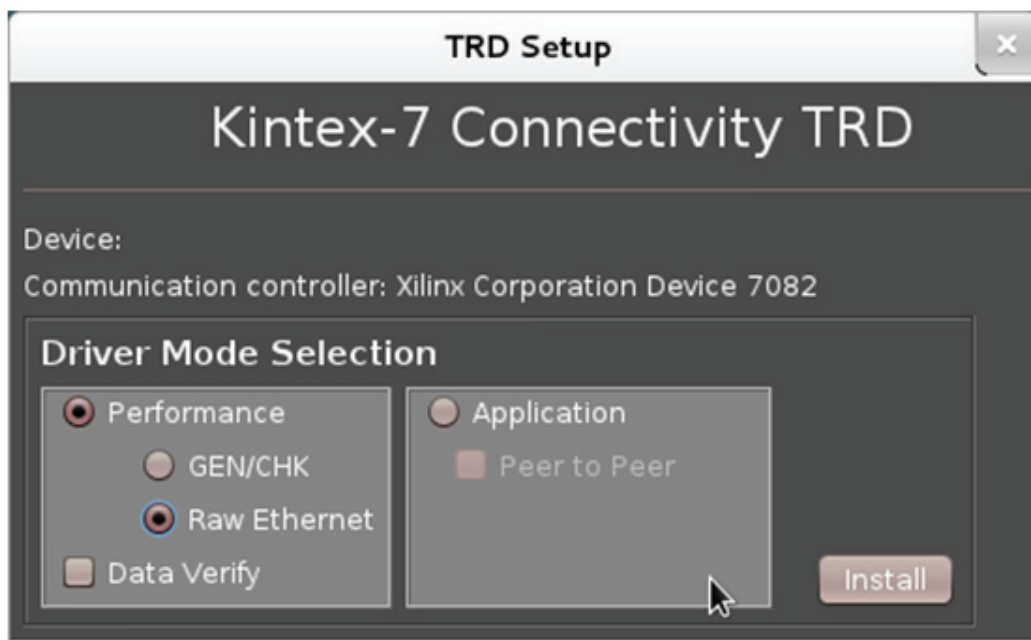

UG929_71_061212

Figure 18: Raw Ethernet Driver Installation

10. The GUI for raw Ethernet mode driver is invoked. The user can configure packet size in raw Ethernet mode and can control PCIe link width and speed change if the host machine supports this. The System Monitor tab monitors system power and temperature (see Figure 19).



UG929_72_061212

Figure 19: Raw Ethernet Driver GUI


11. Click **Start** on both Data Path-0 and Data Path-1. Navigate to the Performance Plots tab to see performance on system-to-card and card-to-system (see Figure 20).



UG929_73_061212

Figure 20: Raw Ethernet Driver Performance Plots

12. Close the GUI – this un-installs driver and opens the Kintex-7 Connectivity TRD landing page. Note that driver un-installation requires the GUI to be closed first.
13. Select the Application mode driver as shown in [Figure 21](#). For using peer-peer option refer to Appendix 8 of UG927, *Kintex-7 FPGA Connectivity TRD User Guide* [\[Ref 1\]](#). Click **Install**.

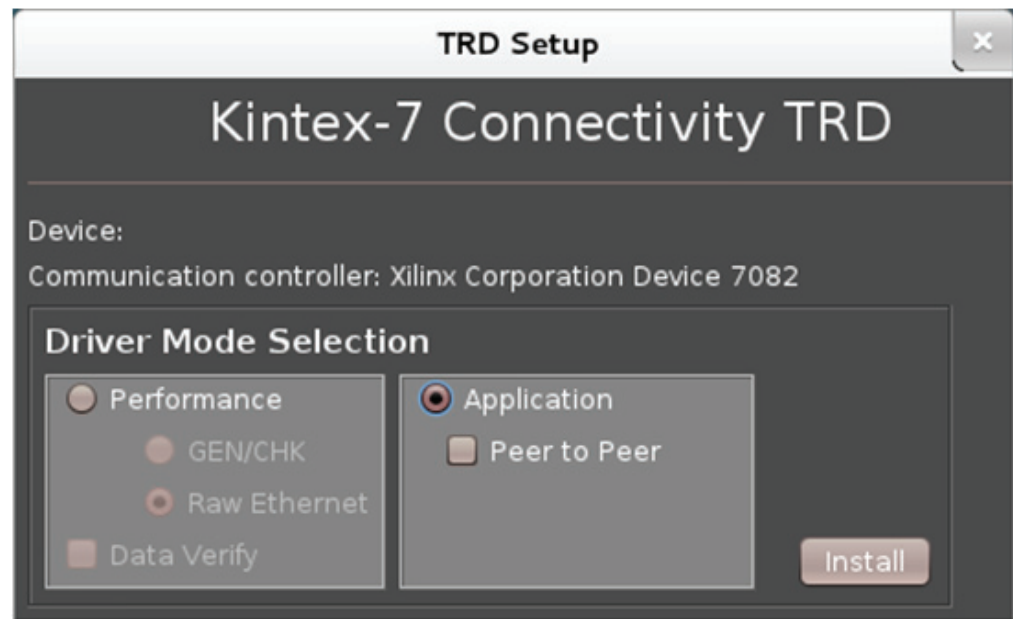

UG929_74_061212

Figure 21: Application Mode Driver Installation

14. The GUI is invoked after the driver is installed. However, in application mode, the user cannot start or stop a test – the traffic is generated by the networking stack. The system monitor shows the system power and temperature (see Figure 22).




UG929_75_061212

Figure 22: Application Mode Driver GUI

15. Open another terminal on the host machine and run ping (see [Figure 23](#)) using the following command:

```
$ ping 10.60.0.1
```

```
$ ping 10.60.1.1
```

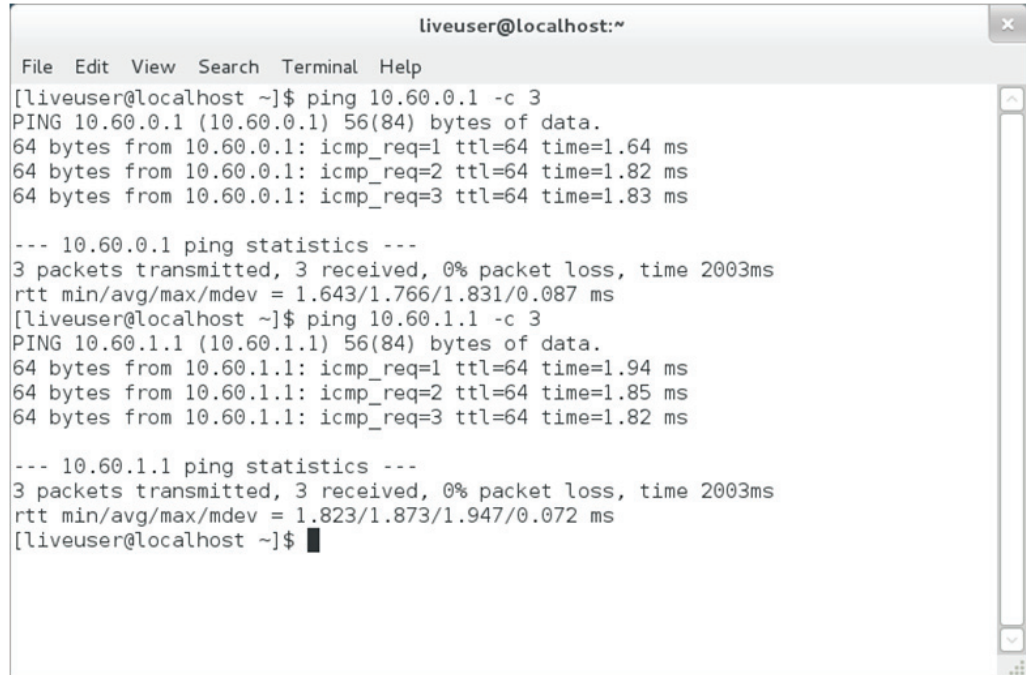


```
liveuser@localhost:~  
File Edit View Search Terminal Help  
[liveuser@localhost ~]$ ping 10.60.0.1 -c 3  
PING 10.60.0.1 (10.60.0.1) 56(84) bytes of data.  
64 bytes from 10.60.0.1: icmp_req=1 ttl=64 time=1.64 ms  
64 bytes from 10.60.0.1: icmp_req=2 ttl=64 time=1.82 ms  
64 bytes from 10.60.0.1: icmp_req=3 ttl=64 time=1.83 ms  
  
--- 10.60.0.1 ping statistics ---  
3 packets transmitted, 3 received, 0% packet loss, time 2003ms  
rtt min/avg/max/mdev = 1.643/1.766/1.831/0.087 ms  
[liveuser@localhost ~]$ ping 10.60.1.1 -c 3  
PING 10.60.1.1 (10.60.1.1) 56(84) bytes of data.  
64 bytes from 10.60.1.1: icmp_req=1 ttl=64 time=1.94 ms  
64 bytes from 10.60.1.1: icmp_req=2 ttl=64 time=1.85 ms  
64 bytes from 10.60.1.1: icmp_req=3 ttl=64 time=1.82 ms  
  
--- 10.60.1.1 ping statistics ---  
3 packets transmitted, 3 received, 0% packet loss, time 2003ms  
rtt min/avg/max/mdev = 1.823/1.873/1.947/0.072 ms  
[liveuser@localhost ~]$
```

UG929_76_061412

Figure 23: Ping application on Application Mode Driver

16. The user can click on the Block Diagram option to view the design block diagram as shown in Figure 24.
17. Close the GUI – this un-installs driver and opens the Kintex-7 Connectivity TRD landing page. Note that driver un-installation requires the GUI to be closed first.

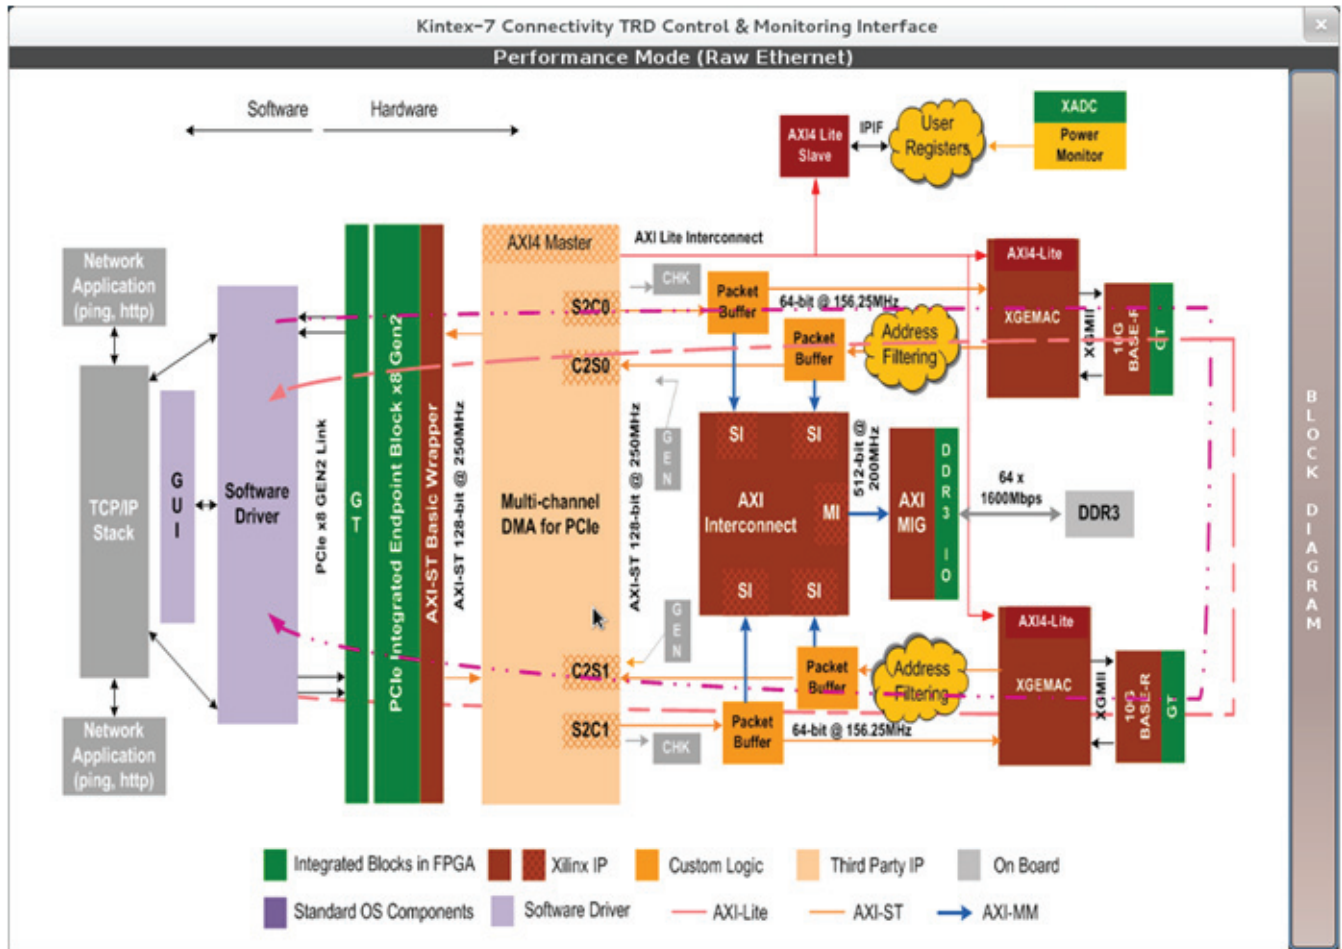

UG929_77_061212

Figure 24: Design Block Diagram

Additional Resources

Xilinx Resources

To search the Answer database of silicon, software, and IP questions and answers, or to create a technical support WebCase, see the Xilinx Support website at:

<http://www.xilinx.com/support>

For a glossary of technical terms used in Xilinx documentation, see:

http://www.xilinx.com/support/documentation/sw_manuals/glossary.pdf

References

These documents provide supplemental material useful with this user guide.

1. [UG927](#), *Kintex-7 FPGA Connectivity Targeted Reference Design User Guide*
2. [UG810](#), *KC705 Evaluation Board for the Kintex-7 FPGA User Guide*
3. [UG798](#), *ISE Design Suite 13: Installation and Licensing Guide*
4. [UG477](#), *7 Series FPGAs Integrated Block for PCI Express User Guide*
5. [WP350](#), *Understanding Performance of PCI Express Systems*
6. [UG476](#), *7 Series FPGAs GTX Transceivers User Guide*
7. [UG586](#), *7 Series FPGAs Memory Interface Solutions User Guide*
8. AXI Interconnect IP:
http://www.xilinx.com/products/intellectual-property/axi_interconnect.htm
9. [UG626](#), *Synthesis and Simulation Design Guide*
10. [UG477](#), *7 Series FPGAs Integrated Block for PCI Express User Guide*
11. [UG692](#), *Ten Gig Ethernet PCS PMA User Guide*
12. [UG129](#), *PicoBlaze 8-bit Embedded microcontroller User Guide*

Additional Useful Sites for Boards and Kits

13. Updated information about the Kintex-7 FPGA Base TRD and Kintex-7 FPGA KC705 Evaluation kit
www.xilinx.com/kc705
14. Design advisories by software release for Kintex-7 FPGA KC705 Evaluation kit
<http://www.xilinx.com/support/#nav=sd-nav-link-179661&tab=tab-bk>
15. KC705 support website
<http://www.xilinx.com/products/boards-and-kits/EK-K7-KC705-G.htm>

Third Party Resources

Documents associated with other software, tool, and IP used by the connectivity TRD are available at these vendor websites:

16. Tera Term Pro program:
<http://hp.vector.co.jp/authors/VA002416/teraterm.html>
17. Drivers on the Silicon Labs site:
http://www.silabs.com/Support%20Documents/Software/CP210x_VCP_Win_XP_S2K3_Vista_7.exe
18. Northwest Logic DMA back end core:
<http://www.nwlogic.com/packetdma>
19. Fedora project:
<http://fedoraproject.org>
Fedora is a Linux-based operating system used in the development of this TRD.
20. FM-S14 FMC:
Faster Technology Fm-s14
http://www.fastertechnology.com/fm_s14.html
21. 10G MMF SFP+ SR Optical Transceivers:
Avago AFBR-703SDZ
http://www.avagotech.com/pages/en/fiber_optics/ethernet/10_gbe/afbr-703sdz/
22. LC to LC OM3 10G fiber optic patch cable:
Amphenol Cables on Demand™ (ACD) FO-10GGBLCX20-001
http://www.cablesondemand.com/category/FO10GGBMM/URvars/Catalog/Library/InfoManage/10-GIGABIT_MULTIMODE_CABLES_...htm

Warranty

THIS LIMITED WARRANTY applies solely to standard hardware development boards and standard hardware programming cables manufactured by or on behalf of Xilinx (“Development Systems”). Subject to the limitations herein, Xilinx warrants that Development Systems, when delivered by Xilinx or its authorized distributor, for ninety (90) days following the delivery date, will be free from defects in material and workmanship and will substantially conform to Xilinx publicly available specifications for such products in effect at the time of delivery. This limited warranty excludes: (i) engineering samples or beta versions of Development Systems (which are provided “AS-IS” without warranty); (ii) design defects or errors known as “errata”; (iii) Development Systems procured through unauthorized third parties; and (iv) Development Systems that have been subject to misuse, mishandling, accident, alteration, neglect, unauthorized repair or installation. Furthermore, this limited warranty shall not apply to the use of covered products in an application or environment that is not within Xilinx specifications or in the event of any act, error, neglect or default of Customer. For any breach by Xilinx of this limited warranty, the exclusive remedy of Customer and the sole liability of Xilinx shall be, at the option of Xilinx, to replace or repair the affected products, or to refund to Customer the price of the affected products. The availability of replacement products is subject to product discontinuation policies at Xilinx. Customer may not return product without first obtaining a customer return material authorization (RMA) number from Xilinx.

THE WARRANTIES SET FORTH HEREIN ARE EXCLUSIVE. XILINX DISCLAIMS ALL OTHER WARRANTIES, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT, AND ANY WARRANTY THAT MAY ARISE FROM COURSE OF DEALING, COURSE OF PERFORMANCE, OR USAGE OF TRADE. (2008.10)



Do not throw Xilinx products marked with the “crossed out wheeled bin” in the trash. Directive 2002/96/EC on waste electrical and electronic equipment (WEEE) requires the separate collection of WEEE. Your cooperation is essential in ensuring the proper management of WEEE and the protection of the environment and human health from potential effects arising from the presence of hazardous substances in WEEE. Return the marked products to Xilinx for proper disposal. Further information and instructions for free-of-charge return available at: <http://www.xilinx.com/ehs/weee.htm>.

