

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0190710155

Status:

Active

Description:

InsulKrimp™ Ring Tongue Terminal for 8 AWG Wire, Stud Size 5/16", Length 36.25mm (1.427"), Mylar Tape Carrier

Documents:

Drawing (PDF)

Product Specification PS-19902-009 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Series

Crimp Quality Equipment

Mil-Spec

Product Name

Type

Ring and Spade Terminals

19071

Yes

N/A

InsulKrimp™

Ring

Physical

Barrel Type

Color - Resin

Insulation

Material - Plating Mating

Packaging Type

Stud Size

Wire Insulation Diameter

Wire Size AWG

Wire Size mm²

Closed - Brazed

Natural

PVC

Tin

Adhesive Tape on Reel

5/16" (M8)

9.78mm (.385")

8

6.60 - 10.5

Electrical

Voltage - Maximum

300V

Material Info

Old Part Number

D-651-56XT


Reference - Drawing Numbers

Product Specification

Sales Drawing

PS-19902-009

SD-19071-002



Series image - Reference only

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

19071Series

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
Crimp Dies for the ATP-201™ Air Crimping Press for Mylar Tape Mounted Terminals designed for large wire guages	0190472030
Crimp Dies for the ATP-201™ Air Crimping Press for Mylar Tape Mounted Terminals	0190472060


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

MATERIAL: Copper
 PLATING: Electro-Tin (.0003 Min.)
 INSULATION: PVC Color Coded Red
 STUD SIZES: ("D" $\pm .005$)

INSULKRIMP X

06 - .146"	38 - .390"
08 - .173"	76 - .453"
10 - .198"	12 - .515"
14 - .265"	58 - .656"
56 - .328"	34 - .781"

ASSEMBLY IS ROHS COMPLIANT.

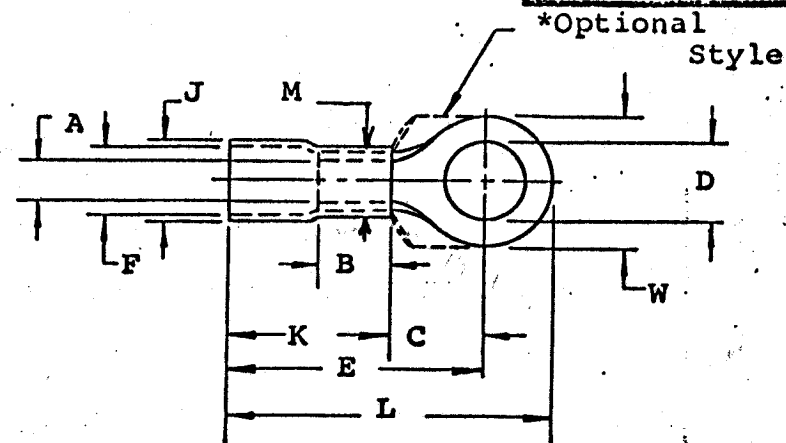

"M" - .375" Maximum

Part Number	"W"	"C" Min.	"E" Max.	"K" Max.	"L" Max.	"A" Min. Avg.	"F" (MWID)	THICKNESS REF	"J" Max.	"B" Min.	Available Stud Size
D-650-X	.478 .458	.363	1.088	.675	1.306	.165	.385	.045	.475	.315	06, 08, 10, 14, 56
D-651-X	.593 .573	.428	1.148	.675	1.427	.165	.385	.045	.475	.315	10, 14, 56, 38, 76
D-652-X	.822 .798	.611	1.336	.675	1.728	.165	.385	.050	.475	.315	10, 14, 56, 38, 76, 12, 58
D-653-X	1.137 1.113	.986	1.715	.675	2.278	.165	.385	.050	.475	.315	14, 56, 38, 76, 12 58, 34
D-656-X	.384 .364	.363	1.088	.675	1.265	.165	.385	.045	.475	.315	06, 08, 10, 14

NOTE: (MWID) denotes maximum wire insulation diameter.

ETC moLEX
 INCORPORATED
 CLEVELAND, OHIO

TITLE: CUSTOMER DRAWING
 #8 WIRE RANGE (D)
 RING TONGUE TERMINAL

DIMENSIONAL TOLERANCE
 UNLESS OTHERWISE SPECIFIED

FRAC.	DEC.	ANG.
$\pm$	$\pm$	$\pm$

REVISION

A	8 MIN WAS 300 EP 7-20-85
B	ETC2007-0019

SCALE: _____

DRWN. BY: JTK

CHKD. BY:

APPRD. BY:

DRAWING NO.:

DATE

1-21-70