LM2586 SIMPLE SWITCHER® 3A Flyback Regulator with Shutdown

Check for Samples: LM2586

FEATURES

- **Requires few external components**
- **Family of standard inductors and transformers**
- **NPN output switches 3.0A, can stand off 65V**
- **Wide input voltage range: 4V to 40V**
- **Adjustable switching frequency: 100 kHz to 200 kHz**
- **External shutdown capability**
- **Draws less than 60 µA when shut down**
- **Frequency synchronization**
- **Current-mode operation for improved transient response, line regulation, and current limit**
- **Internal soft-start function reduces in-rush current during start-up**
- **Output transistor protected by current limit, under voltage lockout, and thermal shutdown**
- **System output voltage tolerance of ±4% max over line and load conditions**

TYPICAL APPLICATIONS

- **Flyback regulator**
- **Forward converter**
- **Multiple-output regulator**
- **Simple boost regulator**

DESCRIPTION

The LM2586 series of regulators are monolithic integrated circuits specifically designed for flyback, step-up (boost), and forward converter applications. The device is available in 4 different output voltage versions: 3.3V, 5.0V, 12V, and adjustable.

Requiring a minimum number of external components, these regulators are cost effective, and simple to use. Included in the datasheet are typical circuits of boost and flyback regulators. Also listed are selector guides for diodes and capacitors and a family of standard inductors and flyback transformers designed to work with these switching regulators.

The power switch is a 3.0A NPN device that can stand-off 65V. Protecting the power switch are current and thermal limiting circuits, and an undervoltage lockout circuit. This IC contains an adjustable frequency oscillator that can be programmed up to 200 kHz. The oscillator can also be synchronized with other devices, so that multiple devices can operate at the same switching frequency.

Other features include soft start mode to reduce in-rush current during start up, and current mode control for improved rejection of input voltage and output load transients and cycle-by-cycle current limiting. The device also has a shutdown pin, so that it can be turned off externally. An output voltage tolerance of ±4%, within specified input voltages and output load conditions, is guaranteed for the power supply system.

Connection Diagrams

Figure 1. Bent, Staggered Leads
7-Lead TO-220 (T)
Top View

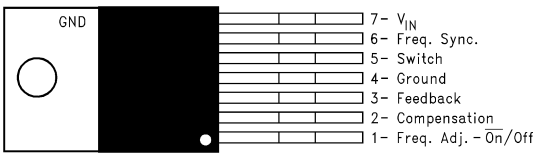

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SIMPLE SWITCHER is a registered trademark of Texas Instruments.
Switchers Made Simple, *Simple Switcher* are registered trademarks of dcl_owner.
All other trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2004–2005, Texas Instruments Incorporated

Figure 2. Bent, Staggered Leads
7-Lead TO-220 (T)
Side View

Figure 3. 7-Lead TO-263 (S)
Top View

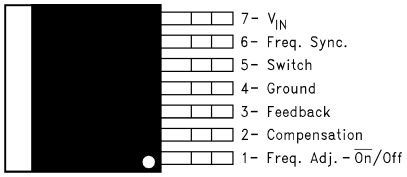

Figure 4. 7-Lead TO-263 (S)
Side View

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings (1)

Input Voltage	$-0.4V \le V_{IN} \le 45V$
Switch Voltage	$-0.4V \le V_{SW} \le 65V$
Switch Current (2)	Internally Limited
Compensation Pin Voltage	$-0.4V \le V_{COMP} \le 2.4V$
Feedback Pin Voltage	$-0.4V \le V_{FB} \le 2\ V_{OUT}$
$\overline{ON}$ /OFF Pin Voltage	$-0.4V \le V_{SH} \le 6V$
Sync Pin Voltage	$-0.4V \le V_{SYNC} \le 2V$
Power Dissipation (3)	Internally Limited
Storage Temperature Range	−65°C to +150°C
Lead Temperature (Soldering, 10 sec.)	260°C
Maximum Junction Temperature (3)	150°C
Minimum ESD Rating (C = 100 pF, R = 1.5 kΩ)	2 kV

(1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. These ratings apply when the current is limited to less than 1.2 mA for pins 1, 2, 3, and 6. Operating ratings indicate conditions for which the device is intended to be functional, but device parameter specifications may not be guaranteed under these conditions. For guaranteed specifications and test conditions, see the Electrical Characteristics.

(2) Note that switch current and output current are not identical in a step-up regulator. Output current cannot be internally limited when the LM2586 is used as a step-up regulator. To prevent damage to the switch, the output current must be externally limited to 3A. However, output current is internally limited when the LM2586 is used as a flyback regulator (see the Application Hints section for more information).

(3) The junction temperature of the device (T_J) is a function of the ambient temperature (T_A), the junction-to-ambient thermal resistance (θ_{JA}), and the power dissipation of the device (P_D). A thermal shutdown will occur if the temperature exceeds the maximum junction temperature of the device: $P_D \times \theta_{JA} + T_{A(MAX)} \ge T_{J(MAX)}$. For a safe thermal design, check that the maximum power dissipated by the device is less than: $P_D \le [T_{J(MAX)} - T_{A(MAX)}]/\theta_{JA}$. When calculating the maximum allowable power dissipation, derate the maximum junction temperature—this ensures a margin of safety in the thermal design.

Operating Ratings

Supply Voltage	$4V \le V_{IN} \le 40V$
Output Switch Voltage	$0V \le V_{SW} \le 60V$
Output Switch Current	$I_{SW} \le 3.0A$

Copyright © 2004–2005, Texas Instruments Incorporated

Operating Ratings (continued)

Junction Temp. Range	−40°C ≤ T_J ≤ +125°C

Copyright © 2004–2005, Texas Instruments Incorporated

Electrical Characteristics LM2586-3.3

Specifications with standard type face are for T_J = 25°C, and those in **bold type face** apply over full **Operating Temperature Range.** Unless otherwise specified, V_{IN} = 5V.

Symbol	Parameters	Conditions	Typical	Min	Max	Units
SYSTEM PARAMETERS Test Circuit of Figure 5 (1)						
V_{OUT}	Output Voltage	V_{IN} = 4V to 12V	3.3	3.17/**3.14**	3.43/**3.46**	V
		I_{LOAD} = 0.3 to 1.2A				
ΔV_{OUT}/	Line Regulation	V_{IN} = 4V to 12V	20		50/**100**	mV
ΔV_{IN}		I_{LOAD} = 0.3A				
ΔV_{OUT}/	Load Regulation	V_{IN} = 12V	20		50/**100**	mV
ΔI_{LOAD}		I_{LOAD} = 0.3A to 1.2A				
η	Efficiency	V_{IN} = 5V, I_{LOAD} = 0.3A	76			%
UNIQUE DEVICE PARAMETERS (2)						
V_{REF}	Output Reference	Measured at Feedback Pin	3.3	3.242/**3.234**	3.358/**3.366**	V
	Voltage	V_{COMP} = 1.0V				
ΔV_{REF}	Reference Voltage	V_{IN} = 4V to 40V	2.0			mV
	Line Regulation					
G_M	Error Amp	I_{COMP} = −30 µA to +30 µA	1.193	**0.678**	**2.259**	mmho
	Transconductance	V_{COMP} = 1.0V				
A_{VOL}	Error Amp	V_{COMP} = 0.5V to 1.6V	260	151/**75**		V/V
	Voltage Gain	R_{COMP} = 1.0 MΩ (3)				

(1) External components such as the diode, inductor, input and output capacitors can affect switching regulator performance. When the LM2586 is used as shown in Figure 5 Figure 6, system performance will be as specified by the system parameters.
(2) All room temperature limits are 100% production tested, and all limits at temperature extremes are guaranteed via correlation using standard Statistical Quality Control (SQC) methods.
(3) A 1.0 MΩ resistor is connected to the compensation pin (which is the error amplifier output) to ensure accuracy in measuring A_{VOL}.

Copyright © 2004–2005, Texas Instruments Incorporated

LM2586-5.0

Symbol	Parameters	Conditions	Typical	Min	Max	Units
SYSTEM PARAMETERS Test Circuit of Figure 5 (1)						
V_{OUT}	Output Voltage	V_{IN} = 4V to 12V	5.0	4.80/**4.75**	5.20/**5.25**	V
		I_{LOAD} = 0.3A to 1.1A				
ΔV_{OUT}/	Line Regulation	V_{IN} = 4V to 12V	20		50/**100**	mV
ΔV_{IN}		I_{LOAD} = 0.3A				
ΔV_{OUT}/	Load Regulation	V_{IN} = 12V	20		50/**100**	mV
ΔI_{LOAD}		I_{LOAD} = 0.3A to 1.1A				
η	Efficiency	V_{IN} = 12V, I_{LOAD} = 0.6A	80			%
UNIQUE DEVICE PARAMETERS (2)						
V_{REF}	Output Reference Voltage	Measured at Feedback Pin V_{COMP} = 1.0V	5.0	4.913/**4.900**	5.088/**5.100**	V
ΔV_{REF}	Reference Voltage	V_{IN} = 4V to 40V	3.3			mV
	Line Regulation					
G_M	Error Amp	I_{COMP} = −30 µA to +30 µA	0.750	**0.447**	**1.491**	mmho
	Transconductance	V_{COMP} = 1.0V				
A_{VOL}	Error Amp	V_{COMP} = 0.5V to 1.6V	165	99/**49**		V/V
	Voltage Gain	R_{COMP} = 1.0 MΩ (3)				

(1) External components such as the diode, inductor, input and output capacitors can affect switching regulator performance. When the LM2586 is used as shown in Figure 5 Figure 6, system performance will be as specified by the system parameters.
(2) All room temperature limits are 100% production tested, and all limits at temperature extremes are guaranteed via correlation using standard Statistical Quality Control (SQC) methods.
(3) A 1.0 MΩ resistor is connected to the compensation pin (which is the error amplifier output) to ensure accuracy in measuring A_{VOL}.

Copyright © 2004–2005, Texas Instruments Incorporated

LM2586-12

Symbol	Parameters	Conditions	Typical	Min	Max	Units
SYSTEM PARAMETERS Test Circuit of Figure 6 (1)						
V_{OUT}	Output Voltage	V_{IN} = 4V to 10V	12.0	11.52/**11.40**	12.48/**12.60**	V
		I_{LOAD} = 0.2A to 0.8A				
ΔV_{OUT}/	Line Regulation	V_{IN} = 4V to 10V	20		100/**200**	mV
ΔV_{IN}		I_{LOAD} = 0.2A				
ΔV_{OUT}/	Load Regulation	V_{IN} = 10V	20		100/**200**	mV
ΔI_{LOAD}		I_{LOAD} = 0.2A to 0.8A				
η	Efficiency	V_{IN} = 10V, I_{LOAD} = 0.6A	93			%
UNIQUE DEVICE PARAMETERS (2)						
V_{REF}	Output Reference	Measured at Feedback Pin	12.0	11.79/**11.76**	12.21/**12.24**	V
	Voltage	V_{COMP} = 1.0V				
ΔV_{REF}	Reference Voltage	V_{IN} = 4V to 40V	7.8			mV
	Line Regulation					
G_M	Error Amp	I_{COMP} = −30 µA to +30 µA	0.328	**0.186**	**0.621**	mmho
	Transconductance	V_{COMP} = 1.0V				
A_{VOL}	Error Amp	V_{COMP} = 0.5V to 1.6V	70	41/**21**		V/V
	Voltage Gain	R_{COMP} = 1.0 MΩ (3)				

(1) External components such as the diode, inductor, input and output capacitors can affect switching regulator performance. When the LM2586 is used as shown in Figure 5 Figure 6, system performance will be as specified by the system parameters.
(2) All room temperature limits are 100% production tested, and all limits at temperature extremes are guaranteed via correlation using standard Statistical Quality Control (SQC) methods.
(3) A 1.0 MΩ resistor is connected to the compensation pin (which is the error amplifier output) to ensure accuracy in measuring A_{VOL}.

Copyright © 2004–2005, Texas Instruments Incorporated

LM2586-ADJ

Symbol	Parameters	Conditions	Typical	Min	Max	Units
SYSTEM PARAMETERS Test Circuit of Figure 6 (1)						
V_{OUT}	Output Voltage	V_{IN} = 4V to 10V	12.0	11.52/**11.40**	12.48/**12.60**	V
		I_{LOAD} = 0.2A to 0.8A				
ΔV_{OUT}/	Line Regulation	V_{IN} = 4V to 10V	20		100/**200**	mV
ΔV_{IN}		I_{LOAD} = 0.2A				
ΔV_{OUT}/	Load Regulation	V_{IN} = 10V	20		100/**200**	mV
ΔI_{LOAD}		I_{LOAD} = 0.2A to 0.8A				
η	Efficiency	V_{IN} = 10V, I_{LOAD} = 0.6A	93			%
UNIQUE DEVICE PARAMETERS (2)						
V_{REF}	Output Reference	Measured at Feedback Pin	1.230	1.208/**1.205**	1.252/**1.255**	V
	Voltage	V_{COMP} = 1.0V				
ΔV_{REF}	Reference Voltage	V_{IN} = 4V to 40V	1.5			mV
	Line Regulation					
G_M	Error Amp	I_{COMP} = −30 µA to +30 µA	3.200	**1.800**	**6.000**	mmho
	Transconductance	V_{COMP} = 1.0V				
A_{VOL}	Error Amp Voltage Gain	V_{COMP} = 0.5V to 1.6V, R_{COMP} = 1.0 MΩ (3)	670	400/**200**		V/V
I_B	Error Amp	V_{COMP} = 1.0V	125		425/**600**	nA
	Input Bias Current					
COMMON DEVICE PARAMETERS for all versions (2)						
I_S	Input Supply Current	Switch Off (4)	11		15.5/**16.5**	mA
		I_{SWITCH} = 1.8A	50		100/**115**	mA
$I_{S/D}$	Shutdown Input	V_{SH} = 3V	16		100/**300**	µA
	Supply Current					
V_{UV}	Input Supply	R_{LOAD} = 100Ω	3.30	**3.05**	**3.75**	V
	Undervoltage Lockout					
f_O	Oscillator Frequency	Measured at Switch Pin				
		R_{LOAD} = 100Ω, V_{COMP} = 1.0V	100	85/**75**	115/**125**	kHz
		Freq. Adj. Pin Open (Pin 1)				
		R_{SET} = 22 kΩ	200			kHz
f_{SC}	Short-Circuit	Measured at Switch Pin				
	Frequency	R_{LOAD} = 100Ω	25			kHz
		$V_{FEEDBACK}$ = 1.15V				
V_{EAO}	Error Amplifier	Upper Limit	2.8	2.6/**2.4**		V
	Output Swing	(5)				
		Lower Limit	0.25		0.40/**0.55**	V
		(4)				
I_{EAO}	Error Amp	(6)				
	Output Current		165	110/**70**	260/**320**	µA
	(Source or Sink)					

(1) External components such as the diode, inductor, input and output capacitors can affect switching regulator performance. When the LM2586 is used as shown in Figure 5 Figure 6, system performance will be as specified by the system parameters.
(2) All room temperature limits are 100% production tested, and all limits at temperature extremes are guaranteed via correlation using standard Statistical Quality Control (SQC) methods.
(3) A 1.0 MΩ resistor is connected to the compensation pin (which is the error amplifier output) to ensure accuracy in measuring A_{VOL}.
(4) To measure this parameter, the feedback voltage is set to a high value, depending on the output version of the device, to force the error amplifier output low and the switch off.
(5) To measure this parameter, the feedback voltage is set to a low value, depending on the output version of the device, to force the error amplifier output high and the switch on.
(6) To measure the worst-case error amplifier output current, the LM2586 is tested with the feedback voltage set to its low value () and at its high value ().

Copyright © 2004–2005, Texas Instruments Incorporated

LM2586-ADJ (continued)

Symbol	Parameters	Conditions	Typical	Min	Max	Units
I_{SS}	Soft Start Current	$V_{FEEDBACK}$ = 0.92V	11.0	8.0/**7.0**	17.0/**19.0**	µA
		V_{COMP} = 1.0V				
D_{MAX}	Maximum Duty Cycle	R_{LOAD} = 100Ω	98	93/**90**		%
		(5)				
I_L	Switch Leakage	Switch Off	15		300/**600**	µA
	Current	V_{SWITCH} = 60V				
V_{SUS}	Switch Sustaining Voltage	dV/dT = 1.5V/ns		65		V
V_{SAT}	Switch Saturation Voltage	I_{SWITCH} = 3.0A	0.45		0.65/**0.9**	V
I_{CL}	NPN Switch Current Limit		4.0	**3.0**	**7.0**	A
V_{STH}	Synchronization	F_{SYNC} = 200 kHz	0.75	0.625/**0.40**	0.875/**1.00**	V
	Threshold Voltage	V_{COMP} = 1V, V_{IN} = 5V				
I_{SYNC}	Synchronization	V_{IN} = 5V	100		**200**	µA
	Pin Current	V_{COMP} = 1V, V_{SYNC} = V_{STH}				
V_{SHTH}	$\overline{ON}$/OFF Pin (Pin 1)	V_{COMP} = 1V	1.6	1.0/**0.8**	2.2/**2.4**	V
	Threshold Voltage	(7)				
I_{SH}	$\overline{ON}$/OFF Pin (Pin 1)	V_{COMP} = 1V	40	15/**10**	65/**75**	µA
	Current	V_{SH} = V_{SHTH}				
θ_{JA}	Thermal Resistance	T Package, Junction to Ambient (8)	65			°C/W
θ_{JA}		T Package, Junction to Ambient (9)	45			
θ_{JC}		T Package, Junction to Case	2			
θ_{JA}		S Package, Junction to Ambient (10)	56			
θ_{JA}		S Package, Junction to Ambient (11)	35			
θ_{JA}		S Package, Junction to Ambient (12)	26			
θ_{JC}		S Package, Junction to Case	2			

(7) When testing the minimum value, do not sink current from this pin—isolate it with a diode. If current is drawn from this pin, the frequency adjust circuit will begin operation (see Figure 40).
(8) Junction to ambient thermal resistance (no external heat sink) for the 7 lead TO-220 package mounted vertically, with ½ inch leads in a socket, or on a PC board with minimum copper area.
(9) Junction to ambient thermal resistance (no external heat sink) for the 7 lead TO-220 package mounted vertically, with ½ inch leads soldered to a PC board containing approximately 4 square inches of (1 oz.) copper area surrounding the leads.
(10) Junction to ambient thermal resistance for the 7 lead TO-263 mounted horizontally against a PC board area of 0.136 square inches (the same size as the TO-263 package) of 1 oz. (0.0014 in. thick) copper.
(11) Junction to ambient thermal resistance for the 7 lead TO-263 mounted horizontally against a PC board area of 0.4896 square inches (3.6 times the area of the TO-263 package) of 1 oz. (0.0014 in. thick) copper.
(12) Junction to ambient thermal resistance for the 7 lead TO-263 mounted horizontally against a PC board copper area of 1.0064 square inches (7.4 times the area of the TO-263 package) of 1 oz. (0.0014 in. thick) copper. Additional copper area will reduce thermal resistance further. See the thermal model in ***Switchers Made Simple***® software.

Copyright © 2004–2005, Texas Instruments Incorporated

Typical Performance Characteristics

Supply Current vs Temperature



Reference Voltage vs Temperature



ΔReference Voltage vs Supply Voltage



Supply Current vs Switch Current



Current Limit vs Temperature



Feedback Pin Bias Current vs Temperature



Switch Saturation Voltage vs Temperature



Switch Transconductance vs Temperature



Oscillator Frequency vs Temperature



Error Amp Transconductance vs Temperature



Copyright © 2004–2005, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Error Amp Voltage Gain vs Temperature



Short Circuit Frequency vs Temperature



Shutdown Supply Current vs Temperature



$\overline{ON}$/OFF Pin Current vs Voltage



Oscillator Frequency vs Resistance



Flyback Regulator

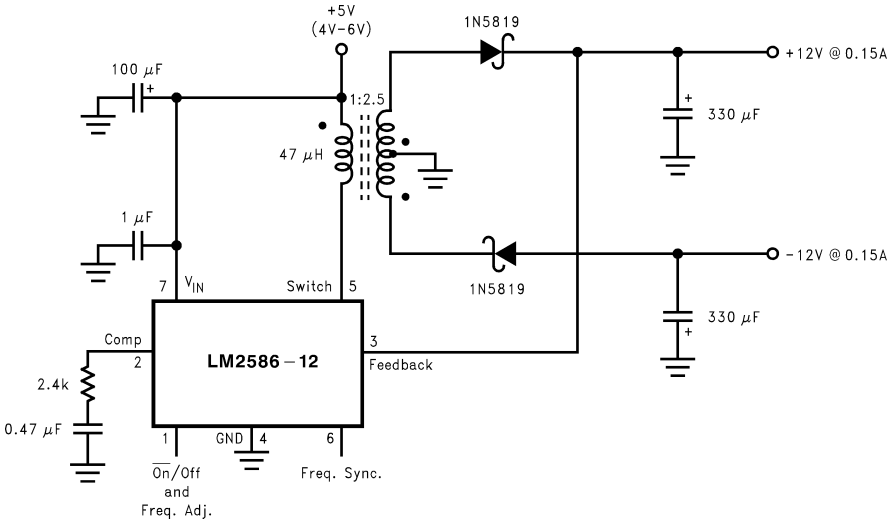

Copyright © 2004–2005, Texas Instruments Incorporated

Test Circuits

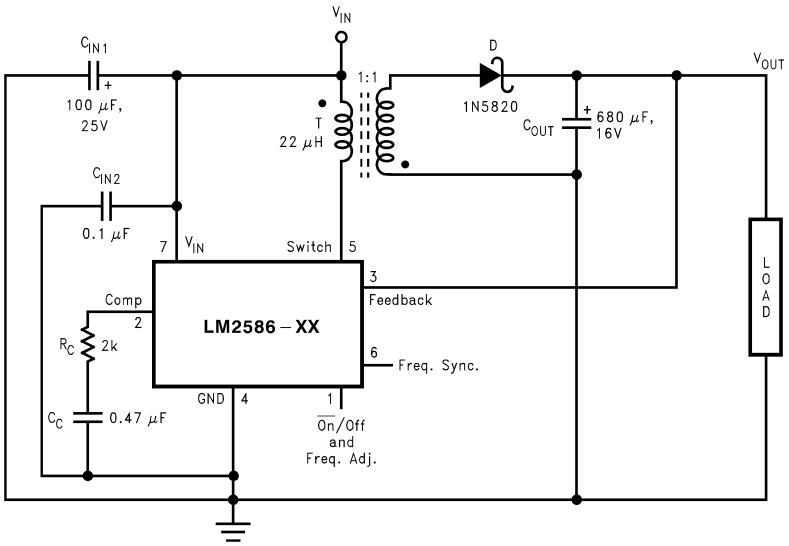

C_{IN1}—100 µF, 25V Aluminum Electrolytic
C_{IN2}—0.1 µF Ceramic
T—22 µH, 1:1 Schott #67141450
D—1N5820
C_{OUT}—680 µF, 16V Aluminum Electrolytic
C_C—0.47 µF Ceramic
R_C—2k

Figure 5. LM2586-3.3 and LM2586-5.0

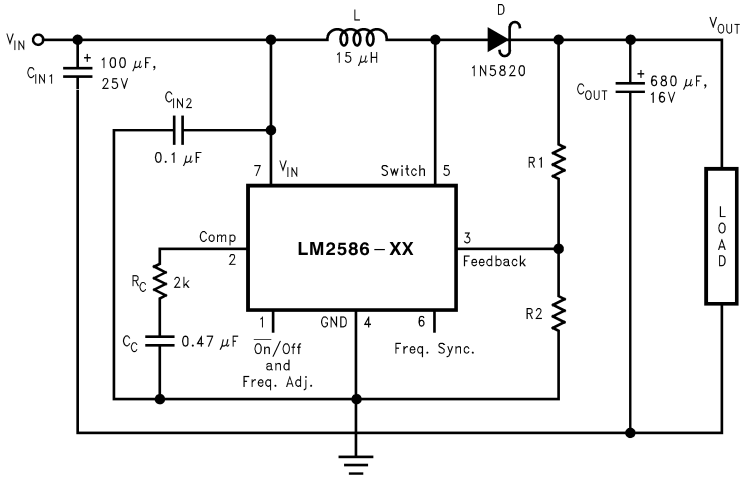

C_{IN1}—100 µF, 25V Aluminum Electrolytic
C_{IN2}—0.1 µF Ceramic
L—15 µH, Renco #RL-5472-5
D—1N5820
C_{OUT}—680 µF, 16V Aluminum Electrolytic
C_C—0.47 µF Ceramic
R_C—2k
For 12V Devices: R1 = Short (0Ω) and 2 = Open
For ADJ Devices: R1 = 48.75k, ±0.1% and 2 = 5.62k, ±0.1%

Figure 6. LM2586-12 and LM2586-ADJ

Copyright © 2004–2005, Texas Instruments Incorporated

Block Diagram

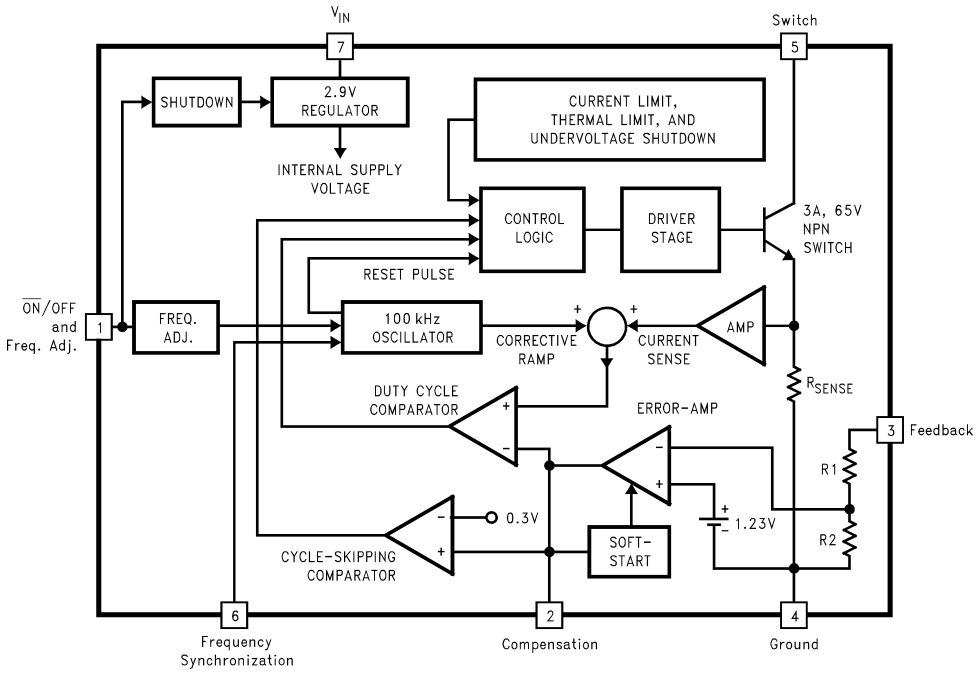

For Fixed Versions
3.3V, R1 = 3.4k, R2 = 2k
5.0V, R1 = 6.15k, R2 = 2k
12V, R1 = 8.73k, R2 = 1k
For Adj. Version
R1 = Short (0Ω), R2 = Open

Flyback Regulator Operation

The LM2586 is ideally suited for use in the flyback regulator topology. The flyback regulator can produce a single output voltage, such as the one shown in Figure 7, or multiple output voltages. In Figure 7, the flyback regulator generates an output voltage that is inside the range of the input voltage. This feature is unique to flyback regulators and cannot be duplicated with buck or boost regulators.

The operation of a flyback regulator is as follows (refer to Figure 7): when the switch is on, current flows through the primary winding of the transformer, T1, storing energy in the magnetic field of the transformer. Note that the primary and secondary windings are out of phase, so no current flows through the secondary when current flows through the primary. When the switch turns off, the magnetic field collapses, reversing the voltage polarity of the primary and secondary windings. Now rectifier D1 is forward biased and current flows through it, releasing the energy stored in the transformer. This produces voltage at the output.

The output voltage is controlled by modulating the peak switch current. This is done by feeding back a portion of the output voltage to the error amp, which amplifies the difference between the feedback voltage and a 1.230V reference. The error amp output voltage is compared to a ramp voltage proportional to the switch current (i.e., inductor current during the switch on time). The comparator terminates the switch on time when the two voltages are equal, thereby controlling the peak switch current to maintain a constant output voltage.

Copyright © 2004–2005, Texas Instruments Incorporated

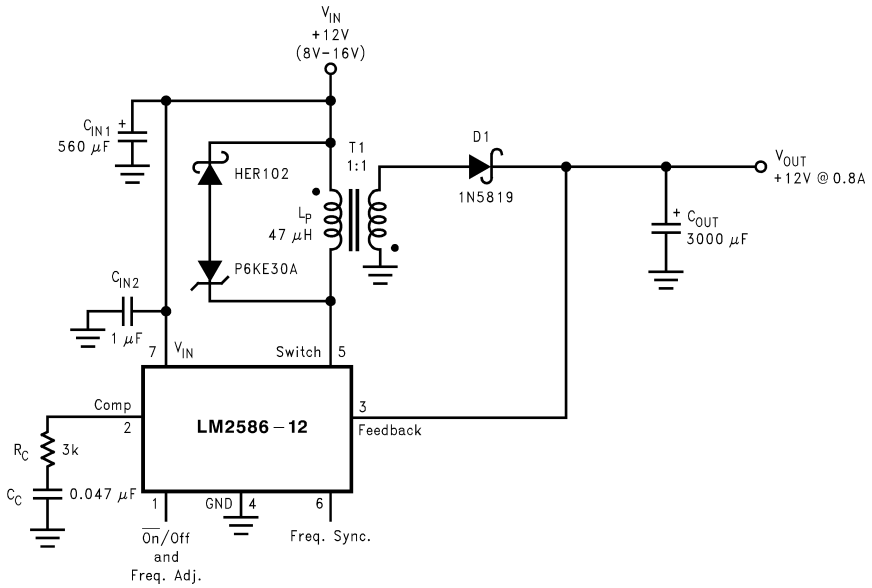

As shown in Figure 7, the LM2586 can be used as a flyback regulator by using a minimum number of external components. The switching waveforms of this regulator are shown in Figure 8. Typical Performance Characteristics observed during the operation of this circuit are shown in Figure 9.

Figure 7. 12V Flyback Regulator Design Example

Typical Performance Characteristics

A: Switch Voltage, 20V/div
B: Switch Current, 2A/div
C: Output Rectifier Current, 2A/div
D: Output Ripple Voltage, 50 mV/div AC-Coupled

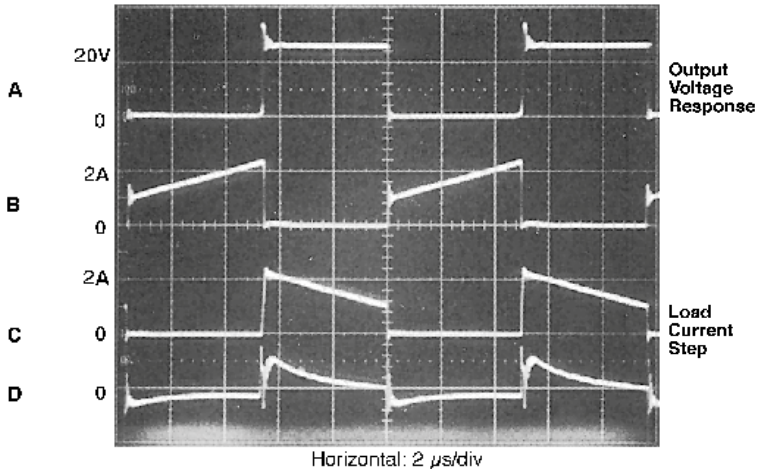

Figure 8. Switching Waveforms

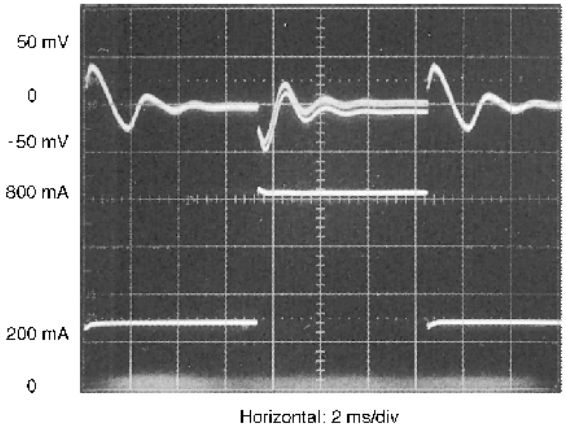

Figure 9. V_{OUT} Response to Load Current Step

Typical Flyback Regulator Applications

Figure 10 through Figure 15 show six typical flyback applications, varying from single output to triple output. Each drawing contains the part number(s) and manufacturer(s) for every component except the transformer. For the transformer part numbers and manufacturers' names, see the table in Table 1. For applications with different output voltages—requiring the LM2586-ADJ—or different output configurations that do not match the standard configurations, refer to the ***Switchers Made Simple*** software.

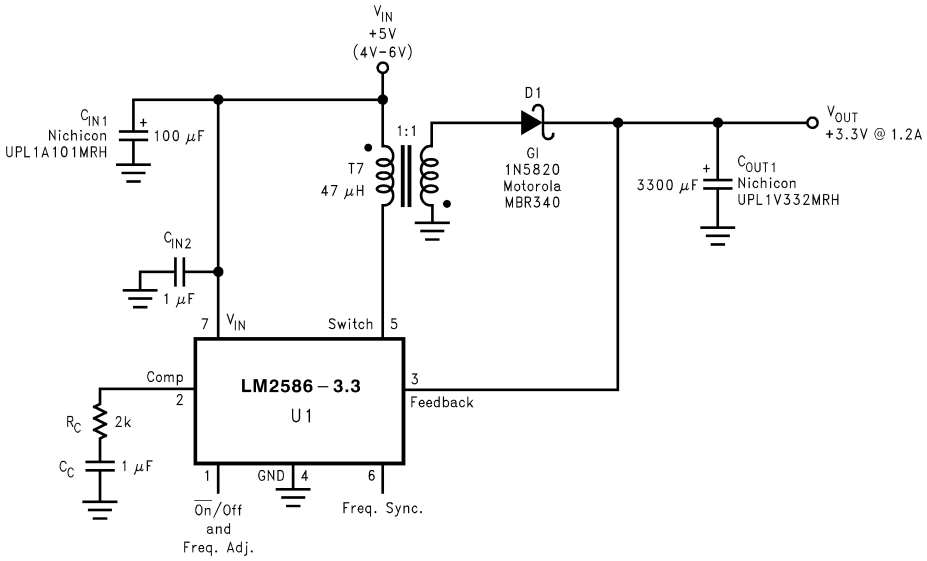

Figure 10. Single-Output Flyback Regulator

Copyright © 2004–2005, Texas Instruments Incorporated

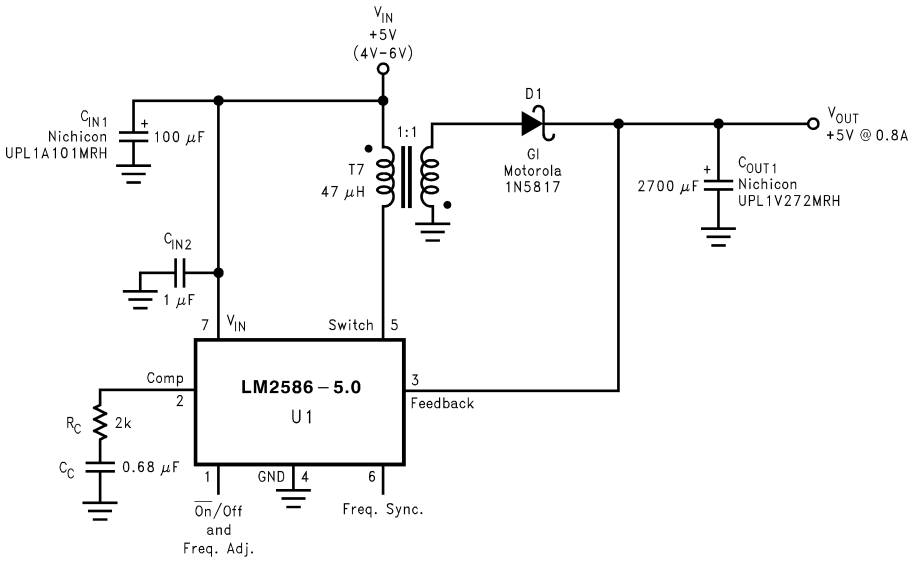

Figure 11. Single-Output Flyback Regulator

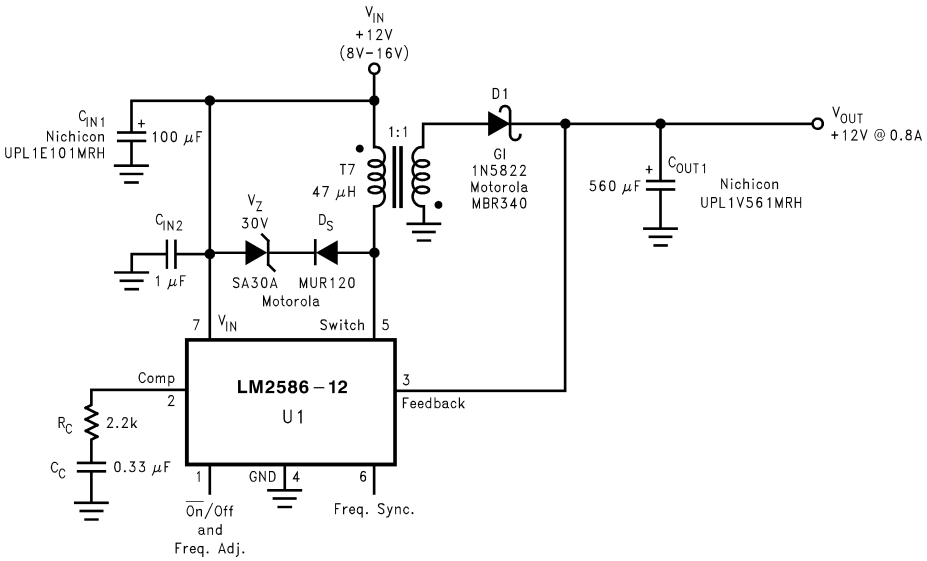

Figure 12. Single-Output Flyback Regulator

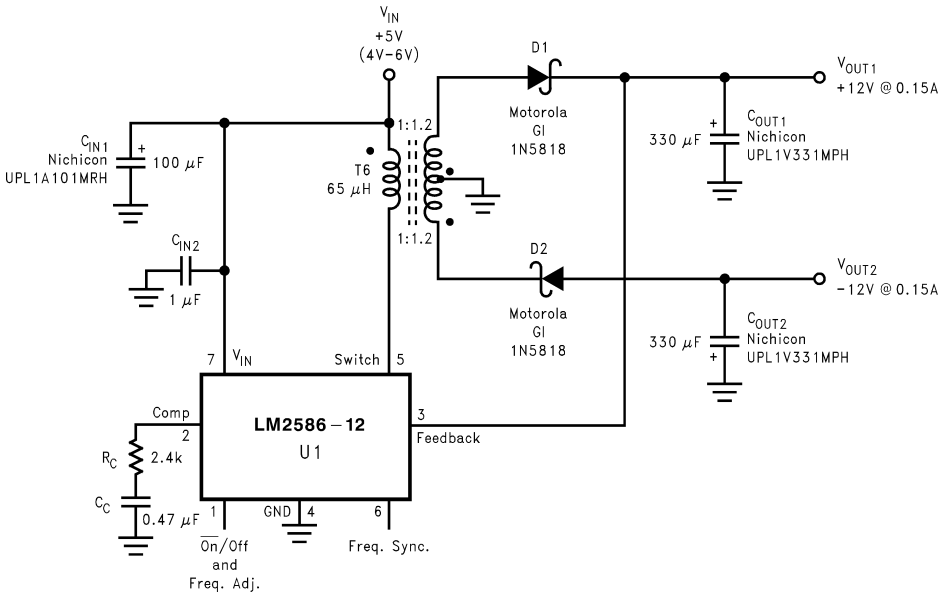

Figure 13. Dual-Output Flyback Regulator

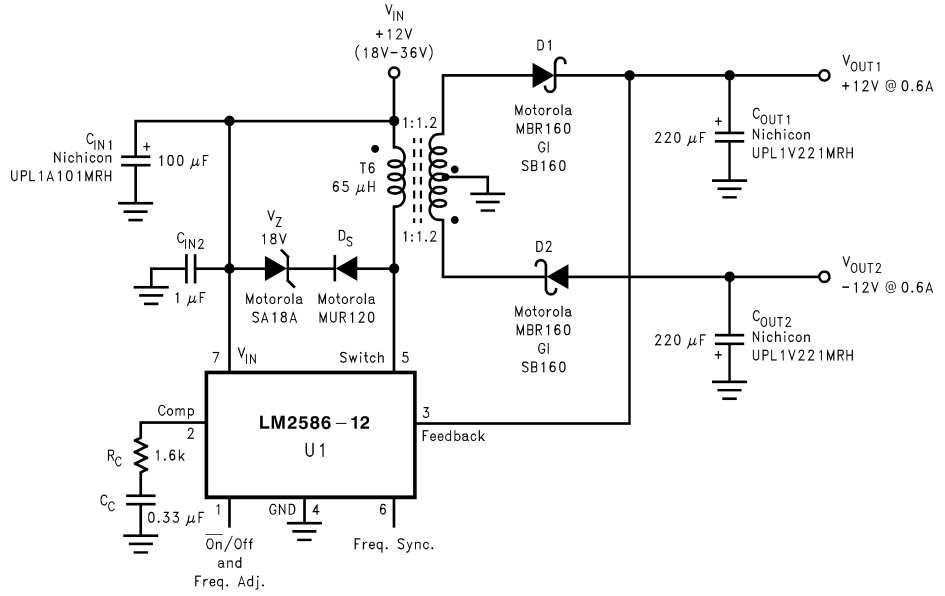

Figure 14. Dual-Output Flyback Regulator

Copyright © 2004–2005, Texas Instruments Incorporated

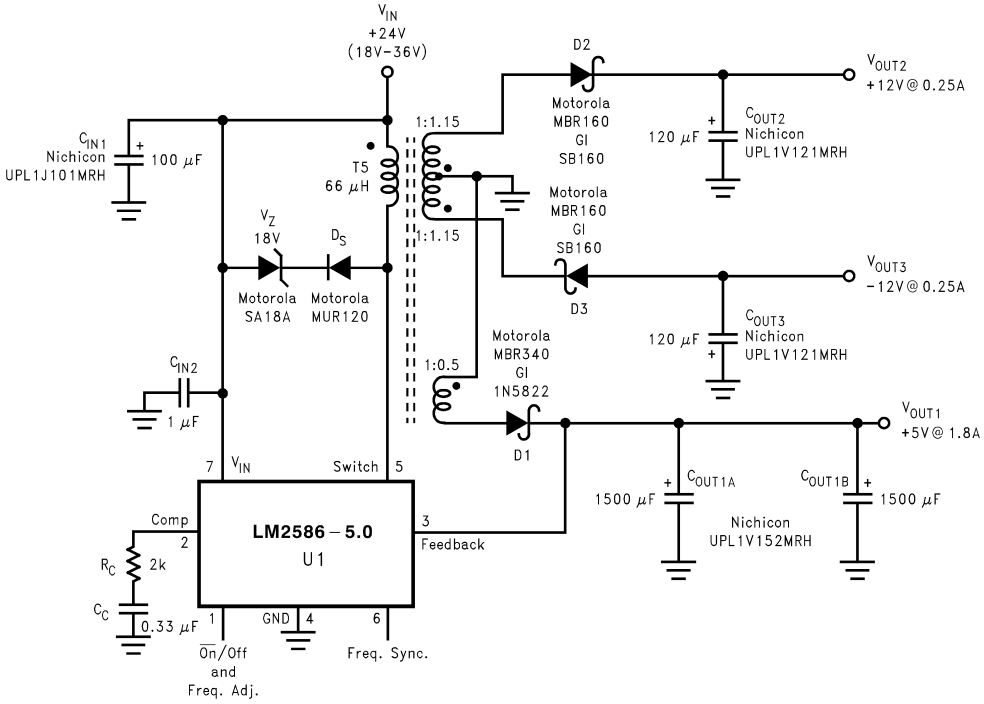

Figure 15. Triple-Output Flyback Regulator

TRANSFORMER SELECTION (T)

Table 1 lists the standard transformers available for flyback regulator applications. Included in the table are the turns ratio(s) for each transformer, as well as the output voltages, input voltage ranges, and the maximum load currents for each circuit.

Table 1. Transformer Selection Table

Applications	Figure 10	Figure 11	Figure 12	Figure 13	Figure 14	Figure 15
Transformers	**T7**	**T7**	**T7**	**T6**	**T6**	**T5**
V_{IN}	4V–6V	4V–6V	8V–16V	4V–6V	18V–36V	18V–36V
V_{OUT1}	3.3V	5V	12V	12V	12V	5V
I_{OUT1} (Max)	1.4A	1A	0.8A	0.15A	0.6A	1.8A
N_1	1	1	1	1.2	1.2	0.5
V_{OUT2}				−12V	−12V	12V
I_{OUT2}(Max)				0.15A	0.6A	0.25A
N_2				1.2	1.2	1.15
V_{OUT3}						−12V
I_{OUT3} (Max)						0.25A
N_3						1.15

Copyright © 2004–2005, Texas Instruments Incorporated

Table 2. Transformer Manufacturer Guide

Transformer Type	Manufacturers' Part Numbers					
	Coilcraft (1)	Coilcraft (1) Surface Mount	Pulse (2) Surface Mount	Pulse (2)	Renco (3)	Schott (4)
T5	Q4338-B	Q4437-B	PE-68413	—	RL-5532	67140890
T6	Q4339-B	Q4438-B	PE-68414	—	RL-5533	67140900
T7	S6000-A	S6057-A	—	PE-68482	RL-5751	26606

(1) Coilcraft Inc., Phone: (800) 322-26451102 Silver Lake Road, Cary, IL 60013 Fax: (708) 639-1469 European Headquarters, 21 Napier Place Phone: +44 1236 730 595Wardpark North, Cumbernauld, Scotland G68 0LL Fax: +44 1236 730 627
(2) Pulse Engineering Inc., Phone: (619) 674-810012220 World Trade Drive, San Diego, CA 92128 Fax: (619) 674-8262European Headquarters, Dunmore Road Phone: +353 93 24 107Tuam, Co. Galway, Ireland Fax: +353 93 24 459
(3) Renco Electronics Inc., Phone: (800) 645-582860 Jeffryn Blvd. East, Deer Park, NY 11729 Fax: (516) 586-5562
(4) Schott Corp., Phone: (612) 475-11731000 Parkers Lane Road, Wayzata, MN 55391 Fax: (612) 475-1786

TRANSFORMER FOOTPRINTS

Figure 16 through Figure 30 show the footprints of each transformer, listed in Table 2.

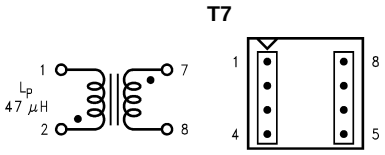

Figure 16. Coilcraft S6000-A (Top View)

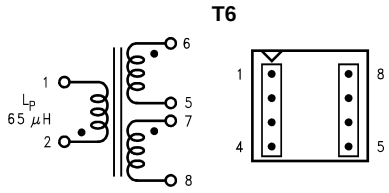

Figure 17. Coilcraft Q4339-B (Top View)

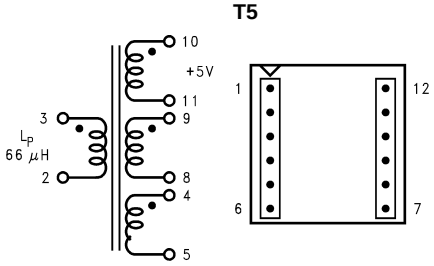

Figure 18. Coilcraft Q4437-B (Surface Mount) (Top View)

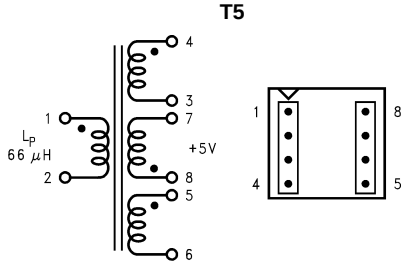

Figure 19. Coilcraft Q4338-B (Top View)

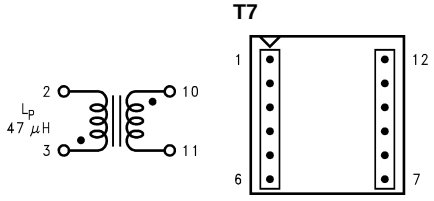

Figure 20. Coilcraft S6057-A (Surface Mount) (Top View)

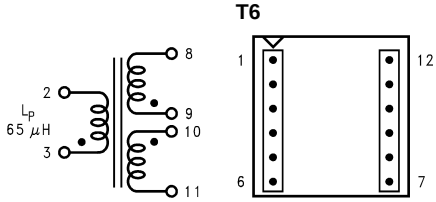

Figure 21. Coilcraft Q4438-B (Surface Mount) (Top View)

Copyright © 2004–2005, Texas Instruments Incorporated

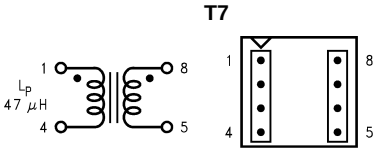

Figure 22. Pulse PE-68482 (Top View)

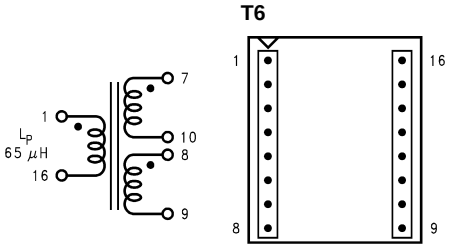

Figure 23. Pulse PE-68414 (Surface Mount) (Top View)

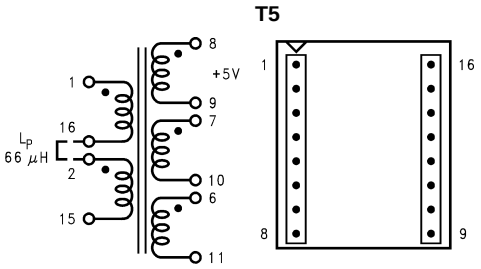

Figure 24. Pulse PE-68413 (Surface Mount) (Top View)

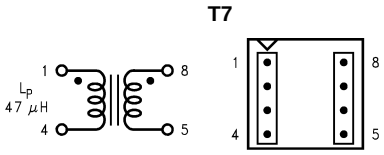

Figure 25. Renco RL-5751 (Top View)

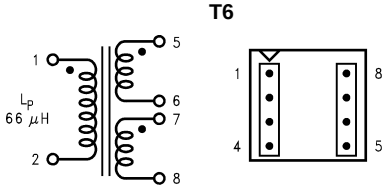

Figure 26. Renco RL-5533 (Top View)

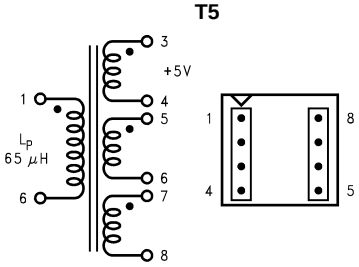

Figure 27. Renco RL-5532 (Top View)

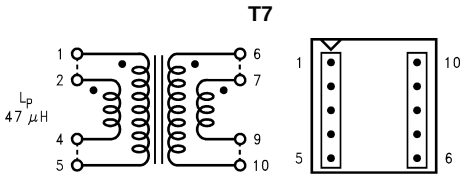

Figure 28. Schott 26606 (Top View)

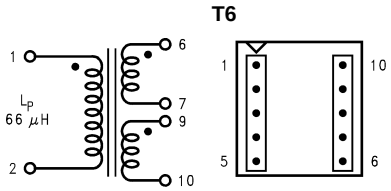

Figure 29. Schott 67140900 (Top View)

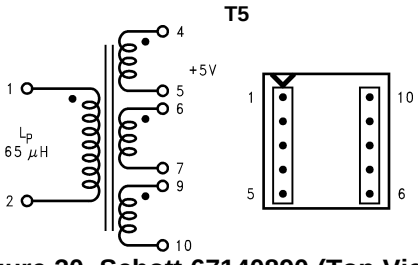

Figure 30. Schott 67140890 (Top View)

Step-Up (Boost) Regulator Operation

Figure 31 shows the LM2586 used as a step-up (boost) regulator. This is a switching regulator that produces an output voltage greater than the input supply voltage.

A brief explanation of how the LM2586 Boost Regulator works is as follows (refer to Figure 31). When the NPN switch turns on, the inductor current ramps up at the rate of V_{IN}/L, storing energy in the inductor. When the switch turns off, the lower end of the inductor flies above V_{IN}, discharging its current through diode (D) into the output capacitor (C_{OUT}) at a rate of $(V_{OUT} - V_{IN})/L$. Thus, energy stored in the inductor during the switch on time is transferred to the output during the switch off time. The output voltage is controlled by adjusting the peak switch current, as described in the flyback regulator section.

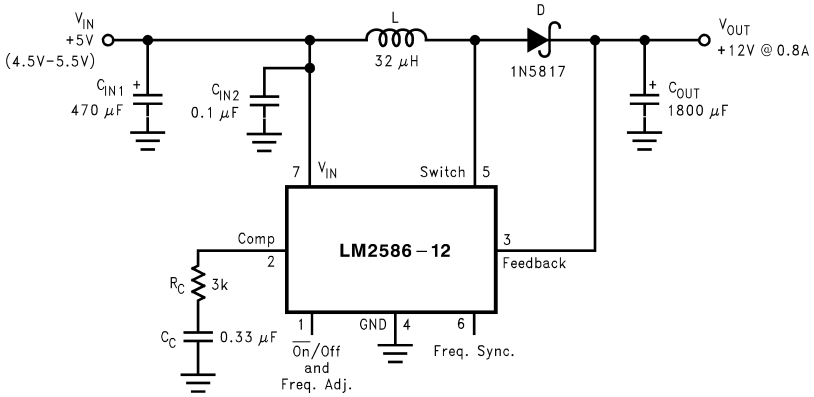

Figure 31. 12V Boost Regulator

By adding a small number of external components (as shown in Figure 31), the LM2586 can be used to produce a regulated output voltage that is greater than the applied input voltage. The switching waveforms observed during the operation of this circuit are shown in Figure 32. Typical performance of this regulator is shown in Figure 33.

Copyright © 2004–2005, Texas Instruments Incorporated

Typical Performance Characteristics

A: Switch Voltage,10V/div
B: Switch Current, 2A/div
C: Inductor Current, 2A/div
D: Output Ripple Voltage,100 mV/div, AC-Coupled

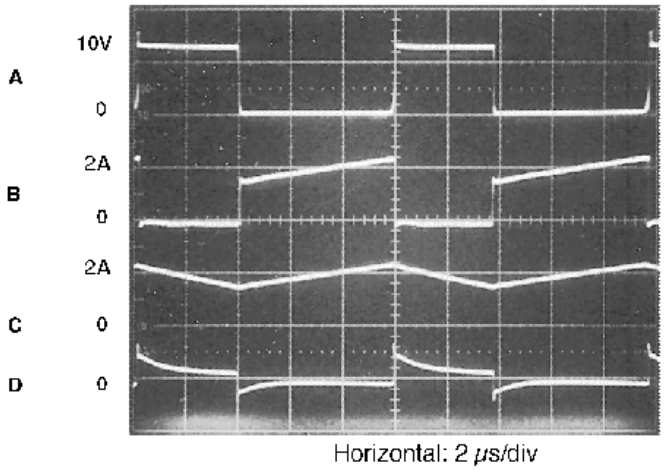

Figure 32. Switching Waveforms

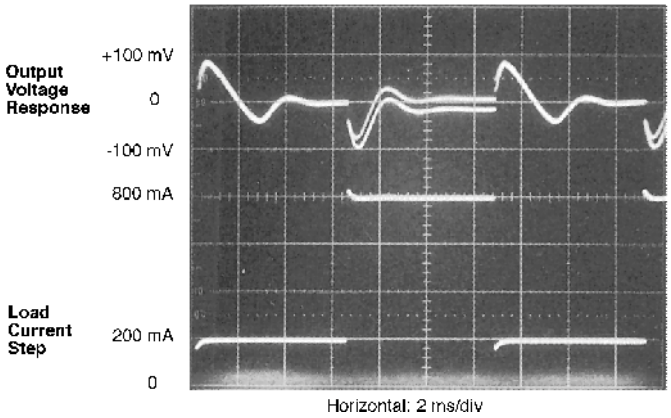

Figure 33. V_{OUT} Response to Load Current Step

Typical Boost Regulator Applications

Figure 34 Figure 35 through Figure 37 show four typical boost applications—one fixed and three using the adjustable version of the LM2586. Each drawing contains the part number(s) and manufacturer(s) for every component. For the fixed 12V output application, the part numbers and manufacturers' names for the inductor are listed in a table in Table 3. For applications with different output voltages, refer to the ***Switchers Made Simple*** software.

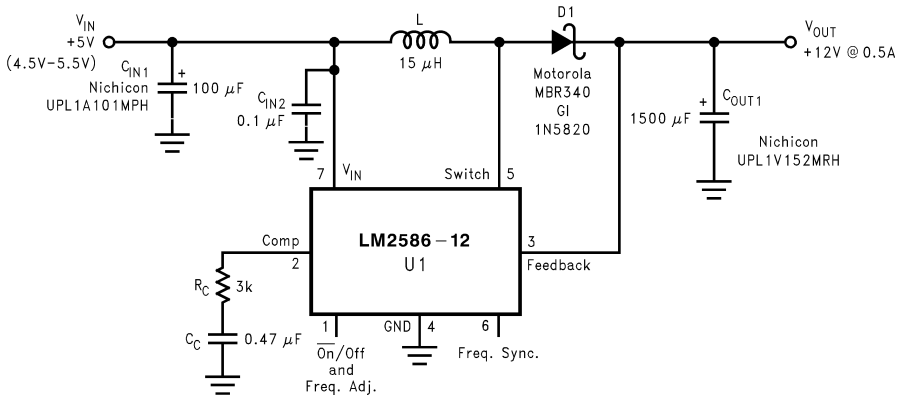

Figure 34. +5V to +12V Boost Regulator

Table 3 contains a table of standard inductors, by part number and corresponding manufacturer, for the fixed output regulator of Figure 34.

Table 3. Inductor Selection Table

Coilcraft (1)	Pulse (2)	Renco (3)	Schott (4)	Schott (4) (Surface Mount)
DO3316-153	PE-53898	RL-5471-7	67146510	67146540

(1) Coilcraft Inc., Phone: (800) 322-26451102 Silver Lake Road, Cary, IL 60013 Fax: (708) 639-1469European Headquarters, 21 Napier Place Phone: +44 1236 730 595Wardpark North, Cumbernauld, Scotland G68 0LL Fax: +44 1236 730 627
(2) Pulse Engineering Inc., Phone: (619) 674-810012220 World Trade Drive, San Diego, CA 92128 Fax: (619) 674-8262European Headquarters, Dunmore Road Phone: +353 93 24 107Tuam, Co. Galway, Ireland Fax: +353 93 24 459
(3) Renco Electronics Inc., Phone: (800) 645-582860 Jeffryn Blvd. East, Deer Park, NY 11729 Fax: (516) 586-5562
(4) Schott Corp., Phone: (612) 475-11731000 Parkers Lane Road, Wayzata, MN 55391 Fax: (612) 475-1786

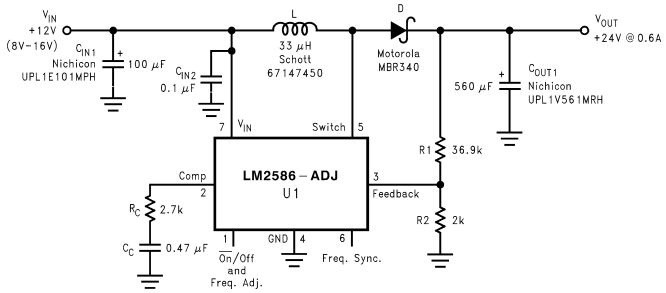

Figure 35. +12V to +24V Boost Regulator

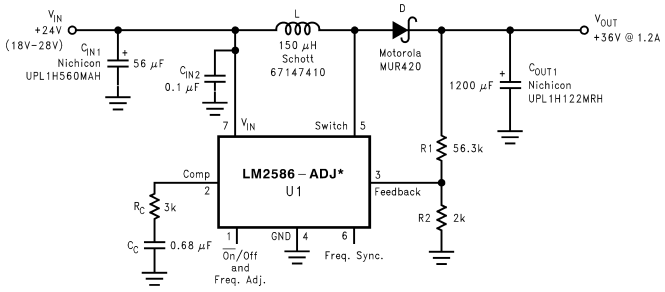

Figure 36. +24V to +36V Boost Regulator

(1) The LM2586 will require a heat sink in these applications. The size of the heat sink will depend on the maximum ambient temperature. To calculate the thermal resistance of the IC and the size of the heat sink needed, see the "Heat Sink/Thermal Considerations" section in the Application Hints.

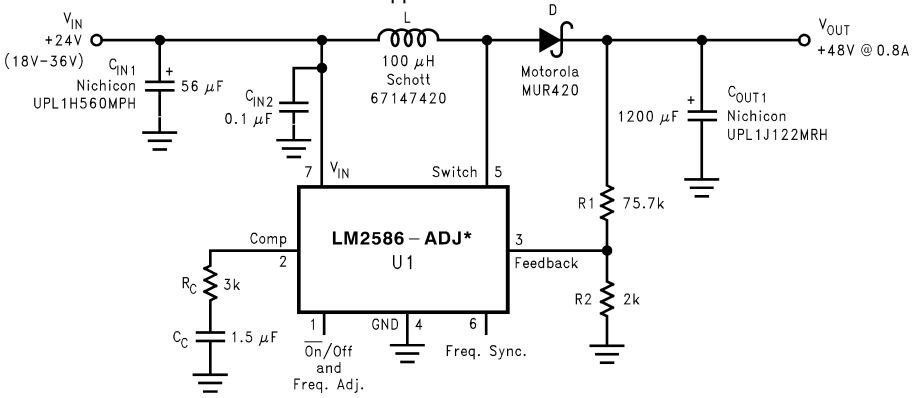

Figure 37. +24V to +48V Boost Regulator

Application Hints

LM2586 SPECIAL FEATURES

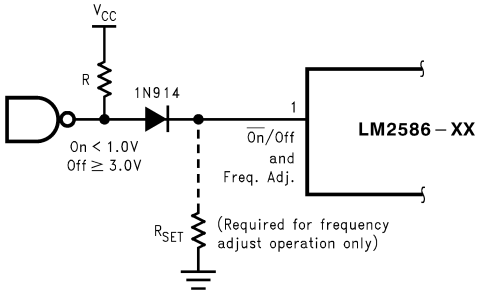

Figure 38. Shutdown Operation

Copyright © 2004–2005, Texas Instruments Incorporated

SHUTDOWN CONTROL

A feature of the LM2586 is its ability to be shut down using the $\overline{ON}$ /OFF pin (pin 1). This feature conserves input power by turning off the device when it is not in use. For proper operation, an isolation diode is required (as shown in Figure 38).

The device will shut down when 3V or greater is applied on the $\overline{ON}$ /OFF pin, sourcing current into pin 1. In shut down mode, the device will draw typically 56 µA of supply current (16 µA to V_{IN} and 40 µA to the $\overline{ON}$ /OFF pin). To turn the device back on, leave pin 1 floating, using an (isolation) diode, as shown in Figure 38 (for normal operation, do not source or sink current to or from this pin—see the next section).

FREQUENCY ADJUSTMENT

The switching frequency of the LM2586 can be adjusted with the use of an external resistor. This feature allows the user to optimize the size of the magnetics and the output capacitor(s) by tailoring the operating frequency. A resistor connected from pin 1 (the Freq. Adj. pin) to ground will set the switching frequency from 100 kHz to 200 kHz (maximum). As shown in Figure 38, the pin can be used to adjust the frequency while still providing the shut down function. A curve in the Performance Characteristics Section graphs the resistor value to the corresponding switching frequency. The table in Table 4 shows resistor values corresponding to commonly used frequencies.

However, changing the LM2586's operating frequency from its nominal value of 100 kHz will change the magnetics selection and compensation component values.

Table 4. Frequency Setting Resistor Guide

R_{SET}(kΩ)	Frequency (kHz)
Open	100
200	125
47	150
33	175
22	200

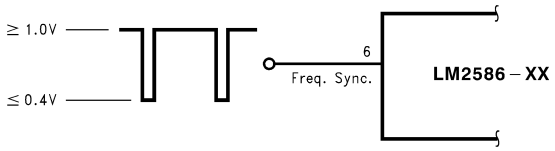

Figure 39. Frequency Synchronization

FREQUENCY SYNCHRONIZATION

Another feature of the LM2586 is the ability to synchronize the switching frequency to an external source, using the sync pin (pin 6). This feature allows the user to parallel multiple devices to deliver more output power.

A negative falling pulse applied to the sync pin will synchronize the LM2586 to an external oscillator (see Figure 39 Figure 40).

Use of this feature enables the LM2586 to be synchronized to an external oscillator, such as a system clock. This operation allows multiple power supplies to operate at the same frequency, thus eliminating frequency-related noise problems.

Copyright © 2004–2005, Texas Instruments Incorporated

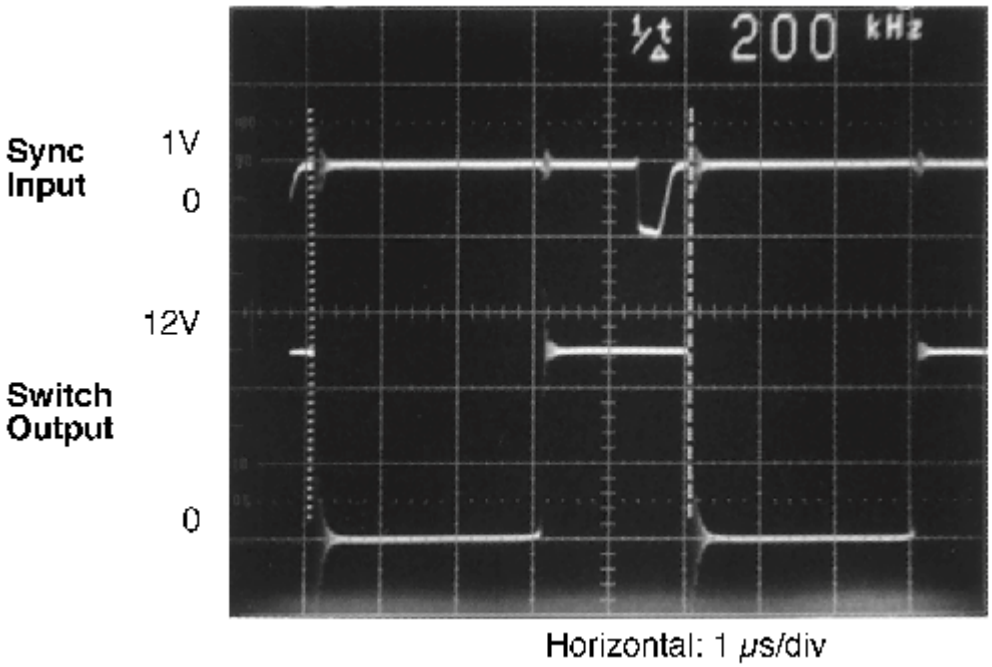

Figure 40. Waveforms of a Synchronized 12V Boost Regulator

The scope photo in Figure 40 shows a LM2586 12V Boost Regulator synchronized to a 200 kHz signal. There is a 700 ns delay between the falling edge of the sync signal and the turning on of the switch.

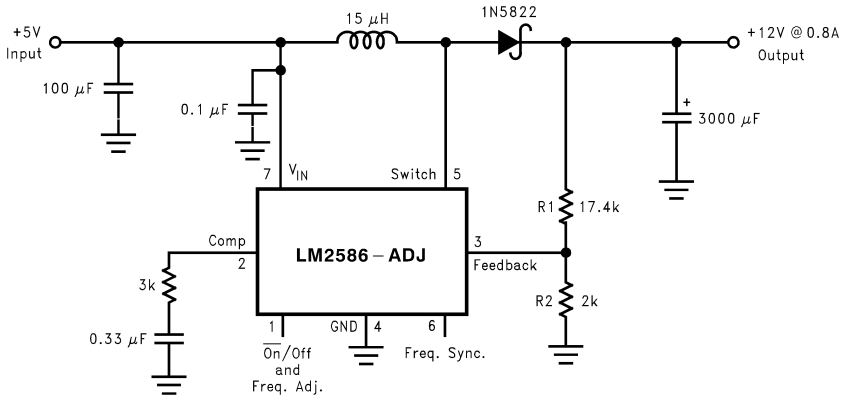

Figure 41. Boost Regulator

PROGRAMMING OUTPUT VOLTAGE (SELECTING R1 AND R2)

Referring to the adjustable regulator in Figure 41, the output voltage is programmed by the resistors R1 and R2 by the following formula:

$$V_{OUT} = V_{REF} (1 + R1/R2) \qquad \text{where } V_{REF} = 1.23V \tag{1}$$

Resistors R1 and R2 divide the output voltage down so that it can be compared with the 1.23V internal reference. With R2 between 1k and 5k, R1 is:

$$R1 = R2 (V_{OUT}/V_{REF} - 1) \qquad \text{where } V_{REF} = 1.23V \tag{2}$$

For best temperature coefficient and stability with time, use 1% metal film resistors.

Copyright © 2004–2005, Texas Instruments Incorporated

SHORT CIRCUIT CONDITION

Due to the inherent nature of boost regulators, when the output is shorted (see Figure 41), current flows directly from the input, through the inductor and the diode, to the output, bypassing the switch. The current limit of the switch *does not* limit the output current for the entire circuit. To protect the load and prevent damage to the switch, the current must be externally limited, either by the input supply or at the output with an external current limit circuit. The external limit should be set to the maximum switch current of the device, which is 3A.

In a flyback regulator application (Figure 42), using the standard transformers, the LM2586 will survive a short circuit to the main output. When the output voltage drops to 80% of its nominal value, the frequency will drop to 25 kHz. With a lower frequency, off times are larger. With the longer off times, the transformer can release all of its stored energy before the switch turns back on. Hence, the switch turns on initially with zero current at its collector. In this condition, the switch current limit will limit the peak current, saving the device.

FLYBACK REGULATOR INPUT CAPACITORS

A flyback regulator draws discontinuous pulses of current from the input supply. Therefore, there are two input capacitors needed in a flyback regulator—one for energy storage and one for filtering (see Figure 42). Both are required due to the inherent operation of a flyback regulator. To keep a stable or constant voltage supply to the LM2586, a storage capacitor (≥100 µF) is required. If the input source is a rectified DC supply and/or the application has a wide temperature range, the required rms current rating of the capacitor might be very large. This means a larger value of capacitance or a higher voltage rating will be needed for the input capacitor. The storage capacitor will also attenuate noise which may interfere with other circuits connected to the same input supply voltage.

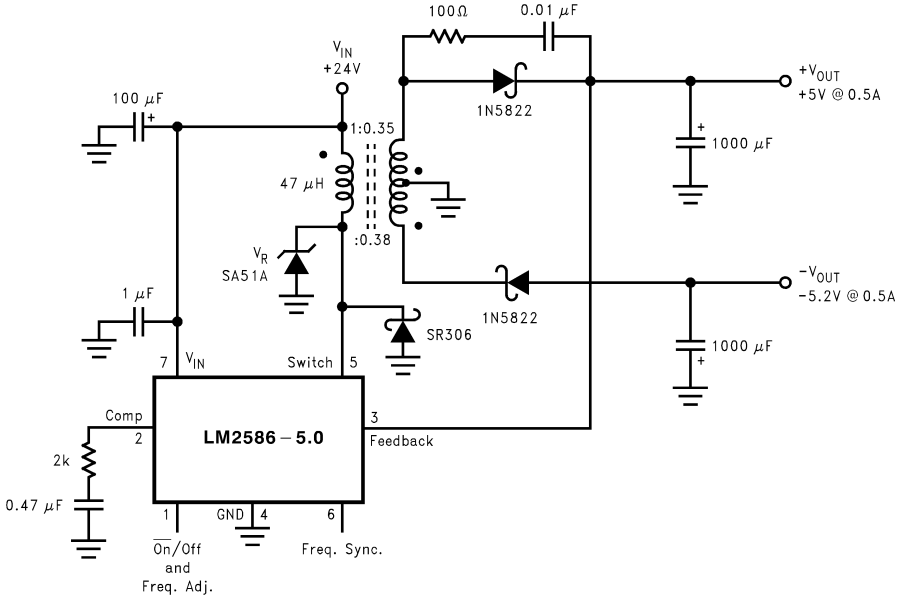

Figure 42. Flyback Regulator

In addition, a small bypass capacitor is required due to the noise generated by the input current pulses. To eliminate the noise, insert a 1.0 µF ceramic capacitor between V_{IN} and ground as close as possible to the device.

SWITCH VOLTAGE LIMITS

In a flyback regulator, the maximum steady-state voltage appearing at the switch, when it is off, is set by the transformer turns ratio, N, the output voltage, V_{OUT}, and the maximum input voltage, V_{IN} (Max):

$$V_{SW(OFF)} = V_{IN}\ (Max) + (V_{OUT} + V_F)/N \quad (3)$$

Copyright © 2004–2005, Texas Instruments Incorporated

where V_F is the forward biased voltage of the output diode, and is typically 0.5V for Schottky diodes and 0.8V for ultra-fast recovery diodes. In certain circuits, there exists a voltage spike, V_{LL}, superimposed on top of the steady-state voltage (see Figure 8, waveform A). Usually, this voltage spike is caused by the transformer leakage inductance and/or the output rectifier recovery time. To “clamp” the voltage at the switch from exceeding its maximum value, a transient suppressor in series with a diode is inserted across the transformer primary (as shown in the circuit in Figure 7 and other flyback regulator circuits throughout the datasheet). The schematic in Figure 42 shows another method of clamping the switch voltage. A single voltage transient suppressor (the SA51A) is inserted at the switch pin. This method clamps the total voltage across the switch, not just the voltage across the primary.

If poor circuit layout techniques are used (see the “Circuit Layout Guideline” section), negative voltage transients may appear on the Switch pin (pin 5). Applying a negative voltage (with respect to the IC's ground) to any monolithic IC pin causes erratic and unpredictable operation of that IC. This holds true for the LM2586 IC as well. When used in a flyback regulator, the voltage at the Switch pin (pin 5) can go negative when the switch turns on. The “ringing” voltage at the switch pin is caused by the output diode capacitance and the transformer leakage inductance forming a resonant circuit at the secondary(ies). The resonant circuit generates the “ringing” voltage, which gets reflected back through the transformer to the switch pin. There are two common methods to avoid this problem. One is to add an RC snubber around the output rectifier(s), as in Figure 42. The values of the resistor and the capacitor must be chosen so that the voltage at the Switch pin does not drop below −0.4V. The resistor may range in value between 10Ω and 1 kΩ, and the capacitor will vary from 0.001 µF to 0.1 µF. Adding a snubber will (slightly) reduce the efficiency of the overall circuit.

The other method to reduce or eliminate the “ringing” is to insert a Schottky diode clamp between pins 5 and 4 (ground), also shown in Figure 42. This prevents the voltage at pin 5 from dropping below −0.4V. The reverse voltage rating of the diode must be greater than the switch off voltage.

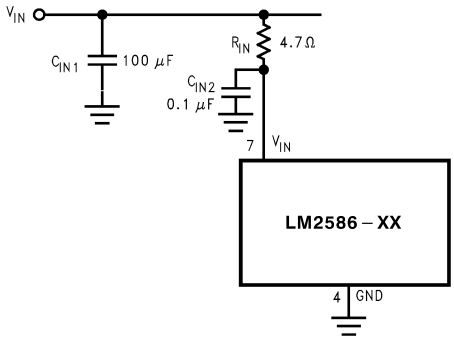

Figure 43. Input Line Filter

OUTPUT VOLTAGE LIMITATIONS

The maximum output voltage of a boost regulator is the maximum switch voltage minus a diode drop. In a flyback regulator, the maximum output voltage is determined by the turns ratio, N, and the duty cycle, D, by the equation:

$$V_{OUT} \approx N \times V_{IN} \times D/(1 - D) \quad (4)$$

The duty cycle of a flyback regulator is determined by the following equation:

$$D = \frac{V_{OUT} + V_F}{N(V_{IN} - V_{SAT}) + V_{OUT} + V_F} \approx \frac{V_{OUT}}{N(V_{IN}) + V_{OUT}} \quad (5)$$

Theoretically, the maximum output voltage can be as large as desired—just keep increasing the turns ratio of the transformer. However, there exists some physical limitations that prevent the turns ratio, and thus the output voltage, from increasing to infinity. The physical limitations are capacitances and inductances in the LM2586 switch, the output diode(s), and the transformer—such as reverse recovery time of the output diode (mentioned above).

Copyright © 2004–2005, Texas Instruments Incorporated

NOISY INPUT LINE CONDITION

A small, low-pass RC filter should be used at the input pin of the LM2586 if the input voltage has an unusually large amount of transient noise, such as with an input switch that bounces. The circuit in Figure 43 demonstrates the layout of the filter, with the capacitor placed from the input pin to ground and the resistor placed between the input supply and the input pin. Note that the values of R_{IN} and C_{IN} shown in the schematic are good enough for most applications, but some readjusting might be required for a particular application. If efficiency is a major concern, replace the resistor with a small inductor (say 10 µH and rated at 200 mA).

STABILITY

All current-mode controlled regulators can suffer from an instability, known as subharmonic oscillation, if they operate with a duty cycle above 50%. To eliminate subharmonic oscillations, a minimum value of inductance is required to ensure stability for all boost and flyback regulators. The minimum inductance is given by:

$$L(Min) = \frac{2.92\ [(V_{IN}(Min) - V_{SAT}) \bullet (2D(Max) - 1)]}{1 - D(Max)}\ (\mu H) \quad (6)$$

where V_{SAT} is the switch saturation voltage and can be found in the Characteristic Curves.

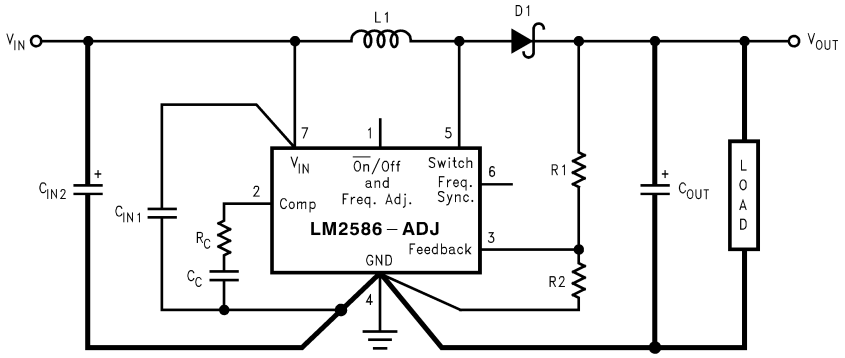

Figure 44. Circuit Board Layout

CIRCUIT LAYOUT GUIDELINES

As in any switching regulator, layout is very important. Rapidly switching currents associated with wiring inductance generate voltage transients which can cause problems. For minimal inductance and ground loops, keep the length of the leads and traces as short as possible. Use single point grounding or ground plane construction for best results. Separate the signal grounds from the power grounds (as indicated in Figure 44). When using the Adjustable version, physically locate the programming resistors as near the regulator IC as possible, to keep the sensitive feedback wiring short.

HEAT SINK/THERMAL CONSIDERATIONS

In many cases, a heat sink is not required to keep the LM2586 junction temperature within the allowed operating temperature range. For each application, to determine whether or not a heat sink will be required, the following must be identified:

1) Maximum ambient temperature (in the application).

2) Maximum regulator power dissipation (in the application).

3) Maximum allowed junction temperature (125°C for the LM2586). For a safe, conservative design, a temperature approximately 15°C cooler than the maximum junction temperature should be selected (110°C).

4) LM2586 package thermal resistances θ_{JA} and θ_{JC} (given in the Electrical Characteristics).

Total power dissipated (P_D) by the LM2586 can be estimated as follows:

Copyright © 2004–2005, Texas Instruments Incorporated

Boost:

$$P_D = 0.15\Omega \bullet \left(\frac{I_{LOAD}}{1-D}\right)^2 \bullet D + \frac{I_{LOAD}}{50\bullet(1-D)} \bullet D \bullet V_{IN}$$

Flyback:

$$P_D = 0.15\Omega \bullet \left(\frac{N \bullet \Sigma I_{LOAD}}{1-D}\right)^2 \bullet D + \frac{N\bullet\Sigma I_{LOAD}}{50\bullet(1-D)} \bullet D \bullet V_{IN} \quad (7)$$

V_{IN} is the minimum input voltage, V_{OUT} is the output voltage, N is the transformer turns ratio, D is the duty cycle, and I_{LOAD} is the maximum load current (and $\sum I_{LOAD}$ is the sum of the maximum load currents for multiple-output flyback regulators). The duty cycle is given by:

Boost:

$$D = \frac{V_{OUT} + V_F - V_{IN}}{V_{OUT} + V_F - V_{SAT}} \approx \frac{V_{OUT} - V_{IN}}{V_{OUT}}$$

Flyback:

$$D = \frac{V_{OUT} + V_F}{N(V_{IN} - V_{SAT}) + V_{OUT} + V_F} \approx \frac{V_{OUT}}{N(V_{IN}) + V_{OUT}} \quad (8)$$

where V_F is the forward biased voltage of the diode and is typically 0.5V for Schottky diodes and 0.8V for fast recovery diodes. V_{SAT} is the switch saturation voltage and can be found in the Characteristic Curves.

When no heat sink is used, the junction temperature rise is:

$$\Delta T_J = P_D \bullet \theta_{JA}. \quad (9)$$

Adding the junction temperature rise to the maximum ambient temperature gives the actual operating junction temperature:

$$T_J = \Delta T_J + T_A. \quad (10)$$

If the operating junction temperature exceeds the maximum junction temperatue in item 3 above, then a heat sink is required. When using a heat sink, the junction temperature rise can be determined by the following:

$$\Delta T_J = P_D \bullet (\theta_{JC} + \theta_{Interface} + \theta_{Heat\ Sink}) \quad (11)$$

Again, the operating junction temperature will be:

$$T_J = \Delta T_J + T_A \quad (12)$$

As before, if the maximum junction temperature is exceeded, a larger heat sink is required (one that has a lower thermal resistance).

Included in the ***Switchers Made Simple***® design software is a more precise (non-linear) thermal model that can be used to determine junction temperature with different input-output parameters or different component values. It can also calculate the heat sink thermal resistance required to maintain the regulator junction temperature below the maximum operating temperature.

To further simplify the flyback regulator design procedure, National Semiconductor is making available computer design software to be used with the Simple Switcher® line of switching regulators. ***Switchers Made Simple****is available on a 3½" diskette for IBM compatible computers from a National Semiconductor sales office in your area or the National Semiconductor Customer Response Center (1-800-272-9959).*

Copyright © 2004–2005, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Samples (Requires Login)
LM2586S-12	ACTIVE	DDPAK	KTW	7	45	TBD	CU SNPB	Level-3-235C-168 HR	
LM2586S-12/NOPB	ACTIVE	DDPAK	KTW	7	45	Pb-Free (RoHS Exempt)	CU SN	Level-3-245C-168 HR	
LM2586S-3.3	ACTIVE	DDPAK	KTW	7	45	TBD	CU SNPB	Level-3-235C-168 HR	
LM2586S-3.3/NOPB	ACTIVE	DDPAK	KTW	7	45	Pb-Free (RoHS Exempt)	CU SN	Level-3-245C-168 HR	
LM2586S-5.0	ACTIVE	DDPAK	KTW	7	45	TBD	CU SNPB	Level-3-235C-168 HR	
LM2586S-5.0/NOPB	ACTIVE	DDPAK	KTW	7	45	Pb-Free (RoHS Exempt)	CU SN	Level-3-245C-168 HR	
LM2586S-ADJ	ACTIVE	DDPAK	KTW	7	45	TBD	CU SNPB	Level-3-235C-168 HR	
LM2586S-ADJ/NOPB	ACTIVE	DDPAK	KTW	7	45	Pb-Free (RoHS Exempt)	CU SN	Level-3-245C-168 HR	
LM2586SX-3.3	ACTIVE	DDPAK	KTW	7	500	TBD	CU SNPB	Level-3-235C-168 HR	
LM2586SX-3.3/NOPB	ACTIVE	DDPAK	KTW	7	500	Pb-Free (RoHS Exempt)	CU SN	Level-3-245C-168 HR	
LM2586SX-5.0	ACTIVE	DDPAK	KTW	7	500	TBD	CU SNPB	Level-3-235C-168 HR	
LM2586SX-5.0/NOPB	ACTIVE	DDPAK	KTW	7	500	Pb-Free (RoHS Exempt)	CU SN	Level-3-245C-168 HR	
LM2586SX-ADJ	ACTIVE	DDPAK	KTW	7	500	TBD	CU SNPB	Level-3-235C-168 HR	
LM2586SX-ADJ/NOPB	ACTIVE	DDPAK	KTW	7	500	Pb-Free (RoHS Exempt)	CU SN	Level-3-245C-168 HR	
LM2586T-3.3	ACTIVE	TO-220	NDZ	7	45	TBD	CU SNPB	Level-1-NA-UNLIM	
LM2586T-3.3/NOPB	ACTIVE	TO-220	NDZ	7	45	Pb-Free (RoHS Exempt)	CU SN	Level-1-NA-UNLIM	
LM2586T-5.0	ACTIVE	TO-220	NDZ	7	45	TBD	CU SNPB	Level-1-NA-UNLIM	
LM2586T-5.0/NOPB	ACTIVE	TO-220	NDZ	7	45	Pb-Free (RoHS Exempt)	CU SN	Level-1-NA-UNLIM	
LM2586T-ADJ	ACTIVE	TO-220	NDZ	7	45	TBD	CU SNPB	Level-1-NA-UNLIM	
LM2586T-ADJ/NOPB	ACTIVE	TO-220	NDZ	7	45	Pb-Free (RoHS Exempt)	CU SN	Level-1-NA-UNLIM	

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

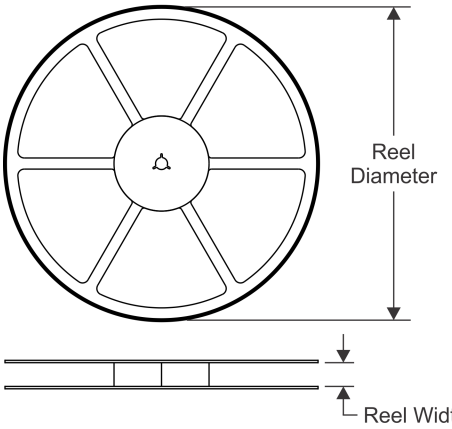

TAPE DIMENSIONS

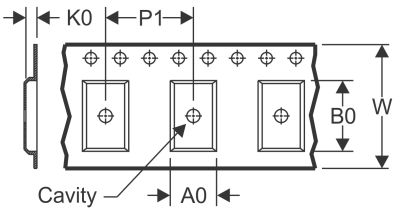

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

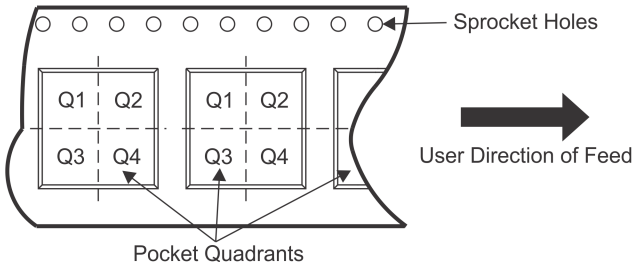

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LM2586SX-3.3	DDPAK	KTW	7	500	330.0	24.4	10.75	14.85	5.0	16.0	24.0	Q2
LM2586SX-3.3/NOPB	DDPAK	KTW	7	500	330.0	24.4	10.75	14.85	5.0	16.0	24.0	Q2
LM2586SX-5.0	DDPAK	KTW	7	500	330.0	24.4	10.75	14.85	5.0	16.0	24.0	Q2
LM2586SX-5.0/NOPB	DDPAK	KTW	7	500	330.0	24.4	10.75	14.85	5.0	16.0	24.0	Q2
LM2586SX-ADJ	DDPAK	KTW	7	500	330.0	24.4	10.75	14.85	5.0	16.0	24.0	Q2
LM2586SX-ADJ/NOPB	DDPAK	KTW	7	500	330.0	24.4	10.75	14.85	5.0	16.0	24.0	Q2

TAPE AND REEL BOX DIMENSIONS

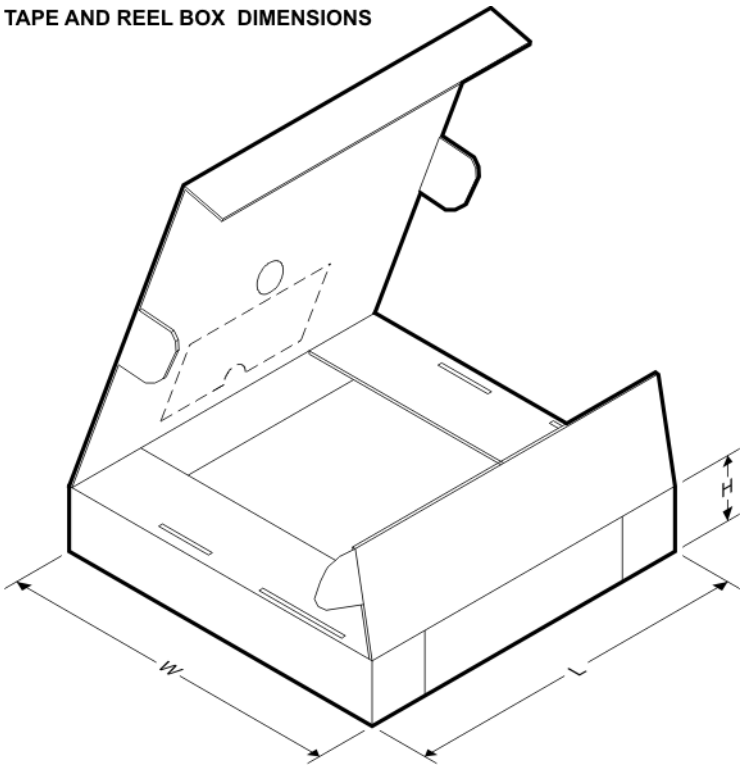

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LM2586SX-3.3	DDPAK	KTW	7	500	358.0	343.0	63.0
LM2586SX-3.3/NOPB	DDPAK	KTW	7	500	358.0	343.0	63.0
LM2586SX-5.0	DDPAK	KTW	7	500	358.0	343.0	63.0
LM2586SX-5.0/NOPB	DDPAK	KTW	7	500	358.0	343.0	63.0
LM2586SX-ADJ	DDPAK	KTW	7	500	358.0	343.0	63.0
LM2586SX-ADJ/NOPB	DDPAK	KTW	7	500	358.0	343.0	63.0

NDZ0007B

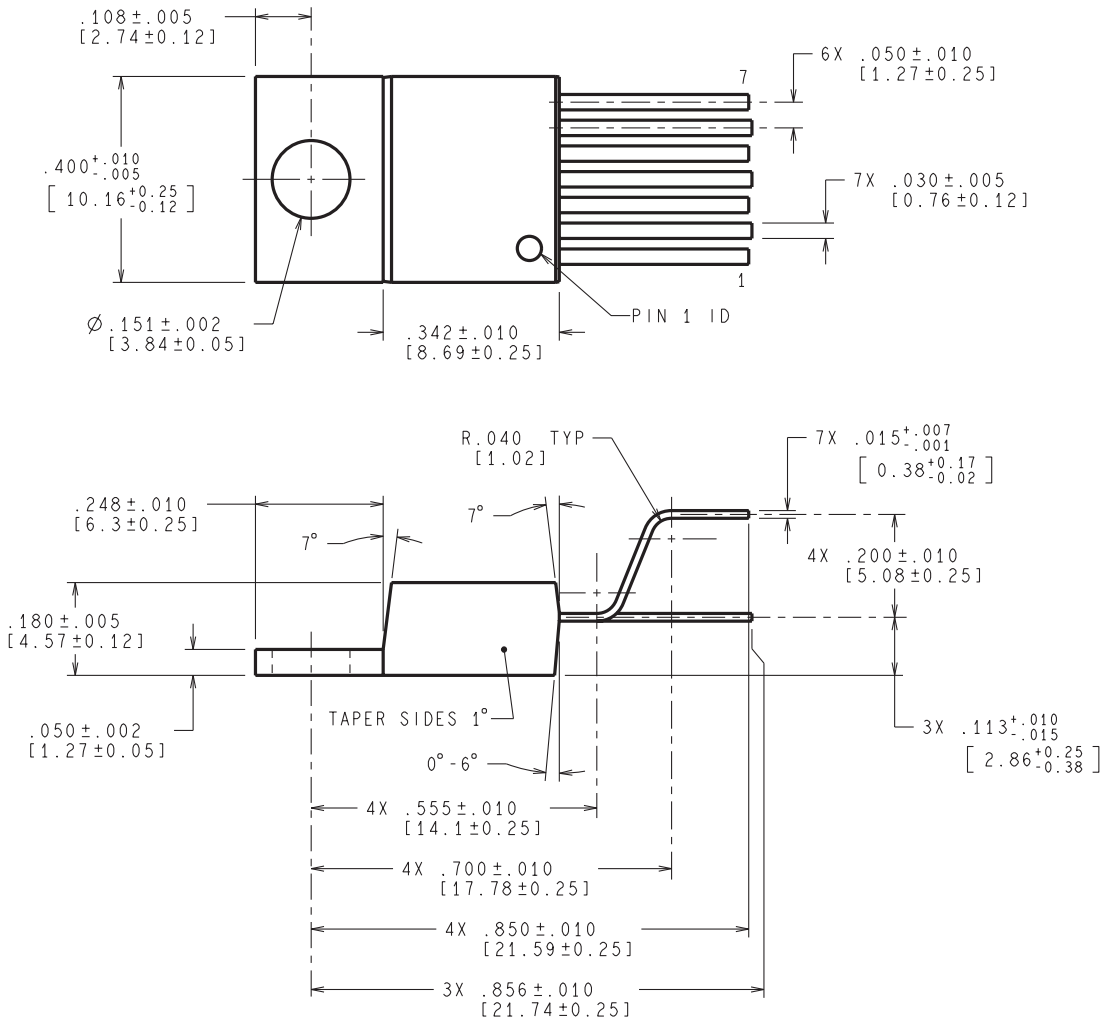

CONTROLING DIMENSIONS IS INCH
VALUES IN [ ] ARE MILLIMETERS

TA07B (Rev E)

KTW (R-PSFM-G7) **PLASTIC FLANGE-MOUNT**

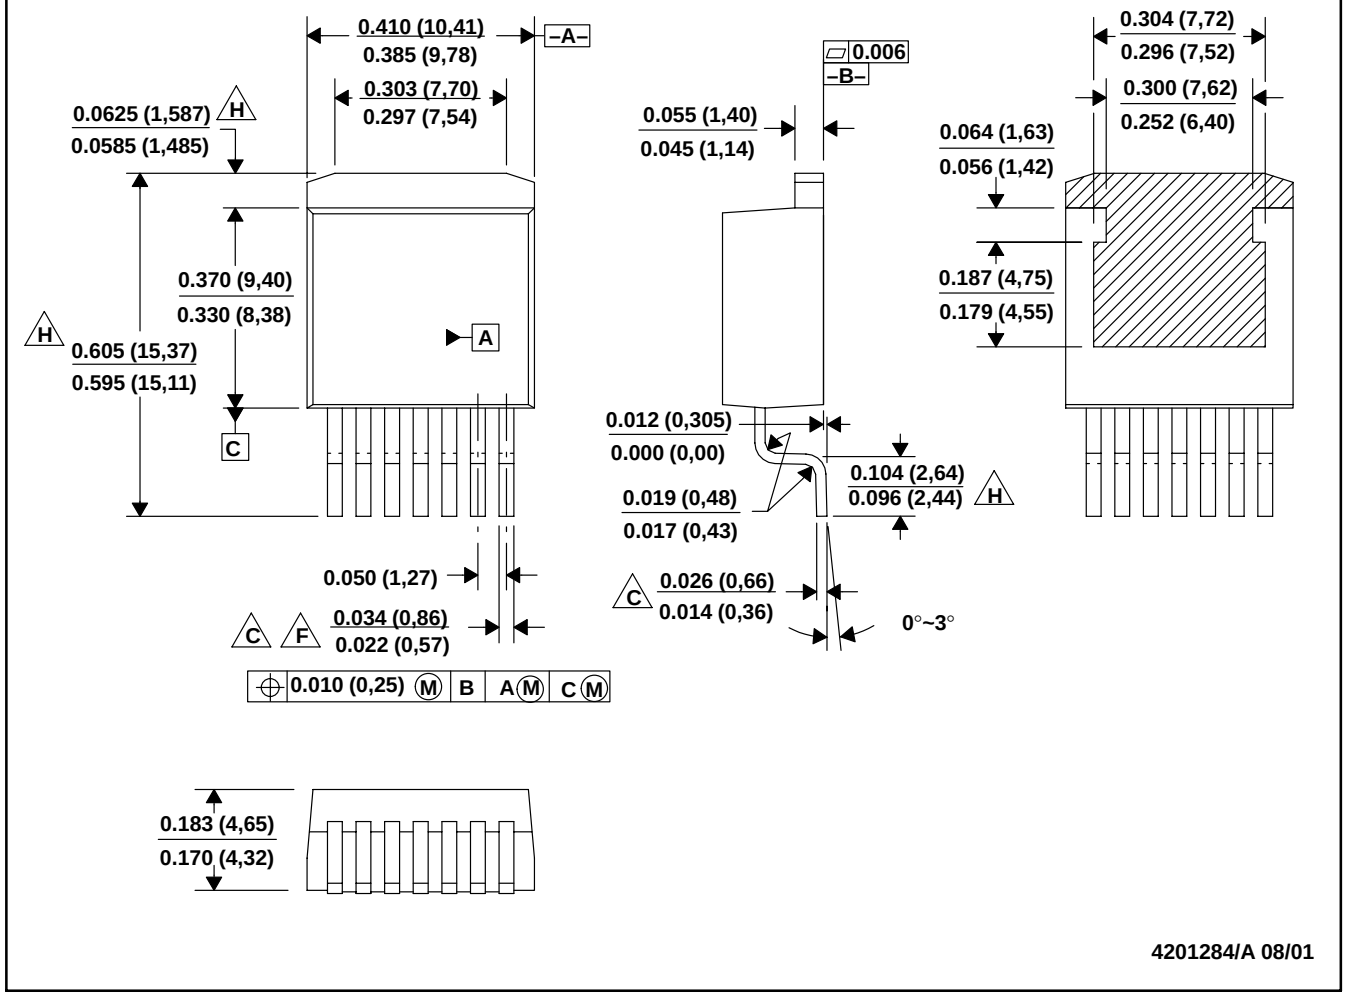

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Lead width and height dimensions apply to the plated lead.
D. Leads are not allowed above the Datum B.
E. Stand–off height is measured from lead tip with reference to Datum B.
F. Lead width dimension does not include dambar protrusion. Allowable dambar protrusion shall not cause the lead width to exceed the maximum dimension by more than 0.003”.
G. Cross–hatch indicates exposed metal surface.
H. Falls within JEDEC MO–169 with the exception of the dimensions indicated.

KTW0007B

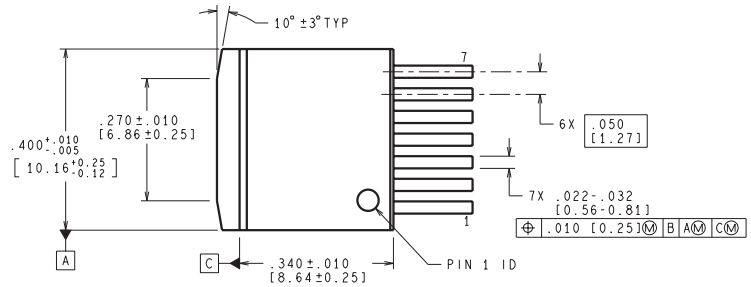

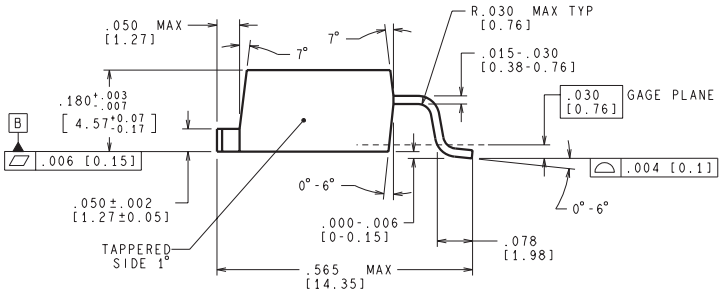

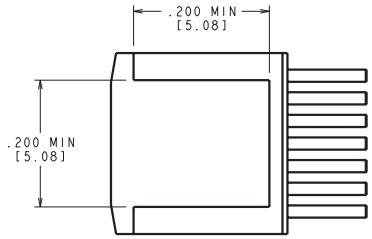

BOTTOM SIDE OF PACKAGE

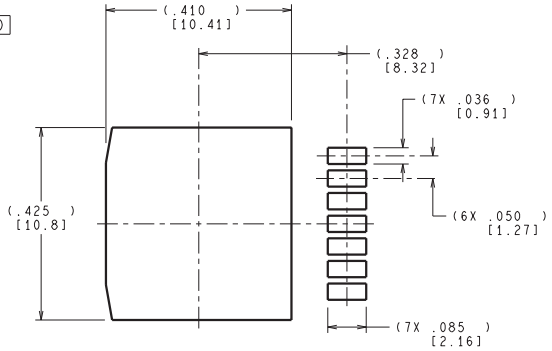

LAND PATTERN RECOMMENDATION

CONTROLLING DIMENSION IS INCH
VALUES IN [ ] ARE MILLIMETERS
DIMENSIONS IN ( ) FOR REFERENCE ONLY

TS7B (Rev E)

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated