National Semiconductor

November 1994

LM102/LM302 Voltage Followers

General Description


The LM102 series are high-gain operational amplifiers designed specifically for unity-gain voltage follower applications. Built on a single silicon chip, the devices incorporate advanced processing techniques to obtain very low input current and high input impedance. Further, the input transistors are operated at zero collector-base voltage to virtually eliminate high temperature leakage currents. It can therefore be operated in a temperature stabilized component oven to get extremely low input currents and low offset voltage drift.

The LM102, which is designed to operate with supply voltages between ±12V and ±15V, also features low input capacitance as well as excellent small signal and large signal frequency response—all of which minimize high frequency gain error. Because of the low wiring capacitances inherent in monolithic construction, this fast operation can be realized without increasing power consumption.

Features

- Fast slewing — 10V/μs
- Low input current — 10 nA (max)
- High input resistance — 10,000 MΩ
- No external frequency compensation required
- Simple offset balancing with optional 1 kΩ potentiometer
- Plug-in replacement for both the LM101 and LM709 in voltage follower applications

Schematic Diagram

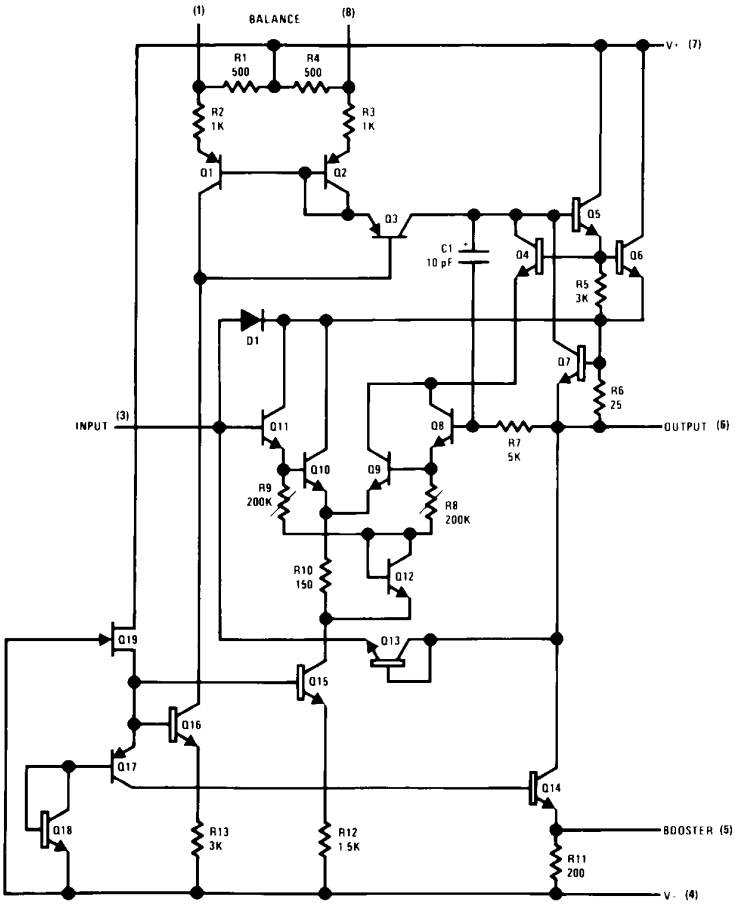

TL/H/7753–1

©1995 National Semiconductor Corporation

RRD-B30M115/Printed in U. S. A.

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications. (Note 6)

Supply Voltage	±18V
Power Dissipation (Note 1)	500 mW
Input Voltage (Note 2)	±15V
Output Short Circuit Duration (Note 3)	Indefinite
Operating Free Air Temperature Range	
LM102	−55°C to +125°C
LM302	0°C to +70°C
Storage Temperature Range	−65°C to +150°C
Lead Temperature (Soldering, 10 sec.)	300°C

ESD rating to be determined.

Electrical Characteristics (Note 4)

Parameter	Conditions	LM102			LM302			Units
		Min	Typ	Max	Min	Type	Max	
Input Offset Voltage	$T_A = 25°C$		2	5		5	15	mV
Input Bias Current	$T_A = 25°C$		3	10		10	30	nA
Input Resistance	$T_A = 25°C$	10^{10}	10^{12}		10^9	10^{12}		Ω
Input Capacitance				3.0		3.0		pF
Large Signal Voltage Gain	$T_A = 25°C$, $V_S \pm 15V$, $V_{OUT} = \pm 10V$, $R_L = 8\ k\Omega$	0.999	0.9996		0.9985	0.9995	1.0	V/V
Output Resistance	$T_A = 25°C$		0.8	2.5		0.8	2.5	Ω
Supply Current	$T_A = 25°C$		3.5	5.5		3.5	5.5	mA
Input Offset Voltage				7.5			20	mV
Offset Voltage Temperature Drift			6			20		μV/°C
Input Bias Current	$T_A = T_AMAX$ $T_A = T_AMIN$		3 30	10 100		3.0 20	15 50	nA nA
Large Signal Voltage Gain	$V_S = \pm 15V$, $V_{OUT} = \pm 10V$, $R_L = 10\ k\Omega$	0.999						
Output Voltage Swing	$V_S = \pm 15V$, $R_L = 10\ k\Omega$ (Note 5)	±10			±10			V
Supply Current	$T_A = 125°C$		2.6	4.0				mA
Supply Voltage Rejection Ratio	$\pm 12V \le V_S \le \pm 15V$	60			60			dB

Note 1: The maximum junction temperature of the LM102 is 150°C, while that of the LM302 is 85°C. For operating at elevated temperatures, devices in the H08 package must be derated based on a thermal resistance of 150°C/W, junction to ambient, or 20°C/W, junction to case.

Note 2: For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

Note 3: It is necessary to insert a resistor (at least 5k and preferably 10k) in series with the input pin when the amplifier is driven from low impedance sources to prevent damage when the output is shorted and to ensure stability.

Note 4: These specifications apply for $\pm 12V \le V_S \le \pm 15V$ and $-55°C \le T_A \le 125°C$ for the LM102 and $0°C \le T_A \le 70°C$ for the LM302 unless otherwise specified.

Note 5: Increased output swing under load can be obtained by connecting an external resistor between the booster and V^- terminals. See curve.


Note 6: Refer to RETS102X for the LM102H military specifications.

APPLICATION HINT


The input must be driven from a source impedance of typically 10 kΩ (5 kΩ Min) to maintain stability. The total source impedance will be reduced at high frequencies if there is stray capacitance at the input pin. In these cases, a 10 kΩ resistor should be inserted in series with the input, physically close to the input pin to minimize the stray capacitance and prevent oscillation.

Guaranteed Performance Characteristics LM102


Input Current



Output Swing




Supply Current




TL/H/7753–7

Typical Performance Characteristics LM102


Voltage Gain and Phase Lag




Voltage Gain and Phase Lag




Output Resistance




Positive Output Swing




Negative Output Swing




Output Swing




Large Signal Frequency Response



Large Signal Pulse Response




Maximum Power Dissipation




TL/H/7753–8

Guaranteed Performance Characteristics LM302


Input Current



Output Swing




Supply Current




TL/H/7753–9

Typical Performance Characteristics LM302


Voltage Gain and Phase Lag




Voltage Gain and Phase Lag




Output Resistance




Positive Output Swing




Negative Output Swing




Output Swing




Large Signal Frequency Response



Large Signal Pulse Response




Maximum Power Dissipation



TL/H/7753–10

Typical Applications


Low Pass Active Filter

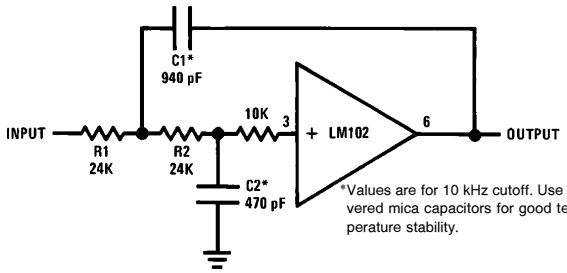

*Values are for 10 kHz cutoff. Use silvered mica capacitors for good temperature stability.

TL/H/7753–3


Sample and Hold with Offset Adjustment

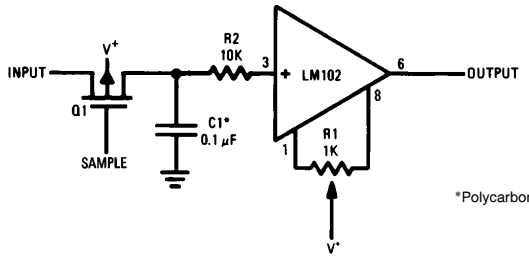

*Polycarbonate-dielectric capacitor.

TL/H/7753–4


High Pass Active Filter

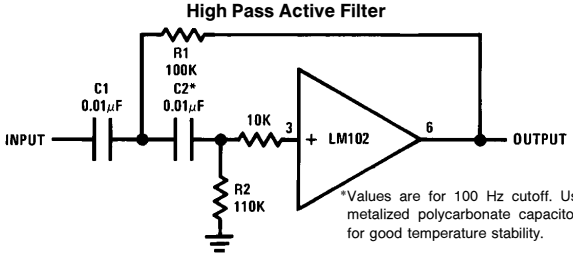

*Values are for 100 Hz cutoff. Use metalized polycarbonate capacitors for good temperature stability.

TL/H/7753–5


High Input Impedance AC Amplifier

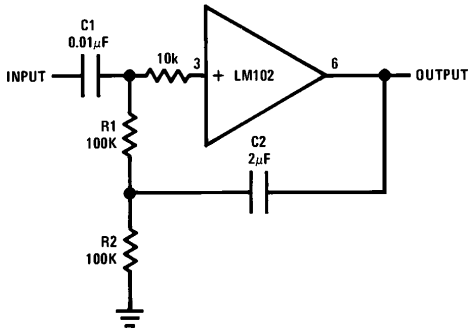

TL/H/7753–6

Connection Diagram


Metal Can Package
Top View

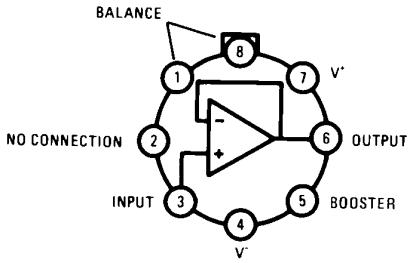

TL/H/7753–2

Order Number LM102H/883
See NS Package Number H08C

Physical Dimensions inches (millimeters)

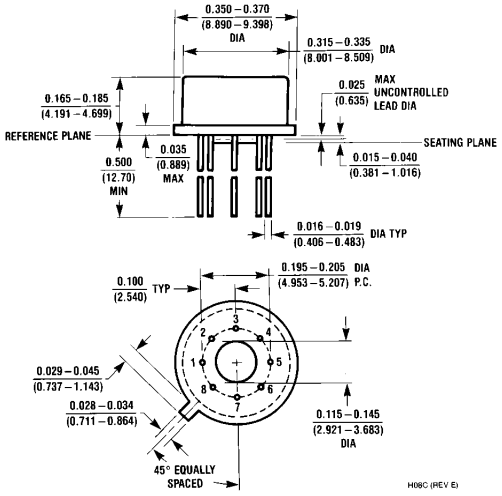

Metal Can Package (H)
Order Number LM102H/883
NS Package Number H08C

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.