


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0002065104](#)
Status: **Active**
Overview: [standard_062](#)
Description: 1.57mm (.062") Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1561, Female, with 1.27µm (50µ") Gold (Au) Plated Brass Contact, 18-24 AWG, 3.05mm (.120") Max. Insulation Diameter, Bag Packaged

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	Crimp Terminals
Series	1561
Crimp Quality Equipment	Yes
Overview	standard_062
Product Name	Standard .062"
Physical	
Gender	Female
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Nickel
Packaging Type	Bag
Plating min: Mating (µin)	50
Plating min: Mating (µm)	1.27
Plating min: Termination (µin)	50
Plating min: Termination (µm)	1.27
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.52-3.05mm (.060-.120")
Wire Size AWG	18, 20, 22, 24
Wire Size mm²	N/A
Material Info	
Old Part Number	1561GL2
Reference - Drawing Numbers	
Sales Drawing	SD-1561-*

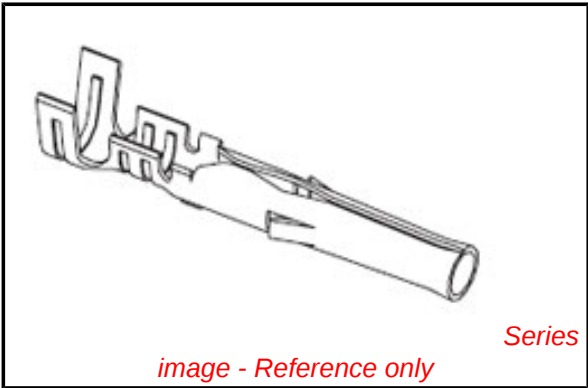

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)


Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[1561Series](#)


Application Tooling | FAQ
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
Hand Crimp Tool for Standard .062" Pin and Socket Crimp Terminals, 18-24 AWG	0638191300
Manual Extraction Tool	0011030002

PART NO.	ENG. NO.	
02-06-1101	1561-(P901)	
02-06-1103	1561-(P901)L	
02-06-5101	1561-(P561)	
02-06-5102	1561-(P561)L	
02-06-5108	1561-(P228)	
02-06-5109	1561-(P228)L	
02-06-5100	1561-(P550)	
02-06-5103	1561-(P550)L	
02-06-5105	1561-(P591)	
02-06-5104	1561-(P591)L	
02-06-1118	1561-1(P901)	
NOT TOOLED	1561-1(P901)L	



SECT. "B-B"
SCALE:10X



SECT. "C-C"
SCALE:10X

LEGEND

1561-*(****)*

BLANK=WITH LOCKING TABS
1=WITHOUT LOCKING TABS

P=PREPLATE
BLANK=POSTPLATE

FORM
BLANK=CHAIN
L=LOOSE

FINISH CODE

NOTES:

1. MATERIAL: BRASS

2. FINISH:

901 HOT TIN DIP (.00051)/.000020 MIN.

228 SELECT GOLD PLATE (.00075)/.000030 MIN. IN CONTACT AREA, SELECT TIN.
(.00250)/.000100 MIN. IN CRIMP AREA OVER (.00125)/.000050 MIN. NICKEL OVERALL.

561 SELECT GOLD PLATE (.00076)/.000030 MIN. IN CONTACT AREA, OVER
(.00127)/.000050 MIN. NICKEL OVERALL.

591 SELECT GOLD PLATE (.00175)/.000050 MIN. IN CONTACT AREA, OVER (.00127)/.000050
MIN. NICKEL OVERALL WITH (.000025)/.000010 MAX. GOLD FLASH OVERALL.





550 SELECT GOLD PLATE (.00038)/.000015 MIN. IN CONTACT AREA, OVER (.00076)/.000030
MIN. NICKEL OVERALL WITH (.000025)/.000010 MAX. GOLD FLASH OVERALL.

* THE PRIMARY SHIPPING CARTON WILL BE LABELED, "COMPLIANT TO
ROHS DIRECTIVE 2004/95/EC AND ANNEX II OF DIRECTIVE 2000/53/EC",
AND CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH
TIN-LEAD."


3. PRODUCT SPECIFICATION: PS-02-06.

4. PACKAGING INFORMATION: NOT AVAILABLE

5. TERMINAL FOR USE WITH (.157)/.062 DIA. SERIES HOUSINGS AND
WILL ACCEPT 18 THRU 24 AWG WIRE WITH (.152/3.05)/.060/.120
INSULATION DIA.

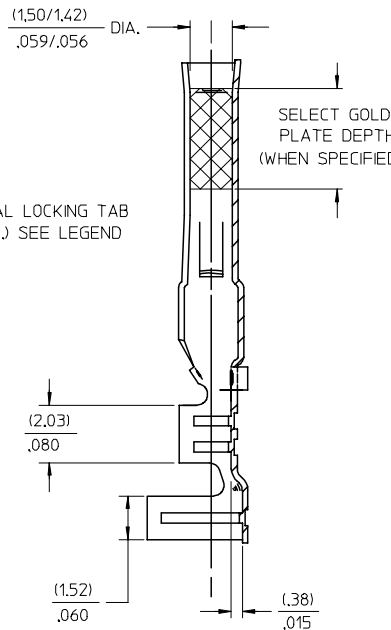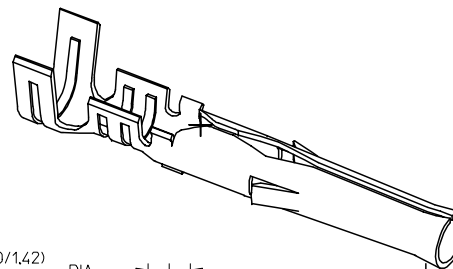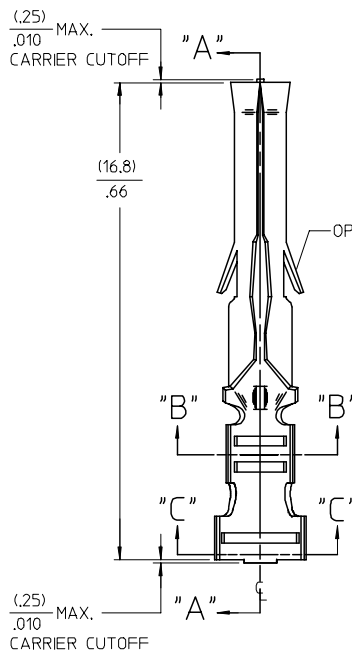

SECT. "A-A"



AP	REVISED/REDRAWN UCP2004-2257 RHOLTS 05/14/04
A0	REINSTATE 02065105 UCP2003-1827 ELHAG 03/02/24
AN	OBSOLETE P/N UCR2002-0270 COMERCI 01/9/25
AM1	ADDED ISO VIEW UCR1998-0248 WANG 98-05-21
AM	REV. AND REDRAWN PER ECR 10372 GEP 8-20-87 RW

SEE REVISION BLOCK EC NO: UCP2004-2257 DRW:RHOLTS 2005/03/30 CHKD:FSMITH 2005/03/30 APPR:FSMITH 2005/04/11 AP	DESCRIPTION REV	QUALITY SYMBOLS ▽ = 0 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 6:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY			
			mm	INCH	DIMENSION STYLE IN/MM		TITLE CRIMP TERMINAL, FEMALE .062 DIA. FOR 18-24 AWG WIRE MOLEX MOLEX INCORPORATED SEE CHART		DOCUMENT NO. SD-1561-*		SHEET NO. 1 OF 1	
			4 PLACES ± --- ± ---	3 PLACES ± --- ± .005	DRAWN BY GEW	DATE 1991/02/19						
			2 PLACES ± 0.13 ± .010	1 PLACE ± 0.25 ± ---	CHECKED BY RW	DATE 1991/02/19						
			ANGULAR ±1/2°		APPROVED BY GWF	DATE 1991/02/19						
			DRAFT WHERE APPLICABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
			MUST REMAIN WITHIN DIMENSIONS									