

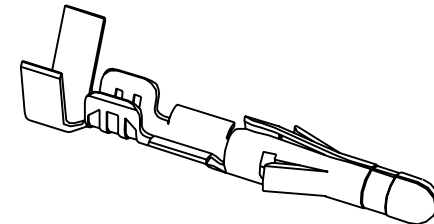



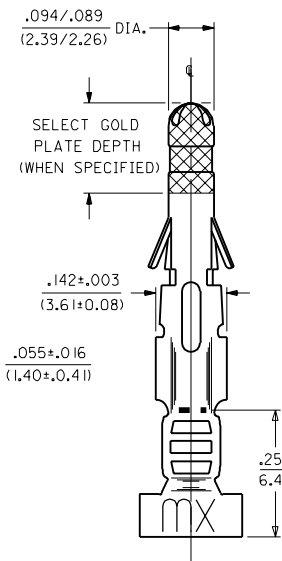


PART NO.	ENG. NO.
02-09-2103	1190-(P90)1L
02-09-2101	1190-(P90)1
02-09-2164	1190-(P914)L
02-09-2165	1190-(P914)
NOT TOOLED	1190-(563)L
02-09-6112	1190-(563)
02-09-6110	1190-(591)L
02-09-6101	1190-(591)
02-09-6109	1190-(565)L
02-09-6107	1190-(565)
02-09-6106	1190-(550)L
02-09-6100	1190-(550)
NOT TOOLED	1190-(558)L
NOT TOOLED	1190-(558)

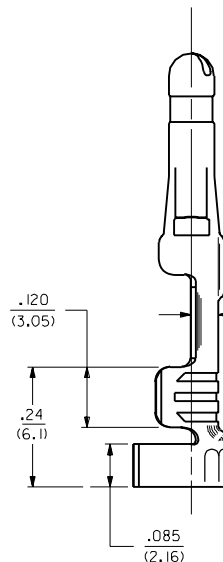

SECT. "A-A"

SECT. "B-B"

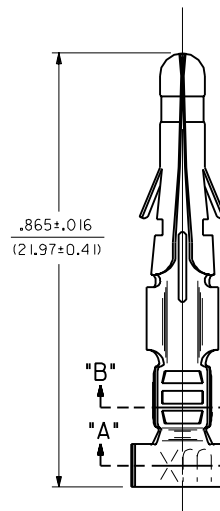

NOTES:

1. TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 14 THRU 20 AWG WIRE.
2. INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
3. RETENTION: 20 LBS. MIN. FROM HOUSING.
4. THIS PART CONFORMS TO PROD. SPEC. 02-09.

△ DIMENSION FROM THE END OF THE TERMINAL TO THE END OF THE BRUSH ON THE WIRE CRIMPED INTO THE TERMINAL.

FINISH CODES:

- 901 HOT TIN DIP .000020/(0.00051) MIN.
- 914 HOT TIN-LEAD DIP .000040/(0.00102) MIN.
- 565 SELECT GOLD PLATE .000020/(0.00051) MIN. IN CONTACT AREA, OVER .000030/(0.00076) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
- 591 SELECT GOLD PLATE .000050/(0.00127) MIN. IN CONTACT AREA, OVER .000050/(0.00127) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
- 550 SELECT GOLD PLATE .000015/(0.00038) MIN. IN CONTACT AREA, OVER .000030/(0.00076) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
- 563 SELECT GOLD PLATE .000030/(0.00076) MIN. IN CONTACT AREA, .000100/(0.00254) MIN. TIN-LEAD IN CRIMP AREA OVER .000050/(0.00127) MIN. NICKEL OVERALL.
- 558 SELECT GOLD PLATE .000030/(0.00076) MIN. IN CONTACT AREA, OVER .000050/(0.00127) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.

LEGEND


1190-(****)*

FORM
BLANK=CHAIN
L=L005E

P=PREPLATE
BLANK=POSTPLATE

MATERIAL:

CARTRIDGE BRASS, ALLOY #C26000.
.010/(0.25) THICK, SPRING TEMPER.



CHAIN FORM
FULL SCALE

REVISIONS

BR3	REVISED UCR2000-0583 3/1/00 DJS
BR2	REVISED UCR1999-0518 STAMBAUGH 99-2-9
BR1	ADDED ISO VIEW UCR1998-0248 WANG 98-05-20
BR	CARRIER CUTOFF ECN #U1 0223 1-4-91 RW
BP	REV. & REDRAWN ECR 10480 SEP 10-26-87 RW

DIMENSIONS SHOWN (METRIC) INCH		TITLE	
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		CRIMP TERMINAL, MALE .093/(2.36) DIA. FOR 14 THRU 20 AWG. WIRE	
INCH METRIC		MOLEX INCORPORATED	
3 PLACE ± .010	---	SHEET NO. 1 OF 1	
2 PLACE ± .014 ± 0.25	---	DATE 10/26/87	
1 PLACE --- ± 0.35	---	REV. & REDRAWN	
DRAWING WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SD-1190-*	
DRWG. BY CEP	CHKD. BY RW	FILE NAME SD1190X1	
APP'D. BY RAS	SCALE 6 : 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	