
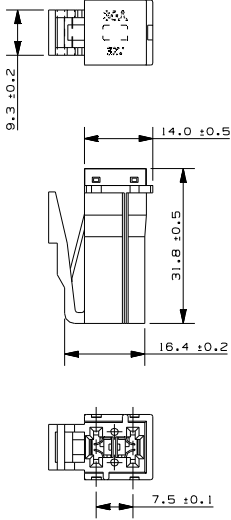


| PART NO.    | CURRENT RATING | BODY COLOR  | RATED VOLTAGE |
|-------------|----------------|-------------|---------------|
| 0293525.MXJ | 25 A           | LIGHT BROWN | 32 V          |
| 0293530.MXJ | 30 A           | LIGHT GREEN | 32 V          |
|             |                |             |               |
|             |                |             |               |

ELECTRICAL CHARACTERISTICS TEST



| % OF RATED CURRENT | CLEARING TIME<br>25A - 30A |         |
|--------------------|----------------------------|---------|
|                    | MIN.                       | MAX.    |
| 110 %              | -                          | -       |
| 150 %              | -                          | -       |
| 200 %              | 5 SEC.                     | 70 SEC. |
| 300 %              | -                          | 6 SEC.  |
| 400 %              | -                          | 3 SEC.  |



| PART NO.    | CURRENT RATING | BODY COLOR | RATED VOLTAGE |
|-------------|----------------|------------|---------------|
| 0293545.MXJ | 45 A           | RED        | 32 V          |
| 0293565.MXJ | 65 A           | BLACK      | 32 V          |
| 0293575.MXJ | 75 A           | GRAY       | 32 V          |
|             |                |            |               |
|             |                |            |               |

ELECTRICAL CHARACTERISTICS TEST

| % OF RATED CURRENT | CLEARING TIME<br>45A - 75A |         |
|--------------------|----------------------------|---------|
|                    | MIN.                       | MAX.    |
| 110 %              | 14,400 SEC.                | -       |
| 150 %              | 100 SEC.                   | -       |
| 200 %              | 2 SEC.                     | 60 SEC. |
| 300 %              | -                          | 5 SEC.  |
| 400 %              | -                          | 2 SEC.  |

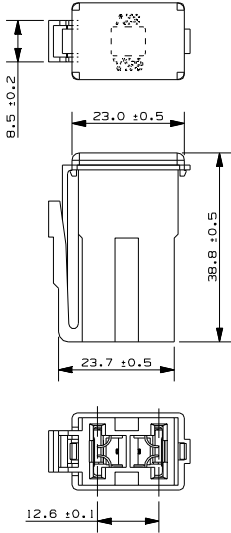

METRIC  
ASSEMBLY

|                                                                                     |    |                                  |             |             |               |
|-------------------------------------------------------------------------------------|----|----------------------------------|-------------|-------------|---------------|
|                                                                                     |    | COPIES TO                        |             | MATL SPEC   |               |
| 1                                                                                   | 9  | 18                               | FINISH      |             |               |
| 2                                                                                   | 10 | 19                               |             |             |               |
| 3                                                                                   | 12 | 20                               |             |             |               |
| 4                                                                                   | 13 | 21                               | DRW         | RLDJ        | SCALE         |
| 5                                                                                   | 14 | 23                               | CHK         | DATE        | SUPER DR      |
| 6                                                                                   | 15 | 33                               |             |             |               |
| 7                                                                                   | 16 | 43                               | APPD        | DATE        | FINSH GOOD WT |
| 8                                                                                   | 17 | 53                               | GRAMS/PIECE |             |               |
| TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-PH)                            |    |                                  |             |             |               |
| DIMENSION                                                                           |    | 0.5 - 1.0                        | 1.0 - 5.0   | 5.0 - 120   | 120 - 400     |
| TOLERANCE                                                                           |    | +0.05                            | +0.05       | +0.1        | +0.15         |
| 3RD ANGLE PROJECTION                                                                |    |                                  |             |             |               |
| TITLE                                                                               |    | FUSE - PAL 293 ATP 32V           |             |             |               |
|  |    | SLOWBLOW                         |             |             |               |
|                                                                                     |    | REVISION                         |             | DRWG. NO.   |               |
|                                                                                     |    | A                                |             | 0293500.MXJ |               |
|                                                                                     |    | LITTLEfuse                       |             | SERIES      |               |
|                                                                                     |    | LIPA CITY, BATANGAS, PHILIPPINES |             |             |               |