
LR1012

CMOS IC

HIGH OPERATING VOLTAGE CMOS VOLTAGE REGULATOR

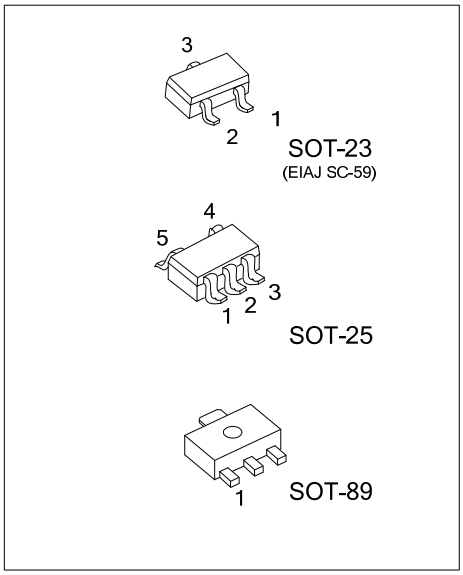

■ DESCRIPTION

The UTC **LR1012** series is high operating voltage regulator using UTC CMOS technology. The max operating voltage of UTC **LR1012L** is 16V so it works best in high-voltage applications. Moreover, it is also suitable in constructing lowpower portable devices including small current consumption, power-off function and short-current protection.

■ FEATURES

* Operating current: Max. 1.8μA (3.0V)
* Output voltage: 2.0 ~ 6.0V, as 0.1V step
* ±2.0% output voltage accuracy
* Output current:
  50mA capable @ 3.0V output, V_{IN}=5V
  75mA capable @ 5.0V output, V_{IN}=7V
* Dropout voltage:120mV @V_{OUT} = 5.0V, I_{OUT}=10mA

■ ORDERING INFORMATION




Ordering Number	Package	Packing
LR1012G-xx-AB3-R	SOT-89	Tape Reel
LR1012G-xx-AE3-R	SOT-23	Tape Reel
LR1012G-xx-AF5-R	SOT-25	Tape Reel

Note: xx: Output Voltage, refer to Marking Information.

LR1012G-xx-AB3-R (1) Packing Type (2) Package Type (3)Output Voltage Code (4) Green Package	 (1) R: Tape Reel (2) AB3: SOT-89, AE3: SOT-23, AF5: SOT-25 (3) xx: Refer to Marking Information (4) G: Halogen Free and Lead Free

Copyright © 2016 Unisonic Technologies Co., Ltd


■ PIN CONFIGURATION

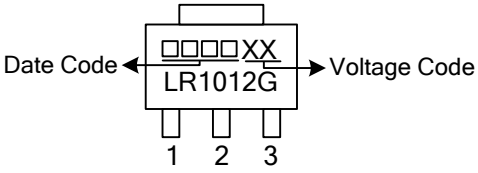PACKAGE	VOLTAGE CODE	MARKING
SOT-23	18:1.8V 33: 3.3V 50: 5.0V 52: 5.2V	
SOT-25		
SOT-89		

■ PIN DESCRIPTION

PIN NO.			PIN NAME	FUNCTION
SOT-23	SOT-25	SOT-89		
1	2	2	V_{IN}	Input voltage
2	3	3	V_{OUT}	Output voltage
3	1	1	V_{SS}	GND
-	4	-	N.C.	N.C. pin is electrically open. N.C. pin can be connected to V_{IN} or V_{SS}.
-	5	-	ON/OFF	ON/OFF select

■ BLOCK DIAGRAM

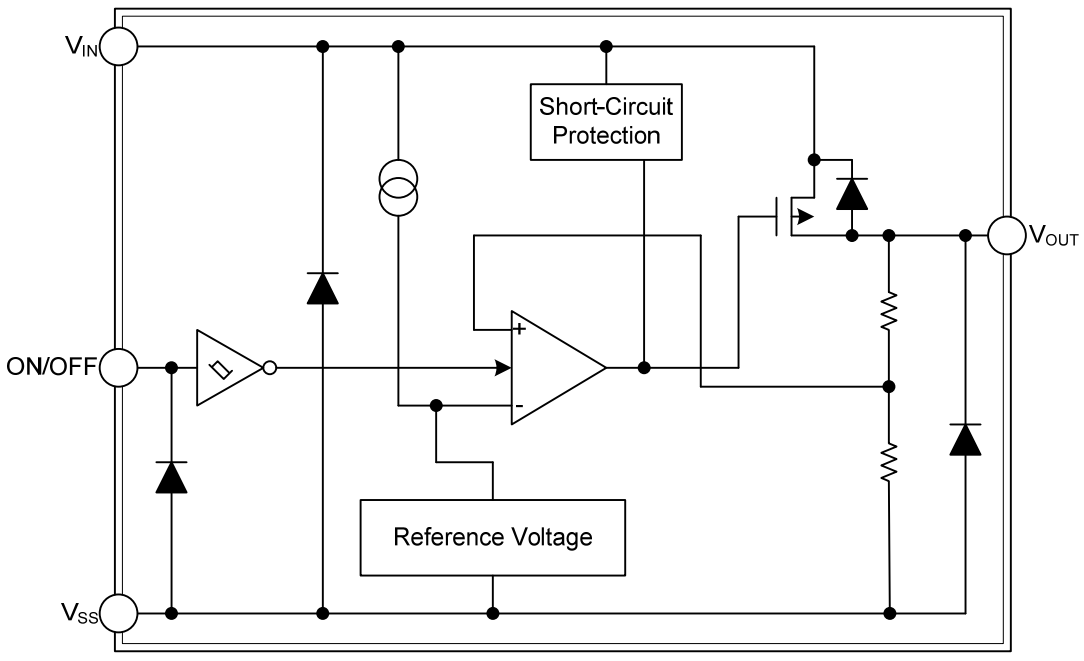

Product With Power-Off Function

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Input Voltage		V_{IN}	18	V
		$V_{ON/OFF}$	V_{SS} -0.3 ~ 18	V
Output Voltage		V_{OUT}	V_{SS} -0.3 ~ V_{IN}+0.3	V
Power Dissipation	SOT-23/SOT-25	P_D	250	mW
	SOT-89		500	mW
Operating Temperature		T_{OPR}	-40 ~ +85	°C
Storage Temperature		T_{STG}	-40 ~ +125	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage (Note 1)	$V_{OUT(E)}$	V_{IN}=V_{OUT}(S)+2V, I_{OUT}=10mA		V_{OUT}(S) × 0.98	V_{OUT}(S)	V_{OUT}(S) ×1.02	V
Output Current (Note 2)	I_{OUT}	V_{OUT}(S)+2≤V_{IN}≤16V	2.0V≤V_{OUT}(S)≤2.9V	30			mA
			3.0V≤V_{OUT}(S)≤3.9V	50			mA
			4.0V≤V_{OUT}(S)≤4.9V	65			mA
			5.0V≤V_{OUT}(S)≤6.0V	75			mA
Dropout Voltage (Note 3)	Vdrop	I_{OUT} =10mA	2.0V≤V_{OUT}(S)≤2.4V		0.46	0.95	V
			2.5V≤V_{OUT}(S)≤2.9V		0.32	0.68	V
			3.0V≤V_{OUT}(S)≤3.4V		0.23	0.41	V
			3.5V≤V_{OUT}(S)≤3.9V		0.19	0.35	V
			4.0V≤V_{OUT}(S)≤4.4V		0.16	0.30	V
			4.5V≤V_{OUT}(S)≤4.9V		0.14	0.27	V
			5.0V≤V_{OUT}(S)≤5.4V		0.12	0.25	V
			5.5V≤V_{OUT}(S)≤6.0V		0.11	0.23	V
Line Regulation 1	$\Delta V_{OUT}1$	V_{OUT}(S)+1V≤V_{IN}≤16V, I_{OUT}=1mA			5	30	mV
Line Regulation 2	$\Delta V_{OUT}2$	V_{OUT}(S)+1V≤V_{IN}≤16V, I_{OUT}=1μA			5	40	mV
Load Regulation	$\Delta V_{OUT}3$	V_{IN}=V_{OUT}(S)+2V	2.0V≤V_{OUT}(S)≤2.9V, 1μA≤I_{OUT}≤20mA		6	30	mV
			3.0V≤V_{OUT}(S)≤3.9V, 1μA≤I_{OU}T≤30mA		10	45	mV
			4.0V≤V_{OUT}(S)≤4.9V, 1μA≤I_{OUT}≤40mA		13	65	mV
			5.0V≤V_{OUT}(S)≤6.0V, 1μA≤I_{OUT}≤50mA		17	80	mV
Output Voltage temperature coefficient (Note 4)	$\frac{\Delta V_{OUT}}{\Delta T_A \cdot V_{OUT}}$	V_{IN} = V_{OUT} (S) + 1 V, I_{OUT} = 10mA -40°C ≤ T_A ≤ 85°C			±100		ppm/°C
Current Consumption	I_{SS}	V_{IN}=V_{OUT}(S)+2V no load	2.0V≤V_{OUT}(S)≤2.7V		0.9	1.6	μA
			2.8V≤V_{OUT}(S)≤3.7V		1.0	1.8	μA
			3.8V≤V_{OUT}(S)≤5.1V		1.2	2.1	μA
			5.2V≤V_{OUT}(S)≤6.0V		1.5	2.5	μA

■ ELECTRICAL CHARACTERISTICS(Cont.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	V_{IN}				16	V
Current Consumption at Poweroff	$I_{SS}2$	V_{IN}=V_{OUT}(S)+2V, $V_{ON/OFF}$=0V, no load		0.1	0.5	μA
ON/OFF Pin Input Voltage For High Level	V_{SH}	V_{IN}=V_{OUT} (S)+2V, R=1kΩ judged by V_{OUT} output level	2.0			V
ON/OFF Pin Input Voltage For Low Level	V_{SL}	V_{IN}=V_{OUT}(S)+2V, R_L=1kΩ judged by V_{OUT} output level			0.4	V
ON/OFF pin Input Current at high Level	I_{SH}	V_{IN}=V_{OUT}(S)+2V, $V_{ON/OFF}$=7V			0.1	μA
ON/OFF Pin Input Current at Low Level	I_{SL}	V_{IN}=V_{OUT}(S)+2V, $V_{ON/OFF}$=0V			-0.1	μA
Short-Circuit Current	I_{OS}	V_{IN}=V_{OUT}(S)+2V, V_{OUT} pin=0 V		40		mA

Notes:

1. V_{OUT}(S)=Specified output voltage
   V_{OUT}(E)=Effective output voltage, i.e., the output voltage when fixing I_{OUT}(=10 mA) and inputting V_{OUT}(S)+2.0V.
2. Output current at which output voltage becomes 95% of V_{OUT}(E) after gradually increasing output current.
3. Vdrop=V_{IN1}-(V_{OUT}(E)×0.98), where V_{IN1} is the Input voltage at which output voltage becomes 98% of V_{OUT}(E) after gradually decreasing input voltage.
4. Temperature change ratio for the output voltage [mV/°C] is calculated using the following equation.

$$\frac{\Delta V_{OUT}}{\Delta T_A}[mV/℃] = V_{OUT}(S)[V] \times \frac{\Delta V_{OUT}}{\Delta T_A \bullet V_{OUT}}[ppm/℃] \div 1000$$

■ TERMS

C_L (Output capacitors)

Cause the UTC **LR1012L** series can provide stable operation without C_L.So the C_L are used only to improve transient response characteristics.And when C_L is used, a low ESR (Equivalent Series Resistance) capacitor like ceramic capacitor can also be used. C_L can hence be removed in applications when transient response can be negligible.

V_{OUT} (Output voltage)

Unless the under conditions change, the accuracy of the output voltage is ±2.0% guaranteed under the specified conditions for input voltage, which differs depending upon the product items, output current, and temperature.

ΔV_{OUT1}, $\Delta V_{OU}T2$ (Line regulations 1 and 2)

After a change in the input voltage with the output current remained unchanged, these values show how much the output voltage changes.


$\Delta V_{OUT}3$ (Load regulation)

After a change in the output current with the input voltage remained unchanged, these values show how much the output voltage changes.


Dropout voltage (Vdrop)

When output voltage falls to 98% of V_{OUT} (E) by gradually decreasing the input voltage (V_{IN}), this value shows the difference between the input voltage (V_{IN}1) and the output voltage. Vdrop=V_{IN}1-[V_{OUT} (E)×0.98]

■ APPLICATION CIRCUIT

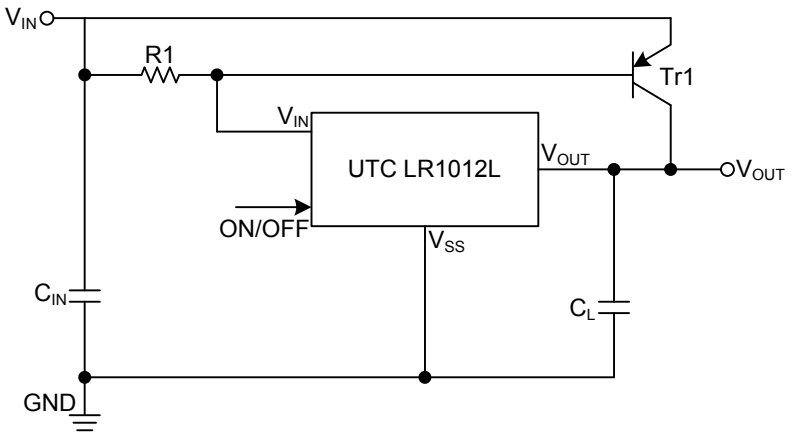


Output Current Boost Circuit

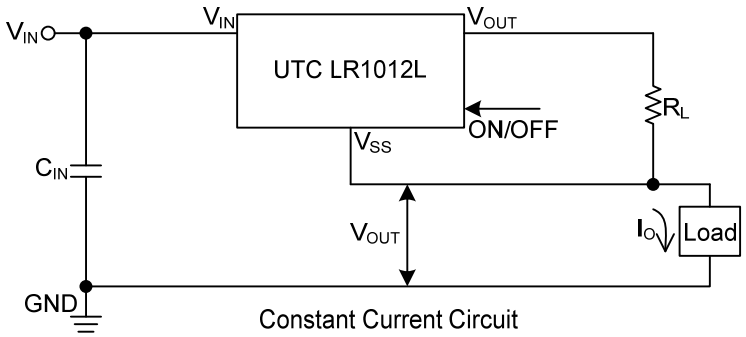


Constant Current Circuit

■ APPLICATION CIRCUIT(Cont.)

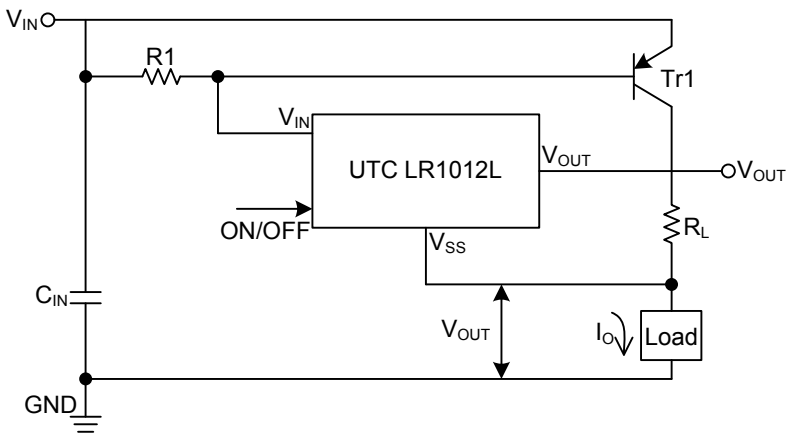

Constant Current Boost Circuit

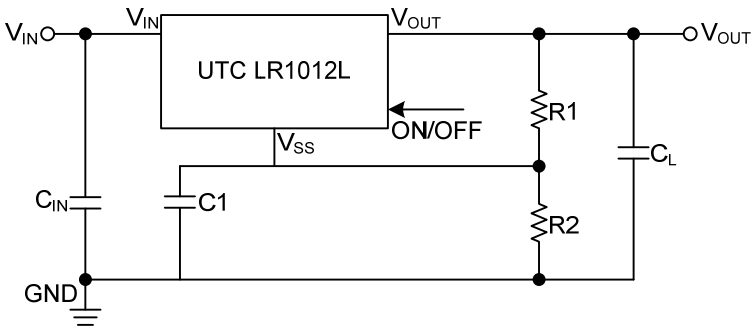

Voltage Adjustment Circuit

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.