LAMINATED TRANSFORMERS
Type UI30 / 7.5 - 4VA



AGENCY APPROVALS

1. UL 506, File E113449


3. EN61558

Primary (V)	Secondary (V / mA)	No-Load Voltage (V)	Part Number	Agency Approvals
2x115	6/333 / 6/333	8.60/8.60	**030-6935.0**	1/3*
2x115	9/222 / 9/222	12.40/12.40	**030-6938.0**	1/3*
2x115	12/166 / 12/166	15.90/15.90	**030-6941.0**	1/3*
2x115	15/133 / 15/133	20.80/20.80	**030-6944.0**	1/3*
2x115	18/111 / 18/111	24.30/24.30	**030-6947.0**	1/3*
2x115	21/95 / 21/95	28.10/28.10	**030-6950.0**	1

***NOTE:** When checking the approval status of this product with VDE, add the prefix "**BV**" and the suffix "**L**" to the orderable Part Number (these letters will also be found on the part label). **The prefix and suffix are not part of the orderable Part Number.**

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 70°C/B
- Weight: 0.145kg
- Packaging unit: 15 pieces (tray)
- Fixing material for □ 2,5mm (0.098 inch)
  - Self-tapping screws: DIN 7513 (M 3x8)
  - Sheet-metal screws: DIN 7971 (2,9x6,5)

Mechanical

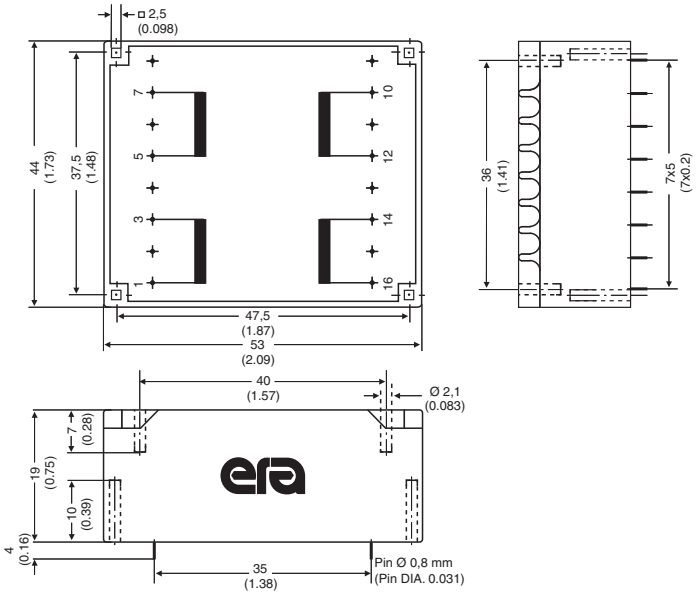

Schematics

