LAMINATED TRANSFORMERS
Type UI30 / 16.5 - 10VA



AGENCY APPROVALS


1. UL 506, File E113449
3. EN61558

Primary (V)	Secondary (V / mA)	No-Load Voltage (V)	Part Number	Agency Approvals
2x115	6/833 / 6/833	9.00/9.00	**030-7073.0**	1/3*
2x115	9/555 / 9/555	13.40/13.40	**030-7076.0**	1/3*
2x115	12/416 / 12/416	17.20/17.20	**030-7079.0**	1/3*
2x115	15/333/ / 15/333	21.70/21.70	**030-7082.0**	1/3*
2x115	18/277 / 18/277	24.80/24.80	**030-7085.0**	1/3*
2x115	21/238 / 21/238	29.50/29.50	**030-7088.0**	1

***NOTE:** When checking the approval status of this product with VDE, add the prefix "**BV**" and the suffix "**L**" to the orderable Part Number (these letters will also be found on the part label). **The prefix and suffix are not part of the orderable Part Number.**

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 40°C/B
- Weight: 0.24kg
- Packaging unit: 15 pieces (tray)
- Fixing material for □ 2,5mm (0.098 inch)
  - Self-tapping screws: DIN 7513 (M 3x8)
  - Sheet-metal screws: DIN 7971 (2,9x6,5)

Mechanical

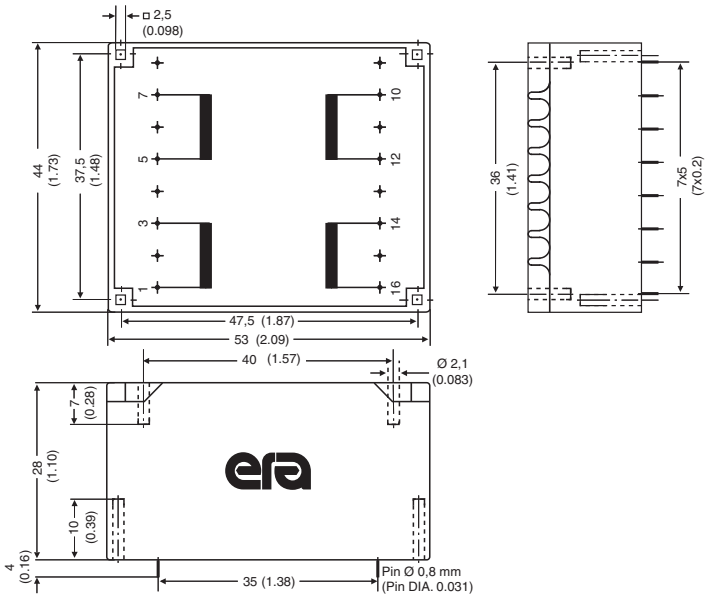

Schematics

