LAMINATED TRANSFORMERS
Type EI30 / 12.5 - 1.5VA



AGENCY APPROVALS


1. UL 506, File E113449
2. UL 1585, File E175197 Class 2/3
3. EN61558

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 70°C/B
- Short-circuit-proof (where noted: 1/2/3* under Agency Approvals)
- Weight: 0.08kg
- Packaging unit: 25 pieces (tube)

Primary (V)	Secondary (V / mA)	No-Load Voltage (V)	Schematic No.	Part Number	Agency Approvals
230	6 / 250	8.95	1	**030-7161.0**	1/2/3*
230	9 / 166	12.90	1	**030-7162.0**	1/2/3*
230	12 / 125	16.70	1	**030-7139.0**	1/2/3*
230	15 / 100	24.70	1	**030-7163.0**	1/2/3*
230	18 / 83	29.50	1	**030-7164.0**	1/2/3*
230	24 / 62	35.80	1	**030-7165.0**	1/2/3*
230	2x6 / 125	2x9.15	2	**030-7166.0**	1/2/3*
230	2x9 / 83	2x13.70	2	**030-7167.0**	1/2/3*
230	2x12 / 62	2x17.30	2	**030-7168.0**	1/2/3*
230	2x15 / 50	2x24.70	2	**030-7169.0**	1/2/3*
230	2x18 / 41	2x29.40	2	**030-7170.0**	1
230	2x24 / 31	2x35.80	2	**030-7171.0**	1
115	6 / 250	8.95	1	**030-7150.0**	1/2/3*
115	9 / 166	12.90	1	**030-7151.0**	1/2/3*
115	12 / 125	16.70	1	**030-7136.0**	1/2/3*
115	15 / 100	24.70	1	**030-7152.0**	1/2/3*
115	18 / 83	29.50	1	**030-7153.0**	1/2/3*
115	24 / 62	35.80	1	**030-7154.0**	1/2/3*
115	2x6 / 125	2x9.15	2	**030-7155.0**	1/2/3*
115	2x9 / 83	2x13.70	2	**030-7156.0**	1/2/3*
115	2x12 / 62	2x17.30	2	**030-7157.0**	1/2/3*
115	2x15 / 50	2x24.70	2	**030-7158.0**	1/2/3*
115	2x18 / 41	2x29.40	2	**030-7159.0**	1
115	2x24 / 31	2x35.80	2	**030-7160.0**	1
2x115	6 / 250	8.95	3	**030-7711.0**	1/2/3*
2x115	9 / 166	12.90	3	**030-7712.0**	1/2/3*
2x115	12 / 125	16.70	3	**030-7713.0**	1/2/3*
2x115	15 / 100	24.70	3	**030-7714.0**	1/2/3*
2x115	18 / 83	29.50	3	**030-7715.0**	1/2/3*
2x115	24 / 62	35.80	3	**030-7716.0**	1/2/3*
2x115	2x6 / 125	2x9.15	4	**030-7717.0**	1/2/3*
2x115	2x9 / 83	2x13.70	4	**030-7718.0**	1/2/3*
2x115	2x12 / 62	2x17.30	4	**030-7719.0**	1/2/3*
2x115	2x15 / 50	2x24.70	4	**030-7720.0**	1/2/3*
2x115	2x18 / 41	2x29.40	4	**030-7721.0**	1
2x115	2x24 / 31	2x35.80	4	**030-7722.0**	1

***NOTE:** When checking the approval status of this product with VDE, add the prefix "**BV**" and the suffix "**N**" to the orderable Part Number (these letters will also be found on the part label). **The prefix and suffix are <u>not</u> part of the orderable Part Number.**

Mechanical

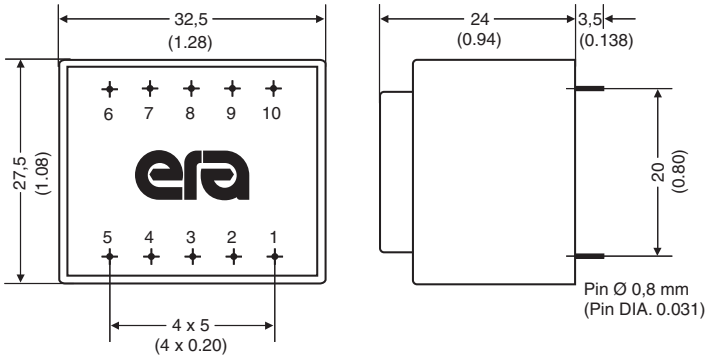

Schematics

