Dual and Quad 250µA, 3MHz, 200V/µs Operational Amplifiers

FEATURES

- **3MHz Gain Bandwidth**
- **200V/µs Slew Rate**
- **250µA Supply Current per Amplifier**
- C-Load™ Op Amp Drives All Capacitive Loads
- Unity-Gain Stable
- Maximum Input Offset Voltage: 600µV
- Maximum Input Bias Current: 50nA
- Maximum Input Offset Current: 15nA
- Minimum DC Gain, R_L = 2k: 30V/mV
- Input Noise Voltage: 14nV/√Hz
- Settling Time to 0.1%, 10V Step: 700ns
- Settling Time to 0.01%, 10V Step: 1.25µs
- Minimum Output Swing into 1k: ±13V
- Minimum Output Swing into 500Ω: ±3.4V
- Specified at ±2.5V, ±5V and ±15V
- Available in SO-8 Package
- LT1353 in Narrow Surface Mount Package

APPLICATIONS

- Battery-Powered Systems
- Wideband Amplifiers
- Buffers
- Active Filters
- Data Acquisition Systems
- Photodiode Amplifiers

DESCRIPTION


The LT®1352/LT1353 are dual and quad, very low power, high speed operational amplifiers with outstanding AC and DC performance. The amplifiers feature much lower supply current and higher slew rate than devices with comparable bandwidth. The circuit combines the slewing performance of a current feedback amplifier in a true operational amplifier with matched high impedance inputs. The high slew rate ensures that the large-signal bandwidth is not degraded. Each output is capable of driving a 1kΩ load to ±13V with ±15V supplies and a 500Ω load to ±3.4V on ±5V supplies.

The LT1352/LT1353 are members of a family of fast, high performance amplifiers using this unique topology and employing Linear Technology Corporation's advanced complementary bipolar processing. For higher bandwidth devices with higher supply current see the LT1354 through LT1365 data sheets. Bandwidths of 12MHz, 25MHz, 50MHz and 70MHz are available with 1mA, 2mA, 4mA and 6mA of supply current per amplifier. Singles, duals and quads of each amplifier are available. The LT1352 is available in an 8-lead SO package. The LT1353 is offered in a 14-lead narrow surface mount package.

LT, LTC and LT are registered trademarks of Linear Technology Corporation.
C-Load is a trademark of Linear Technology Corporation.

TYPICAL APPLICATION


Instrumentation Amplifier

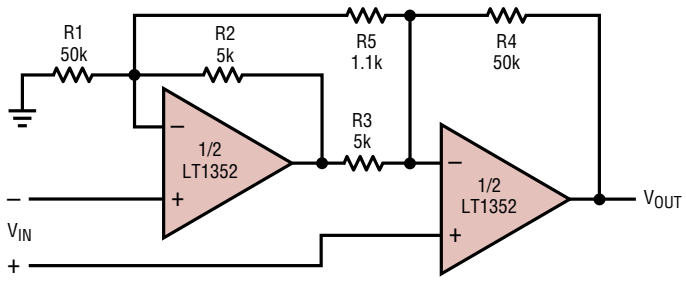

GAIN = [R4/R3][1 + (1/2)(R2/R1 + R3/R4) + (R2 + R3)/R5] = 102
TRIM R5 FOR GAIN
TRIM R1 FOR COMMON MODE REJECTION
BW = 30kHz

1352/53 TA01

Large-Signal Response

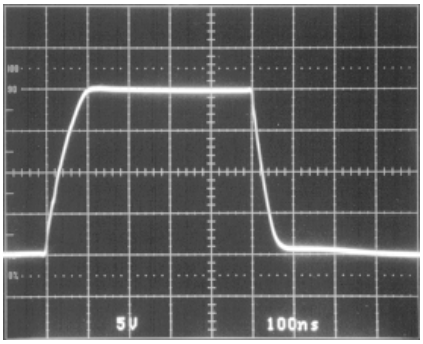

A_V = –1


1352/53 TA02

ABSOLUTE MAXIMUM RATINGS

(Note 1)

Total Supply Voltage (V^+ to V^-) 36V
Differential Input Voltage (Transient Only, Note 2) ±10V
Input Voltage ..... $\pm V_S$
Output Short-Circuit Duration (Note 3) ..... Indefinite
Operating Temperature Range ..... –40°C to 85°C
Specified Temperature Range (Note 7) .. –40°C to 85°C
Maximum Junction Temperature (See Below)
Plastic Package ..... 150°C
Storage Temperature Range ..... –65°C to 150°C
Lead Temperature (Soldering, 10 sec) ..... 300°C

PACKAGE/ORDER INFORMATION




N8 PACKAGE
8-LEAD PDIP

S8 PACKAGE
8-LEAD PLASTIC SO

T_{JMAX} = 150°C, θ_{JA} = 130°C/W (N8)
T_{JMAX} = 150°C, θ_{JA} = 190°C/W (S8)

ORDER PART NUMBER
LT1352CN8 LT1352CS8 LT1352IN8 LT1352IS8
S8 PART MARKING
1352 1352I



S PACKAGE
14-LEAD PLASTIC SO

T_{JMAX} = 150°C, θ_{JA} = 150°C/W

ORDER PART NUMBER
LT1353CS

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

T_A = 25°C, V_{CM} = 0V unless otherwise noted

SYMBOL	PARAMETER	CONDITIONS	V_{SUPPLY}	MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage		±15V ±5V ±2.5V		0.2 0.2 0.3	0.6 0.6 0.8	mV mV mV
I_{OS}	Input Offset Current		±2.5V to ±15V		5	15	nA
I_B	Input Bias Current		±2.5V to ±15V		20	50	nA
e_n	Input Noise Voltage	f = 10kHz	±2.5V to ±15V		14		$nV/\sqrt{Hz}$
i_n	Input Noise Current	f = 10kHz	±2.5V to ±15V		0.5		$pA/\sqrt{Hz}$
R_{IN}	Input Resistance	V_{CM} = ±12V Differential	±15V ±15V	300	600 20		MΩ MΩ
C_{IN}	Input Capacitance		±15V		3		pF
	Positive Input Voltage Range		±15V ±5V ±2.5V	12.0 2.5 0.5	13.5 3.5 1.0		V V V
	Negative Input Voltage Range		±15V ±5V ±2.5V		–13.5 –3.5 –1.0	–12.0 –2.5 –0.5	V V V
CMRR	Common Mode Rejection Ratio	V_{CM} = ±12V V_{CM} = ±2.5V V_{CM} = ±0.5V	±15V ±5V ±2.5V	80 78 68	94 86 77		dB dB dB
PSRR	Power Supply Rejection Ratio	V_S = ±2.5V to ±15V		90	106		dB

ELECTRICAL CHARACTERISTICS

T_A = 25°C, V_{CM} = 0V unless otherwise noted

SYMBOL	PARAMETER	CONDITIONS	V_{SUPPLY}	MIN	TYP	MAX	UNITS
A_{VOL}	Large-Signal Voltage Gain	V_{OUT} = ±12V, R_L = 5k	±15V	40	80		V/mV
		V_{OUT} = ±10V, R_L = 2k	±15V	30	60		V/mV
		V_{OUT} = ±10V, R_L = 1k	±15V	20	40		V/mV
		V_{OUT} = ±2.5V, R_L = 5k	±5V	30	60		V/mV
		V_{OUT} = ±2 .5V, R_L = 2k	±5V	25	50		V/mV
		V_{OUT} = ±2.5V, R_L = 1k	±5V	15	30		V/mV
		V_{OUT} = ±1V, R_L = 5k	±2.5V	20	40		V/mV
V_{OUT}	Output Swing	R_L = 5k, V_{IN} = ±10mV	±15V	13.5	14.0		±V
		R_L = 2k, V_{IN} = ±10mV	±15V	13.4	13.8		±V
		R_L = 1k, V_{IN} = ±10mV	±15V	13.0	13.4		±V
		R_L = 1k, V_{IN} = ±10mV	±5V	3.5	4.0		±V
		R_L = 500Ω, V_{IN} = ±10mV	±5V	3.4	3.8		±V
		R_L = 5k, V_{IN} = ±10mV	±2.5V	1.3	1.7		±V
I_{OUT}	Output Current	V_{OUT} = ±13V	±15V	13.0	13.4		mA
		V_{OUT} = ±3.4V	±5V	6.8	7.6		mA
I_{SC}	Short-Circuit Current	V_{OUT} = 0V, V_{IN} = ±3V	±15V	30	45		mA
SR	Slew Rate	A_V = –1, R_L = 5k (Note 4)	±15V	120	200		V/µs
			±5V	30	50		V/µs
	Full-Power Bandwidth	10V Peak (Note 5)	±15V		3.2		MHz
		3V Peak (Note 5)	±5V		2.6		MHz
GBW	Gain Bandwidth	f = 200kHz, R_L = 10k	±15V	2.0	3.0		MHz
			± 5V	1.8	2.7		MHz
			± 2.5V		2.5		MHz
t_r, t_f	Rise Time, Fall Time	A_V = 1, 10% to 90%, 0.1V	±15V		46		ns
			±5V		53		ns
	Overshoot	A_V = 1, 0.1V	±15V		13		%
			±5V		16		%
	Propagation Delay	50% V_{IN} to 50% V_{OUT}, 0.1V	±15V		41		ns
			±5V		52		ns
t_s	Settling Time	10V Step, 0.1%, A_V = –1	±15V		700		ns
		10V Step, 0.01%, A_V = –1	±15V		1250		ns
		5V Step, 0.1%, A_V = –1	±5V		950		ns
		5V Step, 0.01%, A_V = –1	±5V		1400		ns
R_O	Output Resistance	A_V = 1, f = 20kHz	±15V		1.5		Ω
	Channel Separation	V_{OUT} = ±10V, R_L = 2k	±15V	101	120		dB
I_S	Supply Current	Each Amplifier	±15V		250	320	µA
		Each Amplifier	±5V		230	300	µA

0°C ≤ T_A ≤ 70°C, V_{CM} = 0V unless otherwise noted

SYMBOL	PARAMETER	CONDITIONS	V_{SUPPLY}	MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage		±15V			0.8	mV
			±5V			0.8	mV
			±2.5V			1.0	mV
	Input V_{OS} Drift	(Note 6)	±2.5V to ±15V		3	8	µV/°C
I_{OS}	Input Offset Current		±2.5V to ±15V			20	nA
I_B	Input Bias Current		±2.5V to ±15V			75	nA

ELECTRICAL CHARACTERISTICS

0°C ≤ T_A ≤ 70°C, V_{CM} = 0V unless otherwise noted

SYMBOL	PARAMETER	CONDITIONS	V_{SUPPLY}	MIN	TYP	MAX	UNITS
CMRR	Common Mode Rejection Ratio	V_{CM} = ±12V V_{CM} = ±2.5V V_{CM} = ±0.5V	±15V ±5V ±2.5V	78 77 67			dB dB dB
PSRR	Power Supply Rejection Ratio	V_S = ±2.5V to ±15V		89			dB
A_{VOL}	Large-Signal Voltage Gain	V_{OUT} = ±12V, R_L = 5k V_{OUT} = ±10V, R_L = 2k V_{OUT} = ±2.5V, R_L = 5k V_{OUT} = ±2 .5V, R_L = 2k V_{OUT} = ±2.5V, R_L = 1k V_{OUT} = ±1V, R_L = 5k	±15V ±15V ±5V ±5V ±5V ±2.5V	25 20 20 15 10 15			V/mV V/mV V/mV V/mV V/mV V/mV
V_{OUT}	Output Swing	R_L = 5k, V_{IN} = ±10mV R_L = 2k, V_{IN} = ±10mV R_L = 1k, V_{IN} = ±10mV R_L = 1k, V_{IN} = ±10mV R_L = 500Ω, V_{IN} = ±10mV R_L = 5k, V_{IN} = ±10mV	±15V ±15V ±15V ±5V ±5V ±2.5V	13.4 13.3 12.0 3.4 3.3 1.2			±V ±V ±V ±V ±V ±V
I_{OUT}	Output Current	V_{OUT} = ±12V V_{OUT} = ±3.3V	±15V ±5V	12.0 6.6			mA mA
I_{SC}	Short-Circuit Current	V_{OUT} = 0V, V_{IN} = ±3V	±15V	24			mA
SR	Slew Rate	A_V = –1, R_L = 5k (Note 4)	±15V ±5V	100 21			V/µs V/µs
GBW	Gain Bandwidth	f = 200kHz, R_L = 10k	±15V ±5V	1.8 1.6			MHz MHz
	Channel Separation	V_{OUT} = ±10V, R_L = 2k	±15V	100			dB
I_S	Supply Current	Each Amplifier Each Amplifier	±15V ±5V			350 330	µA µA

–40°C ≤ T_A ≤ 85°C, V_{CM} = 0V unless otherwise noted (Note 7)

SYMBOL	PARAMETER	CONDITIONS	V_{SUPPLY}	MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage		±15V ±5V ±2.5V			1.0 1.0 1.2	mV mV mV
	Input V_{OS} Drift	(Note 6)	±2.5V to ±15V		3	8	µV/°C
I_{OS}	Input Offset Current		±2.5V to ±15V			50	nA
I_B	Input Bias Current		±2.5V to ±15V			100	nA
CMRR	Common Mode Rejection Ratio	V_{CM} = ±12V V_{CM} = ±2.5V V_{CM} = ±0.5V	±15V ±5V ±2.5V	76 76 66			dB dB dB
PSRR	Power Supply Rejection Ratio	V_S = ±2.5V to ±15V		87			dB
A_{VOL}	Large-Signal Voltage Gain	V_{OUT} = ±12V, R_L = 5k V_{OUT} = ±10V, R_L = 2k V_{OUT} = ±2.5V, R_L = 5k V_{OUT} = ±2 .5V, R_L = 2k V_{OUT} = ±2.5V, R_L = 1k V_{OUT} = ±1V, R_L = 5k	±15V ±15V ±5V ±5V ±5V ±2.5V	20 15 15 10 8 10			V/mV V/mV V/mV V/mV V/mV V/mV

ELECTRICAL CHARACTERISTICS

$-40°C \le T_A \le 85°C$, V_{CM} = 0V unless otherwise noted (Note 7)

SYMBOL	PARAMETER	CONDITIONS	V_{SUPPLY}	MIN	TYP	MAX	UNITS
V_{OUT}	Output Swing	R_L = 5k, V_{IN} = ±10mV	±15V	13.3			±V
		R_L = 2k, V_{IN} = ±10mV	±15V	13.2			±V
		R_L = 1k, V_{IN} = ±10mV	±15V	10.0			±V
		R_L = 1k, V_{IN} = ±10mV	±5V	3.3			±V
		R_L = 500Ω, V_{IN} = ±10mV	±5V	3.2			±V
		R_L = 5k, V_{IN} = ±10mV	±2.5V	1.1			±V
I_{OUT}	Output Current	V_{OUT} = ±10V	±15V	10.0			mA
		V_{OUT} = ±3.2V	±5V	6.4			mA
I_{SC}	Short-Circuit Current	V_{OUT} = 0V, V_{IN} = ±3V	±15V	20			mA
SR	Slew Rate	A_V = –1, R_L = 5k (Note 4)	±15V	50			V/µs
			±5V	15			V/µs
GBW	Gain Bandwidth	f = 200kHz, R_L = 10k	±15V	1.6			MHz
			±5V	1.4			MHz
	Channel Separation	V_{OUT} = ±10V, R_L = 2k	±15V	99			dB
I_S	Supply Current	Each Amplifier	±15V			380	µA
		Each Amplifier	±5V			350	µA

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: Differential inputs of ±10V are appropriate for transient operation only, such as during slewing. Large, sustained differential inputs will cause excessive power dissipation and may damage the part. See Input Considerations in the Applications Information section of this data sheet for more details.

Note 3: A heat sink may be required to keep the junction temperature below absolute maximum when the output is shorted indefinitely.

Note 4: Slew rate is measured between ±8V on the output with ±12V input for ±15V supplies and ±2V on the output with ±3V input for ±5V supplies.


Note 5: Full-power bandwidth is calculated from the slew rate measurement: FPBW = (Slew Rate)/$2\pi V_P$.

Note 6: This parameter is not 100% tested.

Note 7: The LT1352C/LT1353C are guaranteed to meet specified performance from 0°C to 70°C. The LT1352C/LT1353C are designed, characterized and expected to meet specified performance from –40°C to 85°C but are not tested or QA sampled at these temperatures. The LT1352I/LT1353I are guaranteed to meet specified performance from –40°C to 85°C.


TYPICAL PERFORMANCE CHARACTERISTICS

Supply Current vs Supply Voltage and Temperature

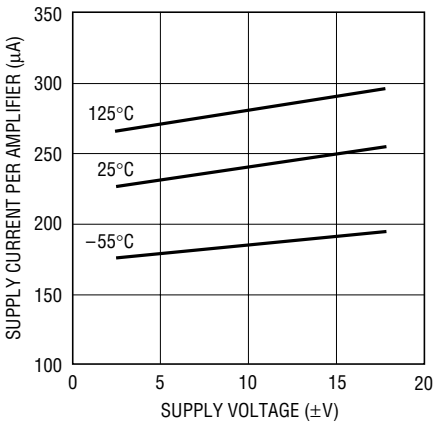


1352/53 G01

Input Common Mode Range vs Supply Voltage

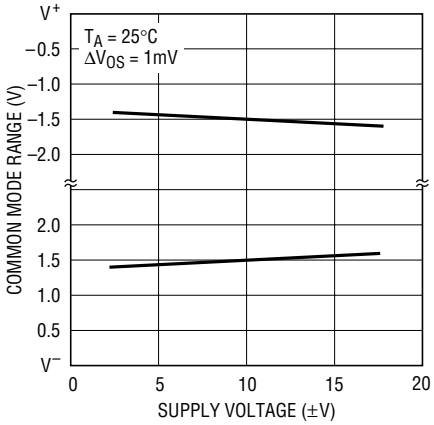

1352/53 G02


Input Bias Current vs Input Common Mode Voltage

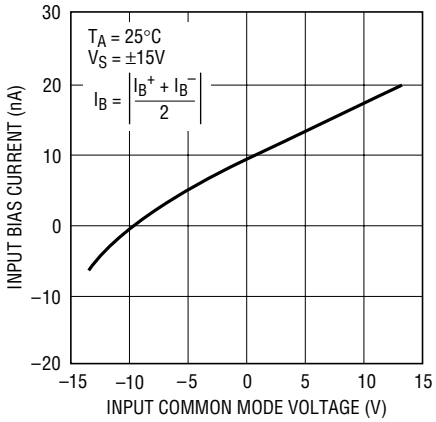

1352/53 G03


TYPICAL PERFORMANCE CHARACTERISTICS

Input Bias Current vs Temperature

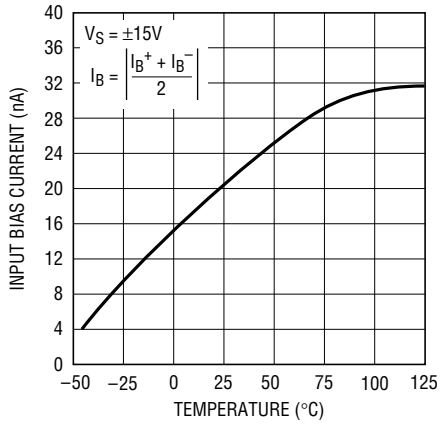


1352/53 G04

Input Noise Spectral Density

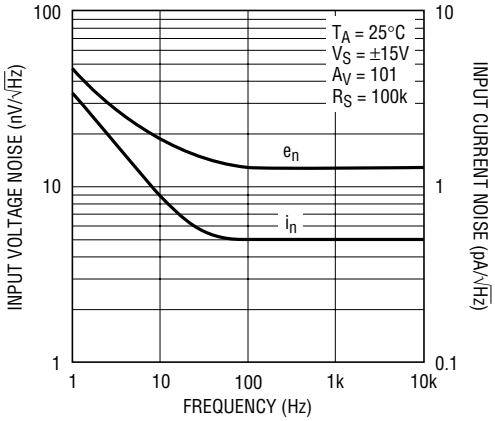


1352/53 G05

Open-Loop Gain vs Resistive Load

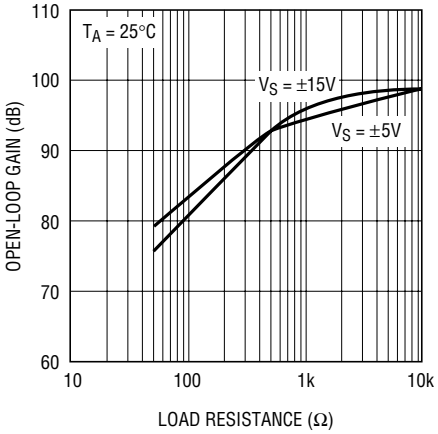


1352/53 G06

Open-Loop Gain vs Temperature

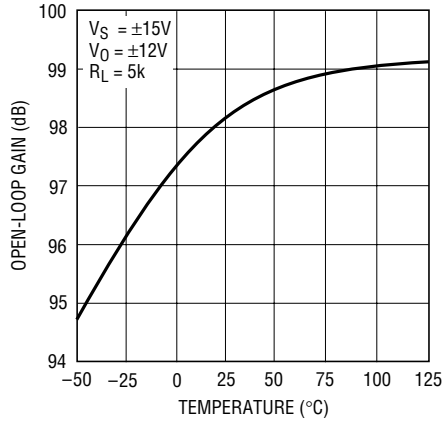


1352/53 G07

Output Voltage Swing vs Supply Voltage

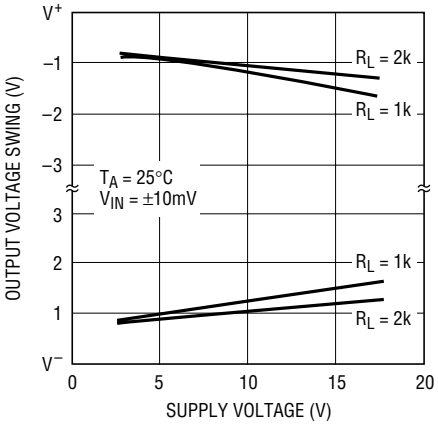


1352/53 G08

Output Voltage Swing vs Load Current

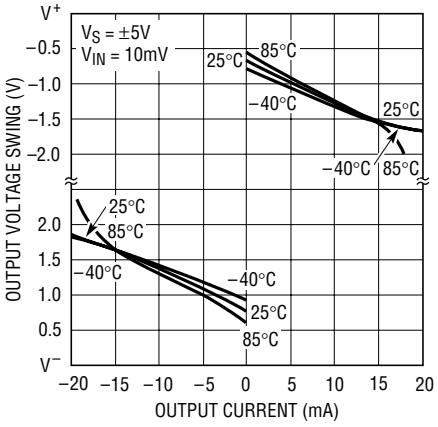


1352/53 G09

Output Short-Circuit Current vs Temperature

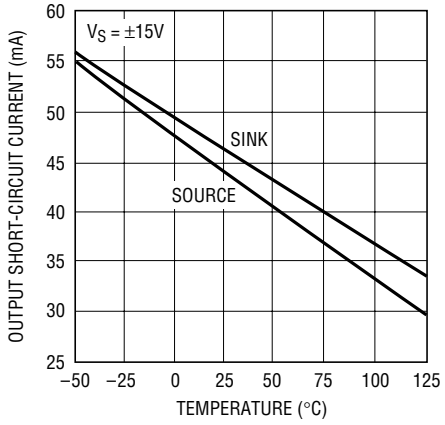


1352/53 G10

Settling Time vs Output Step (Noninverting)

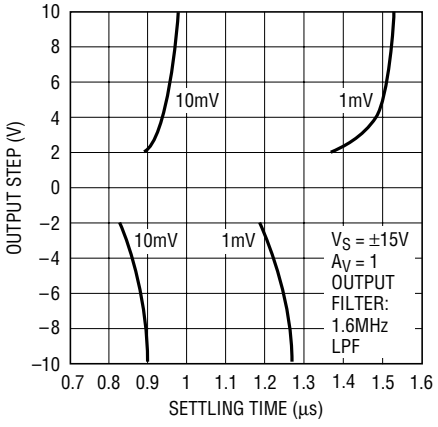

1352/53 G11


Settling Time vs Output Step (Inverting)

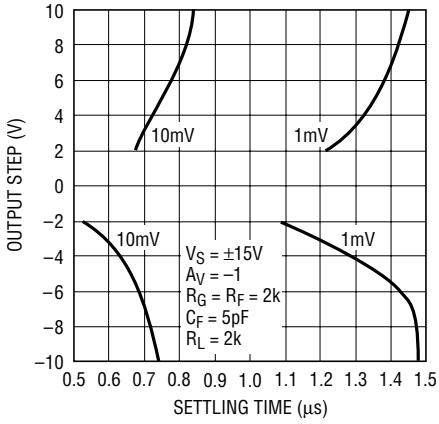


1352/53 G12

TYPICAL PERFORMANCE CHARACTERISTICS


Gain and Phase vs Frequency

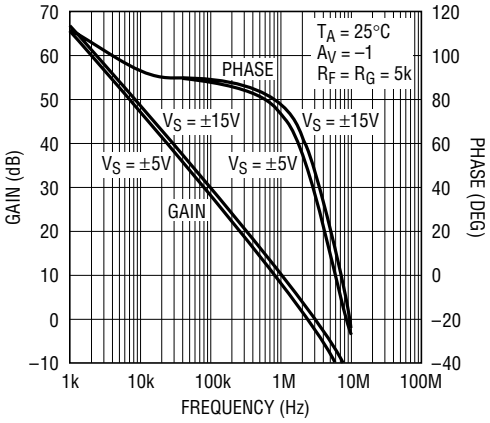


Output Impedance vs Frequency

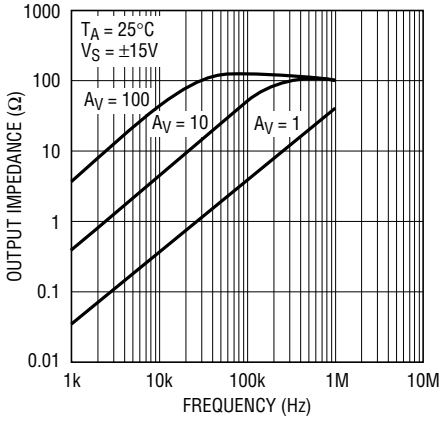


Frequency Response vs Capacitive Load

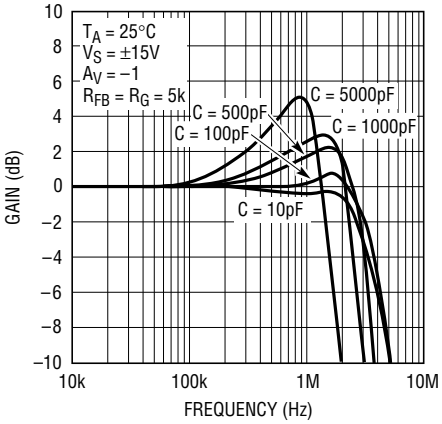


Gain Bandwidth and Phase Margin vs Temperature

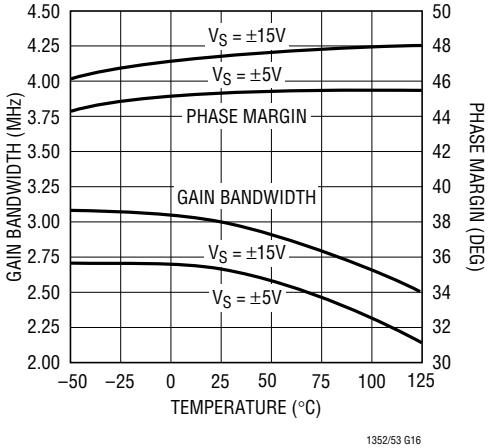


Frequency Response vs Supply Voltage (A_V = 1)

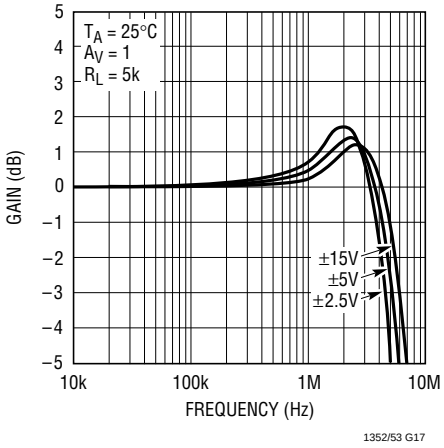


Frequency Response vs Supply Voltage (A_V = –1)

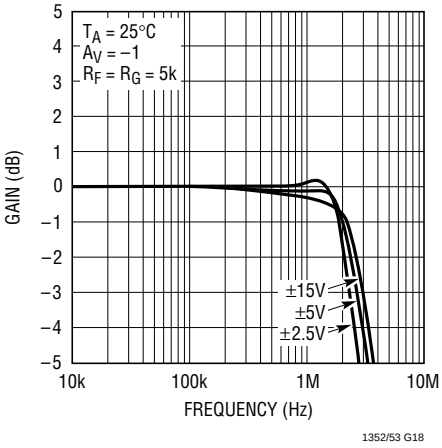


Gain Bandwidth and Phase Margin vs Supply Voltage

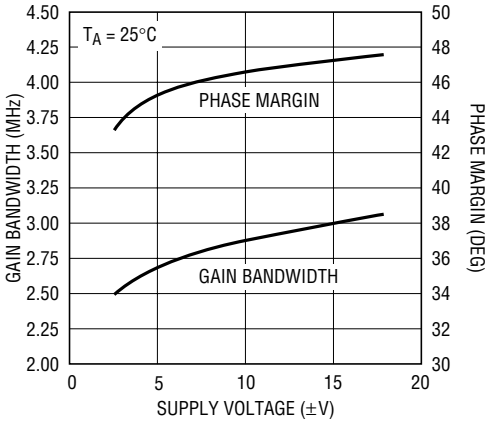

Power Supply Rejection Ratio vs Frequency

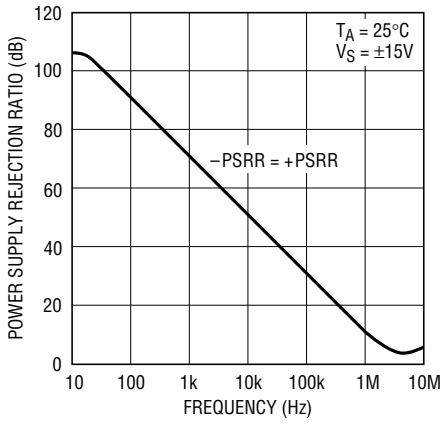


Common Mode Rejection Ratio vs Frequency

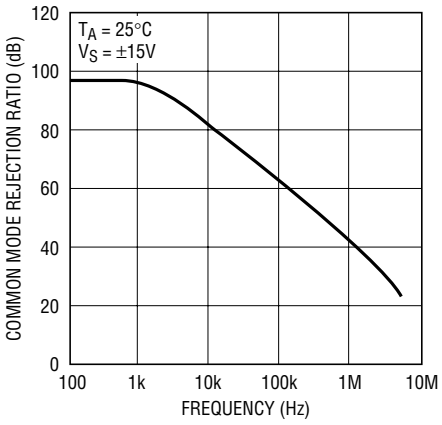


TYPICAL PERFORMANCE CHARACTERISTICS

Slew Rate vs Supply Voltage

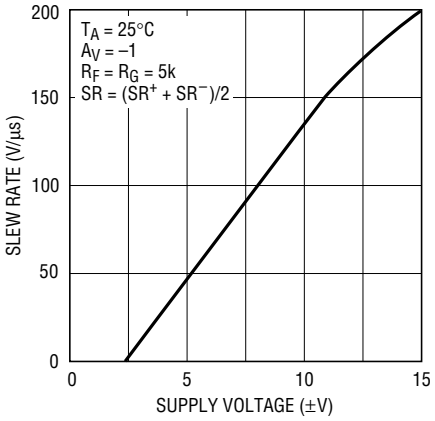


1352/53 G22

Slew Rate vs Temperature

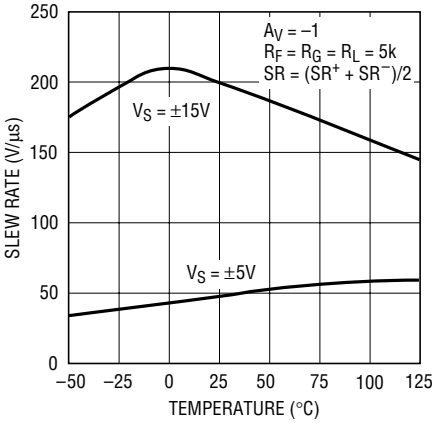


1352/53 G23

Slew Rate vs Input Level

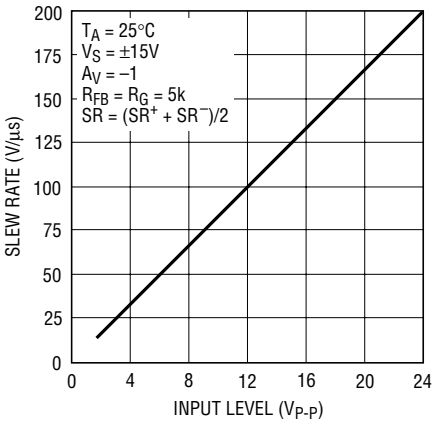


1352/53 G24

Total Harmonic Distortion vs Frequency

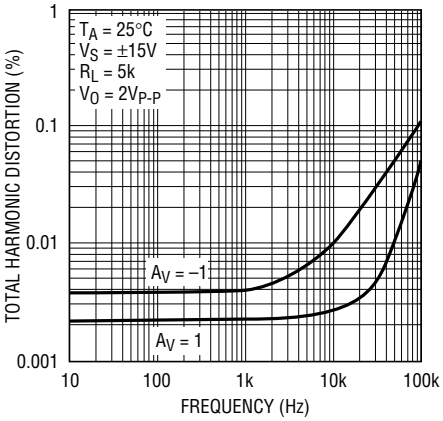


1352/53 G25

Undistorted Output Swing vs Frequency (±15V)

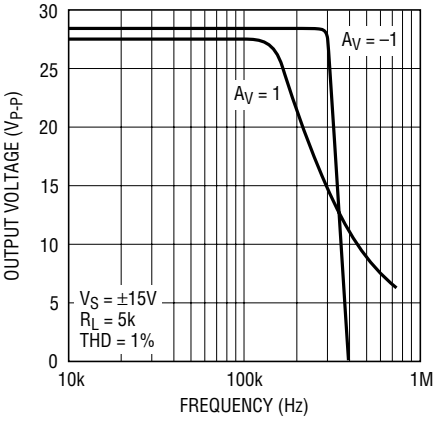


1352/53 G26

Undistorted Output Swing vs Frequency (±5V)

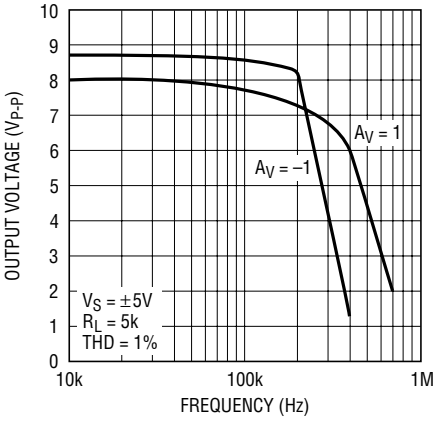


1352/53 G27

2nd and 3rd Harmonic Distortion vs Frequency

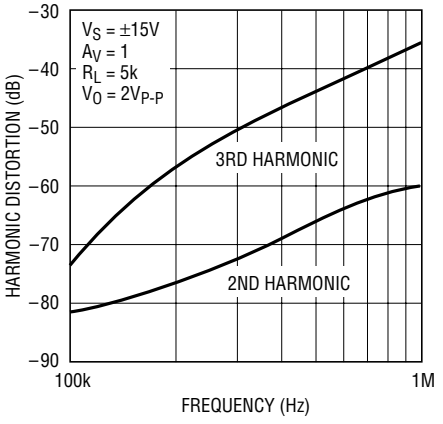


1352/53 G28

Crosstalk vs Frequency

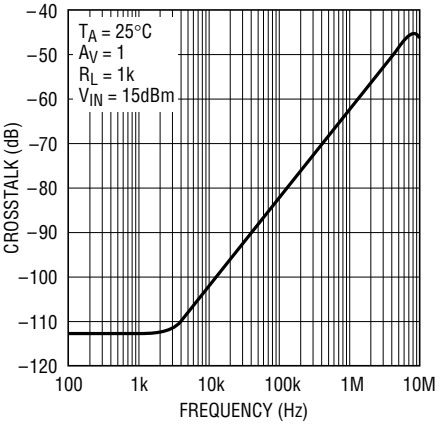

1352/53 G29


Capacitive Load Handling

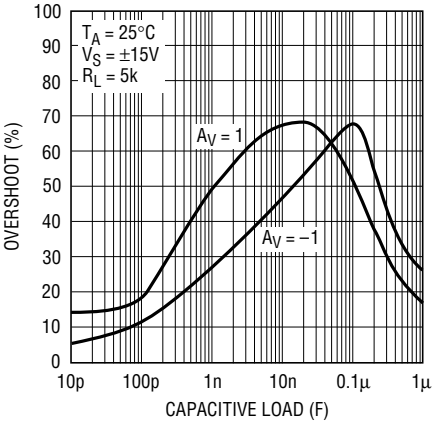

1352/53 G30


TYPICAL PERFORMANCE CHARACTERISTICS

Small-Signal Transient ($A_V = 1$)

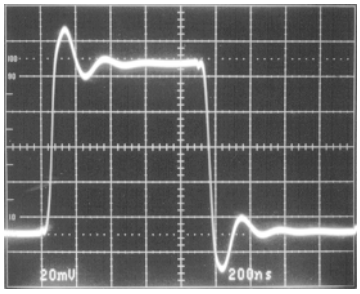


1352/53 G31

Small-Signal Transient ($A_V = -1$)

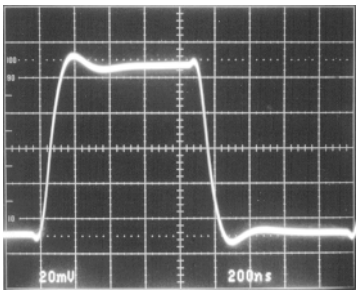


1352/53 G32

Small-Signal Transient ($A_V = -1$, $C_L = 1000pF$)

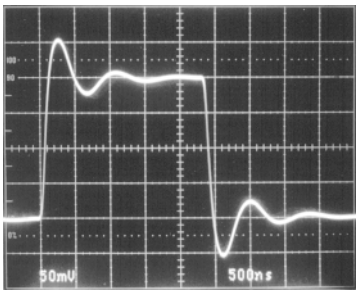


1352/53 G33

Large-Signal Transient ($A_V = 1$)

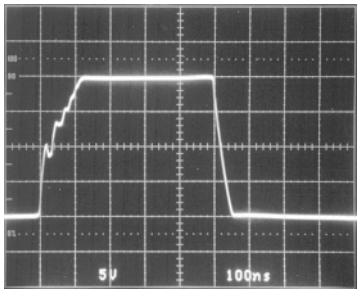


1352/53 G34

Large-Signal Transient ($A_V = -1$)

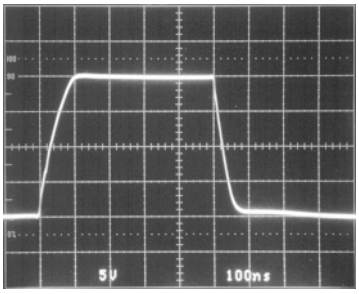

1352/53 G35

Large-Signal Transient ($A_V = 1$, $C_L = 10{,}000pF$)

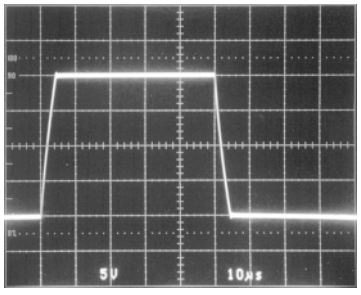

1352/53 G36

APPLICATIONS INFORMATION

Layout and Passive Components

The LT1352/LT1353 amplifiers are easy to use and tolerant of less than ideal layouts. For maximum performance (for example, fast 0.01% settling) use a ground plane, short lead lengths and RF-quality bypass capacitors (0.01µF to 0.1µF). For high drive current applications use low ESR bypass capacitors (1µF to 10µF tantalum).

The parallel combination of the feedback resistor and gain setting resistor on the inverting input can combine with the input capacitance to form a pole which can cause peaking or even oscillations. If feedback resistors greater than 10k are used, a parallel capacitor of value, $C_F > (R_G)(C_{IN}/R_F)$, should be used to cancel the input pole and optimize dynamic performance. For applications where the DC noise gain is one and a large feedback resistor is used, C_F should be greater than or equal to C_{IN}. An example would be an I-to-V converter as shown in the Typical Applications section.

Capacitive Loading

The LT1352/LT1353 are stable with any capacitive load. As the capacitive load increases, both the bandwidth and phase margin decrease so there will be peaking in the frequency domain and in the transient response. Graphs of Frequency Response vs Capacitive Load, Capacitive Load Handling and the transient response photos clearly show these effects.

Input Considerations

Each of the LT1352/LT1353 inputs is the base of an NPN and a PNP transistor whose base currents are of opposite polarity and provide first-order bias current cancellation. Because of variation in the matching of NPN and PNP beta, the polarity of the input bias current can be positive or negative. The offset current does not depend on NPN/PNP beta matching and is well controlled. The use of balanced source resistance at each input is recommended for

APPLICATIONS INFORMATION

applications where DC accuracy must be maximized. The inputs can withstand transient differential input voltages up to 10V without damage and need no clamping or source resistance for protection. Differential inputs, however, generate large supply currents (tens of mA) as required for high slew rates. If the device is used with sustained differential inputs, the average supply current will increase, excessive power dissipation will result and the part may be damaged. **The part should not be used as a comparator, peak detector or other open-loop application with large, sustained differential inputs**. Under normal, closed-loop operation, an increase of power dissipation is only noticeable in applications with large slewing outputs and is proportional to the magnitude of the differential input voltage and the percent of time that the inputs are apart. Measure the average supply current for the application in order to calculate the power dissipation.

Circuit Operation

The LT1352/LT1353 circuit topology is a true voltage feedback amplifier that has the slewing behavior of a current feedback amplifier. The operation of the circuit can be understood by referring to the Simplified Schematic.

The inputs are buffered by complementary NPN and PNP emitter followers which drive R1, a 1k resistor. The input voltage appears across the resistor generating currents which are mirrored into the high impedance node and compensation capacitor C_T. Complementary followers form an output stage which buffers the gain node from the load. The output devices Q19 and Q22 are connected to form a composite PNP and a composite NPN.

The bandwidth is set by the input resistor and the capacitance on the high impedance node. The slew rate is determined by the current available to charge the high impedance node capacitance. This current is the differential input voltage divided by R1, so the slew rate is proportional to the input. Highest slew rates are therefore seen in the lowest gain configurations. For example, a 10V output step in a gain of 10 has only a 1V input step whereas the same output step in unity gain has a 10 times greater input step. The graph Slew Rate vs Input Level illustrates this relationship. In higher gain configurations the large-signal performance and the small-signal performance both look like a single pole response.

Capacitive load compensation is provided by the R_C, C_C network which is bootstrapped across the output stage. When the amplifier is driving a light load the network has no effect. When driving a capacitive load (or a low value resistive load) the network is incompletely bootstrapped and adds to the compensation at the high impedance node. The added capacitance slows down the amplifier and a zero is created by the RC combination, both of which improve the phase margin. The design ensures that even for very large load capacitances, the total phase lag can never exceed 180 degrees (zero phase margin) and the amplifier remains stable.

Power Dissipation

The LT1352/LT1353 combine high speed and large output drive in small packages. Because of the wide supply voltage range, it is possible to exceed the maximum junction temperature of 150°C under certain conditions. Maximum junction temperature T_J is calculated from the ambient temperature T_A and power dissipation P_D as follows:

LT1352CN8: $T_J = T_A + (P_D)(130°C/W)$
LT1352CS8: $T_J = T_A + (P_D)(190°C/W)$
LT1353CS: $T_J = T_A + (P_D)(150°C/W)$


Worst-case power dissipation occurs at the maximum supply current and when the output voltage is at 1/2 of either supply voltage (or the maximum swing if less than 1/2 supply voltage). For each amplifier $P_{D(MAX)}$ is:

$$P_{D(MAX)} = (V^+ - V^-)(I_{S(MAX)}) + (V^+/2)^2/R_L \text{ or}$$
$$(V^+ - V^-)(I_{S(MAX)}) + (V^+ - V_{MAX})(I_{MAX})$$

Example: LT1353 in S14 at 85°C, $V_S = \pm 15V$, $R_L = 500\Omega$, $V_{OUT} = \pm 5V$ ($\pm 10mA$)


$$P_{D(MAX)} = (30V)(380\mu A) + (15V - 5V)(10mA) = 111mW$$
$$T_J = 85°C + (4)(111mW)(150°C/W) = 152°C$$

SIMPLIFIED SCHEMATIC

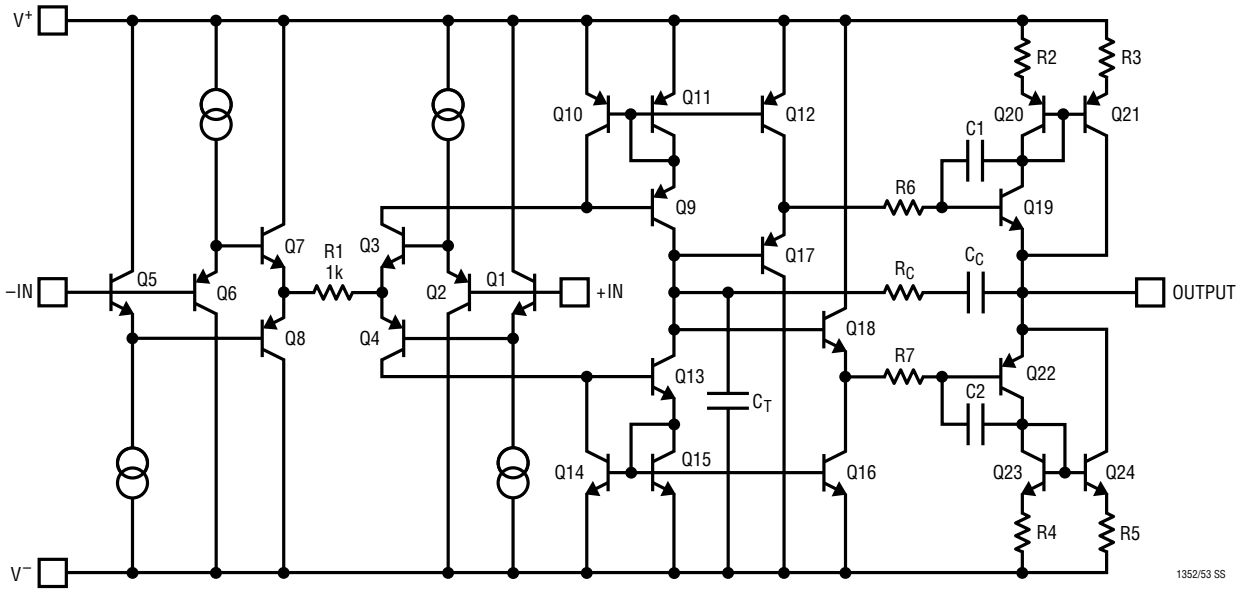


TYPICAL APPLICATIONS

DAC I-to-V Converter

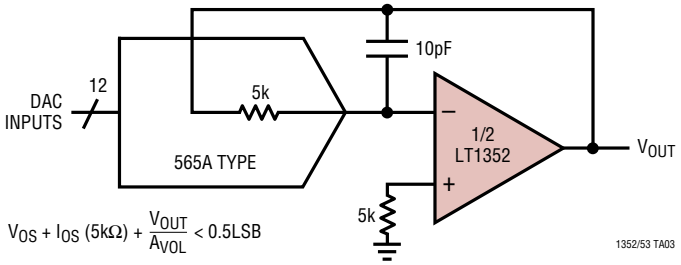


400kHz Photodiode Preamp with 10kHz Highpass Loop

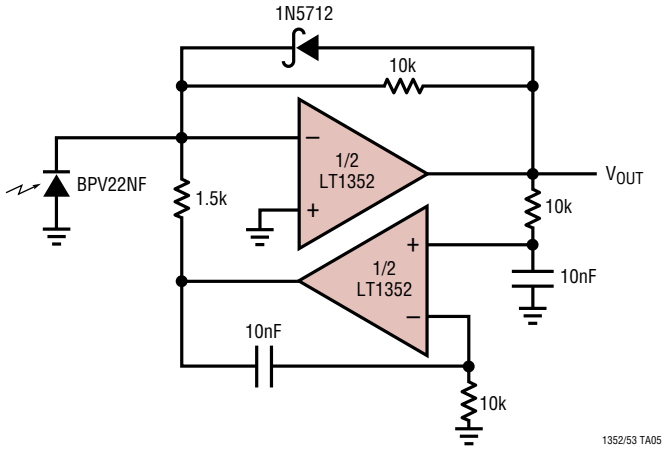

PACKAGE DESCRIPTION

N8 Package
8-Lead PDIP (Narrow .300 Inch)
(Reference LTC DWG # 05-08-1510)

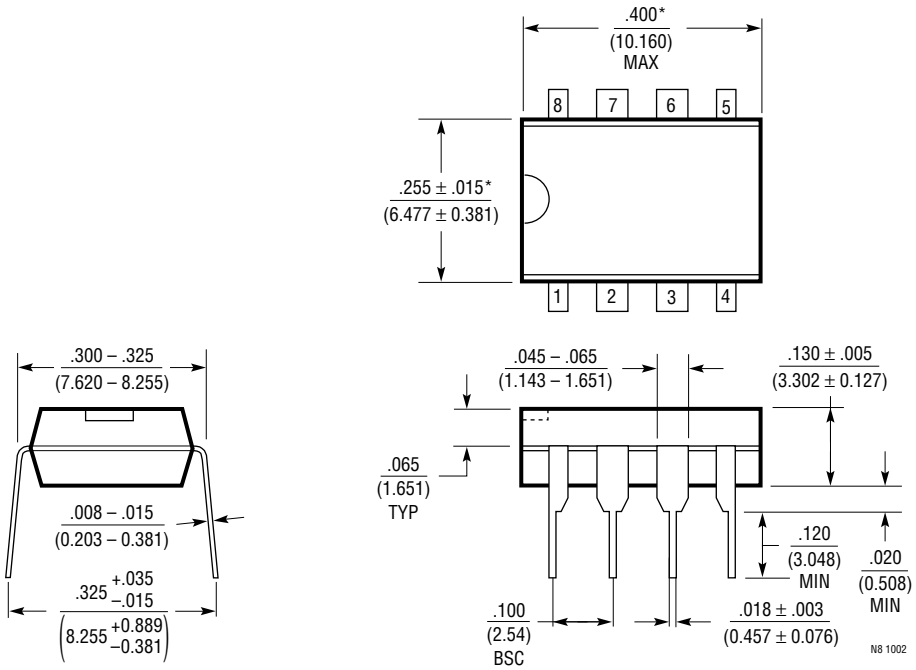


NOTE:
1. DIMENSIONS ARE INCHES / MILLIMETERS

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

PACKAGE DESCRIPTION

S8 Package
8-Lead Plastic Small Outline (Narrow .150 Inch)
(Reference LTC DWG # 05-08-1610)

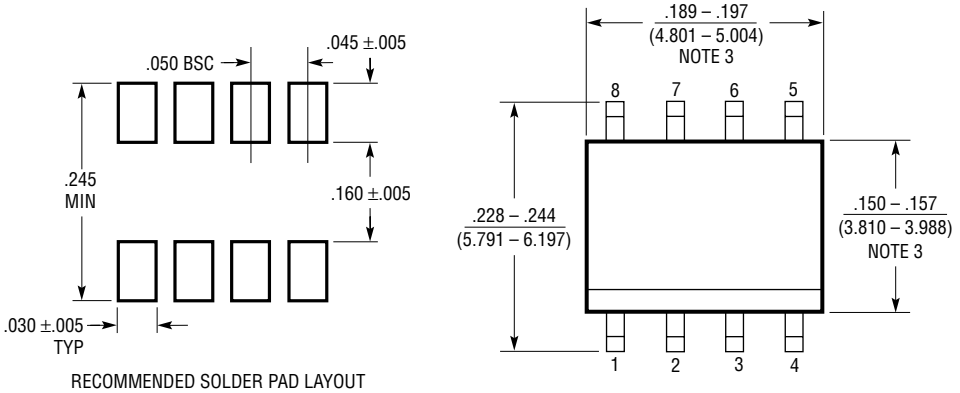


NOTE:
1. DIMENSIONS IN $\frac{\text{INCHES}}{(\text{MILLIMETERS})}$
2. DRAWING NOT TO SCALE
3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
   MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

SO8 0303

PACKAGE DESCRIPTION

S Package
14-Lead Plastic Small Outline (Narrow .150 Inch)
(Reference LTC DWG # 05-08-1610)

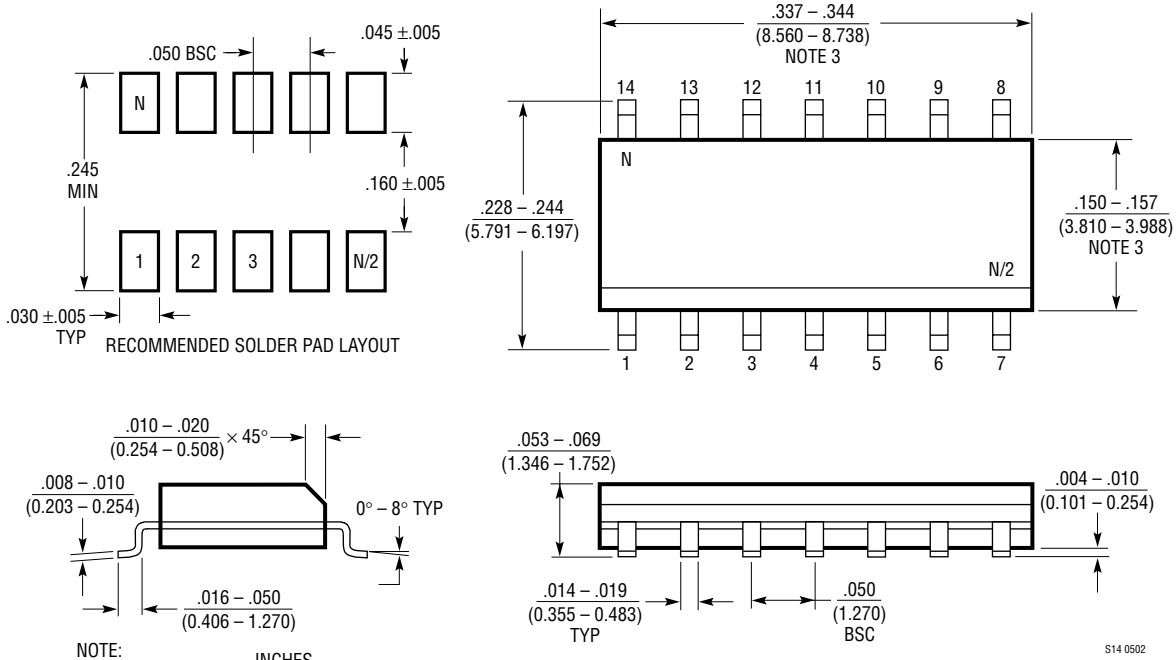


NOTE:
1. DIMENSIONS IN $\frac{\text{INCHES}}{(\text{MILLIMETERS})}$
2. DRAWING NOT TO SCALE
3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
   MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

TYPICAL APPLICATIONS

20kHz, 4th Order Butterworth Filter

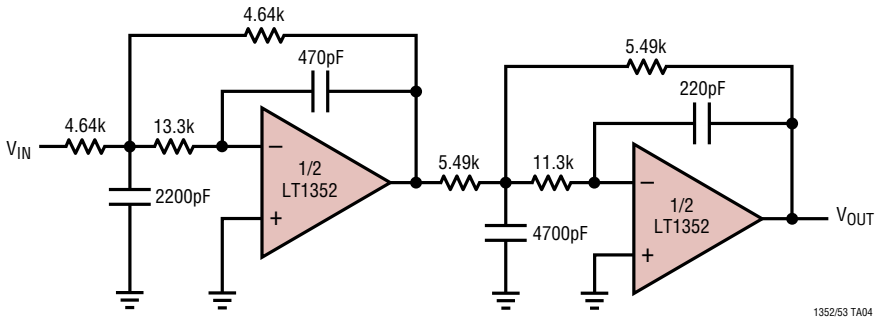

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1351	250µA, 3MHz, 200V/µs Op Amp	Good DC Precision, C-Load Stable, Power Saving Shutdown
LT1354/55/56	Single/Dual/Quad 1mA, 12MHz, 400V/µs Op Amp	Good DC Precision, Stable with All Capacitive Loads

Linear Technology Corporation
1630 McCarthy Blvd., Milpitas, CA 95035-7417
(408) 432-1900 • FAX: (408) 434-0507 • www.linear.com
LT/TP 0603 1K REV A • PRINTED IN USA
© LINEAR TECHNOLOGY CORPORATION 1996