
VICOR CONFIDENTIAL
THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APVD
02	DRN PER E990513 AK	11/19/99	RCM

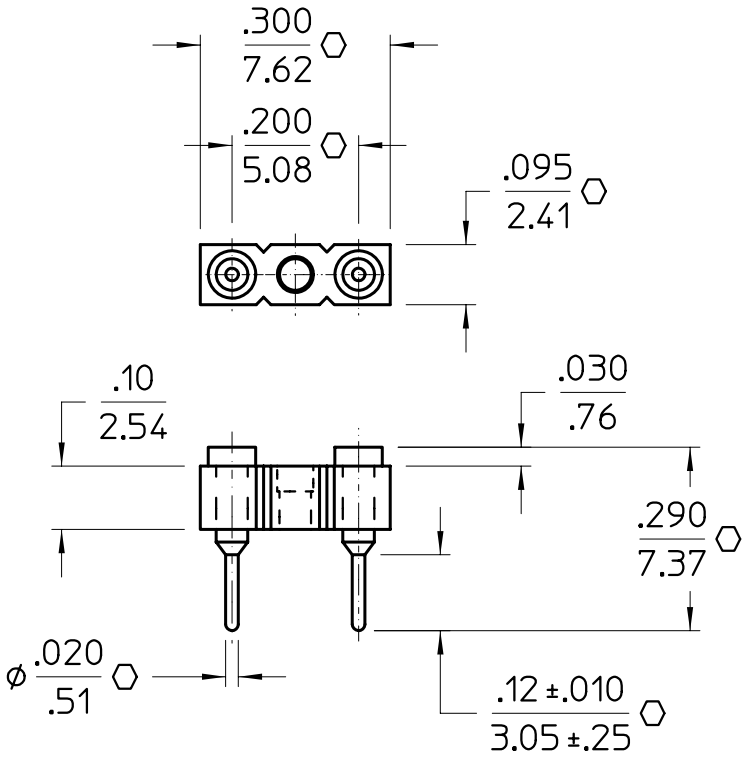

NOTES:
1. MATERIAL: PIN: BRASS ALLOY TYPE 360, PER QQ-B626, 1/2 HARD
   CONTACT: BERYLLIUM COPPER
   INSULATOR: THERMOPLASTIC POLYESTER(BLACK) RATED 94V0
2. FINISH: SHELL: 100uINCH TIN PER MIL-T-10727, OVER
   100uINCH NICKEL PER QQ-N-290.
   CONTACT: 10uINCH GOLD PER MIL-C-45204 OVER 50uINCH
   NICKEL PER QQ-N-290.
3. "O" DENOTES CRITICAL CHARACTERISTIC FOR LOT INSPECTION.

DRAWN BY	DATE
A. KUMAR	11/19/99

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN IN/MM-
TOLERANCES ARE:
DECIMALS .XX= ±.01/.25 .XXX=±.005/.13
ANGLES ±1°

THIRD ANGLE PROJECTION

VICOR

SOCKET, FUSE, PCB, 5A, 125VAC

SIZE	FSCM NO.	DWG NO	REV
A	67131	03144	02

DO NOT SCALE DRAWING | SCALE 4:1 | SHEET 1 OF 1