

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0357181510](#)
Status: **Active**
Description: 4.75mm (.187") Tab Slip-On Terminal, Quick Disconnect, Female, 0.50mm (.020") Tab Thickness, Wire Range 10-14 AWG (5.26-2.08mm²), Post-Tin Plated

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-35703-001 \(PDF\)](#)

Agency Certification

CSA	LR95446
TUV	R9451159
UL	E92853

General

Product Family	Quick Disconnects
Series	35718
Crimp Quality Equipment	Yes
Product Name	Slip-On
Type	Quick Disconnect

Physical

Barrel Type	Open
Gender	Female
Glow-Wire Compliant	No
Insulation	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Orientation	Straight
Packaging Type	Reel
Plating min: Mating (µin)	40
Plating min: Mating (µm)	1
Plating min: Termination (µin)	40
Plating min: Termination (µm)	1
Polarized to Mating Part	No
Tab Thickness	0.51mm (.020")
Tab Width	4.75mm (.187")
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	4.40-5.30mm (.173-.209") max.
Wire Size AWG	10, 12, 14
Wire Size mm ²	2.08 - 5.26


Electrical

Voltage - Maximum	250V
-------------------	------

Material Info

Reference - Drawing Numbers

Product Specification	PS-35703-001
Sales Drawing	SD-35718-15*0

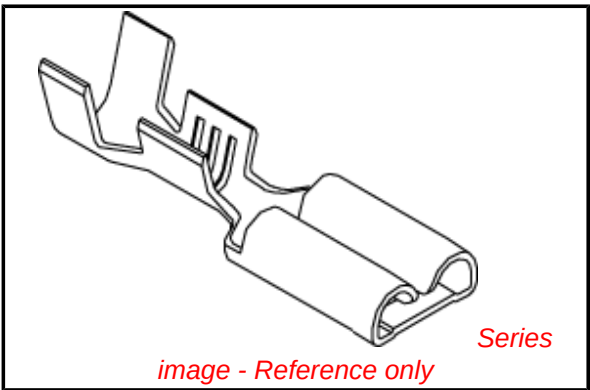

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Halogen-Free

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[35718Series](#)

Use With
4.75mm (.187") Tab

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION





DO NOT SCALE DRAWING
DIMENSION IN METRIC

PROJECT NO.

SIMILAR ITEM

EDP NO.

ENG. NO
SD 35718-15*0

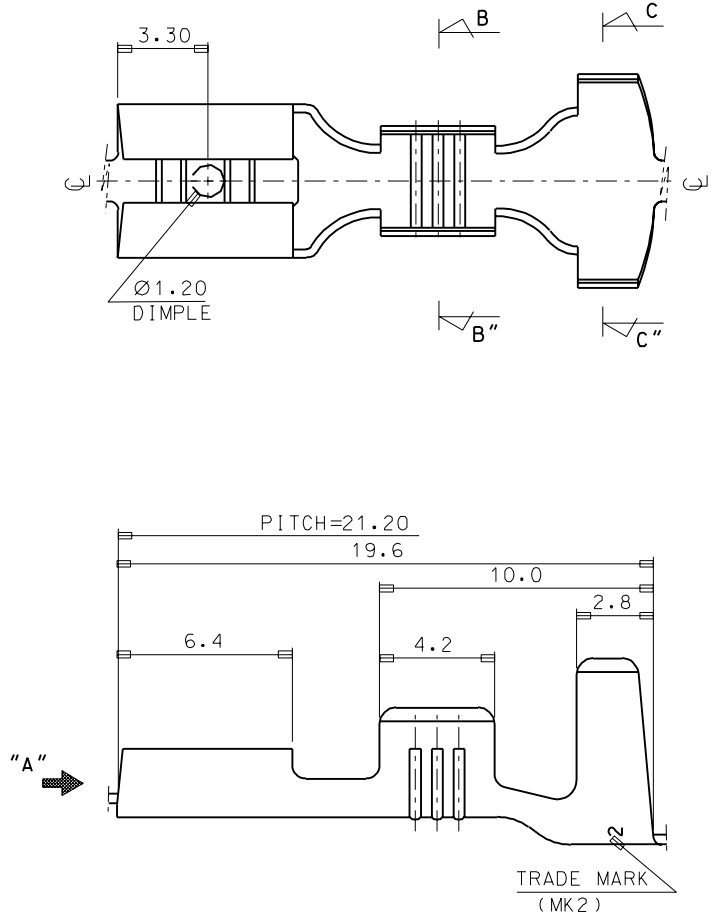

- NOTES
- 1. MATERIAL: BRASS , 0.35THICKNESS
 - 2. FINISH: 35718-1500: UNPLATED
35718-1510: POST-TIN PLATED
 - 3. RECOMMENDED LENGTH OF WIRE STRIP IS 6.2-6.7

					ASS'Y PART		QTY/REEL OR PACK 4,000 0'ty / reel	SURFACE AREA MM ²	MATERIAL SEE NOTES		WIRE RANGE AWG: #14 MM ² : #10	GENERAL TOLERANCES DIM. : ±0.30 ANGLE : ±0.20	molex MOLEX-KOREA CO.,LTD.	
					DESCRIPTION	ENG.NO.			DIMENSION CLASSIFICATION					
					///	///	DIE NO. ///	LAYOUT NO. ///	■♥: CRITICAL ☒: MAJOR □: MINOR (): REFERENCE	INSULATION RANGE	REVISE ONLY ON CAD SYSTEM			
							WIRE CRIMP WIDTH ///	INS. CRIMP WIDTH ///	DRAWN BY W. Y. YANG		CHK'D BY B. K. CHOI	TITLE: .187 SLIP-ON RECEPTACLE(L)		1 of 1
A	CAD REDRAWING	93-011		93.5.24										
LTR	REVISION RECORD	ECN	DR/CHK	DATE	DIE FEED	APPL FEED	WBDW ///	IBDW ///	APP'D BY	SCALE 6:1	Ø 4.4-5.3	ENG.NO.	SD 35718-15*0	REV A