

M51524L/P/FP

AUTO REVERSE PREAMPLIFIER WITH MUSIC SENSOR

DESCRIPTION

The M51524 is a preamplifier IC developed for car audio systems.

The IC, in additions to 2 channels of high-gain, low-noise preamplifiers, has a lead-in detection function suiting to auto reverse function and is capable of processing analog signals transmitted from the cassteed deck.

Its applications cover home-use audio systems and portable radio CD/cassette players, as well as car audio systems.

FEATURES

- Built-in electronic switch for forward/reverse selection offers capability of switching 2 channels with a single switch.
- Built-in switch for forward/reverse switching makes it possible to switch 2 channels with a single switch.
- Use of reference voltage of bias circuit eliminates the need for input coupling capacitor.
- 2 channels of high-gain, low-noise preamplifiers built-in.
- Internal direct connections between each preamplifier output and high-gain mixing amplifier, without using coupling capacitor.
- Built-in filter circuits for prevention of malfunctioning caused by tape pop up noise at music blank.
- Built-in reset circuit to reset music selection at power up.
- Capable of setting timing for music blank by means of external CR combination.



Outline 20P5A(L)

1.27mm pitch 325mil ZIP
(2.8mm × 25.2mm × 6.3mm)



Outline 24P4D(P)

2.54mm pitch 300mil DIP
(6.3mm × 29.2mm × 3.3mm)




Outline 24P2N-B(FP)

1.27mm pitch 300mil SOP
(5.3mm × 15.02mm × 1.8mm)

RECOMMENDED OPERATING CONDITIONS

Supply voltage range..... $V_{CC} = 6$ to $15V$

Rated supply voltage..... $V_{CC} = 8V$

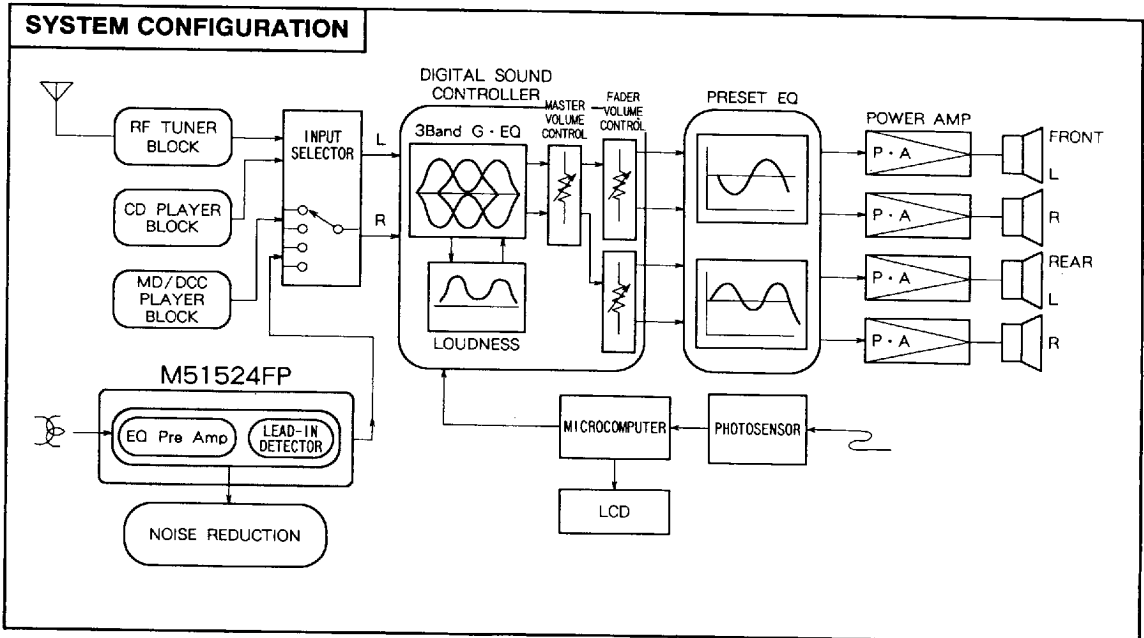


6249826 0022528 TT7




M51524L/P/FP

AUTO REVERSE PREAMPLIFIER WITH MUSIC SENSOR

PIN CONFIGURATION (TOP VIEW)

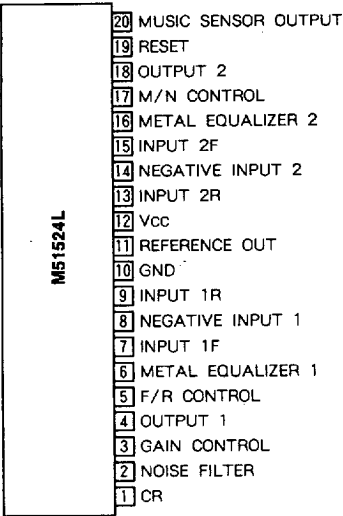

Outline 20P5A(L)

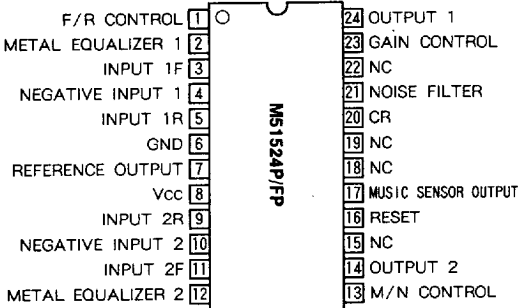


Outline 24P4D(P)
24P2N-B(FP)

NC : NO CONNECTION

M51524L/P/FP

AUTO REVERSE PREAMPLIFIER WITH MUSIC SENSOR

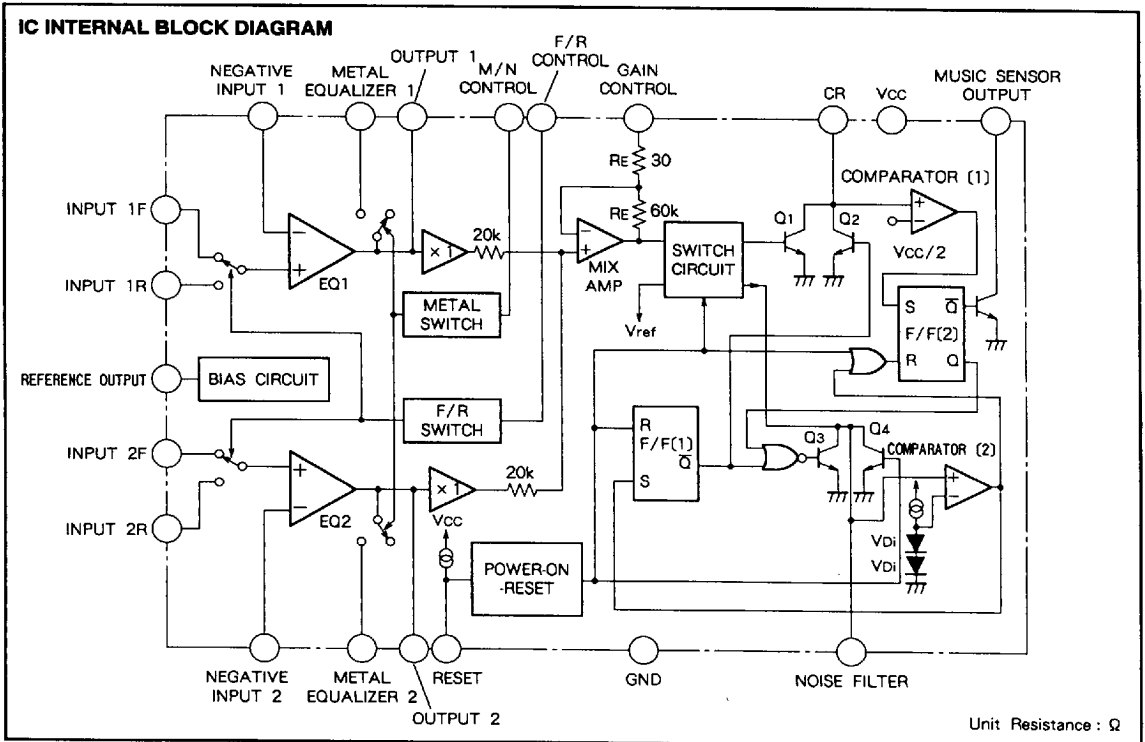

6249826 0022530 655



M51524L/P/FP

AUTO REVERSE PREAMPLIFIER WITH MUSIC SENSOR

ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C, unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply voltage		16	V
Icc	Circuit current		40	mA
Pd	Power dissipation	(M51524L)	800	mW
		(M51524P)	1000	
		(M51524FP)	500	
Kθ	Thermal derating	(M51524L)	8	mW/°C
		(M51524P)	10	
		(M51524FP)	5	
Topr	Operating temperature		- 20 to + 75	°C
Tstg	Storage temperature		- 40 to + 125	°C

ELECTRICAL CHARACTERISTICS (f = 1kHz, Rg = 620Ω, Vcc = 8V, Normal equalizer, Ta = 25 °C, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
Icc	Circuit current	Quiescent circuit current	—	9	14	mA
Gvo	Open loop gain	CE = 220μF	68	80	—	dB
Gvc	Closed loop gain		38.5	40.5	42.5	dB
THD	Total harmonic distortion	Vo = 0.5Vrms	—	0.06	0.2	%
Vomax	Maximum output voltage	THD = 1 %	1.5	2.0	—	Vrms
No	Output noise voltage	BW = 20Hz to 20kHz	—	85	160	μVrms
Sep	Separation	Vo = 0dBm, BW = 20Hz to 20kHz	45	63	—	dB
CT	Cross talk	Vo = 0dBm, BW = 20Hz to 20kHz	60	78	—	dB
Iin1(20)	CR circuit input current		—	- 0.1	- 0.6	μA
VoL	Music senser output voltage Low		—	0.15	0.4	V
Vth1(20)	Comparator (1) threshold voltage		3.5	4.0	4.5	V
I19(16)	Reset charging current		- 3	- 9	- 30	μA
V19(16)	Reset completion voltage		1.0	1.4	1.7	V
Vth19(16)	Reset threshold voltage		0.8	1.2	1.7	V
I2(21)	Noise filter charging current		- 30	- 60	- 110	μA
Vth2(21)	Comparator (2) threshold voltage		1.1	1.5	1.7	V
Rs(1)	Input impedance pin⑤ (1)	V5(1) = 1V	70	100	150	kΩ
R17(13)	Input impedance pin⑩ (13)	V17(13) = 1V	70	100	150	kΩ







Note1. () M51524P,FP,AFP



M51524L/P/FP

AUTO REVERSE PREAMPLIFIER WITH MUSIC SENSOR

TYPICAL CHARACTERISTICS

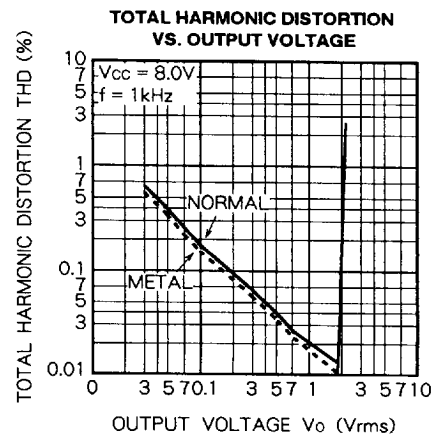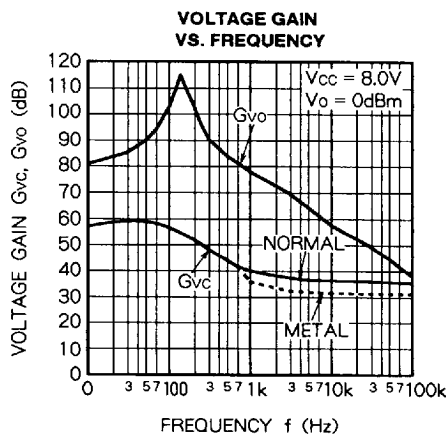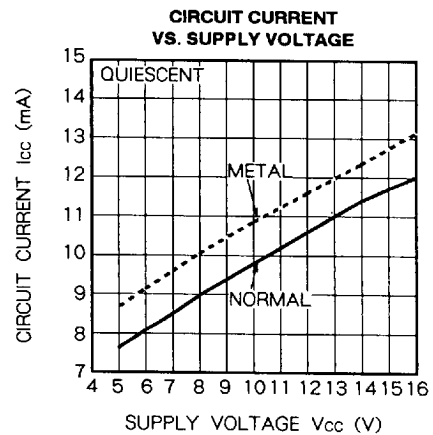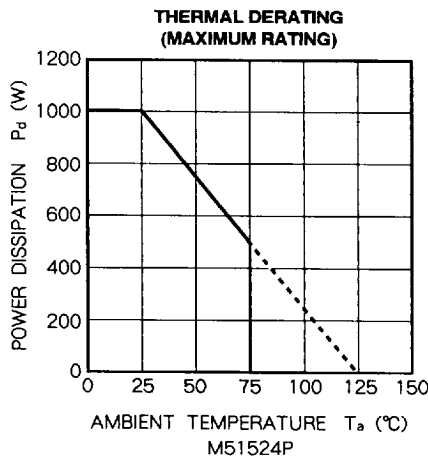
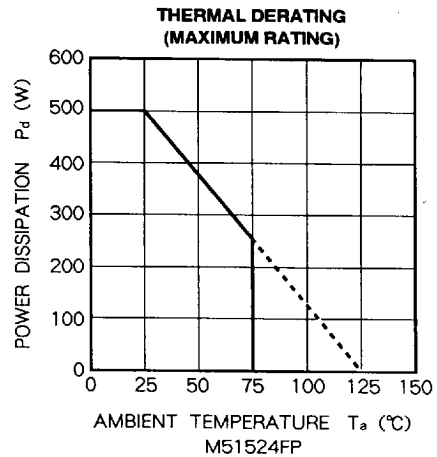
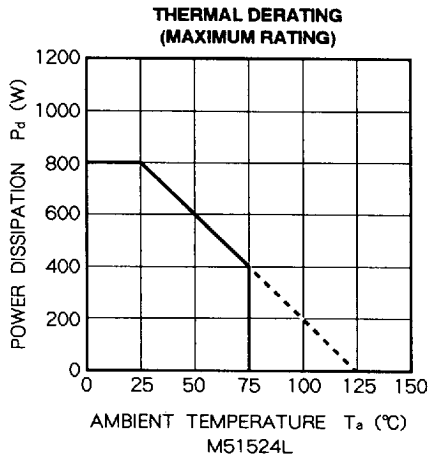


6249826 0022532 428



M51524L/P/FP

AUTO REVERSE PREAMPLIFIER WITH MUSIC SENSOR

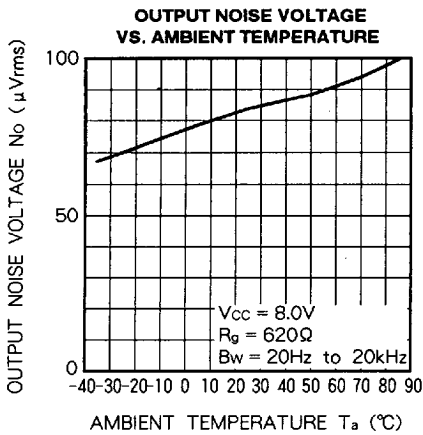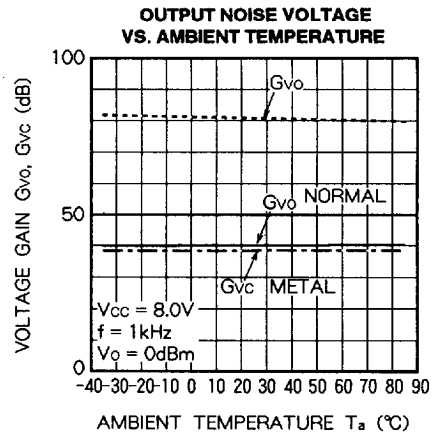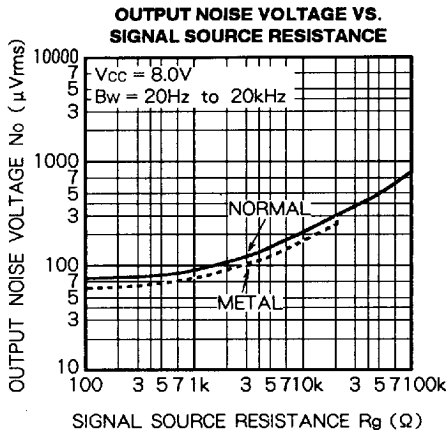

6249826 0022533 364



TEST CIRCUIT (M51524L)



6249826 0022534 2T0



[illegible]

Units Resistance : Ω
Capacitance : F



M51524L/P/FP

AUTO REVERSE PREAMPLIFIER WITH MUSIC SENSOR

TEST CONDITIONS

Parameter	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	S13	Methods
Icc	2	0	1	1	1	1	1	1	2	1	1	1	1	Read value on ammeter
Gvo	1	1/2 3/4	1/2	1	2	1	1	1	2	1	1	2	1	Gvo = 20 log (Vo/Vi)
Gvc	1	1/3	1	1	1	1	1/2	1	2	1	1	2	1	Gvc = 20 log (Vo/Vi)
THD	1	1/3	1	1	1	1	1/2	1	2	1	1	2	1	Read value on distortion meter at Vo = 0.5Vrms
Vomax	1	1/3	1	1	1	1	1/2	1	2	1	1	2	1	Measure output valtage at THD = 1 %
No	1	0	1/2	1	1	1	1/2	2	2	1	1	2	1	BW = 20Hz to 20kHz
Sep	1	1/3	1	1	1	1	1,2 1,2	2	2	1	1	2	1	Measure output voltage when another output voltage is 0dBm. BW = 20Hz to 20kHz, Sep = Vo(dB)
CT	1	1/2 3/4	1,2 1,2	1	1	1	1/2 2	2	2	1	1	2	1	Measure crosstalk between Forward and Reverse Vi = 0dBm, BW = 20Hz to 20kHz
Iin1(20)	1	0	1	1	1	1	1	1	2	4	1	1	2	Measure current of pin①(20) after preset pulse enters to pin②(21)
VoL	1	0	1	1	1	1	1	1	2	4	1	1	2	Measure voltage of pin②(17) after preset pulse enters to pin②(21)
Vth1(20)	1	0	1	1	1	1	1	1	2	3	1	1	1	Measure voltage of pin①(20) when V1 increases from 1V and output of pin②(17) changes to High from Low after preset pulse enters to pin ②(21)
I19(16)	1	0	1	1	1	1	1	1	2	1	1	4	1	Measure current with pin⑨(16)
V19(16)	1	0	1	1	1	1	1	1	2	1	1	1	1	Measure voltage with pin⑨(16)
Vth19(16)	1	0	1	1	1	1	1	1	2	1	1	3	1	Measure voltage of pin⑨(16) when V19 decreases from 2V and output of pin②(17) changes to Low from High, after preset pulse enters to pin
I2(21)	1	0	1	1	1	1	1	1	3	2	3	*	1	Measere current of pin②(21) after S12 changes to 1→2→1
Vth2(21)	1	0	1	1	1	1	1	1	2	2	2	*	1	Measure supply voltage of pin②(21) when V2 increases from 0.5V and voltage of pin①(20) changes to High (≈2.7V) from Low, after S12 changes to 1→2→1
R5(1)	1	0	1	1	1	1	1	1	2	1	1	1	1	Measure current I⑤ (1) at pin⑤ (1) P⑤ (1) = 1/I⑤ (1)(kΩ)
R17(13)	1	0	1	1	1	1	1	1	2	1	1	1	1	Measure current I⑰(13) at pin⑰(13) P⑰ (13) = 1/I⑰ (13)(kΩ)

Note 2.()M51524P, FP


6249826 0022536 073



M51524L/P/FP

AUTO REVERSE PREAMPLIFIER WITH MUSIC SENSOR

APPLICATION EXAMPLE (M51524P/FP)

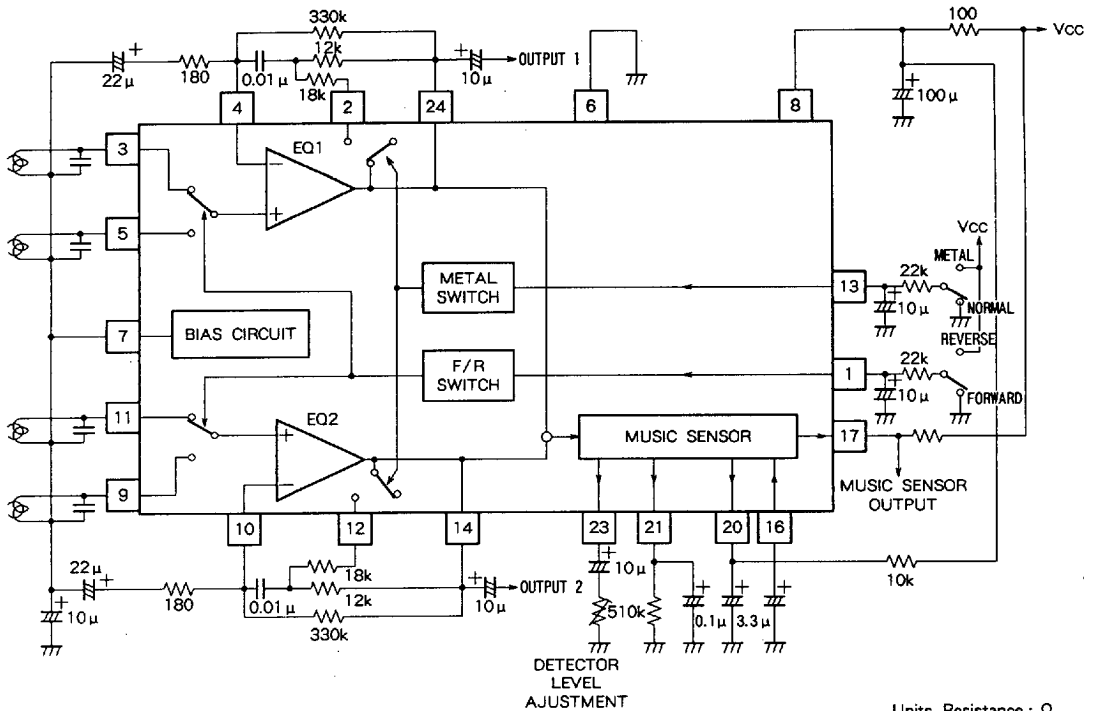

6249826 0022537 TOT

