
03 0362


Circular connectors with threaded joint M16 acc. to IEC 61076-2-106, IP40/IP67/IP68





Chassis socket acc. to AISG specification and IEC 61076-2-106, IP 68, with threaded joint, empty housing for reception of crimp contacts, for front mounting

03 0362



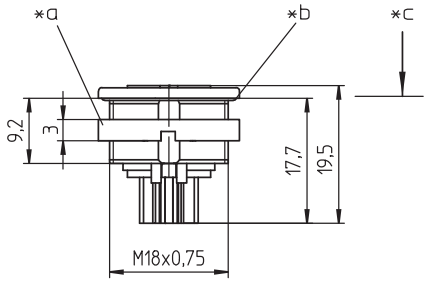





Environmental conditions

Temperature range	-40 °C/+85 °C

Materials

Insulating body	PA GF, V-0 according to UL94
Housing	Zn diecast, pre-copper and nickel-plated
Ring screw	CuZn, nickel-plated
Seal	NBR

Mechanical data

Insertion force/contact	≤ 50 N [1]
Withdrawal force/contact	≥ 35 N [1]
Protection class	IP68 [2]

[1] measured with a proper counterpart

[2] according to IEC DIN EN 60529, only in locked condition with an appropriate counterpart; IPX8 requirements under agreement between manufacturer and user

Electrical data (at T_{amb} 20 °C)

Rated current	5 A (T_{amb} 40 °C)
Rated voltage	100 V (with pollution degree 1) 32 V (with pollution degree 2)
Rated impulse voltage	500 V
Material group	I (IEC)/0 (UL) (CTI ≥ 600)
Overvoltage category	I
Insulation resistance	> 100 MΩ
Further data	see suitable crimp contact

Associated products


Counterparts

0331	0332	0332-1
033200	0365	036500

Accessories

0322 C 16	0364 V109	0381
038199	0382	0384
0385	038799	


03 0362



*g
0362 05-3



0362 06-1



08-a
0362 08-1

*a nut enclosed separately
*b O-ring gasket
*c mounting direction
*d flat gasket
*e port in mounting plate
*f anti-rotation, alternative execution
*g pin configuration according to AISG C485

03 0362

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
0362 05-3	5	50	100
0362 06-1	6	50	100
0362 08-1	8	50	100

Packaging:
in a cardboard box