


Keysight Technologies

M9260A PXIe Audio Analyzer Module

Data Sheet

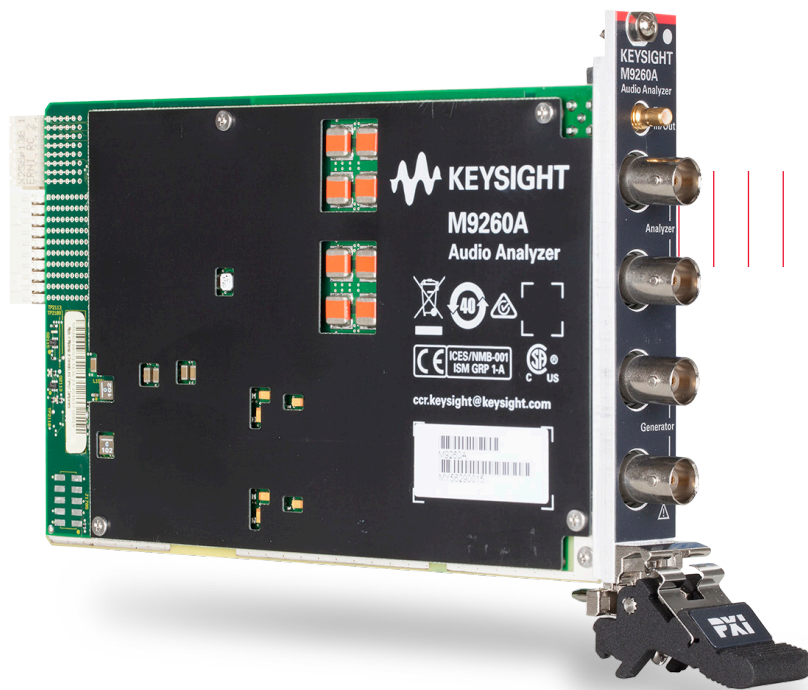

What is an audio analyzer?

An audio analyzer is a test and measurement instrument that is used to quantify the audio quality of electronic and electro-acoustical devices, including but not limited to the following:

- Radio
- Mobile phone
- *Bluetooth*® audio device
- Broadcasting system
- Home theater
- Speaker
- Microphone
- ADC/DAC
- Audio/Low-frequency amplifier
- Automotive infotainment system
- Hearing aid

Typically, audio quality metrics comprise the level gain, total harmonic distortion (THD), total harmonic distortion plus noise (THD+N), crosstalk, relative phase of signals and frequency response, among others.

The two important characteristics in the selection of an audio analyzer:

- **Test speed:** How fast can the audio analyzer test multiple device under tests (DUTs) in the production line?
- **Purity of signal generation:** How certain are you that the signal received by the DUT is the signal generated by the audio analyzer?

The M9260A PXIe audio analyzer is not your traditional digitizer

The Keysight Technologies, Inc. M9260A PXIe audio analyzer module is designed for fast, high-performance audio measurement, unlike traditional general-purpose digitizers.

The M9260A build includes two audio generator channels and two audio analyzer channels in a single 3U height PXIe module.

Key features that make the M9260A uniquely fast and accurate include:

- **Large 1-million-sample arbitrary waveform buffer** that speeds up signal generation
- **Large 1-million-sample input buffer** that speeds up signal acquisition and analysis
- **Gain of 5 amplifiers** that increase signal sensitivity, leading to accurate replication of signals to and from the DUT
- Super-linear, low-noise analog-to-digital converters (ADC) and digital-to-analog converters (DAC)
- Signal generation with ultra-low residual distortion of -106 dB and 1% amplitude accuracy

Additional built-in features of the M9260A PXIe audio analyzer that make it a worthy investment:

- **Built-in loopback system** helps with self-calibration of the “generator” and “analyzer” blocks, hence ensuring the quality and accuracy of signal used for test
- **Built-in multiple impedance selection** allows convenient impedance matching to avoid errors due to mismatched impedances in the test system

Pure audio signal generation

A pure or clean audio signal is defined by a signal with very low distortion and noise. One of the common contributors to signal distortion in traditional digitizers is phase discontinuity. Traditional digitizers typically come with relatively small arbitrary waveform buffers that can only house a maximum of 1K to 2K samples. For complex test signals that exceed this capacity, usually several hundred thousand samples, the signal needs to be 'chopped' up into multiple pieces and then 'stitched back' together to recreate the entire waveform. The 'stitching back' is where phase discontinuity inevitably happens. With the M9260A PXIe audio analyzer module, you can transmit up to 1 million samples of signal all at once, owing to its large arbitrary waveform buffer, which avoids the issue of distortion due to phase discontinuity.

Distortion in audio signal generation can also be caused by the non-linearity of output amplifiers. Typically, this can be resolved by using an amplifier with a higher gain. While a traditional digitizer module typically has only three ranges (gain of 3), the M9260A PXIe audio analyzer module has five, resulting in an output that's relatively more linear and accurate. With the M9260A, you can achieve:

- THD+N (20 Hz to 20 kHz): -103 dB (≥ 1 Vp)
- THD (20 Hz to 20 kHz): -106 dB
- Amplitude accuracy: ± 0.087 dB ($\pm 1\%$)

High-performance audio measurement

Leveraging the design of the high performance Keysight U8903B audio analyzer, the M9260A PXIe audio analyzer module provides reliable audio measurement capabilities that matches its pure signal generation.

- Amplitude accuracy: $\pm 0.58\%$ for AC, $\pm 1\%$ for DC
- Low input residual distortion and noise: -95 dB @1 kHz, 20 Hz to 20 kHz BW
- Residual THD: -101 dB @1 kHz, 20 Hz to 20 kHz BW
- Max input amplitude: 46 Vp
- Flatness: ± 0.08 dB (20 Hz to 88 kHz BW, ≤ 10 Vp)
- Ultra-low crosstalk for multi-channel measurement: -123 dB (20 kHz BW)

High-speed production testing

In high-throughput production testing, speed is critical. The M9260A PXIe audio analyzer module is designed to optimize testing speed in two ways: fast signal generation and fast signal analysis. Figure 1 illustrates the blocks within the M9260A that define its unique high-throughput capability.

Fast audio signal generation

There are two ways for a signal to be generated by the M9260A. The first method is to have the test signal created via the PC software and then loaded to the M9260A arbitrary waveform buffer. The M9260A PXI module then generates the test signal according to the arbitrary waveform description, to the Device Under Test (DUT).

Large 1-million-sample arbitrary waveform buffer

Traditional digitizers typically come with relatively small arbitrary waveform buffers that can only house a maximum of 1K to 2K samples. For complex test signals that exceed this capacity, usually several hundred thousand samples, the signal needs to be first ‘chopped’ up into multiple pieces, and then sequentially sent to the PXIe module. The total processing time can be significantly reduced with the M9260A PXIe audio analyzer module, as it comes with a large 1-million-sample arbitrary waveform buffer. This means you can transmit any waveform of up to 1 million samples, to the M9260A module once, without having to face buffer and speed limitations that are common with traditional digitizers.

Built-in waveforms

In addition to the large arbitrary waveform buffer, Figure 1 also shows that the M9260A PXIe audio analyzer module comes with built-in waveforms that speed up the signal generation process further. Commonly used waveforms that are built into the M9260A include the sinewave, dual-sinewave, variable-phase sinewave, DC, Gaussian noise, rectangular noise and pink noise. Having these waveforms built in means you do not need to generate the test signal with a PC software. All you need to do is send a software command to the PXIe module and indicate which of the built-in waveforms you would like to generate. The PXIe module then sends the signal almost immediately to the DUT, reducing significant signal generation time.

Fast audio signal analysis

For signal measurement, the M9260A receives the incoming test signal from the DUT, after which the signal goes through signal conditioning and the analog-to-digital converter before it is sent to the input buffer where the signal ‘waits’ to be streamed back to the PC for analysis.

Large 1-million-sample input buffer

As with its large arbitrary waveform buffer for signal generation, the M9260A PXIe audio analyzer has a large 1-million-sample input buffer, which means a virtually ‘limitless’ memory for acquisition and seamless streaming to PC. This is unlike traditional digitizers that typically provide a smaller 1K input buffer size that limits the signal measurement capability to just 1 thousand samples at any one time. With the M9260A module, you can achieve fast audio signal acquisition and analysis for high-speed production testing.

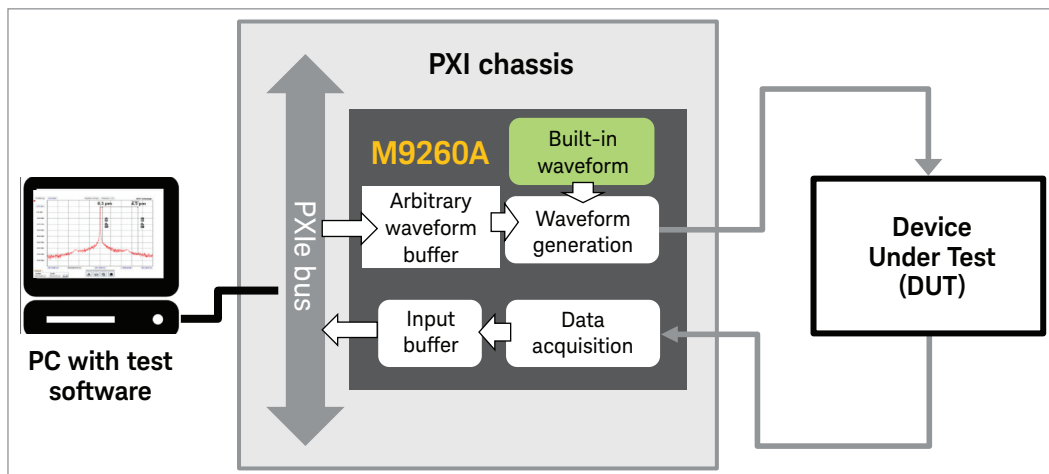


Figure 1. M9260A PXIe audio analyzer signal generation and acquisition building blocks

Loopback and multiple impedance selection

The M9260A PXIe audio analyzer module includes built-in features that aim to provide you with greater convenience and confidence in your audio measurement tasks. Figure 2 illustrates the loopback and multiple impedance selection within the M9260A.

Loopback: The M9260A module has a loopback from the generator to the analyzer. This enables an automatic self-test and self-calibration of the audio analyzer module. This avoids the need for manual calibration via an external BNC cable, which could inevitably introduce errors due to the external connector or cable. For automated test systems, the loopback is a critical feature as manual calibration via an external BNC cable is not an allowed procedure.

Multiple impedance selection: Unmatched impedances can create errors in test, which is why it is necessary to ensure exact impedance matches to the DUT. Typical digitizers do not provide a selection of impedances – usually only one – hence you often need to use external impedance converters to achieve the required impedance. The M9260A output impedance selection includes the 50 Ω impedance that's commonly used for audio devices, and 600 Ω impedance to match legacy audio devices. The M9260A input impedance includes three selections: 50 Ω , 600 Ω , and 1 M Ω to match the output of most audio devices. In addition to this selection, the Keysight U8903A-109 BNC accessory kit is available if you need to convert the M9260A impedance to any other required value.

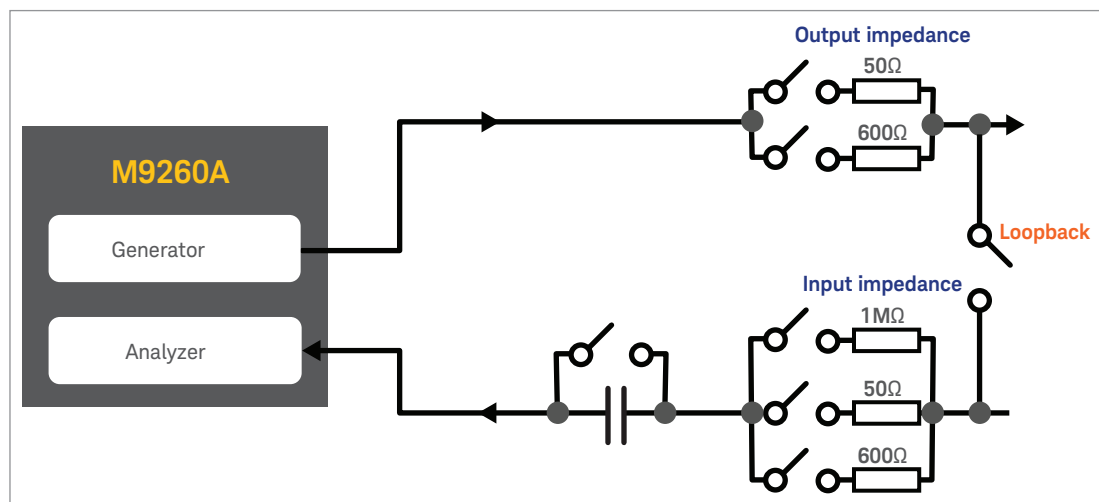


Figure 2. M9260A PXIe audio analyzer loopback and multiple impedance selection features

The M9260A PXIe audio analyzer for your radio testing

Keysight Radio Test Solution

The M9260A PXIe audio analyzer module is a critical part of the Keysight Radio Test Solution, specifically in the audio signal generation and analysis. The Keysight Radio Test Solution is a combination of hardware and software building blocks in a single, scalable chassis, aimed at providing military, public safety, and avionics radio communication departments with reliable, quality RF and audio signal generation and analysis.

More info on the Keysight Radio Test Solution: www.keysight.com/find/solution-radiotest

Radio Test Audio Library (M9560A-1TP)

The M9560A-1TP Radio Test Audio Library provides audio analysis software components (.NET classes) for Keysight Radio Test Solution. You can also use the M9560A-1TP for audio signal generation and analysis in usage with the M9260A PXIe audio analyzer module. The M9560A-1TP audio signal generation library includes pseudo-voice with ITU-T G227 filter and baseband audio waveforms such as single tone, dual tone and Gaussian noise. The M9560A-1TP audio signal analysis library includes audio spectrum with selectable FFT windows, audio measurement results (THD, SINAD, SNR, max voltage), and audio filtering (low pass, high pass, band pass and Bit Error Rate (BER)).

More info on the Keysight Radio Test Audio Library: www.keysight.com/find/M9560A

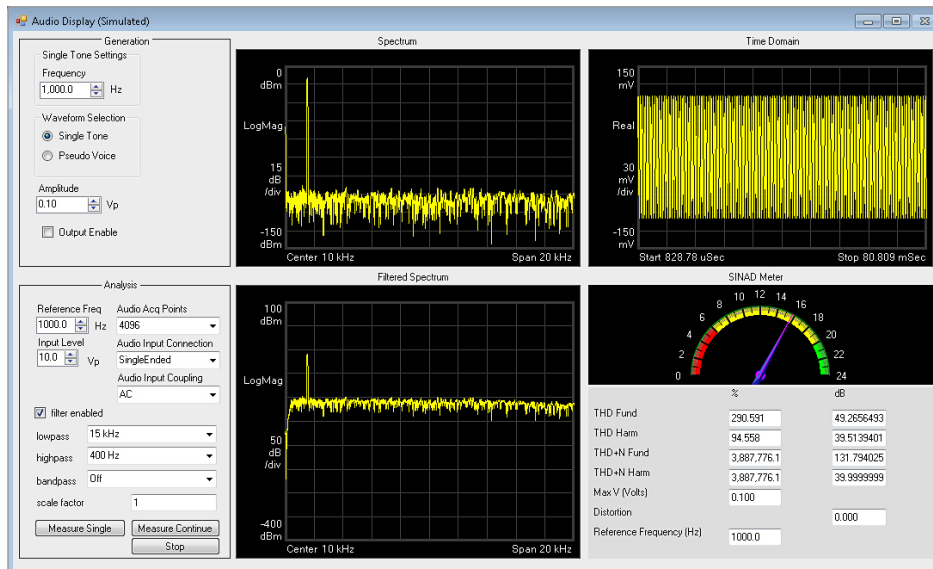


Figure 3. M9560A-1TP software interface

Software: Drivers and Soft Front Panel (SFP)

Included in the M9260A software installer that you can **download from Keysight.com** are the IVI-C, IVI-COM and LabVIEW G drivers. Also included in the installer is the intuitive M9260A PXIe module soft front panel (SFP) software that you can use to configure and control the PXIe module.

SFP features:

- Module maintenance allows self-test, module reset and firmware upgrades
- Audio generator settings allow sine-wave generation, with amplitude frequency and DC offset adjustments. You can also select differential or pseudo-differential output, and 50 Ω or 600 Ω output impedance.
- Audio analyzer settings allow loopback control, and selection of differential or pseudo-differential input, AC or DC input coupling, and 50 Ω , 600 Ω or 1 M Ω input impedance.
- Basic audio measurements: AC voltage, DC voltage, frequency, THD+N ratio, THD ratio, SINAD and SNR
- Filter options: 20 kHz low-pass filter, 20 Hz high-pass filter, A-weight filter or no filter

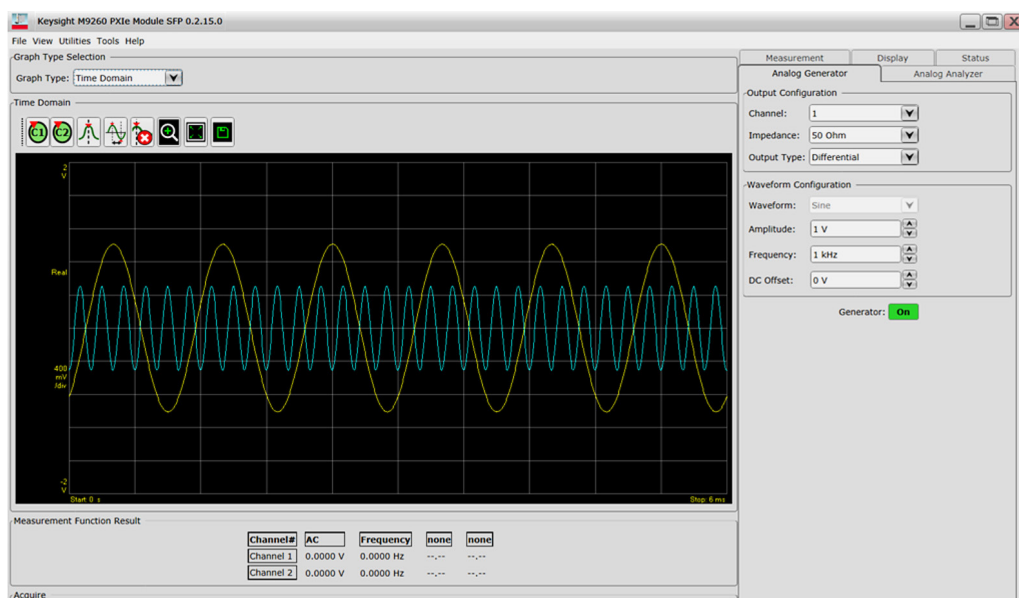


Figure 4. M9260A PXIe module soft front panel interface

Product Characteristics

Description

Operating environment

Operating temperature	0 to 55 °C
Storage temperature	–40 to 71 °C
Operating humidity	Up to 95% RH at 40 °C (non-condensing)
Storage humidity	Up to 90% RH at 65 °C (non-condensing)
Operating altitude	Up to 3000 m
Non-operating altitude	Up to 4600 m
Other	Meets or exceeds Keysight ETM requirements on class GP where applicable. These include EMC, ESD, shock and vibration, power tolerances from PXI chassis, etc.
Form factor	Type/dimension: PXIe, 1 slot, 3U
Calibration period	1 year
Drivers	Support and complies with Keysight CCE requirements for PXI modular: IVI-COM, IVI-C, LabVIEW

Trigger - Digital

Trigger connector	SMB male
Trigger level	3.3 V TTL
Polarity	Rising or falling edge
Trigger source	External trigger input (available at front panel), PXI trigger bus
Pulse width	Min 10 µs

Trigger - Analog

Trigger connector	SMB male
Trigger level	±full-scale
Polarity	Rising or falling edge
Resolution	24 bits

Performance Specifications

The following specifications are based on performance following 30 minutes of warm-up time and at operating temperatures between 0 °C to 55 °C, and sample rate of 192 kS/s unless stated otherwise.

Analog Generator Specifications	
Connector type	BNC
Impedance	50 Ω , 600 Ω (nom)
Input configuration	Differential, pseudo-differential (50 Ω connected from negative input to chassis ground)
Number of output channels	2 channels per module
Built-in waveform	Sine, Dual Sine, Variable Phase, Gaussian Noise, Rectangular Noise, Pink Noise
Dual sine amplitude ratio	0% to 100%
Variable phase	–180° to 179.99°
Sample rate (f_s)	1.024 kS/s to 204.8 kS/s (363.8 μ Hz resolution)
Arbitrary waveform buffer	Max 1,048,576 samples/download
DAC resolution	24 bits
Max output amplitude	10 Vp
Output range	0.1 Vp, 0.316 Vp, 1 Vp, 3.16 Vp, 10 Vp in 10 dB steps
Max output current	50 mA (nom)
DC accuracy	$\pm 1\%$ (–0.087 dB to 0.086 dB) $\pm 0.32\%$ (± 0.028 dB) (typ)
AC accuracy @1 kHz	$\pm 1\%$ (–0.087 dB to 0.086 dB) $\pm 0.4\%$ (± 0.035 dB) (typ)
AC flatness (refer to 1 kHz)	
5 Hz to 20 kHz BW	
@0.1 Vp	$\pm 0.2500\%$ (± 0.0217 dB) $\pm 0.1440\%$ (± 0.0125 dB) (typ)
@0.316 Vp, 1 Vp, 3.16 Vp,	$\pm 0.0925\%$ (± 0.008 dB) $\pm 0.0560\%$ (± 0.0049 dB) (typ)
@10 Vp	$\pm 0.1\%$ (± 0.0087 dB) $\pm 0.0560\%$ (± 0.0049 dB) (typ)
20 kHz to 80 kHz BW	$\pm 0.9250\%$ (–0.081 dB to 0.080 dB)
All ranges	$\pm 0.64\%$ (± 0.055 dB) (typ)
Residual THD+N (@1 kHz)	
20 Hz to 20 kHz BW	
@0.316 V	$< 0.0017\%$ (< -95 dB) $< 0.0012\%$ (< -98.4 dB) (typ)
@1 Vp, 3.16 Vp, 10 Vp	$< 0.0007\%$ (< -103 dB) $< 0.00056\%$ (< -105 dB) (typ)
Residual THD (@1 kHz)	
20 Hz to 20 kHz BW	
@0.316 Vp, 1 Vp, 3.16 Vp, 10 Vp	$< 0.0005\%$ (< -106 dB) (typ) $< 0.00036\%$ (< -108.9 dB) (typ)
Frequency range ($f_s = 192$ kS/s)	5 Hz to 79.8 kHz (up to 0.416 F_s)
Frequency accuracy	± 2 ppm + 100 μ Hz

Note: The voltage levels indicated in the specifications are at the full-scale of each respective range.

Analog Analyzer Specifications	
Connector type	BNC
Impedance	50 Ω , 600 Ω , 1 M Ω (nom)
Input coupling	AC, DC
Number of input channels	2 channels per module
Sample rate	1.024 kS/s to 204.8 kS/s (363.8 μ Hz resolution)
Acquisition buffer	Max 1,048,576 samples/acquisition
ADC resolution	24 bits
Measurement bandwidth	90 kHz @ 192 kS/s (up to 0.47 SR)
Max input amplitude	46 Vp
Input range	0.316 Vp, 1 Vp, 3.16 Vp, 10 Vp, 31.6 Vp, 46 Vp in 10 dB steps
Input protection	Overload protection for all ranges, with overload status registers (each channel) that enables the software to be informed of the overload status
DC accuracy	$\pm 1\%$ (–0.087 dB to 0.086 dB) $\pm 0.24\%$ (± 0.021 dB) (typ)
AC accuracy	$\pm 0.58\%$ (± 0.05 dB) $\pm 0.12\%$ (± 0.010 dB) (typ)
AC flatness (ref to 1 kHz)	
10 Hz to 20 kHz BW	
@0.316 Vp	$\pm 0.13\%$ (± 0.011 dB) $\pm 0.072\%$ (± 0.0062 dB) (typ)
@1 Vp, 3.16 Vp, 10 Vp	$\pm 0.0925\%$ (± 0.008 dB) $\pm 0.056\%$ (± 0.0049 dB) (typ)
@31.6 Vp, 46 Vp	$\pm 0.8000\%$ (–0.07 dB to 0.069 dB) $\pm 0.32\%$ (± 0.0278 dB) (typ)
20 Hz to 88 kHz BW	
@0.316 Vp, 1 Vp, 3.16 Vp, 10 Vp	$\pm 0.9250\%$ (–0.081 dB to 0.080 dB) $\pm 0.520\%$ (± 0.045 dB) (typ)
@31.6 Vp, 46 Vp	$\pm 5.2000\%$ (–0.46 dB to 0.44 dB) $\pm 3\%$ (–0.26 dB to 0.257 dB) (typ)
Residual THD+N (@1 kHz)	
20 Hz to 20 kHz BW	
@0.316 Vp	< 0.0017% (< –95 dB) < 0.00136% (< –97 dB) (typ)
@1 Vp, 3.16 Vp, 10 Vp	< 0.00085% (< –101 dB) < 0.00068% (< –103.3 dB) (typ)
Residual THD (@1 kHz)	
20 Hz to 20 kHz BW	
@0.316 Vp, 1 Vp, 3.16 Vp, 10 Vp	< 0.00085% (< –101 dB) < 0.00048% (< –106 dB) (typ)
Residual noise (@0.316 Vp)	
20 Hz to 20 kHz BW	≤ 1.3 μ Vrms

Note: The voltage levels indicated in the specifications are at the full-scale of each respective range.

Performance Characteristics

Generator Output Characteristics

Crosstalk

100 Hz to 20 kHz

@0.316 Vp, 1 Vp, 3.16 Vp, 10 Vp < 0.00136% (< -97.3 dB) (typ)

SMPTE IMD

≤ 20 kHz BW < 0.002% (< -94 dB) (typ)

DFD (IEC60118 / IEC60268)

≤ 20 kHz BW < 0.0008% (< -101.9 dB) (typ)

Phase Offset

≤ 20 kHz ±2° (typ)

20 kHz to 80 kHz ±5° (typ)

Analyzer Input Characteristics

Crosstalk

≤ 20 kHz

@0.316 Vp < 0.000064% (< -123 dB) (typ)

@1 Vp < 0.0000253% (< -131 dB) (typ)

@3.16 Vp, 10 Vp < 0.0000142% (< -136 dB) (typ)

@31.6 Vp, 46 Vp < 0.0000142% (< -136 dB) (typ)

SMPTE IMD

≤ 20 kHz BW < 0.0036% (< -88 dB) (typ)

DFD (IEC60118 / IEC60268)

≤ 20 kHz BW < 0.0008% (< -102 dB) (typ)

CMRR

≤ 20 kHz BW, ≤ 10 Vp > 70 dB (typ)

Phase Accuracy (@1 Vp)

≤ 20 kHz ±0.15° (typ)

20 kHz to 90 kHz ±0.6° (typ)

Note: The voltage levels indicated in the specifications are at the full-scale of each respective range.

Definitions

Specification (spec)

The warranted performance of a calibrated instrument that has been stored for a minimum of 2 hours within the operating temperature range of 0°- 55°C and after a 30-minute warm up period. All specifications include measurement uncertainty and were created in compliance with ISO-17025 methods. Data published in this document are specifications (spec) unless otherwise noted.

Typical (typ)

The characteristic performance, which 80% or more of the manufactured instruments will meet. This data is not warranted, does not include measurement uncertainty, and is valid only at room temperature (approximately 23°C).

Nominal (nom)

The mean or average characteristic performance, or the value of an attribute that is determined by design such as a connector type, connector impedance, physical dimension, or operating speed. This data is not warranted and is measured at room temperature (approximately 23°C).

Ordering Information

Product Model	Description
M9260A-STD	PXIe audio analyzer, 2 channels
M9260A-UDF	PXIe audio analyzer for US Defense Force, 2 channels
Optional Accessories	Description
U8903A-101	Male BNC to male BNC cable, 1.2 m, jade gray
U8903A-102	Male BNC to male RCA cable, 2 m, black
U8903A-109	BNC accessory kit
M9260A-101	Trigger cable, 1 m SMB female to BNC male, 50 Ω
M9260A-102	Trigger cable, 1 m SMB female to BNC female, 50 Ω
Warranty and Service	Description
M9260A-1A7	Calibration + Uncertainties + Guardbanding (not accredited)
M9260A-A6J	ANSI Z540-1-1994 calibration


Related Products

Product Model	Description
U8903B	Performance audio analyzer, 2 channels
U8903A	Audio analyzer, 2 channels, discontinued on December 31, 2016

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

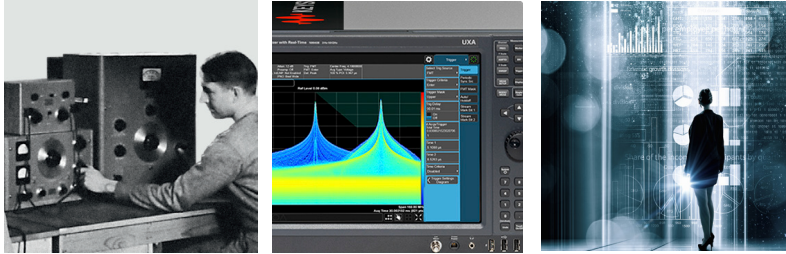

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

Bluetooth® and the Bluetooth® logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Keysight Technologies is under license.

www.keysight.com/find/M9260A

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System



This information is subject to change without notice.

© Keysight Technologies, 2017
Published in USA, December 21, 2017
5992-1918EN

www.keysight.com