19-3086; Rev 2; 10/06

EVALUATION KIT AVAILABLE

Low Input/Output Voltage Step-Up DC-DC Converter with RESET

MAX1947

General Description

The MAX1947 is a compact, high-efficiency, step-up DC-DC converter that regulates output voltages from 1.8V to 3.3V to power µP/DSP cores, memory, and I/O rails in 1- and 2-cell alkaline/NiMH/NiCd battery-powered systems. It features an internal 800mA switch and synchronous rectifier to achieve up to 94% efficiency and to eliminate the need for an external Schottky diode.

High-frequency switching (up to 2MHz) results in low ripple and small external components, while automatic pulse skipping at light loads reduces supply current to just 70µA for extended battery life. Maxim's proprietary True Shutdown™ reduces supply current to just 2µA and fully discharges the output to ground. The converter is offered in fixed-output voltages of 1.8V, 2.5V, 3.0V, and 3.3V, requiring no feedback or compensation network. A 75ms $\overline{\text{RESET}}$ output flag provides for power-on reset (POR) and undervoltage detection. The MAX1947 is available in a space-saving 8-pin TDFN package.

Applications

MP3 Players, Pagers, and CD Players

PDAs and Organizers

Digital Still Cameras

Cordless Phones

Wireless Mice/Keyboards

Portable Medical Equipment

Other Battery-Powered Systems

Features

- **Low Input (0.7V) and Output (1.8V) Voltage Capability**
- **Internal Synchronous Rectifier**
- **High 94% Efficiency**
- **Fixed Output Voltages: 1.8V, 2.5V, 3V, and 3.3V**
- **Up to 2MHz Switching Allows Small External Components and Low Output Ripple**
- **Automatic Pulse Skipping at Light Loads for Extended Battery Life**
- **Low 70µA (typ) Operating Supply Current (Measured at OUT)**
- **Low 2µA Logic-Controlled Shutdown**
- **True Shutdown Fully Discharges Output to Ground**
- **Uses Only Small Ceramic Capacitors**
- **75ms $\overline{\text{RESET}}$ Output Flag**

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	PKG CODE
MAX1947ETAxy*-T	-40°C to +85°C	8 TDFN 3mm x 3mm	T833-1
MAX1947ETAxy*+T	-40°C to +85°C	8 TDFN 3mm x 3mm	T833-1

**xy represents the output voltage code (e.g., 18 =1.8V). Standard output voltages include 3.3V (33), 3.0V (30), 2.5V (25), and 1.8V (18). Contact the factory for other output voltages in 100mV increments between 1.8V and 3.3V; the minimum order quantity is 25,000 units.*
+Denotes lead-free package.

Typical Application Circuit

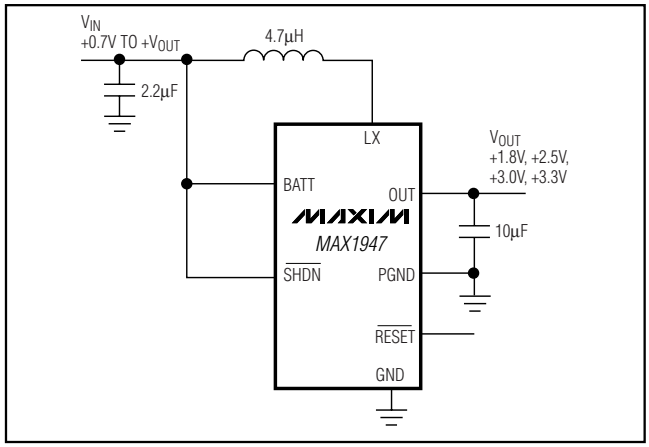

True Shutdown is a trademark of Maxim Integrated Products, Inc.

Pin Configuration



TDFN
3mm x 3mm

A "+" SIGN WILL REPLACE THE FIRST PIN INDICATOR ON LEAD-FREE PACKAGES.

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Low Input/Output Voltage Step-Up DC-DC Converter with RESET

ABSOLUTE MAXIMUM RATINGS

BATT, OUT, SHDN to GND .....-0.3V to +4.0V
RESET to GND.....-0.3V to (V_{OUT} + 0.3V)
PGND to GND .....-0.3V to +0.3V
Switch Current (I_{LX}, I_{OUT}, I_{PGND}) (Note 1) .....-1A to +1A
Continuous Power Dissipation (T_A = +70°C)
8-Pin TDFN (derate 24.4mW/°C above +70°C).....1951.2mW

Operating Temperature Range .....-40°C to +85°C
Junction Temperature.....+150°C
Storage Temperature Range .....-65°C to +150°C
Lead Temperature (soldering, 10s) .....+300°C

Note 1: LX has internal clamp diodes to PGND and OUT. Applications that forward bias these diodes should take care not to exceed the IC's package power-dissipation limits.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{BATT} = 1.5V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Minimum Startup Voltage	R_{LOAD} = 1kΩ, T_A = +25°C			0.8	0.95	V
Startup-Voltage Temperature Coefficient				-2.1		mV/°C
Maximum Input Operating Voltage	(Note 3)				3.6	V
Minimum Input Operating Voltage				0.7		V
Output Voltage	MAX1947ETA18, I_{LOAD} = 40mA		1.74	1.8	1.86	V
	MAX1947ETA25, I_{LOAD} = 32mA		2.42	2.5	2.58	
	MAX1947ETA30, I_{LOAD} = 25mA		2.9	3.0	3.1	
	MAX1947ETA33, I_{LOAD} = 25mA		3.2	3.3	3.4	
Load Regulation	No load to full load			1.2		%
Full-Load Output Current	V_{BATT} = 1V	MAX1947ETA18	160	273		mA
		MAX1947ETA25	130	214		
		MAX1947ETA30	100	185		
		MAX1947ETA33	100	169		
	V_{BATT} = 1.8V	MAX1947ETA25	240	380		
		MAX1947ETA30	200	361		
		MAX1947ETA33	200	329		
Supply Current into BATT	No switching			2	4	µA
Supply Current into OUT	No switching			70	110	µA
LX Switch Maximum On-Time			0.7	1	1.3	µs
LX Switch Minimum Off-Time			0.2	0.25	0.3	µs
Maximum On-Time to Minimum Off-Time Ratio	V_{OUT} = 2.5V, 3.0V, 3.3V		3.6	4	4.6	s/s
	V_{OUT} = 1.8V		3.0	4	4.6	
Frequency in Startup				650		kHz

ELECTRICAL CHARACTERISTICS (continued)

(V_{BATT} = 1.5V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Startup to Normal-Mode Output Transition Voltage	50mV hysteresis, rising edge		1.40	1.62	1.73	V
NFET Current Limit	T_A = 0°C to +85°C		600	800	1000	mA
	T_A = -40°C to +85°C		580	800	1000	
PFET Turn-Off Current	T_A = 0°C to +85°C		15	75	150	mA
	T_A = -40°C to +85°C		10	75	150	
Internal NFET On-Resistance	I_{LX} = 100mA	MAX1947ETA18		0.3	0.6	Ω
		MAX1947ETA25		0.22	0.44	
		MAX1947ETA30		0.17	0.34	
		MAX1947ETA33		0.15	0.3	
Internal PFET On-Resistance	I_{LX} = 100mA	MAX1947ETA18		0.5	1.0	Ω
		MAX1947ETA25		0.35	0.7	
		MAX1947ETA30		0.28	0.56	
		MAX1947ETA33		0.25	0.5	
LX Leakage Current	$\overline{SHDN}$ = GND, V_{OUT} = 0V, V_{LX} = 3.6V	T_A = +25°C		0.1	1	µA
		T_A = +85°C		1		
SHUTDOWN MODE						
Shutdown Supply Current	$\overline{SHDN}$ = GND			2	4	µA
$\overline{SHDN}$ Input Voltage	V_{IH}		0.8 x V_{BATT}			V
	V_{IL}				0.18 x V_{BATT}	
$\overline{SHDN}$ Input Bias Current	$\overline{SHDN}$ = OUT or GND, T_A = +25°C			1	100	nA
	$\overline{SHDN}$ = OUT or GND, T_A = +85°C			5		
OUT Discharge Resistance in Shutdown	$\overline{SHDN}$ = GND			500	1000	Ω
$\overline{RESET}$ OUTPUT						
Reset OUT Voltage Trip Level	V_{OUT} falling, 1% hysteresis		87	90	93	%
Minimum V_{OUT} for Valid Reset			0.9			V
Reset Timeout			65	140	235	ms
$\overline{RESET}$ Output Voltage	I_{SINK} = 200µA				0.3	V
	I_{SOURCE} = 200µA		0.8 x V_{OUT}			

Note 2: Limits are 100% production tested at T_A = +25°C. Limits over the operating temperature range are guaranteed by design.
Note 3: When BATT is greater than the output-voltage set point, the part is in track mode (see the *Track Mode* section).

Low Input/Output Voltage Step-Up DC-DC Converter with RESET

Typical Operating Characteristics

(V_{IN} = 1.5V, Circuit of Typical Application Circuit, T_A = +25°C, unless otherwise noted.)

MAX1947ETA18 EFFICIENCY vs. LOAD CURRENT

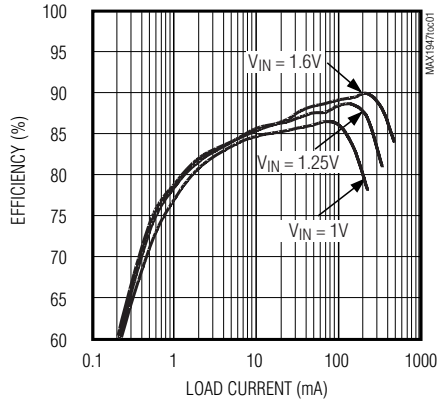

MAX1947ETA25 EFFICIENCY vs. LOAD CURRENT

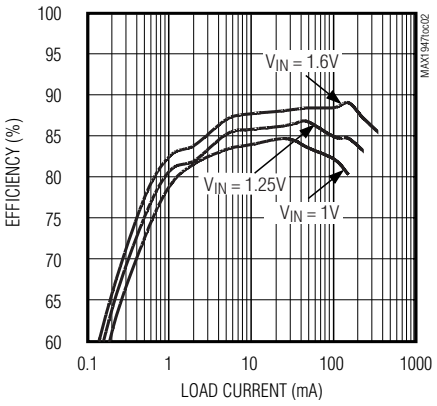

MAX1947ETA30 EFFICIENCY vs. LOAD CURRENT

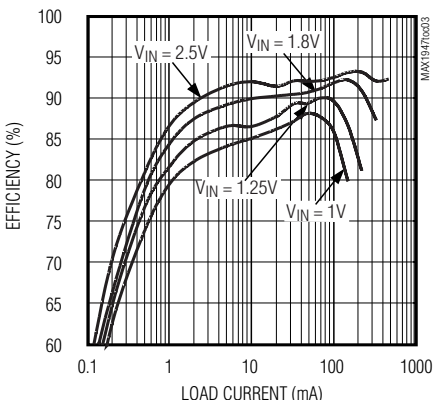

MAX1947ETA33 EFFICIENCY vs. LOAD CURRENT

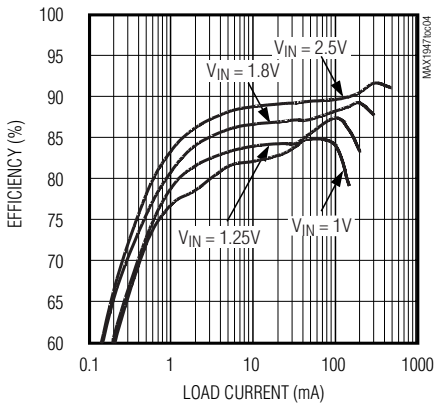

MAXIMUM OUTPUT CURRENT vs. INPUT VOLTAGE

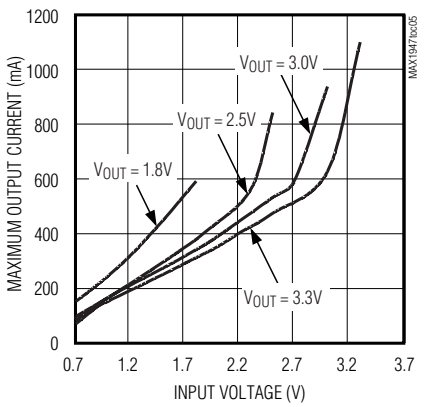

NO-LOAD INPUT CURRENT vs. INPUT VOLTAGE

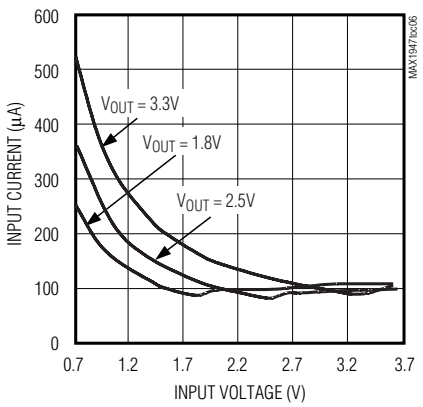

STARTUP VOLTAGE vs. LOAD CURRENT

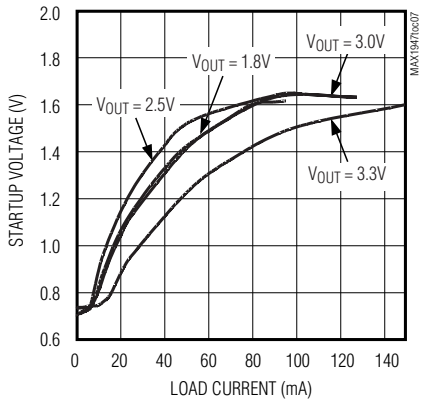

STARTUP VOLTAGE vs. TEMPERATURE

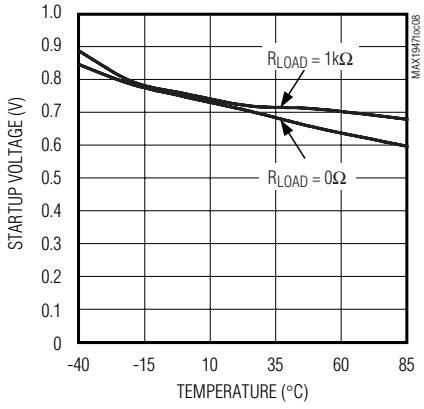

SHUTDOWN THRESHOLD vs. INPUT VOLTAGE

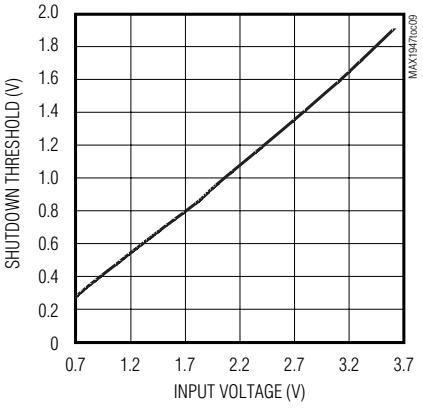

Typical Operating Characteristics (continued)

(V_{IN} = 1.5V, Circuit of Typical Application Circuit, T_A = +25°C, unless otherwise noted.)

OUTPUT VOLTAGE vs. LOAD CURRENT

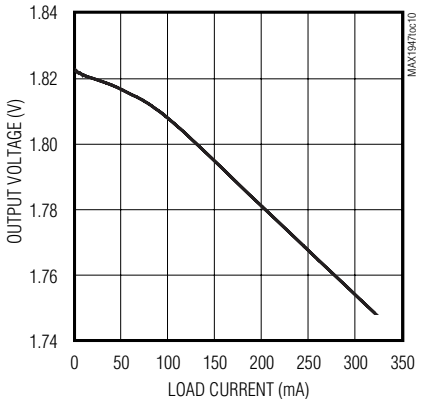

NO-LOAD OUTPUT VOLTAGE vs. INPUT VOLTAGE

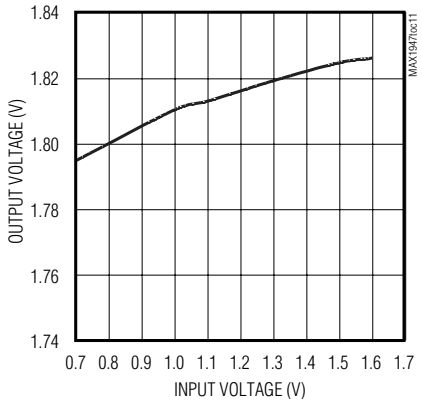

OUTPUT VOLTAGE vs. TEMPERATURE

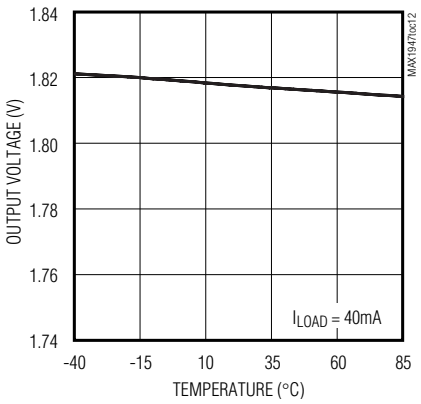

HEAVY-LOAD SWITCHING WAVEFORMS

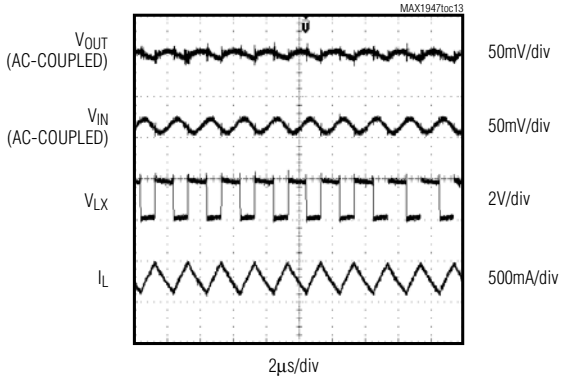

LIGHT-LOAD SWITCHING WAVEFORMS

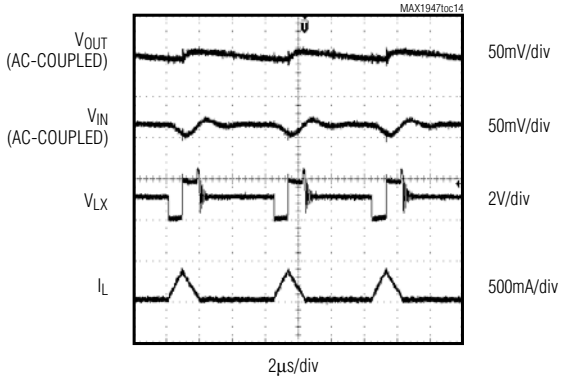

LINE-TRANSIENT WAVEFORMS

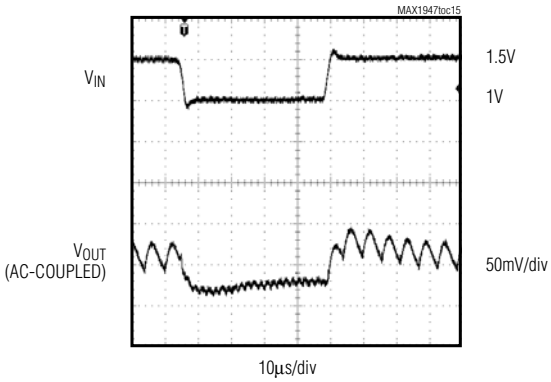

LOAD-TRANSIENT WAVEFORMS

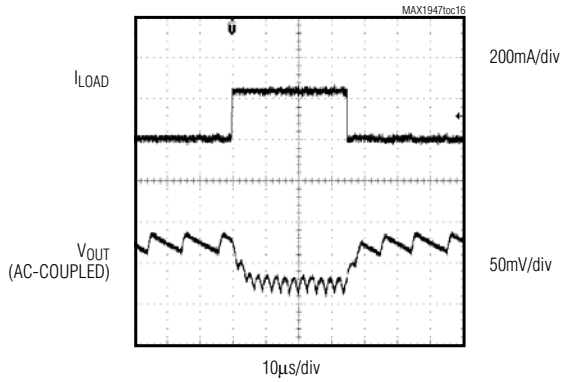

Low Input/Output Voltage Step-Up DC-DC Converter with $\overline{\text{RESET}}$

Typical Operating Characteristics (continued)

(V_{IN} = 1.5V, Circuit of Typical Application Circuit, T_A = +25°C, unless otherwise noted.)

POWER-ON RESET WAVEFORMS

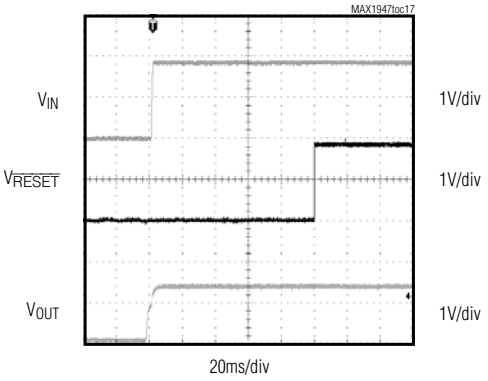

EXITING AND ENTERING SHUTDOWN WAVEFORMS

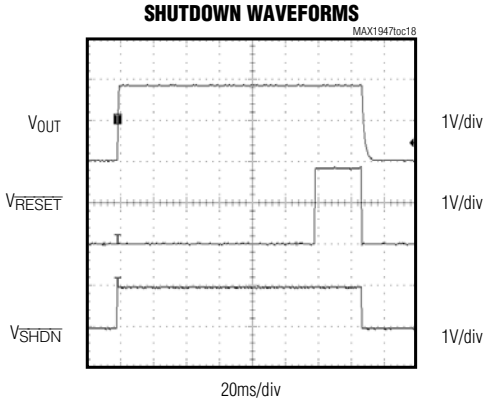

Pin Description

PIN	NAME	FUNCTION
1	$\overline{\text{RESET}}$	Active-Low Push-Pull Reset Output. $\overline{\text{RESET}}$ goes high 75ms (min) after the output voltage has exceeded 90% of its final value. The $\overline{\text{RESET}}$ output is valid for output voltages as low as 0.9V. $\overline{\text{RESET}}$ is driven low in shutdown.
2	GND	Ground. Connect to exposed paddle.
3	GND	Ground. Connect to exposed paddle.
4	$\overline{\text{SHDN}}$	Shutdown Input. Connect to BATT or logic 1 for normal operation. Connect to GND or logic 0 for a low quiescent-current shutdown mode.
5	PGND	Power Ground. Connect to exposed paddle.
6	LX	Inductor Connection to the Drains of the Internal n-Channel Switch and p-Channel Synchronous Rectifier
7	OUT	Regulator Output. Bypass with 10µF ceramic capacitor to GND for full-load capability. For less than 50% of full load, a 4.7µF capacitor can be used.
8	BATT	Battery Connection. V_{BATT} is used for the startup oscillator and to power the chip when $V_{OUT} < V_{BATT}$.
—	EP	Exposed Paddle. Connect to GND and PGND.

Detailed Description

The MAX1947 compact step-up DC-DC converter starts up with voltages as low as 0.8V and operates with input voltages down to 0.7V. An internal synchronous rectifier reduces cost by eliminating the need for an external Schottky diode and improves overall efficiency by reducing losses in the circuit. The efficiency is further increased with the low 70µA quiescent current and low on-resistance of the internal n-channel MOSFET power switch. The MAX1947 uses Maxim's proprietary True Shutdown circuitry, which disconnects the output from the input in shutdown and actively discharges the output to ground.

Functional Diagram

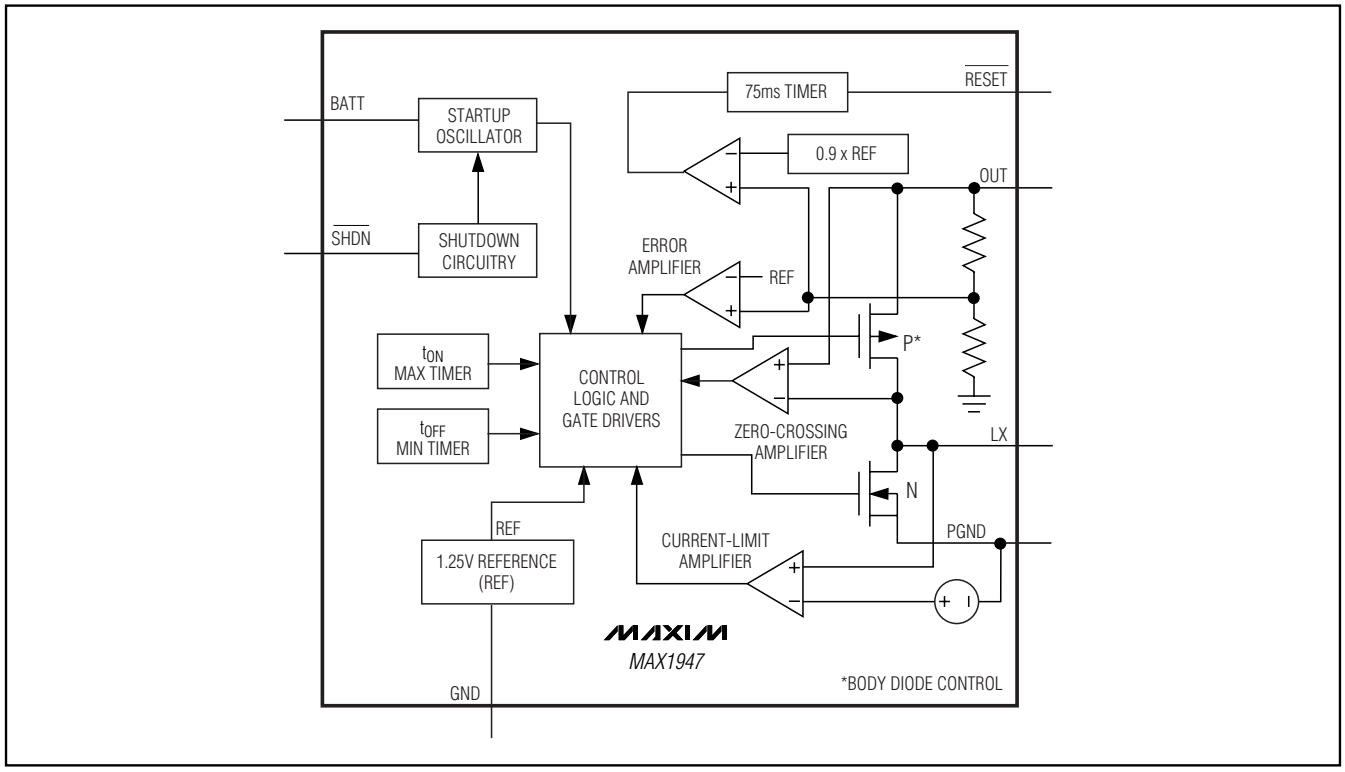

Control Scheme

The MAX1947 is a bootstrapped design. Upon turn-on, a startup oscillator brings the output voltage high enough to allow the main DC-DC circuitry to run. Once the output voltage reaches 1.62V (typ) the main DC-DC circuitry turns on and boosts the output voltage to the final regulation point.

The unique minimum off-time, current-limited control scheme is the key to the MAX1947's low operating current and high efficiency over a wide load range. The architecture combines the high output power and efficiency of a pulse-width modulation (PWM) device with the ultra-low quiescent current of a traditional pulse-skipping controller. The switching frequency can be as high as 2MHz and depends upon the load current and input voltage. The MAX1947 is designed to operate using low-ESR ceramic capacitors, so output voltage ripple due to ESR is very small (approximately $10mV_{P-P}$).

Track Mode

The MAX1947 enters track mode when BATT is greater than the output-voltage regulation point. Track mode can only be entered under the following conditions: $V_{BATT} > V_{OUT}$, $V_{OUT} > V_{OUT}$ regulation point, and the minimum off-time expires. During track mode, the synchronous rectifier is turned on 100% of the time and the output voltage tracks the battery voltage. Track mode is exited by V_{OUT} falling below the V_{OUT} regulation point.

Synchronous Rectification

The internal synchronous rectifier eliminates the need for an external Schottky diode, reducing cost and board space. During the cycle off-time, the p-channel MOSFET turns on and shunts the MOSFET body diode. As a result, the synchronous rectifier significantly improves efficiency without the addition of an external component. Conversion efficiency can be as high as 94%.

$\overline{\text{RESET}}$

The MAX1947 features an active-low push-pull $\overline{\text{RESET}}$ output for use with a microcontroller (µC). It signals the µC when the MAX1947 output voltage is within operating limits. During startup, $\overline{\text{RESET}}$ is held low. When the $\overline{\text{RESET}}$ threshold (90% of the output regulation voltage) is reached, a 75ms (min) timer begins counting. $\overline{\text{RESET}}$ is switched high once the timer expires.

Low Input/Output Voltage Step-Up DC-DC Converter with RESET

Table 1. Suggested Component Values

APPLICATION	LOAD	INPUT CAPACITOR (µF)	OUTPUT CAPACITOR (µF)	INDUCTOR (µH)
1-Cell Input, Output < 2.7V	≤50% full load	2.2	4.7	3.3
	>50% full load	2.2	10	3.3
1-Cell Input, Output > 2.7V	≤50% full load	2.2	4.7	4.7
	>50% full load	2.2	10	4.7
2-Cell Input	≤50% full load	2.2	4.7	6.8
	>50% full load	2.2	10	6.8

Table 2. Suggested Component Manufacturers

MANUFACTURER	PART	PART NUMBER	PHONE	WEBSITE
Sumida	Inductor	CDRH3D16 series	81-3-3667-3381	www.sumida.com
Taiyo Yuden	Output capacitors	4.7µF JMK212BJ475MG, 10µF JMK212BJ106MG	408-573-4150	www.t-yuden.com
	Input capacitors	2.2µF LMK107BJ225MA		
TDK	Output capacitors	4.7µF C2012X5R0J475K, 10µF C2012X5R0J106K	888-835-6646	www.TDK.com
	Input capacitors	2.2µF C1608X5R03225M		

Shutdown

The MAX1947 enters shutdown mode when $\overline{SHDN}$ is driven low. During shutdown, the synchronous rectifier disconnects the output from the input, eliminating the DC conduction path that normally exists with traditional boost converters in shutdown mode. The output is actively discharged to ground through an internal 500Ω resistor. The quiescent current is reduced to 2µA while in shutdown mode. Drive $\overline{SHDN}$ high for normal operation. The output reaches regulation approximately 650µs after $\overline{SHDN}$ goes high.

Applications Information

Inductor Selection

An inductor value of 4.7µH performs well in most applications. The MAX1947 also works with inductors in the 2.2µH to 6.8µH range. Smaller inductance values typically offer a smaller physical size for a given series resistance, allowing the smallest overall circuit dimensions but with lower output-current capability. Circuits using larger inductance values exhibit higher output-current capability, but are larger for the same series resistance and current rating.

The inductor's incremental saturation current rating should be greater than the peak switch-current limit. However, it is generally acceptable to bias the inductor into saturation by as much as 20%, although this slightly reduces efficiency (see the *Electrical Characteristics* for the MAX1947 NFET current limit). Table 1 lists the suggested components for several typical applications. Also, the inductor's DC resistance significantly affects efficiency. Table 2 lists suggested component manufacturers.

Calculate the maximum output current (I_{OUTMAX}) using inductor ripple current (I_{RIPPLE}) and duty cycle (D) as follows:

$$I_{RIPPLE} = \frac{V_{OUT} + I_{LIM} \times (R_{DS(ON)PFET} + R_L) - V_{BATT}}{L/t_{OFF} + \frac{(R_{DS(ON)PFET} + R_L)}{2}}$$

$$D = \frac{\left[\frac{V_{OUT} + (I_{LIM} - \frac{I_{RIPPLE}}{2}) \times}{(R_{DS(ON)PFET} + R_L) - V_{BATT}}\right]}{\left[\frac{V_{OUT} + (I_{LIM} - \frac{I_{RIPPLE}}{2}) \times}{(R_{DS(ON)PFET} - R_{DS(ON)NFET} + R_L)}\right]}$$

$$I_{OUTMAX} = (I_{LIM} - \frac{I_{RIPPLE}}{2}) \times (1 - D)$$

Here, I_{LIM} is the NFET current limit (800mA typ), t_{OFF} is the LX switch's off-time (0.25µs typ), and R_L is the series resistance of the inductor.

Capacitor Selection

The MAX1947 is specifically designed for using small, inexpensive, low-ESR ceramic capacitors. X5R and X7R dielectrics are recommended when operating over wide temperature ranges. Bypass the output of the MAX1947 with 10µF when using maximum load currents. When using less than half the maximum load current capability, the output capacitor can be reduced to 4.7µF. Bypass the input with a 2.2µF or larger ceramic capacitor. Table 1 lists the suggested values for the input and output capacitors for typical applications.

PCB Layout and Grounding

Careful PCB layout is important for minimizing ground bounce and noise. Keep the IC's GND pins and the ground leads of the input and output filter capacitors very close together. Connect GND and PGND directly to the exposed paddle. In addition, keep all connections to the OUT and LX pins as short as possible. To maximize output power and efficiency and minimize output ripple voltage, use short, wide traces from the input and output. A sample layout is available in the MAX1947 evaluation kit.

Chip Information

TRANSISTOR COUNT: 5156

PROCESS: BiCMOS

Low Input/Output Voltage Step-Up DC-DC Converter with RESET

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to **www.maxim-ic.com/packages**.)

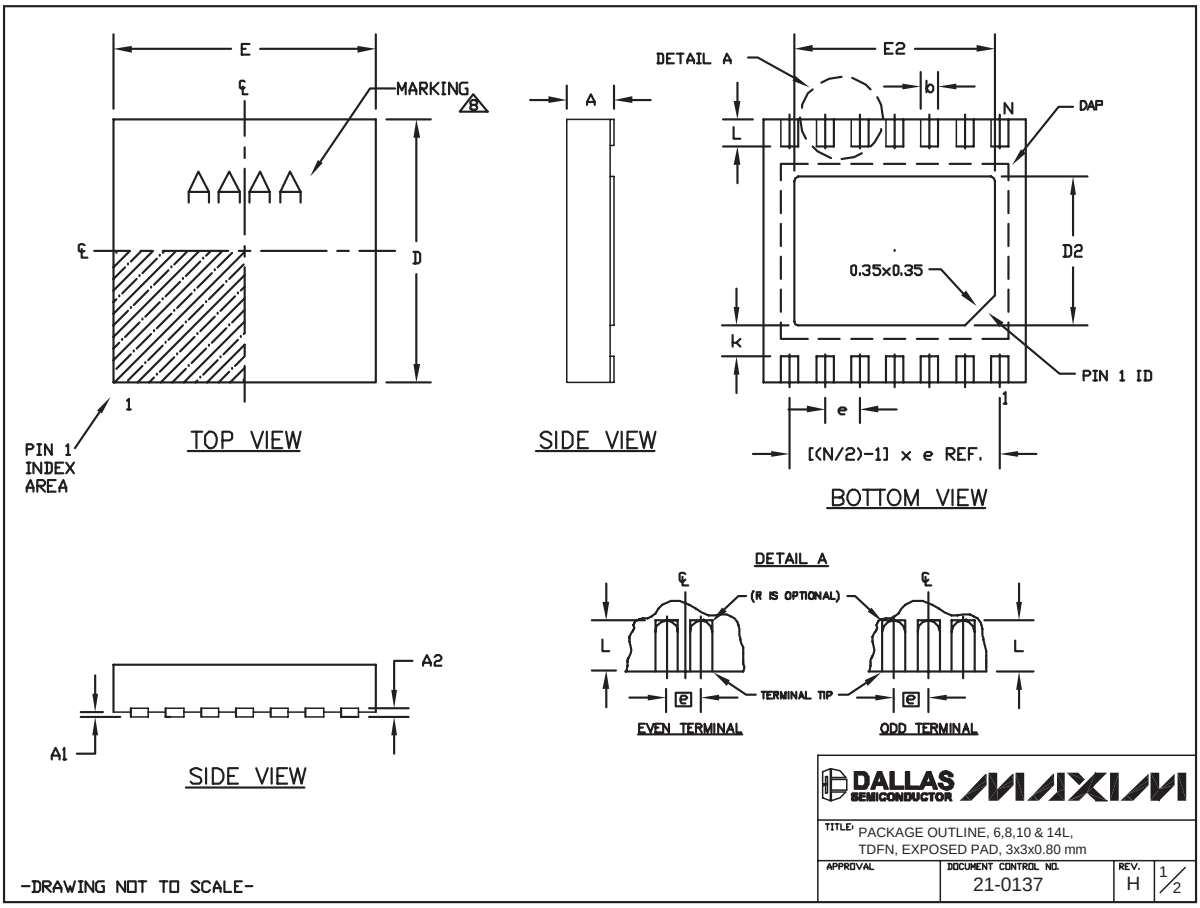

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to **www.maxim-ic.com/packages**.)

COMMON DIMENSIONS		
SYMBOL	MIN.	MAX.
A	0.70	0.80
D	2.90	3.10
E	2.90	3.10
A1	0.00	0.05
L	0.20	0.40
k	0.25 MIN.	
A2	0.20 REF.	

PACKAGE VARIATIONS							
PKG. CODE	N	D2	E2	e	JEDEC SPEC	b	[(N/2)-1] x e
T633-1	6	1.50±0.10	2.30±0.10	0.95 BSC	MO229 / WEEA	0.40±0.05	1.90 REF
T633-2	6	1.50±0.10	2.30±0.10	0.95 BSC	MO229 / WEEA	0.40±0.05	1.90 REF
T833-1	8	1.50±0.10	2.30±0.10	0.65 BSC	MO229 / WEEC	0.30±0.05	1.95 REF
T833-2	8	1.50±0.10	2.30±0.10	0.65 BSC	MO229 / WEEC	0.30±0.05	1.95 REF
T833-3	8	1.50±0.10	2.30±0.10	0.65 BSC	MO229 / WEEC	0.30±0.05	1.95 REF
T1033-1	10	1.50±0.10	2.30±0.10	0.50 BSC	MO229 / WEED-3	0.25±0.05	2.00 REF
T1033-2	10	1.50±0.10	2.30±0.10	0.50 BSC	MO229 / WEED-3	0.25±0.05	2.00 REF
T1433-1	14	1.70±0.10	2.30±0.10	0.40 BSC	- - - -	0.20±0.05	2.40 REF
T1433-2	14	1.70±0.10	2.30±0.10	0.40 BSC	- - - -	0.20±0.05	2.40 REF

NOTES:
1. ALL DIMENSIONS ARE IN mm. ANGLES IN DEGREES.
2. COPLANARITY SHALL NOT EXCEED 0.08 mm.
3. WARPAGE SHALL NOT EXCEED 0.10 mm.
4. PACKAGE LENGTH/PACKAGE WIDTH ARE CONSIDERED AS SPECIAL CHARACTERISTIC(S).
5. DRAWING CONFORMS TO JEDEC MO229, EXCEPT DIMENSIONS "D2" AND "E2", AND T1433-1 & T1433-2.
6. "N" IS THE TOTAL NUMBER OF LEADS.
7. NUMBER OF LEADS SHOWN ARE FOR REFERENCE ONLY.
8. MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.

-DRAWING NOT TO SCALE-

DALLAS SEMICONDUCTOR MAXIM

TITLE: PACKAGE OUTLINE, 6,8,10 & 14L, TDFN, EXPOSED PAD, 3x3x0.80 mm

APPROVAL	DOCUMENT CONTROL NO.	REV.	
	21-0137	H	2/2

Revision History

Pages changed at Revision 5: 1, 2, 8, 10

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 2006 Maxim Integrated Products MAXIM is a registered trademark of Maxim Integrated Products, Inc.