

## General Description

The MAX20734 Evaluation Kit (EV kit) serves as a reference platform for evaluating the MAX20734 voltage regulator IC. This single-chip, integrated switching regulator provides an extremely compact, low cost, highly efficient, fast, accurate and reliable power delivery solution for emerging low-output voltage applications up to 40A. Refer to the MAX20734 IC data sheet for more information.

The EV kit comprises a fully-assembled and tested PCB implementation of the MAX20734. Jumper pins, test points, and input/output connectors are included for flexibility and ease-of-use in a wide range of applications.

The evaluation board is configured with an edge strip to allow high di/dt loading when evaluating the system. The +V<sub>OUT</sub> connection is on the top side, while the return (or -V<sub>OUT</sub>) is on the bottom side, directly mirroring the top-side strip.

Either solder directly to the output strip or use the J8 terminal block to interface to a load.

## Features

- High Efficiency and Power Density
- Low Component Count
- Small Solution Size
  - 509mm<sup>2</sup> Including Inductor and Output Capacitors
- Optimized Performance
- Reduced Design-In Time
- Interfaces to Maxim PMBus™ Dongle and PowerTool™ GUI
- Proven PCB Layout
- Fully Assembled and Tested

Ordering Information appears at end of data sheet.

PMBus is a trademark of SMIF, Inc.

PowerTool is a trademark of Maxim Integrated Products, Inc.

## Quick Start

### Required Equipment

- MAX20734 EV kit
- 4.5V to 16V power supply
- 0A to 40A load
- Oscilloscope, probes, voltmeter

### Optional Equipment

- MAXPOWERTOOL002# USB-to-PMBus interface dongle
- Maxim PowerTool software

### Procedure

The EV kit is fully assembled and tested. Verify board operation using these steps:

- 1) Connect a powered-off 4.5V to 16V input supply to J1.
  - Optionally, connect supply sense leads to V<sub>DD1</sub> and GND1 for best accuracy.
- 2) Connect the load to J3 or J8.
- 3) If Maxim PowerTool software is used, connect the MAXPOWERTOOL002# USB-to-PMBus interface dongle to J704 and to the USB port on the PC.
- 4) Connect the V<sub>OUT</sub> scope probe/voltmeter to J4 or J11, as desired.
  - J4 and J11 are connected to the sense point for best accuracy.
- 5) Position the SW1 toggle switch, pointing away from J1 to enable the IC (if desired).
- 6) Turn on the input supply and observe that V<sub>OUT</sub> = 1V.
- 7) For efficiency measurements, J6 has the appropriate Kelvin sense points.

## Operation

The MAX20734 IC is a monolithic, high-frequency step-down switching regulator optimized for applications requiring small size, high efficiency, and low output voltages. Detailed product and application information is provided in the MAX20734 IC data sheet.

### Output Enable (OE)

OE is used to enable/disable the output voltage. The output voltage is enabled/disabled by SW1. Pointing SW1 in the direction of the silkscreened arrow enables the regulator.

### Output-Voltage Selection

The MAX20734 EV kit is set up to initially boot up to an output voltage of 1V. This has been accomplished by setting the reference to come up to a  $V_{BOOT}$  of 0.6484V and placing a voltage-divider in the feedback path with a divide ratio of 0.6484. The reference voltage can be changed through PMBus, in which case the output voltage follows the reference voltage divided by the 0.6484 divide ratio. To achieve higher output voltages, a higher divide ratio can be used. Note that the PMBus commanded and reported  $V_{OUT}$  is actually the voltage at the sense pins, so with the feedback-divider in place, the divide ratio must be taken into account.

$R_{GAIN}$  and  $C_{OUT}$  can also be changed to affect performance. Refer to the MAX20734 IC data sheet for more details.

### Soft-Start and Switching Frequency

These are programmable parameters. For the EV kit, soft-start is set to 3ms and switching frequency is set to 400kHz.

## Status Monitoring

Whenever the part is actively regulating, and the output voltage is within the power-good window, the STAT pin is high. In all other conditions, including enabled but in a fault state, the STAT pin is pulled low. Refer to the MAX20734 IC data sheet for more details.

### Input-Voltage Monitoring

The  $V_{DD1}$  and GND1 sense points monitor the input supply.

### Switching-Voltage Monitoring

The switching waveform can be monitored on VX1.

### Output-Voltage Monitoring

J4-1 and J4-2 monitor the output voltage of  $V_{OUT}$  and GND, respectively. These test points should not be used for loading. Alternatively, scopejack J11 can be used to monitor the output voltage.

### Efficiency Testing

J6 provides convenient access to the appropriate  $V_{IN}$  and  $V_{OUT}$  sense points.

- $V_{IN\_EFF\pm}$  are on J6 pins 1 and 2.
- $V_{OUT\_EFF\pm}$  are on J6 pins 3 and 4.
- Input and output currents should be measured with 0.1% lab shunts.
- For increased accuracy, shunt mismatch can be measured and calibrated out by doing a test running the same current through both shunts.

## Ordering Information


| DEVICE TYPE    | TYPE   |
|----------------|--------|
| MAX20734EVKIT# | EV Kit |

#Denotes RoHS compliant.

## MAX20734 Bill of Materials


| Part Reference                              | Quantity | Description                                |
|---------------------------------------------|----------|--------------------------------------------|
| C1, C74, C75                                | 3        | 100uF, 25V, 20%, TANTALUM                  |
| C24                                         | 1        | 0.01uF, 25V, 10%, X7R                      |
| C3                                          | 1        | 0.1uF, 25V, 10%, X7R                       |
| C32                                         | 1        | 1000pF, 50V, 10%, X7R                      |
| C5, C6, C10, C11                            | 4        | 47uF, 25V, 20%, X5R                        |
| C50                                         | 1        | 22uF, 6.3V, 20%, X6S                       |
| C60, C61                                    | 2        | 1.0uF, 25V, 20%, X5R                       |
| C62, C63, C66, C67, C69, C70, C71, C76, C77 | 9        | 100uf, 6.3V, 20%, X5R                      |
| C7                                          | 1        | 1uF, 25V, 10%, X7R                         |
| C8                                          | 1        | 0.22uF, 16V, 10%, X7R                      |
| C9, C36, C51                                | 3        | 10uF, 6.3V, 20%, X5R                       |
| GND1, GND2, GND3, LOOP, VDD1, VX1           | 6        | 1_PIN-1X1 Straight                         |
| J1, J8                                      | 2        | 2_PIN-2 Pin, Terminal Block w/Screws, Blue |
| J11                                         | 1        | Shielded Scope Probe Jack, Vertical        |
| J3                                          | 1        | 2_Pin-Edge Fingers                         |
| J4                                          | 1        | VOUT-DIF-1X2 Straight                      |
| J6                                          | 1        | 8_PIN-2X4 Straight                         |
| J7                                          | 1        | 6_PIN-2X3 Straight                         |
| J704                                        | 1        | 16_PIN-BoxHeader 2x8                       |
| L1                                          | 1        | 170nH, 10%, Isat= 66A                      |
| R1                                          | 1        | 1.78KΩ, 1%, 1/16W                          |
| R10, R20, R21, R22, R23                     | 5        | 1KΩ, 5%, 1/16W                             |
| R11, R14                                    | 2        | 0Ω, 5%, 1/16W                              |
| R2                                          | 1        | 162KΩ, 1%, 1/16W                           |
| R4                                          | 1        | 10Ω, 1%, 1/16W                             |
| R5, R8                                      | 2        | 20KΩ, 5%, 1/16W                            |
| R6                                          | 1        | 1.87KΩ, 1%, 1/16W                          |
| R9                                          | 1        | 3.48KΩ, 1%, 1/16W                          |
| SW1                                         | 1        | DPDT-DPDT, 6pins, 1switch                  |
| U1                                          | 1        | MAX20734                                   |
|                                             | 1        | PCB# 35-900335-01-00                       |

## MAX20734 Schematics

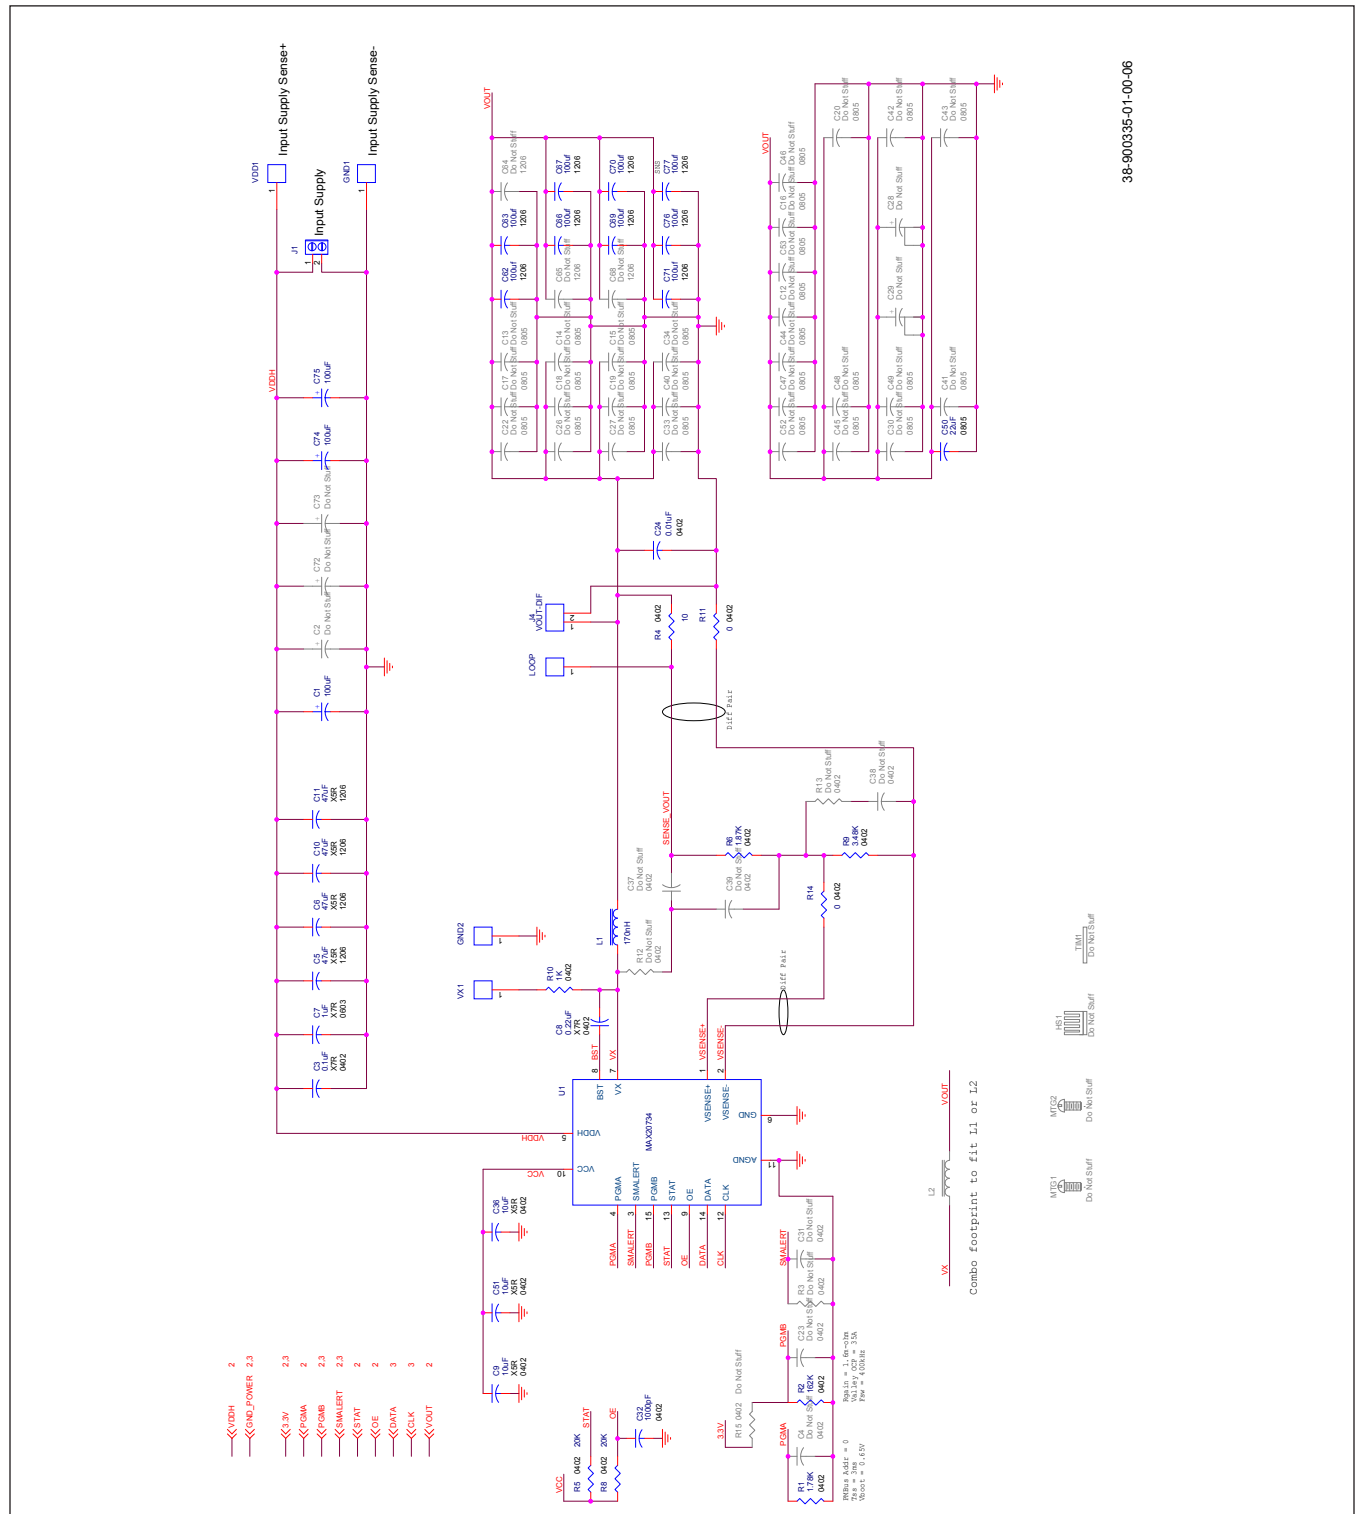


38-900335-01-00-06


MAX20734 Schematics (continued)

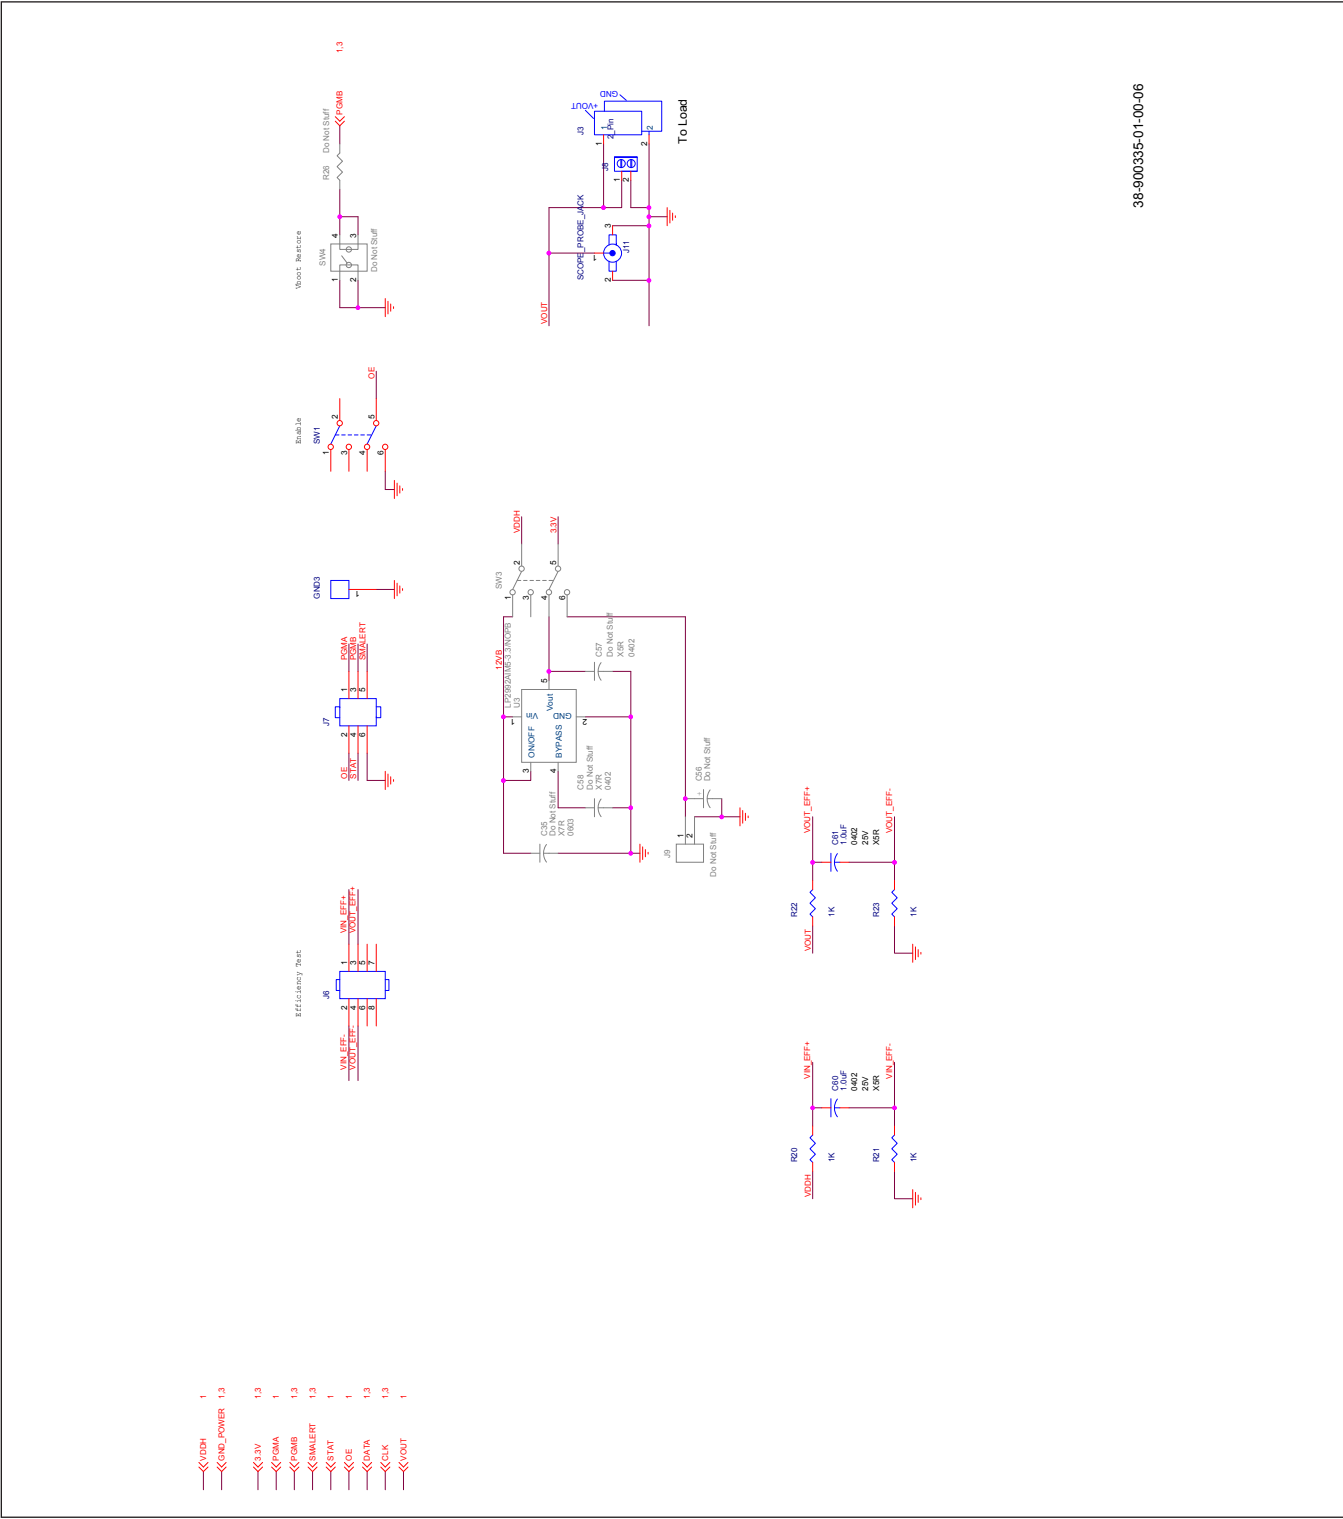


38-900335-01-00-06

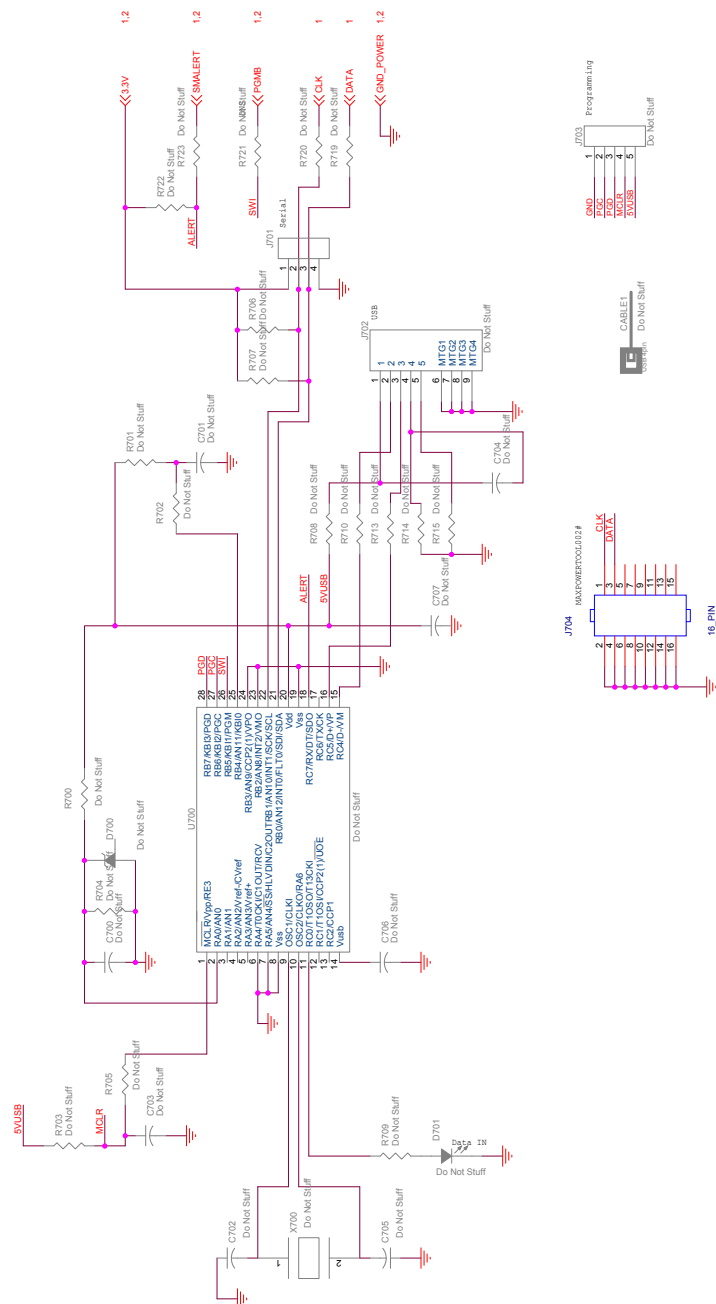

## MAX20734 PCB Layout

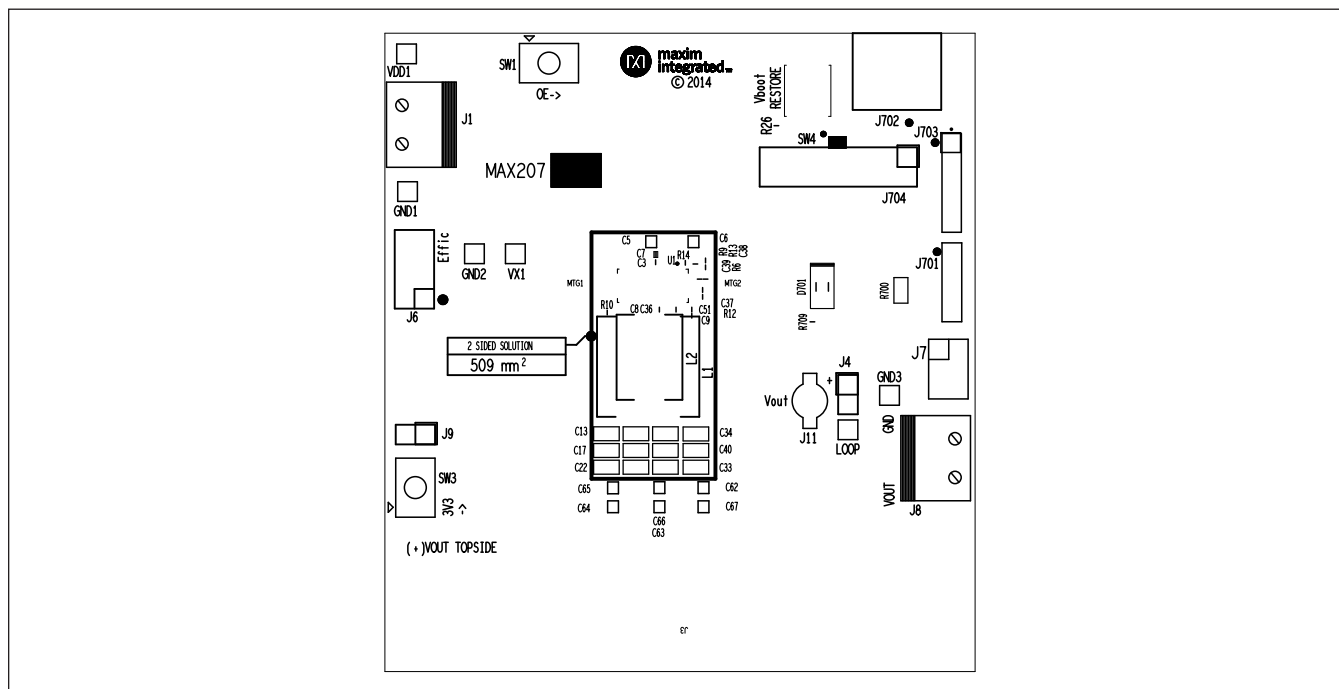


Top Silkscreen

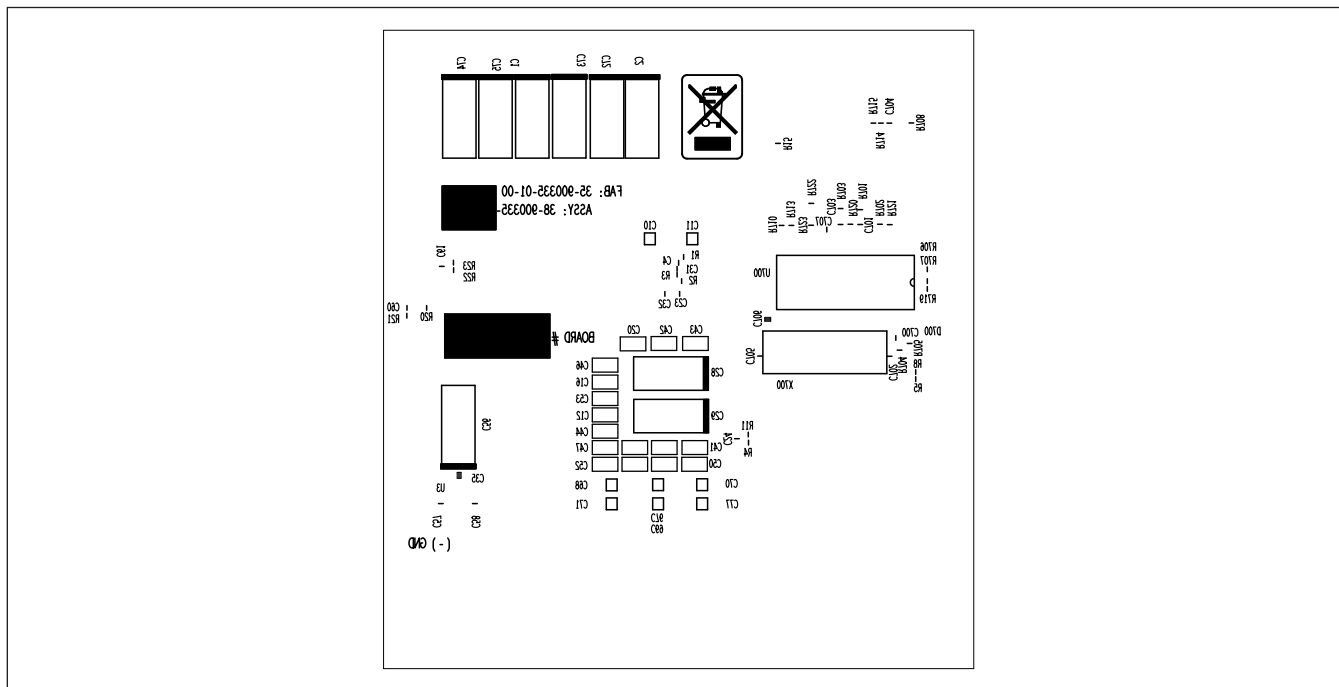


Bottom Silkscreen

## MAX20734 PCB Layout (continued)

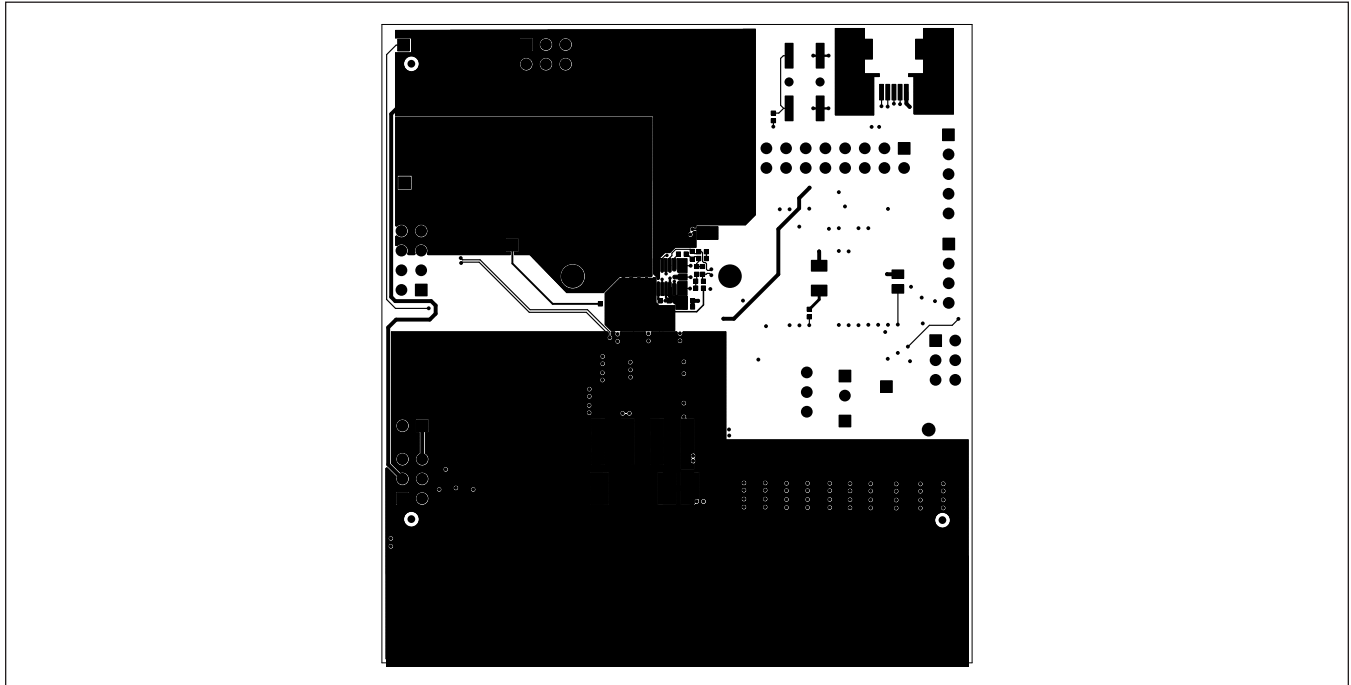


Layer 1

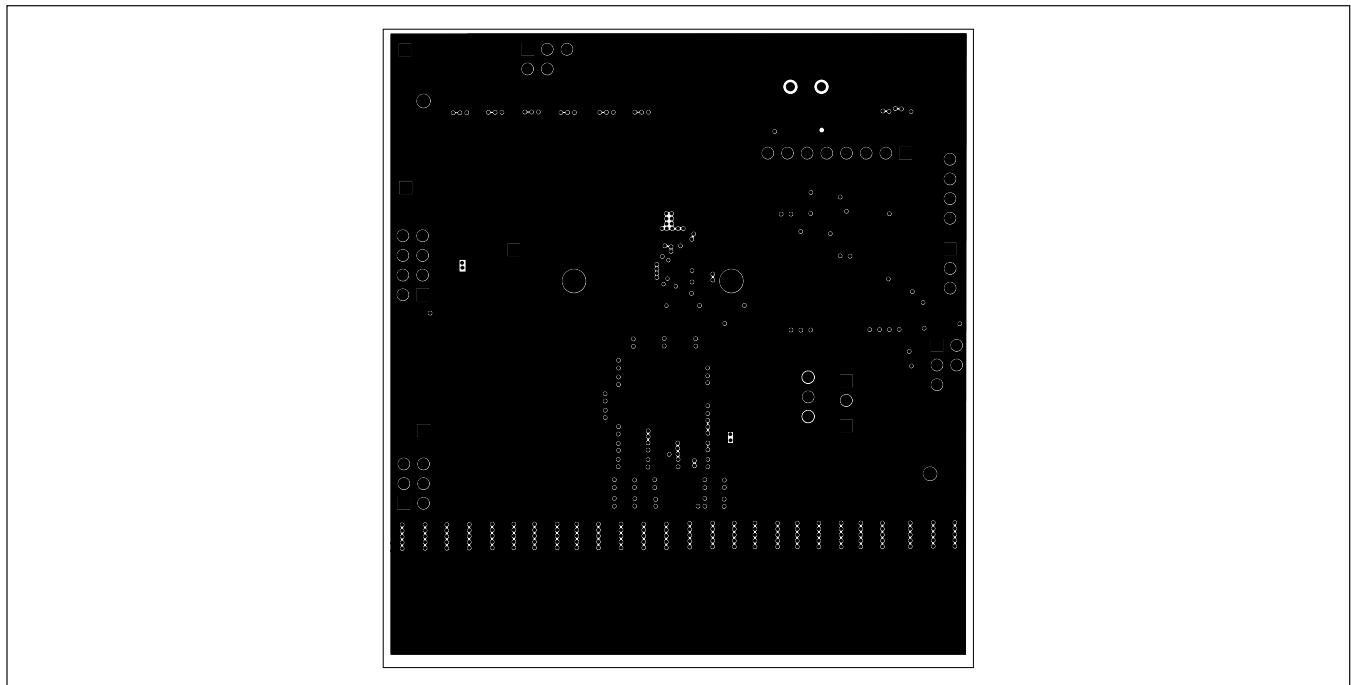


Layer 2

## MAX20734 PCB Layout (continued)

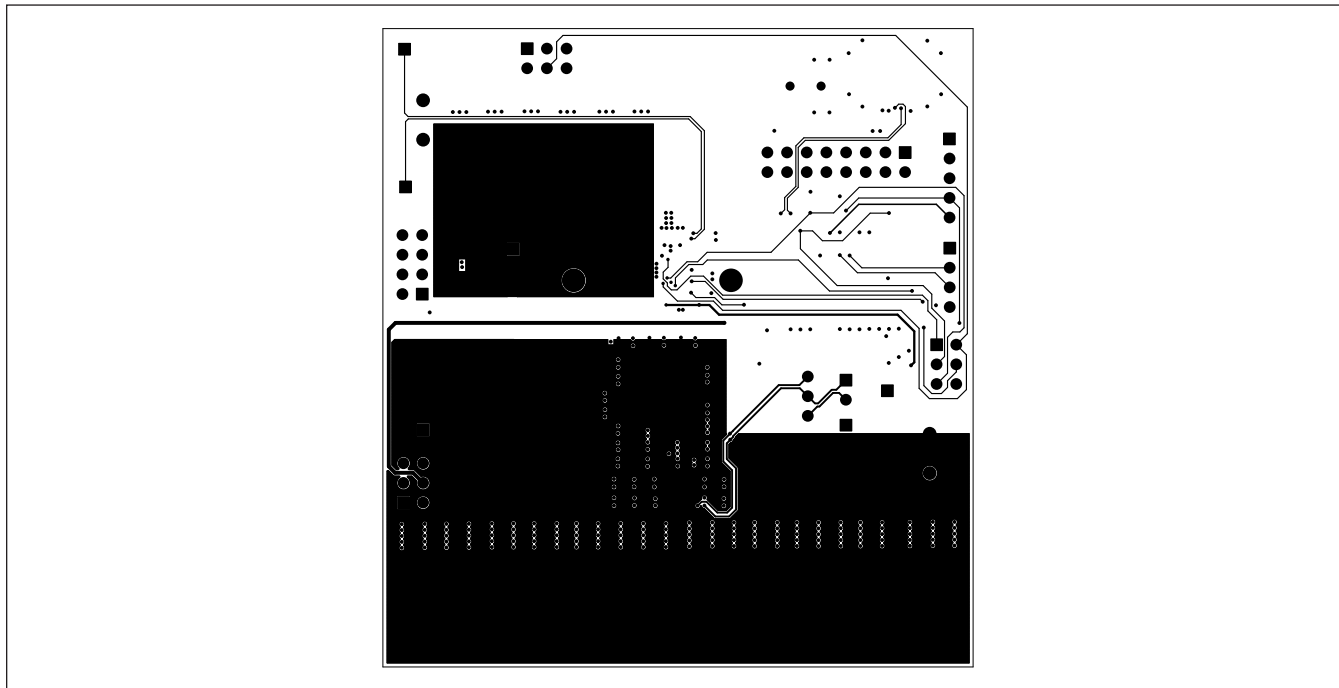

Layer 3

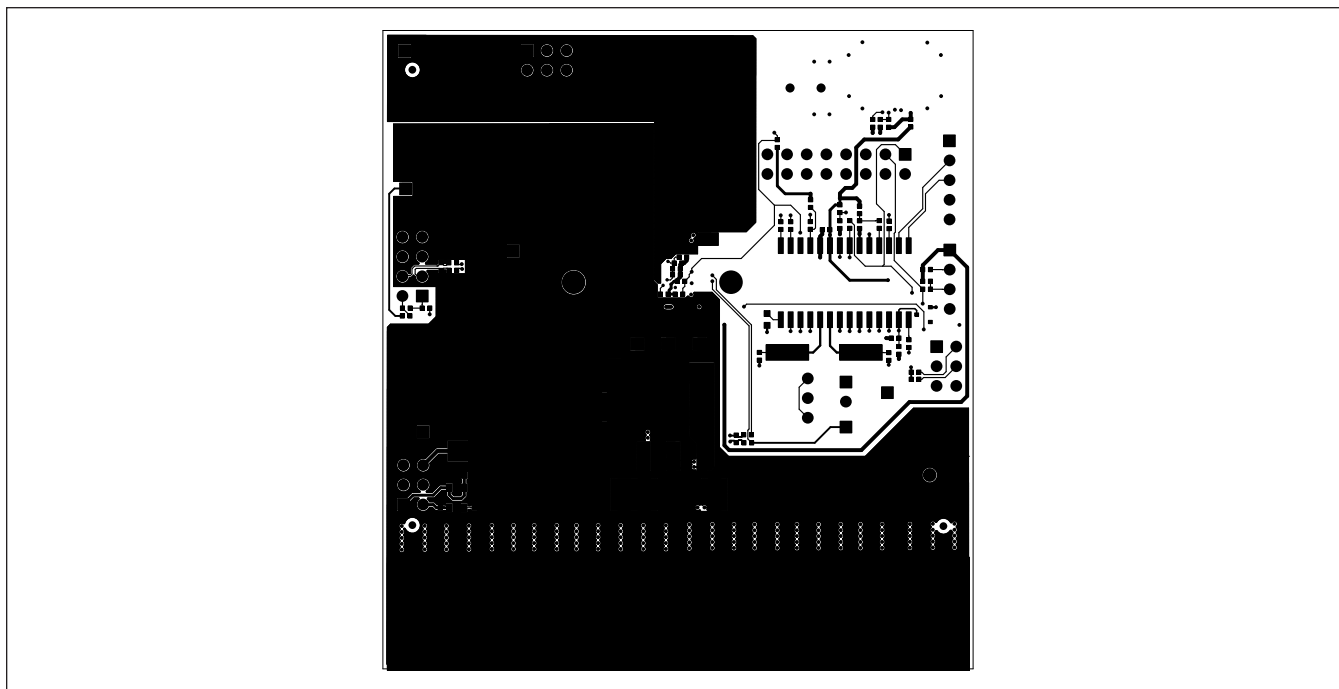

Layer 4

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION     | PAGES<br>CHANGED |
|--------------------|------------------|-----------------|------------------|
| 0                  | 8/16             | Initial release | —                |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*