
Spiral Wrap

Features

- **Designed to Hold and Protect Cables, Harnesses, and Hoses**
- **Allows Flexibility while Providing Secure Bundling**
- **Quick and Easy to Install due to Flexible Polyethylene Construction**
- **Heavy Duty Wall Thickness Provides Greater Resistance to Abrasions and Vibrations**
- **Breakout at Any Point**
- **.0625" to 7" Expanded Bundle Range**
- **Natural and UV Black Polyethylene**
- **RoHS Compliant**
- **Operating Temperature Rating: –60° to +88°C (–76° to +190°F)**

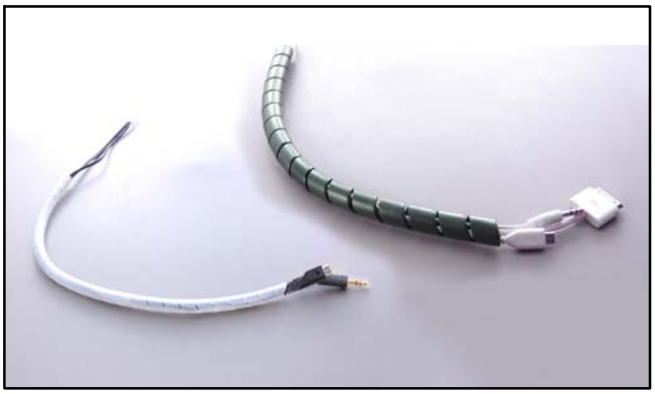

Spiral Wrap

NTE Type No.	Color & Material	Feet per Roll	Outer Diameter (in. / mm)	Inner Diameter (in. / mm)	Wall Thickness (in. / mm)	Pitch (in. / mm)	Bundle Range (inches)
04–SWP1259C	Natural Polyethylene	100	.125 (3.17)	.061 (1.54)	.032 (.812)	.187 (4.74)	.0625 – .500
04–SWP1250C	UV Black Polyethylene	100	.125 (3.17)	.061 (1.54)	.032 (.812)	.187 (4.74)	.0625 – .500
04–SWP1879C	Natural Polyethylene	100	.187 (4.74)	.127 (3.22)	.030 (.762)	.250 (6.35)	.125 – 1.500
04–SWP1870C	UV Black Polyethylene	100	.187 (4.74)	.127 (3.22)	.030 (.762)	.250 (6.35)	.125 – 1.500
04–SWP2509C	Natural Polyethylene	100	.250 (6.35)	.160 (4.06)	.045 (1.14)	.375 (9.52)	.1875 – 2.000
04–SWP2500C	UV Black Polyethylene	100	.250 (6.35)	.160 (4.06)	.045 (1.14)	.375 (9.52)	.1875 – 2.000
04–SWP3759C	Natural Polyethylene	100	.375 (9.52)	.271 (6.88)	.052 (1.32)	.438 (11.12)	.3125 – 3.000
04–SWP3750C	UV Black Polyethylene	100	.375 (9.52)	.271 (6.88)	.052 (1.32)	.438 (11.12)	.3125 – 3.000
04–SWP5009C	Natural Polyethylene	100	.500 (12.70)	.375 (9.52)	.062 (1.57)	.563 (14.30)	.375 – 4.000
04–SWP5000C	UV Black Polyethylene	100	.500 (12.70)	.375 (9.52)	.062 (1.57)	.500 (12.70)	.375 – 4.000
04–SWP6259C	Natural Polyethylene	100	.625 (15.87)	.500 (12.70)	.062 (1.57)	.652 (15.87)	.500 – 4.500
04–SWP6250C	UV Black Polyethylene	100	.625 (15.87)	.500 (12.70)	.062 (1.57)	.652 (15.87)	.500 – 4.500
04–SWP7509C	Natural Polyethylene	100	.750 (19.05)	.620 (15.74)	.065 (1.65)	.750 (19.05)	.750 – 5.000
04–SWP7500C	UV Black Polyethylene	100	.750 (19.05)	.620 (15.74)	.065 (1.65)	.750 (19.05)	.750 – 5.000
04–SWP10009C	Natural Polyethylene	100	1.000 (25.40)	.840 (21.33)	.080 (2.03)	1.000 (25.40)	1.000 – 7.000
04–SWP10000C	UV Black Polyethylene	100	1.000 (25.40)	.840 (21.33)	.080 (2.03)	1.000 (25.40)	1.000 – 7.000

Note 1. Tolerance: .xxx = ±.005 (±.127mm); .xx = ±.015 (±.381mm)