

EVALUATION KIT  
AVAILABLE

# 500kHz, 36V Output, SOT23, PWM Step-Up DC-DC Converters

MAX5025-MAX5028

## General Description


The MAX5025-MAX5028 constant-frequency, pulse-width modulating (PWM), low-noise boost converters are intended for low-voltage systems that often need a locally generated high voltage. These devices are capable of generating low-noise, high output voltages required for varactor diode biasing in TV tuners, set-top boxes, and PCI cable modems. The MAX5025-MAX5028 operate from as low as 3V and switch at 500kHz.

The constant-frequency, current-mode PWM architecture provides for low output noise that is easy to filter. A 40V lateral DMOS device is used as the internal power switch, making the devices ideal for boost converters up to 36V. The MAX5025/MAX5026 adjustable versions require the use of external feedback resistors to set the output voltage. The MAX5027/MAX5028 offer a fixed 30V output. These devices are available in a small, 6-pin SOT23 package.

## Applications

TV Tuner Power Supply  
Low-Noise Varactor Diode Biasing  
Set-Top Box Tuner Power Supply  
PCI Cable Modem  
Voice-Over-Cable  
LCD Power Supply  
Avalanche Photodiode Biasing

## Typical Operating Circuit

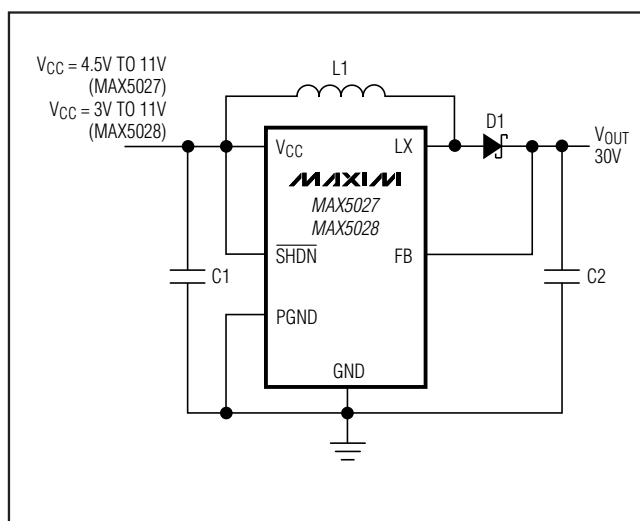

## Features


- ◆ Input Voltage Range:  
3V to 11V (MAX5026/MAX5028)  
4.5V to 11V (MAX5025/MAX5027)
- ◆ Wide Output Voltage Range: VCC to 36V
- ◆ Output Power: 120mW (max)
- ◆ User-Adjustable Output Voltage with  
MAX5025/MAX5026 Using External Feedback  
Resistors
- ◆ Fixed 30V Output Voltage: MAX5027/MAX5028
- ◆ Internal 1.3Ω (typ), 40V Switch
- ◆ Constant PWM Frequency Provides Easy Filtering  
in Low-Noise Applications
- ◆ 500kHz (typ) Switching Frequency
- ◆ 1μA (max) Shutdown Current
- ◆ Small, 6-Pin SOT23 Package

## Ordering Information

| PART         | TEMP RANGE     | PIN-PACKAGE |
|--------------|----------------|-------------|
| MAX5025EUT-T | -40°C to +85°C | 6 SOT23-6   |
| MAX5026EUT-T | -40°C to +85°C | 6 SOT23-6   |
| MAX5027EUT-T | -40°C to +85°C | 6 SOT23-6   |
| MAX5028EUT-T | -40°C to +85°C | 6 SOT23-6   |

Selector Guide appears at end of data sheet.

## Pin Configuration

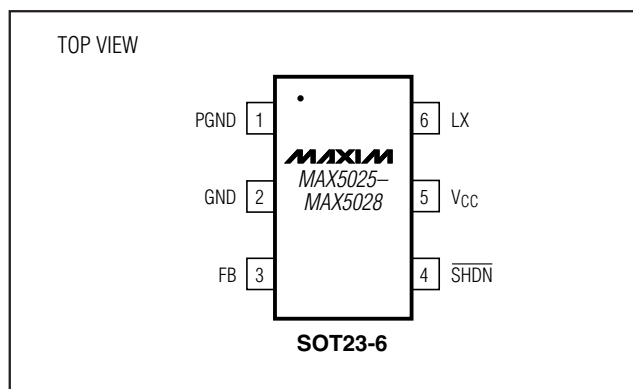

# 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

## ABSOLUTE MAXIMUM RATINGS

V<sub>CC</sub> to GND .....-0.3V to +12V  
 PGND to GND .....-0.1V to +0.1V  
 FB to GND (MAX5025/MAX5026).....-0.3V to (V<sub>CC</sub> + 0.3V)  
 FB to GND (MAX5027/MAX5028).....-0.3V to +40V  
 SHDN to GND.....-0.3V to (V<sub>CC</sub> + 0.3V)  
 LX to GND .....-0.3V to +45V  
 Peak LX Current.....600mA

Operating Temperature Range .....-40°C to +85°C  
 Continuous Power Dissipation (T<sub>A</sub> = +70°C)  
     6-Pin SOT23 (derate 8.7mW/°C above +70°C).....695.7mW  
 Junction Temperature.....+150°C  
 Storage Temperature Range .....-65°C to +165°C  
 Lead Temperature (soldering 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(V<sub>CC</sub> = 5V,  $\overline{\text{SHDN}}$  = V<sub>CC</sub>, T<sub>A</sub> = -40°C to +85°C, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                   | SYMBOL            | CONDITIONS                                                                                            | MIN  | TYP  | MAX  | UNITS |
|-----------------------------|-------------------|-------------------------------------------------------------------------------------------------------|------|------|------|-------|
| <b>SUPPLY VOLTAGE</b>       |                   |                                                                                                       |      |      |      |       |
| Input Voltage Range         | V <sub>CC</sub>   | MAX5026/MAX5028                                                                                       | 3.0  |      | 11   | V     |
|                             |                   | MAX5025/MAX5027                                                                                       | 4.5  |      | 11   |       |
| Undervoltage Lockout        | V <sub>UVLO</sub> | Rise/fall, hysteresis = 3mV                                                                           | 2.25 | 2.65 | 2.95 | V     |
| Supply Current              | I <sub>CC</sub>   | MAX5025/MAX5026, FB = 1.4V<br>MAX5027/MAX5028, FB = 35V                                               |      | 350  | 1000 | μA    |
| Shutdown Current            | I <sub>SHDN</sub> | $\overline{\text{SHDN}}$ = GND                                                                        |      | 0.01 | 1    | μA    |
| <b>BOOST CONVERTER</b>      |                   |                                                                                                       |      |      |      |       |
| Switching Frequency         | f <sub>SW</sub>   | MAX5025/MAX5027                                                                                       | 345  | 500  | 1000 | kHz   |
|                             |                   | MAX5026/MAX5028, V <sub>CC</sub> = 3.3V                                                               | 410  | 500  | 670  |       |
| Line Regulation             |                   | MAX5025/MAX5027,<br>I <sub>LOAD</sub> = 2mA, V <sub>CC</sub> = 4.5V to 11V,<br>V <sub>OUT</sub> = 30V |      | 0.25 |      | %V    |
|                             |                   | MAX5026/MAX5028,<br>I <sub>LOAD</sub> = 0.5mA, V <sub>CC</sub> = 3V to 11V,<br>V <sub>OUT</sub> = 30V |      | 0.25 |      |       |
| Load Regulation             |                   | MAX5025/MAX5027,<br>V <sub>CC</sub> = 5V, I <sub>LOAD</sub> = 0 to 4mA,<br>V <sub>OUT</sub> = 30V     |      | 2.0  |      | %     |
|                             |                   | MAX5026/MAX5028,<br>V <sub>CC</sub> = 3.3V, I <sub>LOAD</sub> = 0 to 1mA,<br>V <sub>OUT</sub> = 30V   |      | 1.0  |      |       |
| Thermal Shutdown            |                   |                                                                                                       |      | 140  |      | °C    |
| Thermal Shutdown Hysteresis |                   |                                                                                                       |      | 2    |      | °C    |

# 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

MAX5025-MAX5028

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{CC} = 5V$ ,  $\overline{SHDN} = V_{CC}$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 1)

| PARAMETER                       | SYMBOL           | CONDITIONS                             |                                         | MIN                 | TYP  | MAX   | UNITS |
|---------------------------------|------------------|----------------------------------------|-----------------------------------------|---------------------|------|-------|-------|
| FB Set Point                    | V <sub>FB</sub>  | MAX5025, V <sub>CC</sub> = 4.5V to 11V |                                         | 1.19                | 1.25 | 1.31  | V     |
|                                 |                  | MAX5027, V <sub>CC</sub> = 4.5V to 11V |                                         | 28.5                | 30.0 | 31.5  |       |
|                                 |                  | MAX5026, V <sub>CC</sub> = 3.3V to 11V |                                         | 1.212               | 1.25 | 1.288 |       |
|                                 |                  | MAX5028, V <sub>CC</sub> = 3.3V to 11V |                                         | 29.0                | 30   | 31    |       |
| FB Input Bias Current           | I <sub>FB</sub>  | MAX5025/MAX5026, FB = 1V               |                                         | 110                 |      | 310   | nA    |
|                                 |                  | MAX5027/MAX5028, FB = 30V              |                                         | 100                 |      | 170   | μA    |
| Output Voltage Adjustment Range |                  | MAX5025/MAX5026                        |                                         | V <sub>CC</sub> + 1 |      | 36    | V     |
| LX OUTPUT                       |                  |                                        |                                         |                     |      |       |       |
| LX On-Resistance                | R <sub>ON</sub>  | I <sub>LX</sub> = 40mA                 | MAX5026/MAX5028, V <sub>CC</sub> = 3V   | 2.0                 |      | 4.0   | Ω     |
|                                 |                  |                                        | V <sub>CC</sub> = 5V                    | 1.3                 |      | 3.0   |       |
|                                 |                  |                                        | V <sub>CC</sub> = 11V                   | 1.0                 |      | 2.5   |       |
| Switch Current Limit            | I <sub>LIM</sub> | Note 2                                 |                                         | 260                 |      |       | mA    |
| LX Leakage Current              |                  | V <sub>LX</sub> = 40V                  | MAX5025/MAX5026, V <sub>FB</sub> = 1.4V | 0.01                |      | 10    | μA    |
|                                 |                  |                                        | MAX5027/MAX5028, V <sub>FB</sub> = 35V  |                     |      |       |       |
| LOGIC INPUT: <u>SHDN</u>        |                  |                                        |                                         |                     |      |       |       |
| Input Low Level                 | V <sub>IL</sub>  |                                        |                                         | 0.8                 |      |       | V     |
| Input High Level                | V <sub>IH</sub>  |                                        |                                         | 2.4                 |      |       | V     |
| Input Bias Current              |                  |                                        |                                         | -1                  |      | 1     | μA    |










**Note 1:** All devices are 100% production tested at  $T_A = +25^{\circ}C$ . All temperature limits are guaranteed by design.

**Note 2:** Switch current-limit accuracy is typically  $\pm 20\%$  and is a function of the input voltage.  $I_{LIM} = (V_{IN}/5)$  (260mA).

# 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

## Typical Operating Characteristics


( $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

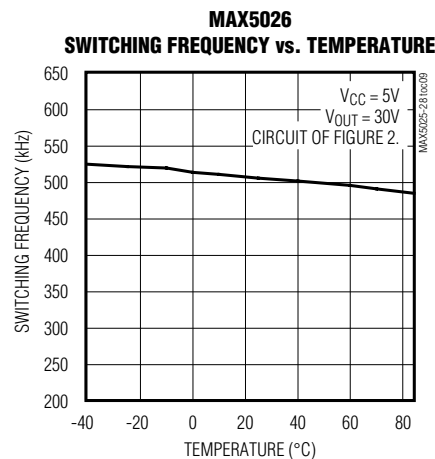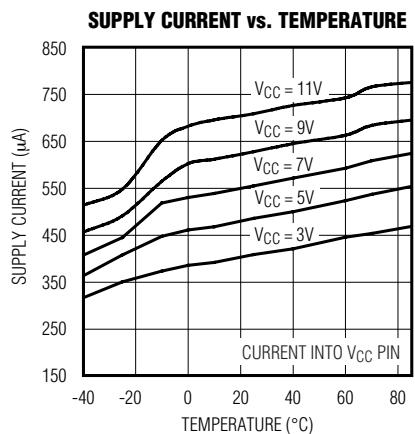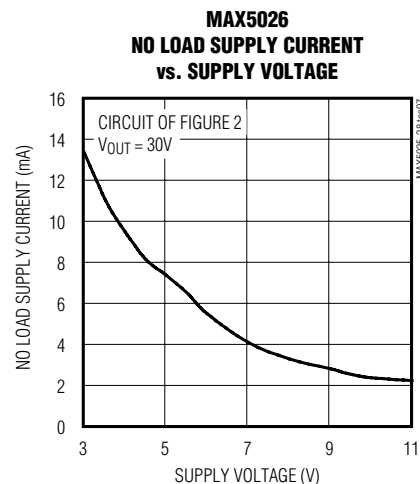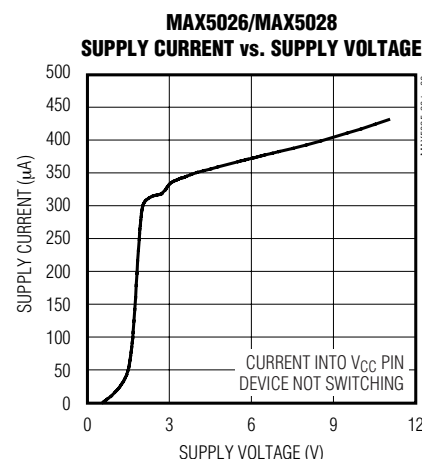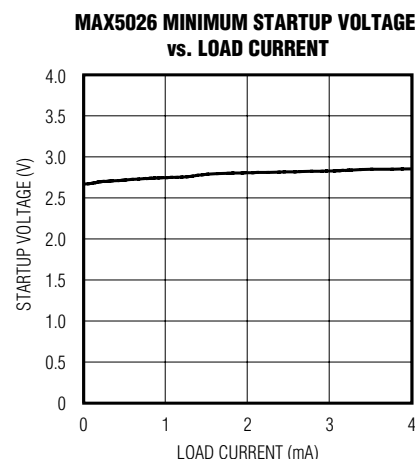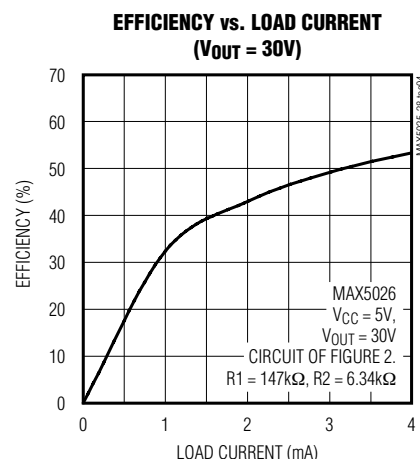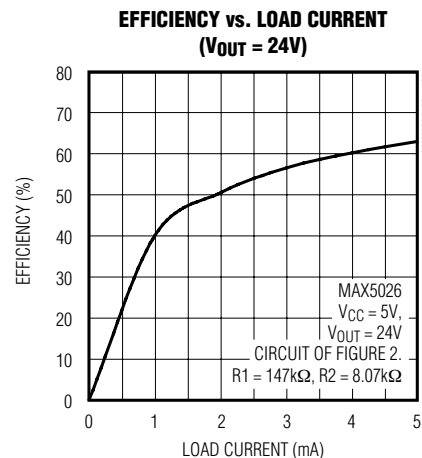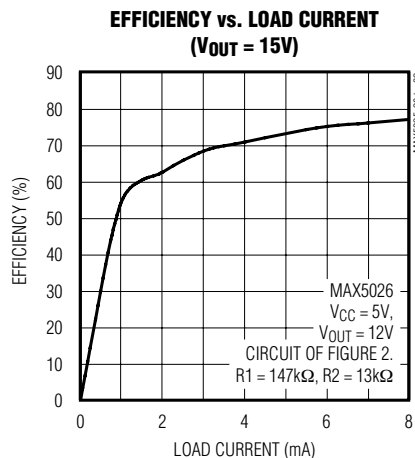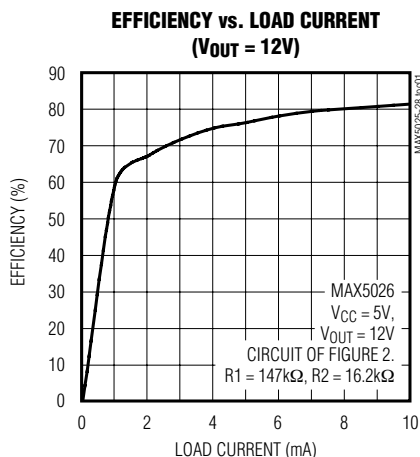


# 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

## Typical Operating Characteristics (continued)


( $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

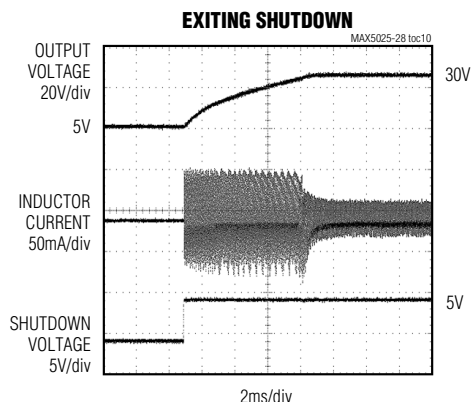


MAX5026,  $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $I_{LOAD} = 1mA$ .  
CIRCUIT OF FIGURE 3

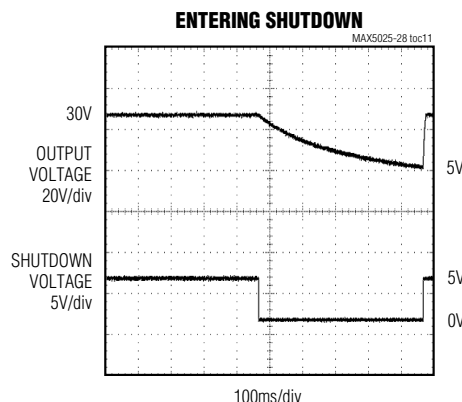


MAX5026,  $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $I_{LOAD} = 1mA$ .  
CIRCUIT OF FIGURE 3

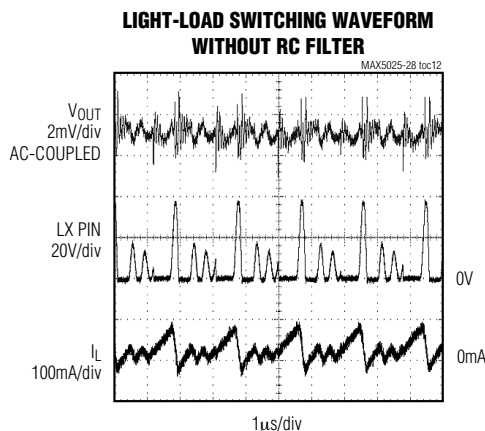


MAX5026,  $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $I_{LOAD} = 0.1mA$ .  
CIRCUIT OF FIGURE 2

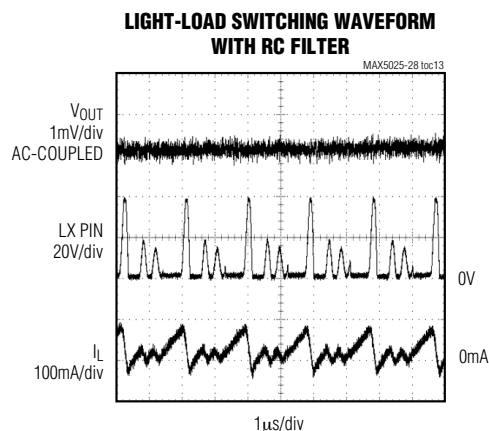

MAX5026,  $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $I_{LOAD} = 0.1mA$ .  
CIRCUIT OF FIGURE 3

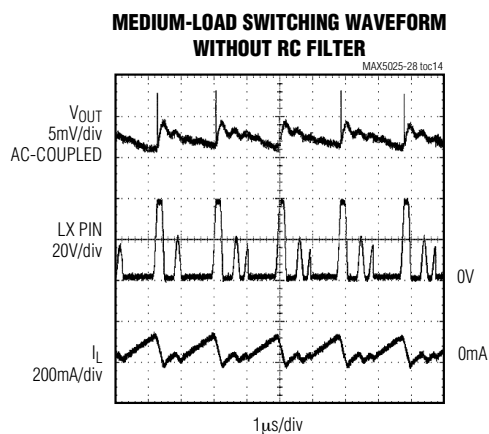

MAX5026,  $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $I_{LOAD} = 2mA$ .  
CIRCUIT OF FIGURE 2

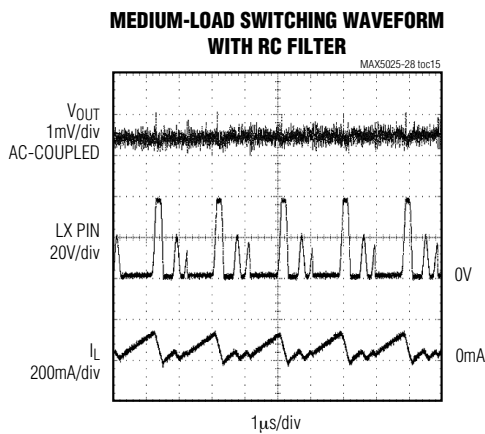


MAX5026,  $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $I_{LOAD} = 2mA$ .  
CIRCUIT OF FIGURE 3

# 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

## Typical Operating Characteristics (continued)


( $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

**HEAVY-LOAD SWITCHING WAVEFORM WITHOUT RC FILTER**

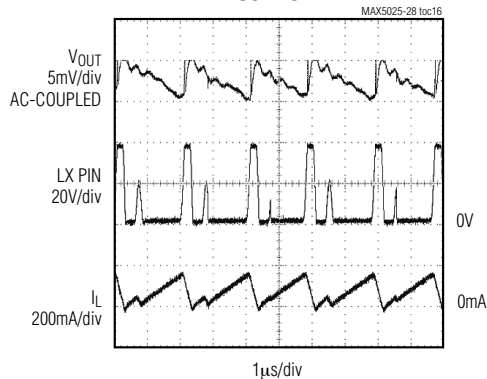


MAX5026,  $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $I_{LOAD} = 4mA$ .  
CIRCUIT OF FIGURE 2

**HEAVY-LOAD SWITCHING WAVEFORM WITH RC FILTER**

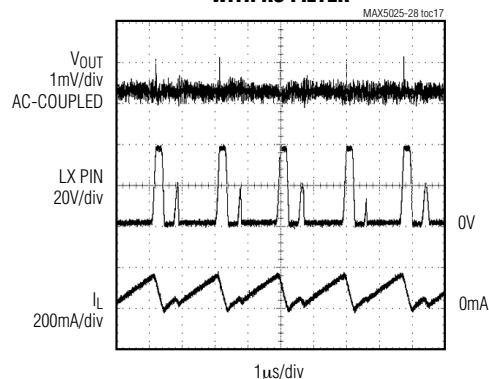


MAX5026,  $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $I_{LOAD} = 4mA$ .  
CIRCUIT OF FIGURE 3

**LOAD TRANSIENT RESPONSE**

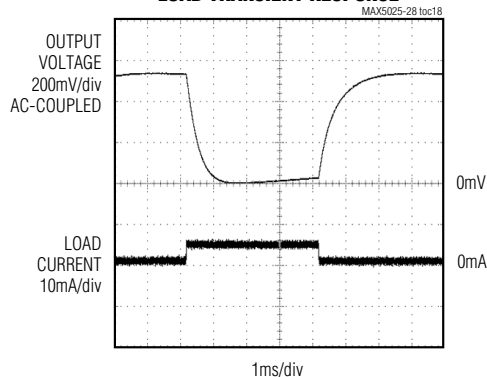


MAX5026,  $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $I_{LOAD} = 0$  TO  $4mA$ .  
CIRCUIT OF FIGURE 2

**LINE TRANSIENT RESPONSE**

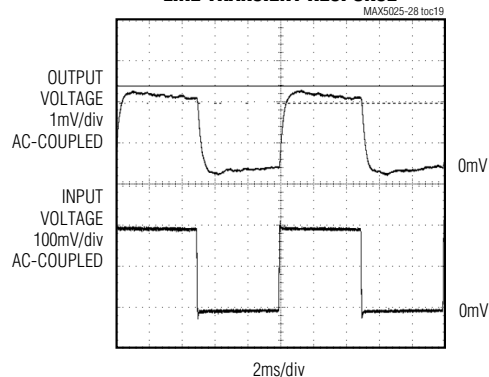


MAX5026,  $V_{CC} = 5V$  TO  $5.2V$ ,  $V_{OUT} = 30V$ ,  $I_{LOAD} = 1mA$ .  
CIRCUIT OF FIGURE 2

**MAX5026  
FB PIN VOLTAGE vs. TEMPERATURE**

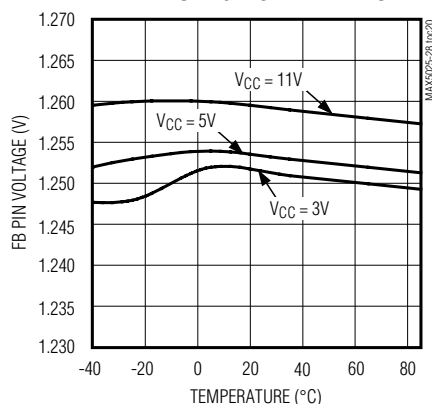

**MAX5028  
FB PIN VOLTAGE vs. TEMPERATURE**




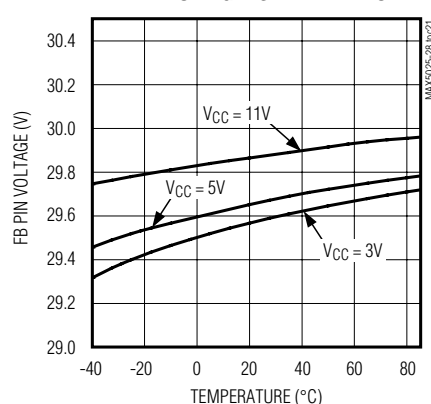


# 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

MAX5025-MAX5028

## Typical Operating Characteristics (continued)

( $V_{CC} = 5V$ ,  $V_{OUT} = 30V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

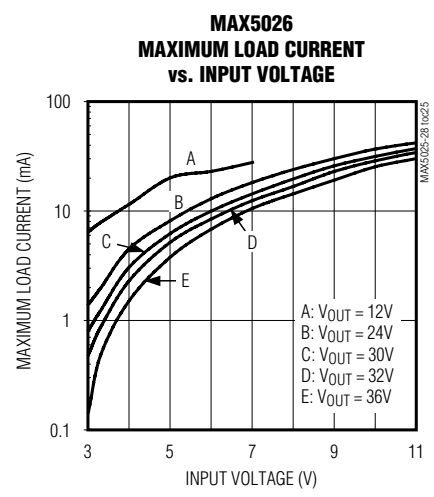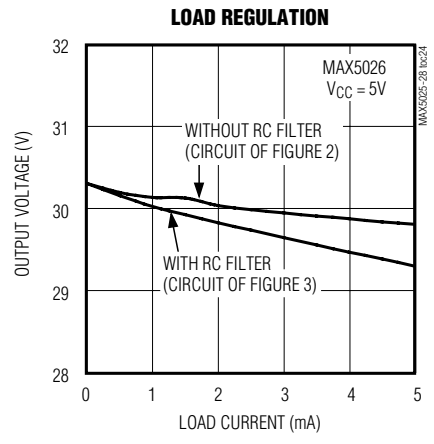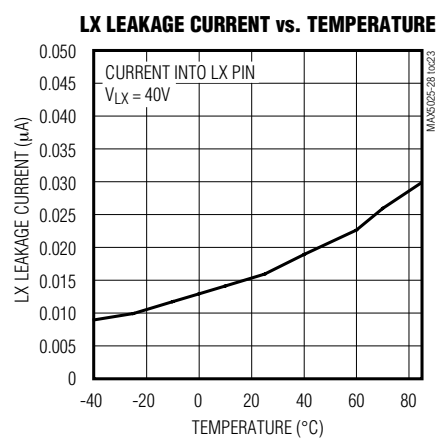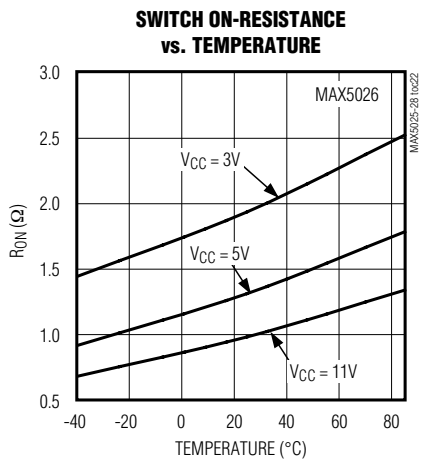

# 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

## Pin Description

| PIN                 |                     | NAME                     | FUNCTION                                                                                                                                                              |
|---------------------|---------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX5025/<br>MAX5026 | MAX5027/<br>MAX5028 |                          |                                                                                                                                                                       |
| 1                   | 1                   | PGND                     | Power Ground. Connect directly to local ground plane. Use a star ground configuration for low noise.                                                                  |
| 2                   | 2                   | GND                      | Ground. Connect directly to local ground plane.                                                                                                                       |
| 3                   | —                   | FB                       | Feedback Pin. Reference voltage is approximately 1.25V. Connect resistive-divider tap here. Minimize trace area at FB. See <i>Setting the Output Voltage</i> section. |
| —                   | 3                   | FB                       | Feedback Pin. Connect $V_{OUT}$ to FB for +30V. Internal resistors divide down the output voltage.                                                                    |
| 4                   | 4                   | $\overline{\text{SHDN}}$ | Shutdown Pin. Connect to $V_{CC}$ to enable device. Connect to GND to shut down.                                                                                      |
| 5                   | 5                   | $V_{CC}$                 | Input Supply Voltage. Bypass with a 4.7 $\mu$ F ceramic capacitor.                                                                                                    |
| 6                   | 6                   | LX                       | Drain of Internal 40V N-Channel DMOS. Connect inductor/diode to LX. Minimize trace area at this pin to keep EMI down.                                                 |

## Detailed Description

The MAX5025–MAX5028 current-mode PWM controllers operate in a wide range of DC-DC conversion applications including boost, flyback, and isolated output configurations. These converters provide low-noise, high output voltages making them ideal for varactor diode tuning applications as well as TFT LCD bias. Other features include shutdown, fixed 500kHz PWM oscillator, and a wide input range: 3V to 11V for MAX5026/MAX5028 and 4.5V to 11V for MAX5025/MAX5027.

The MAX5025–MAX5028 operate in discontinuous mode in order to reduce the switching noise at the output. Other continuous mode boost converters generate a large voltage spike at the output when the LX switch turns on because there is a conduction path between the output, diode, and switch to ground during the time needed for the diode to turn off.

To reduce the output noise even further, the LX switch turns off by taking 40ns typically to transition from “ON” to “OFF.” As a consequence, the positive slew rate of the LX node is reduced and the current from the inductor does not “force” the output voltage as hard as would be the case if the LX switch were to turn off more quickly.

### PWM Controller

The heart of the MAX5025–MAX5028 current-mode PWM controllers is a BiCMOS multi-input comparator that simultaneously processes the output-error signal and switch current signal. The main PWM comparator

is direct summing, lacking a traditional error amplifier and its associated phase shift. The direct summing configuration approaches ideal cycle-by-cycle control over the output voltage since there is no conventional error amp in the feedback path.

The device operates in PWM mode using a fixed-frequency, current-mode operation. The current-mode feedback loop regulates peak inductor current as a function of the output error signal.

### $\overline{\text{SHDN}}$ Input

The  $\overline{\text{SHDN}}$  pin provides shutdown control. Connect  $\overline{\text{SHDN}}$  to  $V_{CC}$  for normal operation. To disable the device, connect  $\overline{\text{SHDN}}$  to GND.

## Design Procedure

The MAX5025–MAX5028 can operate in a number of DC-DC converter configurations including step-up, single-ended primary inductance converter (SEPIC), and flyback. The following design discussions are limited to step-up, with a complete circuit shown in the *Application Circuits* section.

### Setting the Output Voltage

The output voltage of the MAX5027/MAX5028 is fixed at 30V. The output voltage of the MAX5025/MAX5026 is set by two external resistors ( $R_1$  and  $R_2$ , Figure 2 and Figure 3). First select the value of  $R_2$  in the 5k $\Omega$  to 50k $\Omega$  range.  $R_1$  is then given by:

## 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

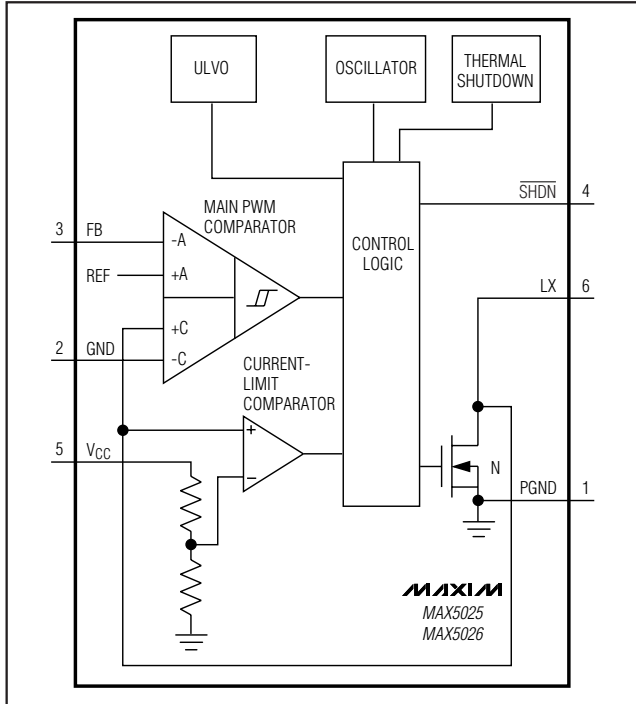


Figure 1. Functional Diagram

$$R1 = R2 \left( \frac{V_{OUT}}{V_{REF}} - 1 \right)$$

where  $V_{REF}$  is 1.25V

### Determining Peak Inductor Current

If the boost converter remains in the discontinuous mode of operation, then the approximate peak inductor current,  $I_{LPEAK}$ , is represented by the formula below:

$$I_{LPEAK} = \sqrt{\frac{2 T_S (V_{OUT} - V_{IN}) I_{OUT}}{\eta L}}$$

where  $T_S$  is the period,  $V_{OUT}$  is the output voltage,  $V_{IN}$  is the input voltage,  $I_{OUT}$  is the output current, and  $\eta$  is the efficiency of the boost converter.

### Determining the Inductor Value

47 $\mu$ H is the recommended inductor value when the output voltage is 30V and the input voltage is 5V. In general, the inductor should have a current rating greater than the current-limit value. For example, the inductor's current rating should be greater than 150mA to support a 4mA output current. Equivalent series resistance (ESR) should be below 1 $\Omega$  for reasonable efficiency. Due to the MAX5025-MAX5028's high switching frequency, inductors with a ferrite core or equivalent are recommended. Powdered iron cores are not recommended due to their high losses at frequencies over 500kHz. Table 1 shows a list of vendors and 47 $\mu$ H inductor parts.

For 4mA output current and output voltages other than 30V, the inductor can be simply scaled in value according to the following formula:

$$L = \frac{(47\mu H)(V_{OUT} - V_{IN})}{(25V)}$$

Use the following formula to calculate the upper bound of the inductor value at different output voltages and output currents. This is the maximum inductance value for discontinuous mode operation.

$$L_{UPPER} = \frac{V_{IN}^2 (V_{OUT} - V_{IN}) T_S \eta}{2 I_{OUT} V_{OUT}^2}$$

Calculate the lower bound,  $L_{LOWER}$ , for the acceptable inductance value using the following formula, which will allow the maximum output current to be delivered without reaching the peak current limit:

$$L_{LOWER} = \frac{2 T_S (V_{OUT} - V_{IN}) I_{OUT}}{\eta \left( \frac{V_{IN}}{5} (260mA) \right)^2}$$

Notice that the switch current limit,  $(V_{IN}/5)(260mA)$ , is a function of the input voltage,  $V_{IN}$ . The current rating of the inductor should be greater than the switch current limit.

Table 1. Inductor Vendors

| VENDOR    | PHONE        | FAX          | PART NUMBER OF 47 $\mu$ H INDUCTOR |
|-----------|--------------|--------------|------------------------------------|
| Coilcraft | 847-639-6400 | 847-639-1469 | DT1608C-473                        |
| Sumida    | 847-545-6700 | 847-545-6720 | CDRH4D28-470                       |
| Toko      | 847-297-0070 | 847-699-7864 | A915BY-470M                        |

## 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

For a design in which  $V_{IN} = 5V$ ,  $V_{OUT} = 30V$ ,  $I_{OUT} = 4mA$ ,  $\eta = 0.5$ , and  $T_S = 2\mu s$ ,

$L_{UPPER} = 87\mu H$

and

$L_{LOWER} = 12\mu H$ .

For a worst-case scenario in which  $V_{IN} = 4.75V$ ,  $V_{OUT} = 29V$ ,  $I_{OUT} = 4.4mA$ ,  $\eta = 0.5$ , and  $T_S = 1.25\mu s$ ,

$L_{UPPER} = 46\mu H$

and

$L_{LOWER} = 9\mu H$ .

The choice of  $47\mu H$  as the recommended inductance value is reasonable given the worst-case scenario above. In general, the higher the inductance, the lower the switching noise. Load regulation is also better with higher inductance.

### Diode Selection

The MAX5025-MAX5028's high switching frequency demands a high-speed rectifier. Schottky diodes are recommended for most applications because of their fast recovery time and low forward-voltage drop. Ensure that the diode's peak current rating is greater than or equal to the peak inductor current. Also, the diode reverse breakdown voltage must be greater than  $V_{OUT}$ . Table 2 lists diode vendors.

**Table 2. Schottky Diode Vendors**

| VENDOR              | PHONE        | FAX          | PART NUMBERS |
|---------------------|--------------|--------------|--------------|
| Comchip             | 510-657-8671 | 510-657-8921 | CDBS1045     |
| Panasonic           | 408-942-2912 | 408-946-9063 | MA2Z785      |
| ST-Microelectronics | 602-485-6100 | 602-486-6102 | TMMBAT48     |
| Vishay-Telefunken   | 402-563-6866 | 402-563-6296 | BAS382       |
| Zetex               | 631-360-2222 | 631-360-8222 | ZHCS500      |

**Table 3. Capacitor Table**

| COMPANY     | PHONE        | FAX          | PART NUMBERS                               |
|-------------|--------------|--------------|--------------------------------------------|
| Murata      | 814-237-1431 | 814-238-0490 | GRM42-2X7R105K050AD (1 $\mu F$ capacitor)  |
|             |              |              | GRM32-1210R71C475R (4.7 $\mu F$ capacitor) |
| Taiyo Yuden | 408-573-4150 | 408-573-4159 | UMK325BJ105KH (1 $\mu F$ capacitor)        |
|             |              |              | EMK316BJ475ML (4.7 $\mu F$ capacitor)      |
| TDK         | 847-803-6100 | 847-803-6296 | C3225X7R1H155K (1.5 $\mu F$ capacitor)     |
|             |              |              | C3225X7R1H105K (1 $\mu F$ capacitor)       |

### Capacitor Selection

#### Output Filter Capacitor

The output filter capacitor should be  $1\mu F$  or greater. To achieve low output ripple, a capacitor with low ESR, low ESL, and high capacitance value should be selected.

For very low output ripple applications, the output of the boost converter can be followed by an RC filter to further reduce the ripple. Figure 3 shows a  $100\Omega$ ,  $1\mu F$  filter used to reduce the switching output ripple to 1mVp-p.

X7R ceramic capacitors are better for this boost application because of their low ESR and tighter tolerance over temperature than the Y5V ceramic capacitors. Table 3 below lists manufacturers of recommended capacitors.

#### Input Capacitor

Bypass  $V_{CC}$  with a 4.7 $\mu F$  ceramic capacitor as close to the IC as is practical.

### Applications Information

#### Layout Considerations

The MAX5025-MAX5028 switch at high speed, mandating careful attention to layout for optimum performance. Protect sensitive analog grounds by using a star ground configuration. Minimize ground noise by connecting GND, PGND, the input bypass-capacitor ground lead, and the output-filter ground lead to a single point (star ground configuration). Also, minimize

## 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

trace lengths to reduce stray capacitance, trace resistance, and radiated noise. The trace between the output voltage-divider (MAX5025/MAX5026) and the FB pin must be kept short, as well as the trace between GND and PGND.

### Inductor Layout

The shielded drum type inductors have a small air gap around the top and bottom periphery. The incident fringing magnetic field from this air gap to the copper plane on the PC board tends to reduce efficiency. This is a result of the induced eddy currents on the copper plane. To minimize this effect, avoid laying out any copper planes under the mounting area of these inductors.

### 30V Boost Application Circuit

Figures 2 and 3 show the MAX5025/MAX5026 operating in a 30V boost application. Figure 3 has an RC filter to reduce noise at the output. These circuits provide output currents greater than 4mA with an input voltage of 5V or greater. They are designed by following the *Design Procedure* section. Operating characteristics of these circuits are shown in the *Typical Operating Characteristics* section.

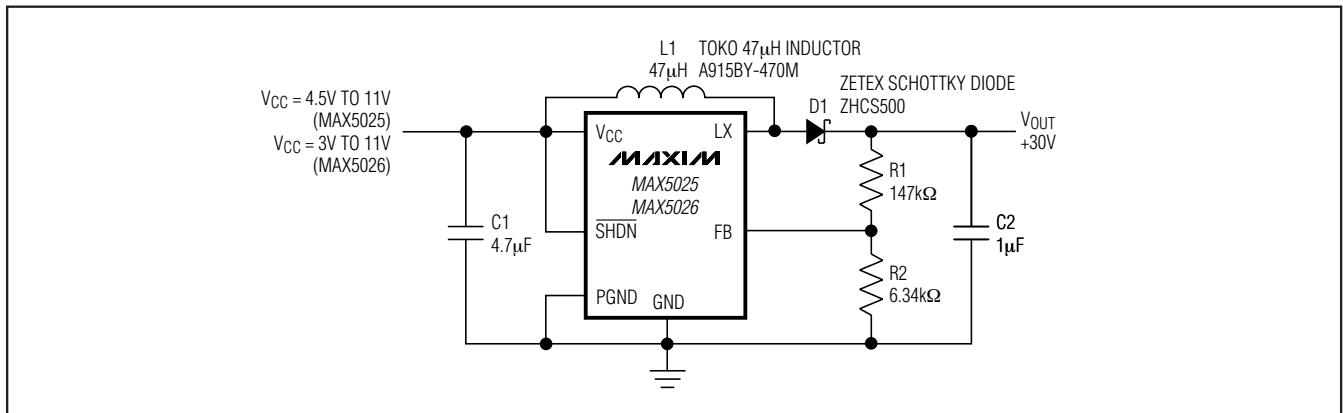


Figure 2. Adjustable 30V Output Circuit

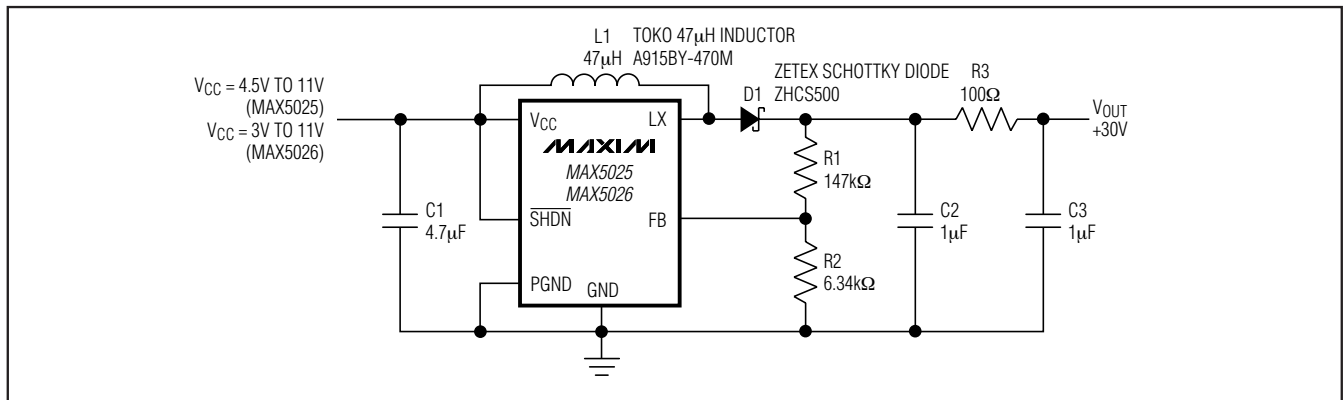


Figure 3. Adjustable 30V Output Circuit with RC Filter

# 500kHz, 36V Output, SOT23, Step-Up DC-DC Converters

## Selector Guide

| PART    | OUTPUT     | FREQUENCY TOLERANCE | FB SET POINT TOLERANCE | INPUT VOLTAGE |
|---------|------------|---------------------|------------------------|---------------|
| MAX5025 | Adjustable | -31% to +100%       | ±5%                    | 4.5V to 11V   |
| MAX5026 | Adjustable | -18% to +34%        | ±3%                    | 3V to 11V     |
| MAX5027 | Fixed 30V  | -31% to +100%       | ±5%                    | 4.5V to 11V   |
| MAX5028 | Fixed 30V  | -18% to +34%        | ±3%                    | 3V to 11V     |

## Chip Information

TRANSISTOR COUNT: 365

PROCESS: BiCMOS

## Package Information

For the latest package outline information and land patterns, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

| PACKAGE TYPE | PACKAGE CODE | DOCUMENT NO.            |
|--------------|--------------|-------------------------|
| 6 SOT23      | S8-2         | <a href="#">21-0058</a> |

**500kHz, 36V Output, SOT23,  
Step-Up DC-DC Converters**

**Revision History**

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                          | PAGES<br>CHANGED |
|--------------------|------------------|------------------------------------------------------|------------------|
| 0                  | 10/01            | Initial release                                      | —                |
| 1                  | 12/01            | Released the MAX5027                                 | 1                |
| 2                  | 3/09             | Revised the <i>Absolute Maximum Ratings</i> section. | 2                |

**MAX5025-MAX5028**

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

**Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600** \_\_\_\_\_ 13