

SMD Power Inductor

0410CDMCC/DS



Description

- Metal compound molding type construction
- Magnetically shielded
- Low audible core noise
- Suitable for large current
- L×W×H: 4.75×4.45×1.0mm Max.
- Product weight: 0.098g (Ref.)
- Moisture Sensitivity Level: 1



Environmental Data

- Operating temperature range: -55°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -55°C~+125°C


Packaging

- Carrier tape and reel packaging.
- 3000pcs per reel

Applications

- Ideally used in notebook, ultrabook, tablet PC, LCD display, server application.
- HDD, SSD modules application.
- Low profile, high current power supplies.
- Battery powered devices.
- High current, POL converters.
- DC/DC converter in distributed power systems.

Dimension - [mm]

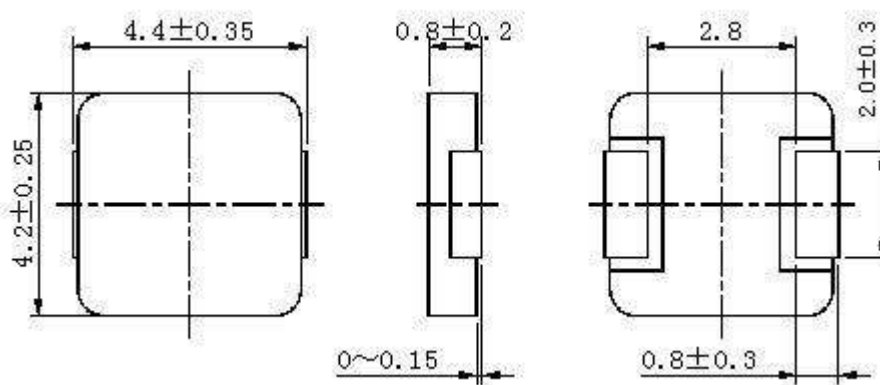


SMD Power Inductor


0410CDMCC/DS



Recommended Land pattern - [mm]

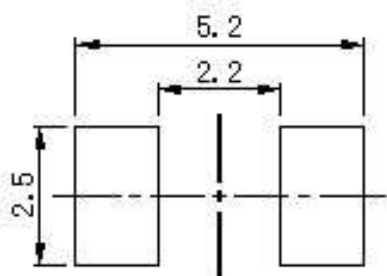

Wire Connection

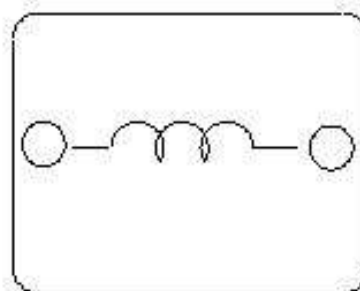



Electrical Characteristics



Part Number	Inductance [Within] (μ H) ※1	D.C.R. at 20°C max(typ) (m Ω)	Saturation Current at 20°C(A) ※2	Temperature Rise Current (A) ※3
0410CDMCCDS-R10MC	0.10 $\pm$ 20%	5.80 (4.80)	14.40	14.00
0410CDMCCDS-R15MC	0.15 $\pm$ 20%	6.30 (5.20)	13.10	13.00
0410CDMCCDS-R22MC	0.22 $\pm$ 20%	11.70 (9.70)	9.20	9.00
0410CDMCCDS-R33MC	0.33 $\pm$ 20%	23.00 (19.20)	8.10	6.00
0410CDMCCDS-R47MC	0.47 $\pm$ 20%	30.50 (25.40)	6.40	5.00
0410CDMCCDS-R56MC	0.56 $\pm$ 20%	34.50 (28.80)	6.20	4.50
0410CDMCCDS-R68MC	0.68 $\pm$ 20%	38.90 (32.40)	5.10	4.00
0410CDMCCDS-1R0MC	1.00 $\pm$ 20%	56.00 (49.00)	4.10	3.70
0410CDMCCDS-1R2MC	1.20 $\pm$ 20%	66.00 (57.00)	3.80	3.50
0410CDMCCDS-1R5MC	1.50 $\pm$ 20%	82.00 (72.00)	3.40	3.20
0410CDMCCDS-2R2MC	2.20 $\pm$ 20%	107 (93.00)	3.10	2.90
0410CDMCCDS-3R3MC	3.30 $\pm$ 20%	203 (177)	2.60	1.80
0410CDMCCDS-4R7MC	4.70 $\pm$ 20%	243 (211)	1.90	1.75
0410CDMCCDS-6R8MC	6.80 $\pm$ 20%	257 (224)	1.70	1.70
0410CDMCCDS-100MC	10.00 $\pm$ 20%	318 (277)	1.65	1.60

※1 Measuring frequency Inductance at 100kHz 1V.

※2 Saturation current: This indicates the actual value of D.C. current when the inductance becomes 30% lower than its initial value.

※3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes $\Delta T=40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$). (Test board condition: FR4, Copper=70 μ m, four-layer PWB t=1.6mm)

Solder Reflow Condition

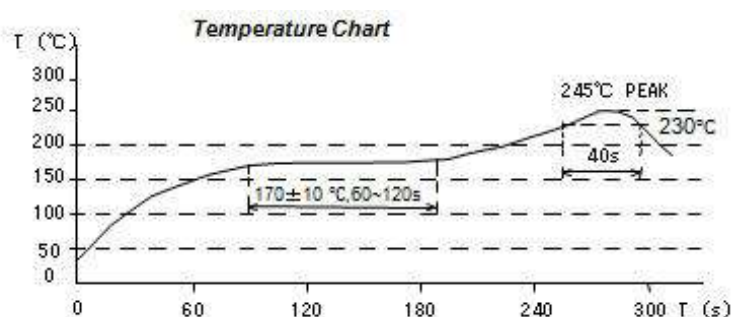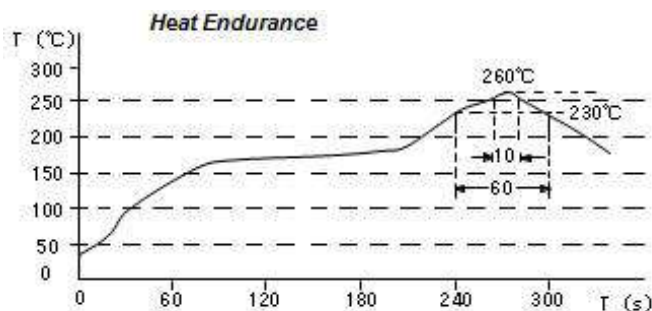

SMD Power Inductor


0410CDMCC/DS




Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT


1. 0410CDMCCDS-R10MC

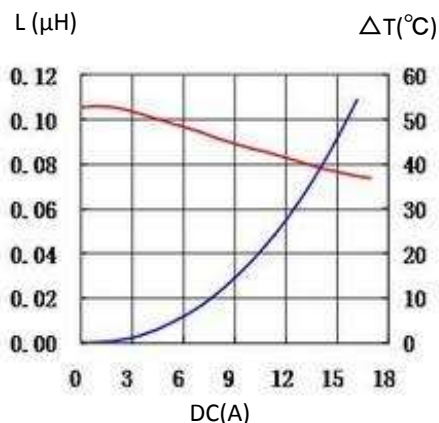


2. 0410CDMCCDS-R15MC

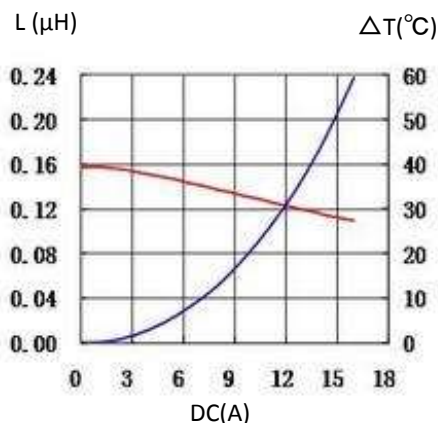


3. 0410CDMCCDS-R22MC

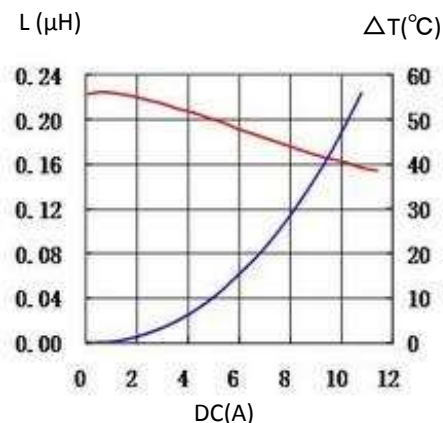


4. 0410CDMCCDS-R33MC

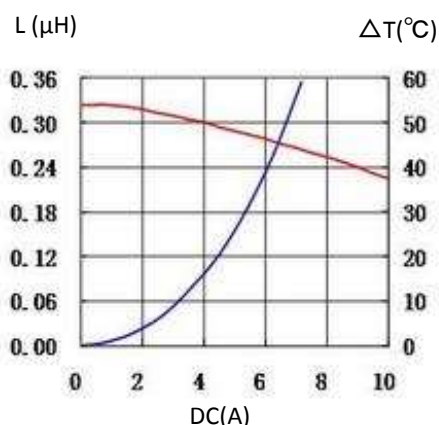


5. 0410CDMCCDS-R47MC

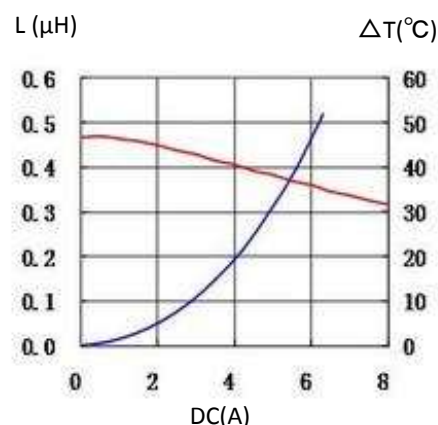


6. 0410CDMCCDS-R56MC

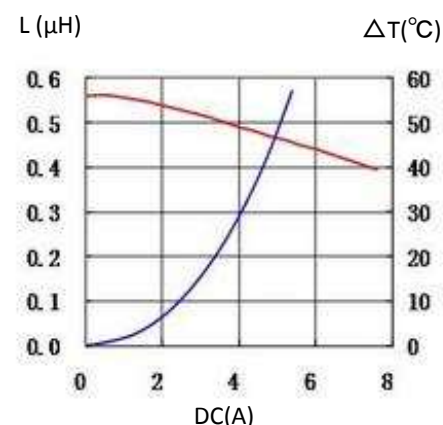


7. 0410CDMCCDS-R68MC

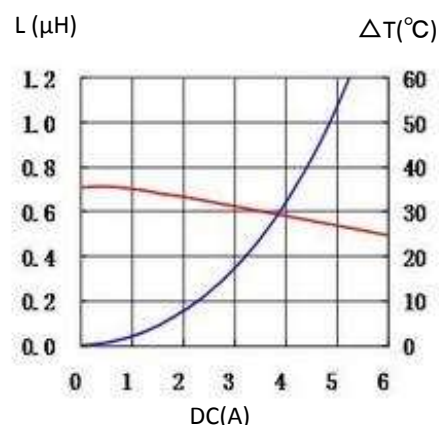

8. 0410CDMCCDS-1R0MC

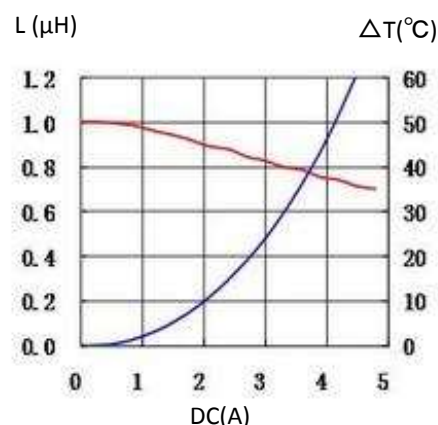

9. 0410CDMCCDS-1R2MC

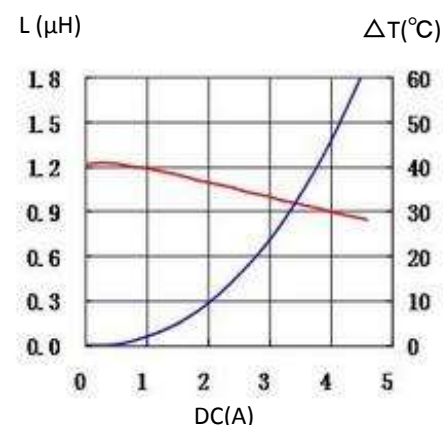


Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor


0410CDMCC/DS




10. 0410CDMCCDS-1R5MC

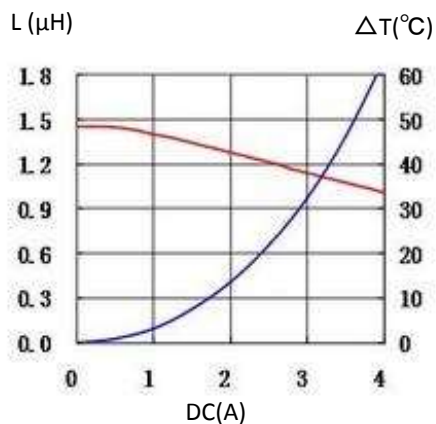


11. 0410CDMCCDS-2R2MC

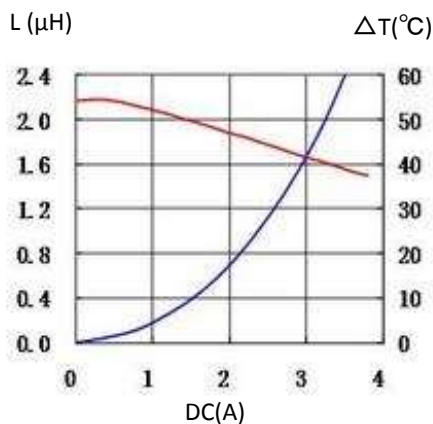


12. 0410CDMCCDS-3R3MC

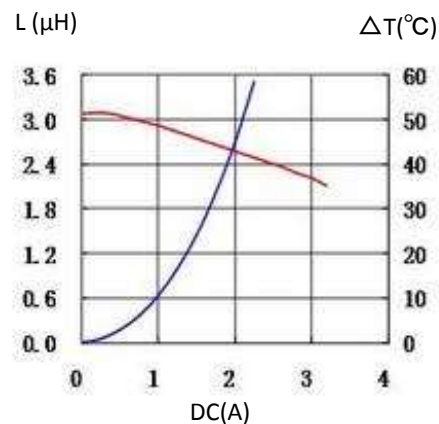


13. 0410CDMCCDS-4R7MC

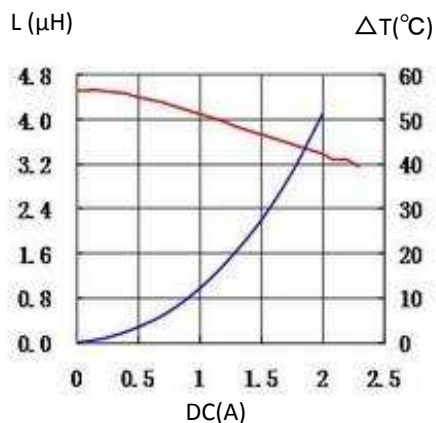

14. 0410CDMCCDS-6R8MC

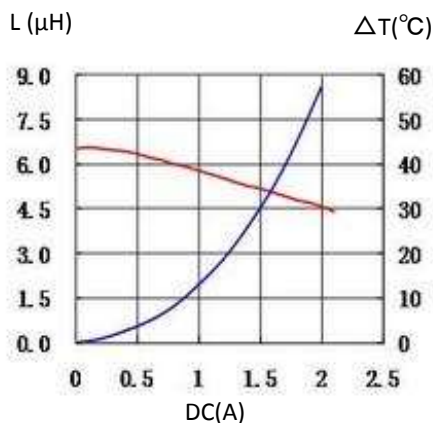

15. 0410CDMCCDS-100MC

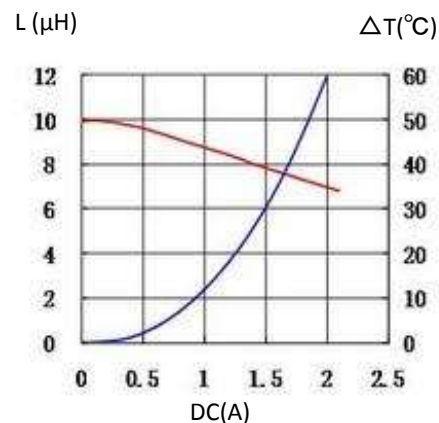

For sales office information, please [click here](#) to visit our website.