

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

**Part Number:** [0428920086](#)  
**Status:** **Active**  
**Description:** 3.96mm (.156") Pitch KK® Solid Header, Right Angle, Friction Lock, with Snap-in Plastic Peg PCB Lock, 8 Circuits, 0.38µm (15µ") Gold (Au) Selective Plating

**Documents:**

|                                               |                                                      |
|-----------------------------------------------|------------------------------------------------------|
| <a href="#">3D Model</a>                      | <a href="#">Product Specification PS-08-50 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                 | <a href="#">RoHS Certificate of Compliance (PDF)</a> |
| <a href="#">Packaging Specification (PDF)</a> |                                                      |

**General**

|                |                       |
|----------------|-----------------------|
| Product Family | PCB Headers           |
| Series         | <a href="#">42892</a> |
| Application    | Wire-to-Board         |
| Product Name   | KK®                   |

**Physical**


|                                |              |
|--------------------------------|--------------|
| Breakaway                      | No           |
| Circuits (Loaded)              | 8            |
| Circuits (maximum)             | 8            |
| Durability (mating cycles max) | 100          |
| Flammability                   | 94V-0        |
| Glow-Wire Compliant            | No           |
| Lock to Mating Part            | Yes          |
| Material - Metal               | Brass        |
| Material - Plating Mating      | Gold         |
| Material - Plating Termination | Tin          |
| Number of Rows                 | 1            |
| Orientation                    | Right Angle  |
| PC Tail Length (in)            | 0.130 In     |
| PC Tail Length (mm)            | 3.30 mm      |
| PCB Locator                    | Yes          |
| PCB Retention                  | Yes          |
| PCB Thickness Recommended (in) | 0.062 In     |
| PCB Thickness Recommended (mm) | 1.60 mm      |
| Packaging Type                 | Bag          |
| Pitch - Mating Interface (in)  | 0.156 In     |
| Pitch - Mating Interface (mm)  | 3.96 mm      |
| Plating min: Mating (µin)      | 15           |
| Plating min: Mating (µm)       | 0.38         |
| Plating min: Termination (µin) | 100          |
| Plating min: Termination (µm)  | 2.5          |
| Polarized to Mating Part       | Yes          |
| Polarized to PCB               | Yes          |
| Shrouded                       | Partial      |
| Stackable                      | Yes          |
| Temperature Range - Operating  | 0°C to +75°C |
| Termination Interface: Style   | Through Hole |

**Electrical**

|                   |         |
|-------------------|---------|
| CSA               | LR19980 |
| Current - Maximum | 7A      |
| UL                | E29179  |
| Voltage - Maximum | 250V    |

**Material Info**

**Reference - Drawing Numbers**



Series image - Reference only

**EU RoHS**

**ELV and RoHS  
Compliant**

**REACH SVHC**

**Contains SVHC: No  
Halogen-Free**

**Status**

**Not Reviewed**

**China RoHS**



**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any  
non-product compliance questions.

|                                  |                                      |
|----------------------------------|--------------------------------------|
| Duration at Max.                 | 5                                    |
| Process Temperature<br>(seconds) |                                      |
| Lead-free Process                | Wave Capable (TH<br>Capability only) |
| Max. Cycles at Max.              | 1                                    |
| Process Temperature              |                                      |
| Process Temperature              | 235<br>max. C                        |

**Search Parts in this Series**



[42892 Series](#)

**Mates With**

[3069](#) , [2139](#) , [2145](#) , [6442](#) , [7674](#) , [7675](#) ,  
[41695](#) , L ink:41815


This document was generated on 11/05/2009

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

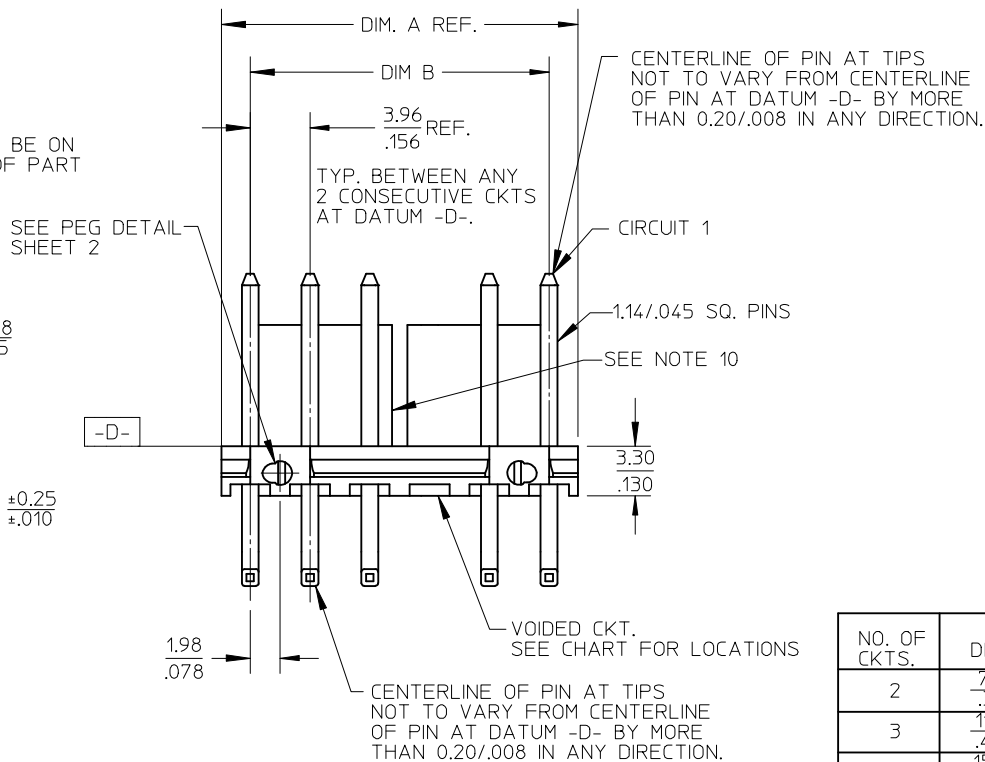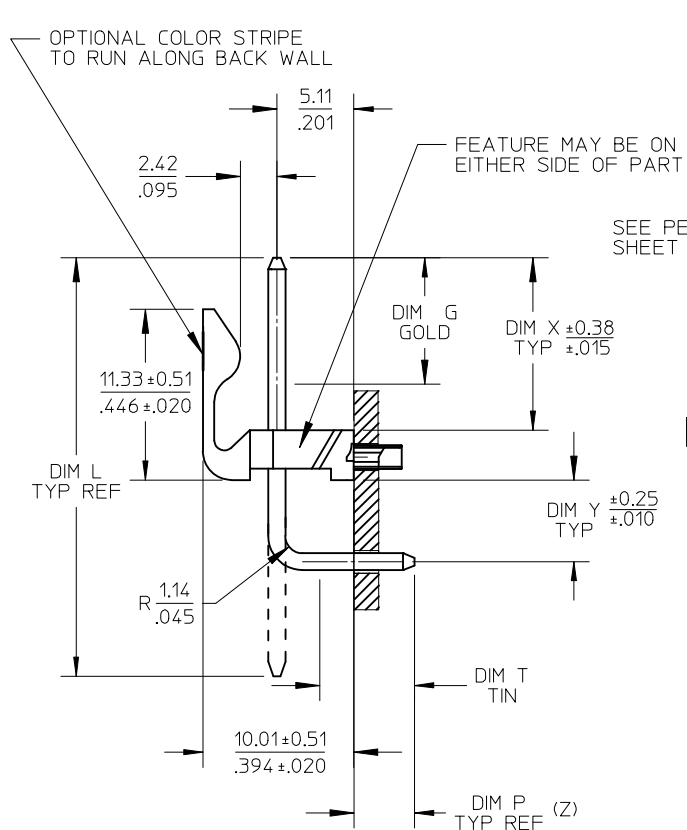


| NO. OF CKTS. | DIM. A         | DIM. B                   | SLOT LOC BETWEEN CKTS |
|--------------|----------------|--------------------------|-----------------------|
| 2            | 7.77<br>.306   | 3.96±0.05<br>.156±.002   | NONE                  |
| 3            | 11.73<br>.462  | 7.92±0.08<br>.312±.003   | NONE                  |
| 4            | 15.70<br>.618  | 11.89±0.08<br>.468±.003  | NONE                  |
| 5            | 19.66<br>.774  | 15.85±0.10<br>.624±.004  | NONE                  |
| 6            | 23.62<br>.930  | 19.81±0.10<br>.780±.004  | 3 & 4                 |
| 7            | 27.58<br>1.086 | 23.77±0.10<br>.936±.004  | 4 & 5                 |
| 8            | 31.55<br>1.242 | 27.74±0.13<br>1.092±.005 | 4 & 5                 |
| 9            | 35.51<br>1.398 | 31.70±0.13<br>1.248±.005 | 5 & 6                 |
| 10           | 39.47<br>1.554 | 35.66±0.13<br>1.404±.005 | 5 & 6                 |
| 11           | 43.43<br>1.710 | 39.62±0.15<br>1.560±.006 | 6 & 7                 |
| 12           | 47.40<br>1.866 | 43.59±0.15<br>1.716±.006 | 4 & 5<br>8 & 9        |

|                                                                                                                   |  |             |                                                  |                                                            |        |           |                                                                                                                               |                  |                                                                                                                        |                      |                        |  |  |
|-------------------------------------------------------------------------------------------------------------------|--|-------------|--------------------------------------------------|------------------------------------------------------------|--------|-----------|-------------------------------------------------------------------------------------------------------------------------------|------------------|------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------|--|--|
| ADD SLOT<br>EC NO: UCP2009-2603<br>DRWN:MK IPPER 2009/05/04<br>CHK'D:SSOUSEK 2009/05/04<br>APPR:FSM TH 2009/05/04 |  | DESCRIPTION | QUALITY SYMBOLS<br><div>▽=0</div> <div>◇=0</div> | GENERAL TOLERANCES (UNLESS SPECIFIED)                      |        |           | DIMENSION STYLE<br>MM/IN                                                                                                      |                  | SCALE<br>2:1                                                                                                           | DESIGN UNITS<br>INCH | THIRD ANGLE PROJECTION |  |  |
|                                                                                                                   |  |             |                                                  |                                                            | mm     | INCH      | DRAWN BY<br>SCHAFER                                                                                                           | DATE<br>12-12-03 | TITLE<br>FRICION LOCK HDR. ASSY.<br>.156 BENT SQ PINS W/PEGS<br>RT. ANGLE MOUNT<br><div>MOLEX</div> MOLEX INCORPORATED |                      |                        |  |  |
|                                                                                                                   |  |             |                                                  | 4 PLACES                                                   | ± ---  | ± ---     | CHECKED BY<br>SAMIEC                                                                                                          | DATE<br>12-15-03 |                                                                                                                        |                      |                        |  |  |
|                                                                                                                   |  |             |                                                  | 3 PLACES                                                   | ± ---  | ± .010    | APPROVED BY<br>MARGULIS                                                                                                       | DATE<br>12-19-03 |                                                                                                                        |                      |                        |  |  |
|                                                                                                                   |  |             |                                                  | 2 PLACES                                                   | ± 0.25 | ± .015    |                                                                                                                               |                  |                                                                                                                        |                      |                        |  |  |
|                                                                                                                   |  |             |                                                  | 1 PLACE                                                    | ± 0.38 | ± ---     |                                                                                                                               |                  |                                                                                                                        |                      |                        |  |  |
|                                                                                                                   |  |             |                                                  | ANGULAR ±1/2°                                              |        |           |                                                                                                                               |                  |                                                                                                                        |                      |                        |  |  |
|                                                                                                                   |  |             |                                                  | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |        |           | MATERIAL NO.                                                                                                                  |                  | DOCUMENT NO.                                                                                                           |                      | SHEET NO.              |  |  |
|                                                                                                                   |  |             |                                                  |                                                            |        |           | SEE CHART                                                                                                                     |                  | SD-42892-001                                                                                                           |                      | 1 OF 2                 |  |  |
| G3                                                                                                                |  | REV         |                                                  |                                                            |        | SIZE<br>A | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                  |                                                                                                                        |                      |                        |  |  |

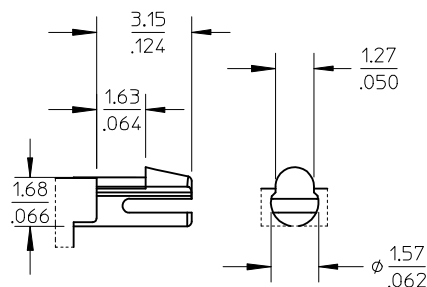

PEG DETAIL

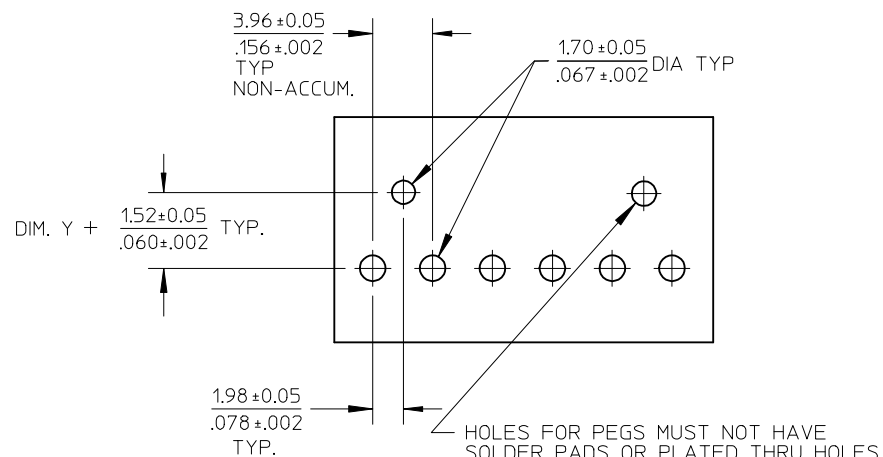

RECOMMENDED PC BOARD HOLE LAYOUT:  
COMPONENT SIDE FOR 1.57/.062 THICK PCB

FOR CORRECT ORIENTATION OF PARTS WITH  
VOIDS, ELIMINATE CORRESPONDING PCB HOLE.

NOTES:

1. MATERIAL: HEADER-GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL WHITE PINS: BRASS
2. FINISHES: (102) OVERALL TIN: 0.00508/.000200 OVER 0.00254/.000100 COPPER  
(208) SELECT GOLD: 0.00038/.000015  
\*SELECT TIN: 0.00254/.000100  
OVERALL NICKEL UNDERPLATE: 0.00127/.000050  
(228) SELECT GOLD: 0.00076/.000030  
\*SELECT TIN: 0.00254/.000100  
OVERALL NICKEL UNDERPLATE: 0.00127/.000050  
(501) OVERALL GOLD: 0.00051/.000020  
OVERALL NICKEL UNDERPLATE: 0.00076/.000030
3. PRODUCT SPECIFICATION: SEE PS-08-50.
4. PACKAGING INFO: SEE TABLES
5. SOLDERABILITY: PER SMES-152
6. PIN PUSH OUT FORCE: PRIOR TO SOLDERING, A 3 LB MINIMUM FORCE (IN EITHER DIRECTION) SHALL BE REQUIRED TO PUSH THE PIN OUT OF THE HEADER.
7. PARTS ARE STACKABLE END TO END ON (3.96)/.156 CENTERS.
8. FOR PART WITHOUT PEGS SEE DWG. NO. SDA-41792.
9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
10. SLOTS ON BACKWALL ARE BETWEEN CIRCUITS. SEE CHART FOR LOCATION.

|                                                                                                                    |             |                                                  |                                                            |        |        |                          |                                                                                                                               |                                                                                   |                      |                           |  |  |                     |
|--------------------------------------------------------------------------------------------------------------------|-------------|--------------------------------------------------|------------------------------------------------------------|--------|--------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------|---------------------------|--|--|---------------------|
| SEE SHEET 1<br>EC NO: UCP2009-2603<br>DRWN:MKIPPER 2009/05/01<br>CHKD:SSOUSEK 2009/05/04<br>APPR:FSM/TH 2009/05/04 | DESCRIPTION | QUALITY SYMBOLS<br><div>▽=0</div> <div>▽=0</div> | GENERAL TOLERANCES (UNLESS SPECIFIED)                      |        |        | DIMENSION STYLE<br>MM/IN |                                                                                                                               | SCALE<br>2:1                                                                      | DESIGN UNITS<br>INCH | THIRD ANGLE<br>PROJECTION |  |  |                     |
|                                                                                                                    |             |                                                  |                                                            | mm     | INCH   | DRAWN BY<br>SCHAFER      | DATE<br>12-12-03                                                                                                              | TITLE<br>FRICITION LOCK HDR. ASSY.<br>.156 BENT SQ PINS W/PEGS<br>RT. ANGLE MOUNT |                      |                           |  |  |                     |
|                                                                                                                    |             |                                                  | 4 PLACES                                                   | ± ---  | ± ---  | CHECKED BY<br>SAMIEC     | DATE<br>12-15-03                                                                                                              |                                                                                   |                      |                           |  |  |                     |
|                                                                                                                    |             |                                                  | 3 PLACES                                                   | ± ---  | ± .010 | APPROVED BY<br>MARGULIS  | DATE<br>12-19-03                                                                                                              |                                                                                   |                      |                           |  |  |                     |
|                                                                                                                    |             |                                                  | 2 PLACES                                                   | ± 0.25 | ± .015 | MATERIAL NO.             |                                                                                                                               | DOCUMENT NO.<br>SD-42892-001                                                      |                      |                           |  |  |                     |
|                                                                                                                    |             |                                                  | 1 PLACE                                                    | ± 0.38 | ± ---  |                          |                                                                                                                               |                                                                                   |                      |                           |  |  | SHEET NO.<br>2 OF 2 |
|                                                                                                                    |             |                                                  | ANGULAR ±1/2°                                              |        |        | SEE CHART                |                                                                                                                               |                                                                                   |                      |                           |  |  |                     |
|                                                                                                                    |             |                                                  | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |        |        |                          |                                                                                                                               |                                                                                   |                      |                           |  |  |                     |
|                                                                                                                    |             |                                                  |                                                            |        |        | SIZE<br>A                | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                                                                   |                      |                           |  |  |                     |

|         |              |                   |              |                   |              |                   |              |                   |
|---------|--------------|-------------------|--------------|-------------------|--------------|-------------------|--------------|-------------------|
| OPTIONS | Group        | A-42892-0002/0018 | Group        | A-42892-0080/0096 | Group        | A-42892-0097/0113 | Group        | A-42892-0019/0035 |
|         | Header No:   | 41790-0070/0086   | Header No:   | 41790-0070/0086   | Header No:   | 41790-0070/0086   | Header No:   | 41790-0070/0086   |
|         | Pin No:      | 2161-62(102)      | Pin No:      | 43294-0452        | Pin No:      | 43290-0453        | Pin No:      | 2161-62(501)      |
|         | Plating:     | 102               | Plating:     | 208               | Plating:     | 228               | Plating:     | 501               |
|         | Pin Length L | 24.89/ .980       | Pin Length L | 24.89/ .980       | Pin Length L | 24.89/ .980       | Pin Length L | 24.89/ .980       |
|         | Mating M     | 11.43/ .450       | Mating M     | 11.43/ .450       | Mating M     | 11.43/ .450       | Mating M     | 11.43/ .450       |
|         | Gold Loc G   | N/A               | Gold Loc G   | 6.86/ .270        | Gold Loc G   | 6.86/ .270        | Gold Loc G   | OVERALL           |
|         | Dim. Y       | 2.82/ .111        | Dim. Y       | 2.82/ .111        | Dim. Y       | 2.82/ .111        | Dim. Y       | 2.82/ .111        |
|         | PC Tail P    | 3.30/ .130        | PC Tail P    | 3.30/ .130        | PC Tail P    | 3.30/ .130        | PC Tail P    | 3.30/ .130        |
|         | Tin Loc T    | OVERALL           | Tin Loc T    | 4.06/ .160        | Tin Loc T    | 4.06/ .160        | Tin Loc T    | N/A               |
|         | Voided Ckts  | NONE              | Voided Ckts  | NONE              | Voided Ckts  | NONE              | Voided Ckts  | NONE              |
|         | Pack Per     | PK-42492-002      | Pack Per     | PK-42492-002      | Pack Per     | PK-42492-002      | Pack Per     | PK-42492-002      |
| Ckts    | Material No  | Engineer Number   | Material No  | Engineer Number   | Material No  | Engineer Number   | Material No  | Engineer Number   |
| 2       | 26-60-7020   | A-42892-0002      | 42892-0080   | A-42892-0080      | 42892-0097   | A-42892-0097      | 26-60-7021   | A-42892-0019      |
| 3       | 26-60-7030   | A-42892-0003      | 42892-0081   | A-42892-0081      | 42892-0098   | A-42892-0098      | 26-60-7031   | A-42892-0020      |
| 4       | 26-60-7040   | A-42892-0004      | 42892-0082   | A-42892-0082      | 42892-0099   | A-42892-0099      | 26-60-7041   | A-42892-0021      |
| 5       | 26-60-7050   | A-42892-0005      | 42892-0083   | A-42892-0083      | 42892-0100   | A-42892-0100      | 26-60-7051   | A-42892-0022      |
| 6       | 26-60-7060   | A-42892-0006      | 42892-0084   | A-42892-0084      | 42892-0101   | A-42892-0101      | 26-60-7061   | A-42892-0023      |
| 7       | 26-60-7070   | A-42892-0007      | 42892-0085   | A-42892-0085      | 42892-0102   | A-42892-0102      | 26-60-7071   | A-42892-0024      |
| 8       | 26-60-7080   | A-42892-0008      | 42892-0086   | A-42892-0086      | 42892-0103   | A-42892-0103      | 26-60-7081   | A-42892-0025      |
| 9       | 26-60-7090   | A-42892-0009      | 42892-0087   | A-42892-0087      | 42892-0104   | A-42892-0104      | 26-60-7091   | A-42892-0026      |
| 10      | 26-60-7100   | A-42892-0010      | 42892-0088   | A-42892-0088      | 42892-0105   | A-42892-0105      | 26-60-7101   | A-42892-0027      |
| 11      | 26-60-7110   | A-42892-0011      | 42892-0089   | A-42892-0089      | 42892-0106   | A-42892-0106      | 26-60-7111   | A-42892-0028      |
| 12      | 26-60-7120   | A-42892-0012      | 42892-0090   | A-42892-0090      | 42892-0107   | A-42892-0107      | 26-60-7121   | A-42892-0029      |

|                                         |                            |                                                                                           |                             |
|-----------------------------------------|----------------------------|-------------------------------------------------------------------------------------------|-----------------------------|
| REV:<br><b>G2</b>                       | ECR/ECN INFORMATION        | TITLE:<br><b>FRICION LOCK HDR. ASSY.<br/>.156 BENT SQ PINS W/PEGS<br/>RT. ANGLE MOUNT</b> | SHEET No.<br><b>- 3 -</b>   |
|                                         | EC NO: <b>UCP2008-0727</b> |                                                                                           |                             |
|                                         | DATE <b>10/8/2007</b>      |                                                                                           |                             |
| DOCUMENT NUMBER:<br><b>SD-42892-001</b> |                            | CREATED / REVISED BY:<br><b>ADERR</b>                                                     | CHECKED BY:<br><b>ADERR</b> |
|                                         |                            | APPROVED BY:<br><b>FSMITH</b>                                                             |                             |

|         |              |                   |              |                   |              |                   |              |                    |
|---------|--------------|-------------------|--------------|-------------------|--------------|-------------------|--------------|--------------------|
| OPTIONS | Group        | A-42892-0036/0052 | Group        | A-42892-0053/0067 | Group        | A-42892-0068/0079 | Group        | A-42892-0114/0118  |
|         | Header No:   | 41790-0070/0086   | Header No:   | 41790-0070/0086   | Header No:   | 41790-0070/0086   | Header No:   | 41790-0070/0086    |
|         | Pin No:      | 2161-62(102)      | Pin No:      | 2161-62(102)      | Pin No:      | 2161-62(102)      | Pin No:      | 2161-62(102)       |
|         | Plating:     | 102               | Plating:     | 102               | Plating:     | 102               | Plating:     | 102                |
|         | Pin Length L | 24.89/ .980       | Pin Length L | 24.89/ .980       | Pin Length L | 24.89/ .980       | Pin Length L | 24.89/ .980        |
|         | Mating M     | 11.43/ .450       | Mating M     | 11.43/ .450       | Mating M     | 11.43/ .450       | Mating M     | 11.43/ .450        |
|         | Gold Loc G   | N/A               | Gold Loc G   | N/A               | Gold Loc G   | N/A               | Gold Loc G   | N/A                |
|         | Dim. Y       | 2.82/ .111        | Dim. Y       | 2.82/ .111        | Dim. Y       | 2.82/ .111        | Dim. Y       | 2.82/ .111         |
|         | PC Tail P    | 3.30/ .130        | PC Tail P    | 3.30/ .130        | PC Tail P    | 3.30/ .130        | PC Tail P    | 3.30/ .130         |
|         | Tin Loc T    | OVERALL           | Tin Loc T    | OVERALL           | Tin Loc T    | OVERALL           | Tin Loc T    | OVERALL            |
|         | Voided Ckts  | 2                 | Voided Ckts  | 4                 | Voided CKts  | 7                 | Voided Ckts  | 2, 4, 6, 8, 10, 14 |
|         | Pack Per     | PK-42492-002      | Pack Per     | PK-42492-002      | Pack Per     | PK-42492-002      | Pack Per     | PK-42492-002       |
| Ckts    | Material No  | Engineer Number   | Material No  | Engineer Number   | Material No  | Engineer Number   | Material No  | Engineer Number    |
| 2       | 26-62-7020   | A-42892-0036      |              |                   |              |                   |              |                    |
| 3       | 26-62-7030   | A-42892-0037      |              |                   |              |                   |              |                    |
| 4       | 26-62-7040   | A-42892-0038      | 26-62-7041   | A-42892-0053      |              |                   |              |                    |
| 5       | 26-62-7050   | A-42892-0039      | 26-62-7051   | A-42892-0054      |              |                   |              |                    |
| 6       | 26-62-7060   | A-42892-0040      | 26-62-7061   | A-42892-0055      |              |                   |              |                    |
| 7       | 26-62-7070   | A-42892-0041      | 26-62-7071   | A-42892-0056      | 26-62-7072   | A-42892-0068      |              |                    |
| 8       | 26-62-7080   | A-42892-0042      | 26-62-7081   | A-42892-0057      | 26-62-7082   | A-42892-0069      |              |                    |
| 9       | 26-62-7090   | A-42892-0043      | 26-62-7091   | A-42892-0058      | 26-62-7092   | A-42892-0070      |              |                    |
| 10      | 26-62-7100   | A-42892-0044      | 26-62-7101   | A-42892-0059      | 26-62-7102   | A-42892-0071      |              |                    |
| 11      | 26-62-7110   | A-42892-0045      | 26-62-7111   | A-42892-0060      | 26-62-7112   | A-42892-0072      |              |                    |
| 12      | 26-62-7120   | A-42892-0046      | 26-62-7121   | A-42892-0061      | 26-62-7122   | A-42892-0073      |              |                    |

|                                         |                            |                                                                                           |                             |
|-----------------------------------------|----------------------------|-------------------------------------------------------------------------------------------|-----------------------------|
| REV:<br><b>G2</b>                       | ECR/ECN INFORMATION        | TITLE:<br><b>FRICION LOCK HDR. ASSY.<br/>.156 BENT SQ PINS W/PEGS<br/>RT. ANGLE MOUNT</b> | SHEET No.<br><b>- 4 -</b>   |
|                                         | EC NO: <b>UCP2008-0727</b> |                                                                                           |                             |
|                                         | DATE <b>10/8/2007</b>      |                                                                                           |                             |
| DOCUMENT NUMBER:<br><b>SD-42892-001</b> |                            | CREATED / REVISED BY:<br><b>ADERR</b>                                                     | CHECKED BY:<br><b>ADERR</b> |
|                                         |                            | APPROVED BY:<br><b>FSMITH</b>                                                             |                             |

|         |              |                   |              |                 |              |                 |              |                 |
|---------|--------------|-------------------|--------------|-----------------|--------------|-----------------|--------------|-----------------|
| OPTIONS | Group        | A-42892-0119/0133 | Group        |                 | Group        |                 | Group        |                 |
|         | Header No:   | 41790-0070/0086   | Header No:   |                 | Header No:   |                 | Header No:   |                 |
|         | Pin No:      | 2161-62(102)      | Pin No:      |                 | Pin No:      |                 | Pin No:      |                 |
|         | Plating:     | 102               | Plating:     |                 | Plating:     |                 | Plating:     |                 |
|         | Pin Length L | 24.89/ .980       | Pin Length L |                 | Pin Length L |                 | Pin Length L |                 |
|         | Mating M     | 11.43/ .450       | Mating M     |                 | Mating M     |                 | Mating M     |                 |
|         | Gold Loc G   | N/A               | Gold Loc G   |                 | Gold Loc G   |                 | Gold Loc G   |                 |
|         | Dim. Y       | 2.82/ .111        | Dim. Y       |                 | Dim. Y       |                 | Dim. Y       |                 |
|         | PC Tail P    | 3.30/ .130        | PC Tail P    |                 | PC Tail P    |                 | PC Tail P    |                 |
|         | Tin Loc T    | OVERALL           | Tin Loc T    |                 | Tin Loc T    |                 | Tin Loc T    |                 |
|         | Voided Ckts  | 2, 4              | Voided Ckts  |                 | Voided CKts  |                 | Voided Ckts  |                 |
|         | Pack Per     | PK-42492-002      | Pack Per     |                 | Pack Per     |                 | Pack Per     |                 |
| Ckts    | Material No  | Engineer Number   | Material No  | Engineer Number | Material No  | Engineer Number | Material No  | Engineer Number |
| 2       |              |                   |              |                 |              |                 |              |                 |
| 3       |              |                   |              |                 |              |                 |              |                 |
| 4       | 42892-0119   | A-42892-0119      |              |                 |              |                 |              |                 |
| 5       | 42892-0120   | A-42892-0120      |              |                 |              |                 |              |                 |
| 6       | 42892-0121   | A-42892-0121      |              |                 |              |                 |              |                 |
| 7       | 42892-0122   | A-42892-0122      |              |                 |              |                 |              |                 |
| 8       | 42892-0123   | A-42892-0123      |              |                 |              |                 |              |                 |
| 9       | 42892-0124   | A-42892-0124      |              |                 |              |                 |              |                 |
| 10      | 42892-0125   | A-42892-0125      |              |                 |              |                 |              |                 |
| 11      | 42892-0126   | A-42892-0126      |              |                 |              |                 |              |                 |
| 12      | 42892-0127   | A-42892-0127      |              |                 |              |                 |              |                 |

|                                         |                            |                                                                                             |                             |
|-----------------------------------------|----------------------------|---------------------------------------------------------------------------------------------|-----------------------------|
| REV:<br><b>G2</b>                       | ECR/ECN INFORMATION        | TITLE:<br><b>FRICITION LOCK HDR. ASSY.<br/>.156 BENT SQ PINS W/PEGS<br/>RT. ANGLE MOUNT</b> | SHEET No.<br><b>- 5 -</b>   |
|                                         | EC NO: <b>UCP2008-0727</b> |                                                                                             |                             |
|                                         | DATE <b>10/8/2007</b>      |                                                                                             |                             |
| DOCUMENT NUMBER:<br><b>SD-42892-001</b> |                            | CREATED / REVISED BY:<br><b>ADERR</b>                                                       | CHECKED BY:<br><b>ADERR</b> |
|                                         |                            | APPROVED BY:<br><b>FSMITH</b>                                                               |                             |