

## 1.5A Synchronous Buck Regulator

### Features

- Input Voltage Range: +4.5V to +16.5V
- Dual-Mode Operation for High Efficiency (up to 96%):
  - PWM Mode for >150 mA Load Current
  - Skip Mode for <150 mA Load Current
- 150 mΩ Internal Power MOSFETs at 12V Input
- 200 kHz Preset Switching Frequency
- Low Quiescent Current
  - 1.0 mA in PWM Mode
  - 600 μA in Skip Mode
  - <5 μA in Shutdown Mode
- Current-Mode Control
  - Simplified Loop Compensation
  - Superior Line Regulation
- 100% Duty Cycle for Low Dropout Operation
- Current Limit
- Thermal Shutdown
- Undervoltage Lockout

### Applications

- High-Efficiency, Battery-Powered Supplies
- Buck (Step-Down) DC/DC Converters
- Laptop Computers
- Cellular Telephones
- Handheld Instruments
- Battery Chargers

### General Description

The MIC2179 is a 200 kHz synchronous buck (step-down) switching regulator designed for high-efficiency, battery-powered applications.


The MIC2179 operates from a 4.5V to 16.5V input and features internal power MOSFETs that can supply up to 1.5A output current. It can operate with a maximum duty cycle of 100% for use in low-dropout conditions. It also features a shutdown mode that reduces quiescent current to less than 5 μA.

The MIC2179 achieves high efficiency over a wide output current range by operating in either PWM or skip mode. The operating mode is externally selected, typically by an intelligent system, which chooses the appropriate mode according to operating conditions, efficiency, and noise requirements. The switching frequency is preset to 200 kHz and can be synchronized to an external clock signal of up to 300 kHz.

The MIC2179 uses current-mode control with internal current sensing. Current-mode control provides superior line regulation and makes the regulator control loop easy to compensate. The output is protected with pulse-by-pulse current limiting and thermal shutdown. Undervoltage lockout turns the output off when the input voltage is less than 4.5V.


The MIC2179 is packaged in a 20-lead SSOP package with an operating temperature range of -40°C to +85°C.

### Package Type

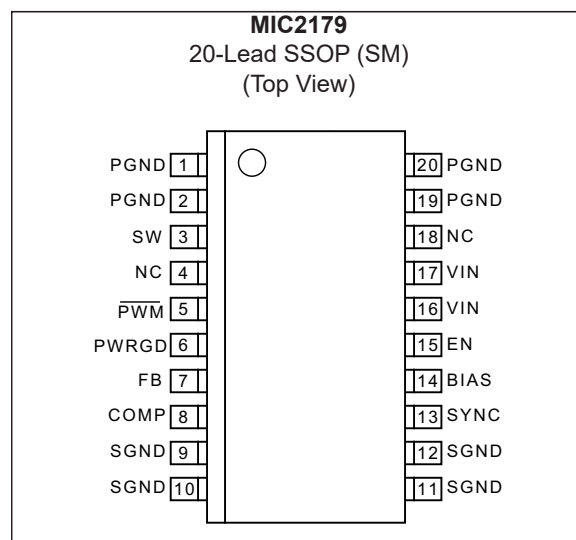


# MIC2179

## Typical Application Circuit

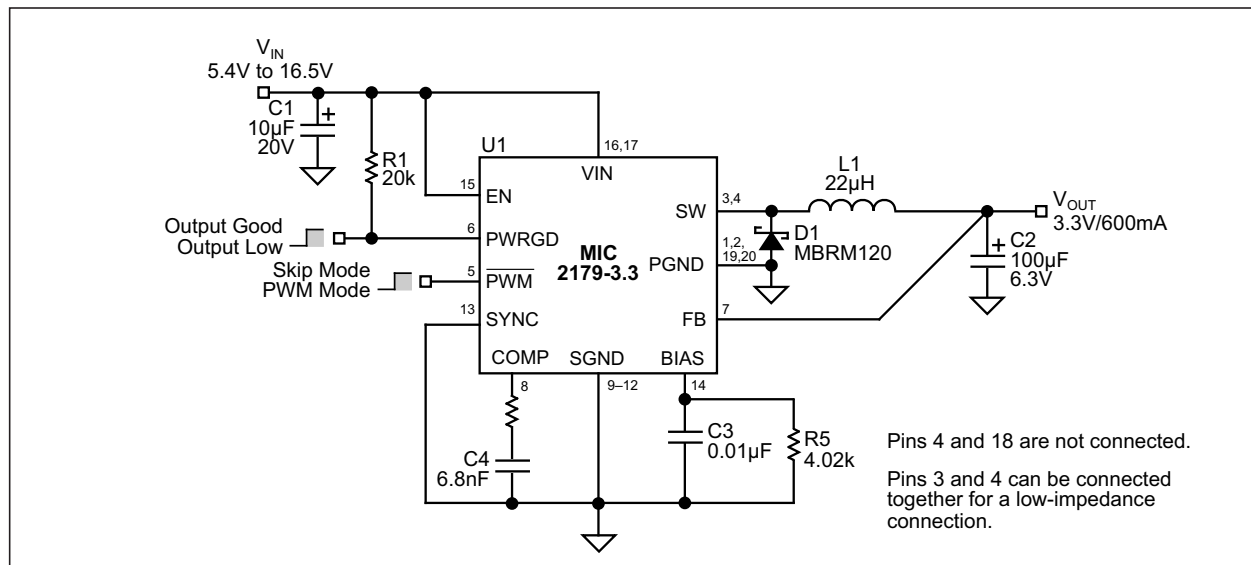

## Functional Block Diagram

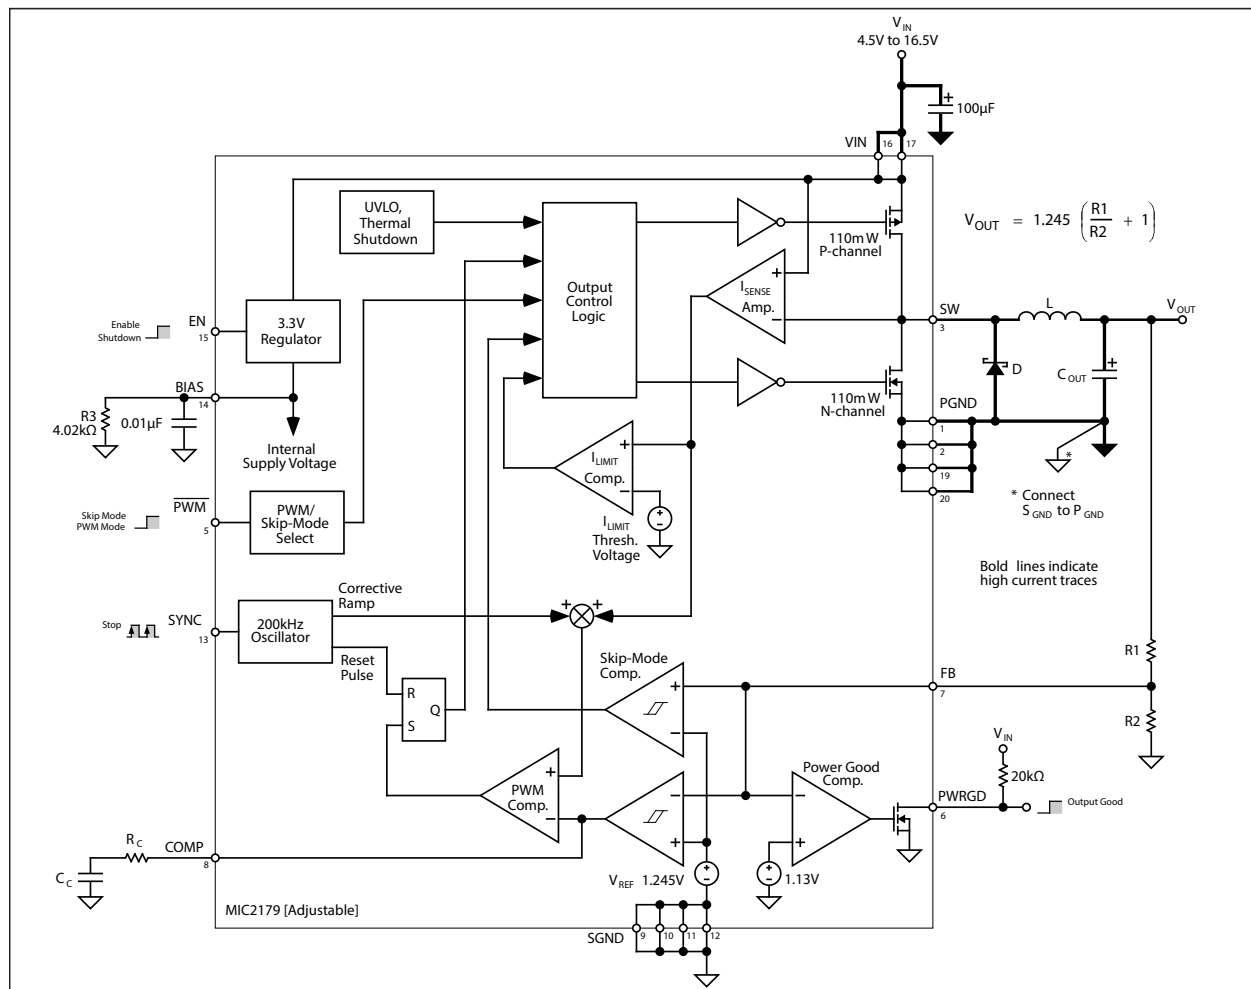

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings †

|                                                                              |      |
|------------------------------------------------------------------------------|------|
| Supply Voltage, 100 ms Transient ( $V_{IN}$ )                                | +18V |
| Output Switch Voltage ( $V_{SW}$ )                                           | +18V |
| Output Switch Current ( $I_{SW}$ )                                           | 6.0A |
| Enable, $\overline{PWM}$ Control Voltage ( $V_{EN}$ , $V_{\overline{PWM}}$ ) | +18V |
| Sync Voltage ( $V_{SYNC}$ )                                                  | +6V  |

### Operating Ratings ††

|                             |                 |
|-----------------------------|-----------------|
| Supply Voltage ( $V_{IN}$ ) | +4.5V to +16.5V |
|-----------------------------|-----------------|

† **Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

†† **Notice:** The device is not guaranteed to function outside its operating ratings.

## ELECTRICAL CHARACTERISTICS

**Electrical Characteristics:**  $V_{IN} = 7.0V$ ;  $T_A = +25^\circ C$ , **bold** indicates  $-40^\circ C \leq T_A \leq +85^\circ C$ ; unless noted. Devices are ESD sensitive. Handling precautions recommended.

| Parameter                     | Sym.       | Min.        | Typ.  | Max.        | Units   | Conditions                                                                                   |
|-------------------------------|------------|-------------|-------|-------------|---------|----------------------------------------------------------------------------------------------|
| Input Supply Current          | $I_{SS}$   | —           | 1.0   | <b>1.5</b>  | mA      | PWM mode, output not switching, $4.5V \leq V_{IN} \leq 16.5V$                                |
|                               |            | —           | 600   | 750         | $\mu A$ | Skip mode, output not switching, $4.5V \leq V_{IN} \leq 16.5V$                               |
|                               |            | —           | 1     | <b>25</b>   | $\mu A$ | $V_{EN} = 0V$ , $4.5V \leq V_{IN} \leq 16.5V$                                                |
| Bias Regulator Output Voltage | $V_{BIAS}$ | <b>3.10</b> | 3.30  | <b>3.4</b>  | V       | $V_{IN} = 16.5V$                                                                             |
| Feedback Voltage              | $V_{FB}$   | <b>1.22</b> | 1.245 | <b>1.27</b> | V       | MIC2179 [adj.]: $V_{OUT} = 3.3V$ , $I_{LOAD} = 0A$                                           |
| Output Voltage                | $V_{OUT}$  | 3.20        | 3.3   | 3.40        | V       | MIC2179 [adj.]: $V_{OUT} = 3.3V$ , $5V \leq V_{IN} \leq 16V$ , $10 mA \leq I_{LOAD} \leq 1A$ |
|                               |            | <b>3.14</b> | —     | <b>3.46</b> | V       |                                                                                              |
|                               |            | <b>4.85</b> | 5.0   | <b>5.15</b> | V       | MIC2179-5.0: $I_{LOAD} = 0A$                                                                 |
|                               |            | 4.85        | 5.0   | 5.15        | V       | MIC2179-5.0: $6V \leq V_{IN} \leq 16V$ , $10 mA \leq I_{LOAD} \leq 1A$                       |
|                               |            | <b>4.75</b> | —     | <b>5.25</b> | V       |                                                                                              |
|                               |            | <b>3.20</b> | 3.3   | <b>3.40</b> | V       | MIC2179-3.3: $I_{LOAD} = 0A$                                                                 |
|                               |            | 3.20        | 3.3   | 3.40        | V       | MIC2179-3.3: $5V \leq V_{IN} \leq 16V$ , $10 mA \leq I_{LOAD} \leq 1A$                       |
|                               |            | <b>3.14</b> | —     | <b>3.46</b> | V       |                                                                                              |
| Undervoltage Lockout          | $V_{TH}$   | —           | 4.25  | <b>4.35</b> | V       | Upper threshold                                                                              |
|                               | $V_{TL}$   | <b>3.90</b> | 4.15  | —           | V       | Lower threshold                                                                              |
| Feedback Bias Current         | $I_{FB}$   | —           | 60    | <b>150</b>  | nA      | MIC2179 [adj.]                                                                               |
|                               |            | —           | 20    | <b>40</b>   | $\mu A$ | MIC2179-5.0, MIC2179-3.3                                                                     |
| Error Amplifier Gain          | $A_{VOL}$  | 5           | 18    | 30          | —       | $0.6V \leq V_{COMP} \leq 0.8V$                                                               |
| Error Amplifier Output Swing  | —          | 0.9         | 15    | —           | V       | Upper Limit                                                                                  |
|                               |            | —           | 0.05  | 0.1         |         | Lower Limit                                                                                  |

## ELECTRICAL CHARACTERISTICS (CONTINUED)

**Electrical Characteristics:**  $V_{IN} = 7.0V$ ;  $T_A = +25^{\circ}C$ , **bold** indicates  $-40^{\circ}C \leq T_A \leq +85^{\circ}C$ ; unless noted. Devices are ESD sensitive. Handling precautions recommended.

| Parameter                      | Sym.                 | Min.        | Typ. | Max.        | Units      | Conditions                          |
|--------------------------------|----------------------|-------------|------|-------------|------------|-------------------------------------|
| Error Amplifier Output Current | —                    | 15          | 25   | 38          | $\mu A$    | Source and sink                     |
| Oscillator Frequency           | $f_O$                | <b>160</b>  | 200  | <b>240</b>  | kHz        | —                                   |
| Maximum Duty Cycle             | $D_{MAX}$            | <b>100</b>  | —    | —           | %          | $V_{FB} = 1.0V$                     |
| Minimum On-Time                | $t_{ON(MIN)}$        | —           | 300  | <b>400</b>  | ns         | $V_{FB} = 1.5V$                     |
| SYNC Frequency Range           | —                    | 220         | —    | 300         | kHz        | —                                   |
| SYNC Threshold                 | —                    | 0.8         | 1.6  | 2.2         | V          | —                                   |
| SYNC Minimum Pulse Width       | —                    | <b>500</b>  | —    | —           | ns         | —                                   |
| SYNC Leakage                   | $I_{SYNC}$           | <b>-1</b>   | 0.01 | <b>1</b>    | $\mu A$    | $V_{SYNC} = 0V$ to $5.5V$           |
| Current Limit                  | $I_{LIM}$            | <b>3.4</b>  | 4.3  | <b>5.5</b>  | A          | PWM mode, $V_{IN} = 12V$            |
|                                |                      | —           | 600  | —           | mA         | Skip mode                           |
| Switch On-Resistance           | $R_{ON}$             | —           | 160  | <b>350</b>  | m $\Omega$ | High-side switch, $V_{IN} = 12V$    |
|                                |                      | —           | 140  | <b>350</b>  |            | Low-side switch, $V_{IN} = 12V$     |
| Output Switch Leakage          | $I_{SW}$             | —           | 1    | <b>10</b>   | $\mu A$    | $V_{SW} = 16.5V$                    |
| Enable Threshold               | —                    | 0.8         | 1.6  | 2.2         | V          | —                                   |
| Enable Leakage                 | $I_{EN}$             | <b>-1</b>   | 0.01 | <b>1</b>    | $\mu A$    | $V_{EN} = 0V$ to $5.5V$             |
| PWM Threshold                  | —                    | 0.6         | 1.1  | 1.4         | V          | —                                   |
| PWM Leakage                    | $I_{\overline{PWM}}$ | <b>-1</b>   | 0.01 | <b>1</b>    | $\mu A$    | $V_{\overline{PWM}} = 0V$ to $5.5V$ |
| PWRGD Threshold                | —                    | <b>1.09</b> | 1.13 | <b>1.17</b> | V          | MIC2179 [adj.]: measured at FB pin  |
|                                |                      | <b>4.33</b> | 4.54 | <b>4.75</b> |            | MIC2179-5.0: measured at FB pin     |
|                                |                      | <b>2.87</b> | 3.00 | <b>3.13</b> |            | MIC2179-3.3: measured at FB pin     |
| PWRGD Output Low               | —                    | —           | 0.25 | 0.4         | V          | $I_{SINK} = 0.5 mA$                 |
| PWRGD Off Leakage              | —                    | —           | 0.01 | <b>1</b>    | $\mu A$    | $V_{PWRGD} = 5.5V$                  |


## TEMPERATURE SPECIFICATIONS

| Parameters                           | Sym.  | Min. | Typ. | Max. | Units       | Conditions |
|--------------------------------------|-------|------|------|------|-------------|------------|
| <b>Temperature Ranges</b>            |       |      |      |      |             |            |
| Operating Junction Temperature Range | $T_J$ | -40  | —    | +125 | $^{\circ}C$ | Note 1     |


**Note 1:** The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e.,  $T_A$ ,  $T_J$ ,  $\theta_{JA}$ ). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum  $+125^{\circ}C$  rating. Sustained junction temperatures above  $+125^{\circ}C$  can impact the device reliability.

## 2.0 TYPICAL PERFORMANCE CURVES


**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

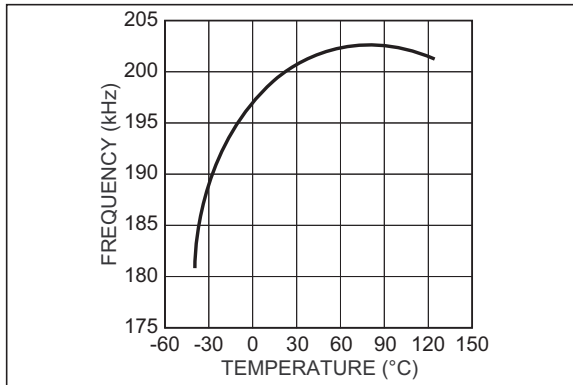


**FIGURE 2-1:** Oscillator Frequency vs. Temperature.

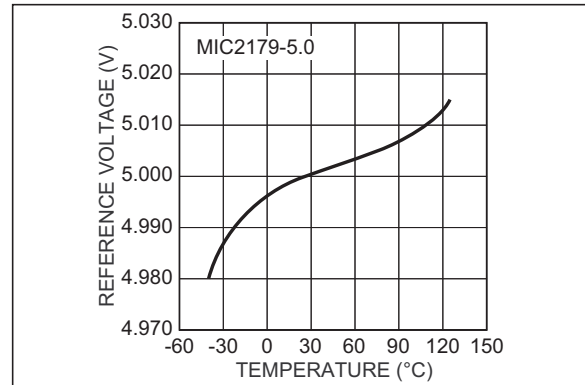


**FIGURE 2-4:** Reference Voltage vs. Temperature.

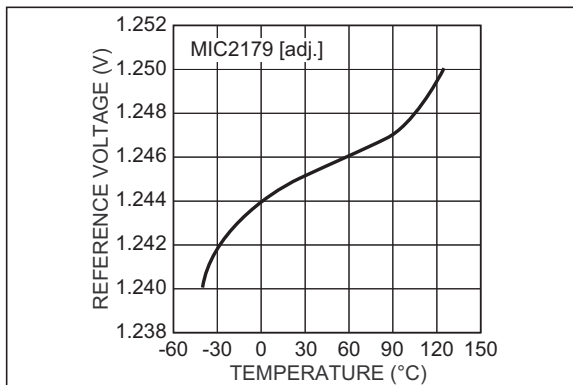


**FIGURE 2-2:** Reference Voltage vs. Temperature.

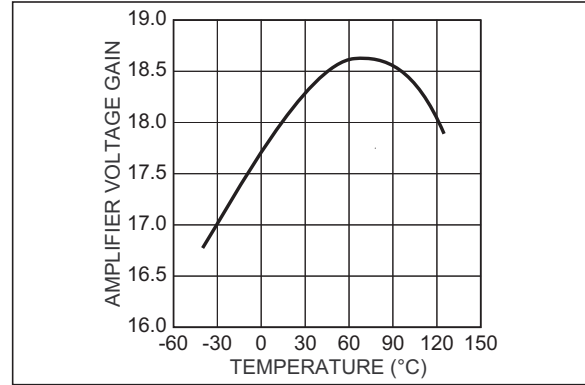


**FIGURE 2-5:** Error-Amplifier Gain vs. Temperature.

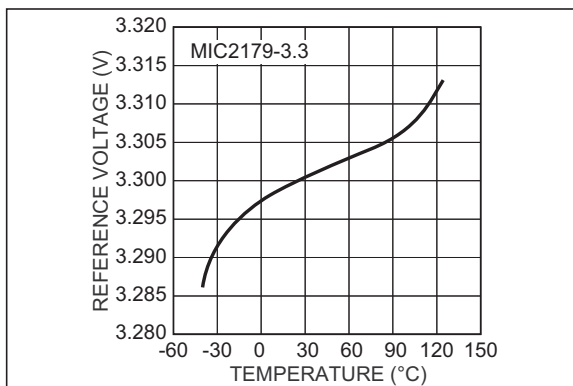


**FIGURE 2-3:** Reference Voltage vs. Temperature.

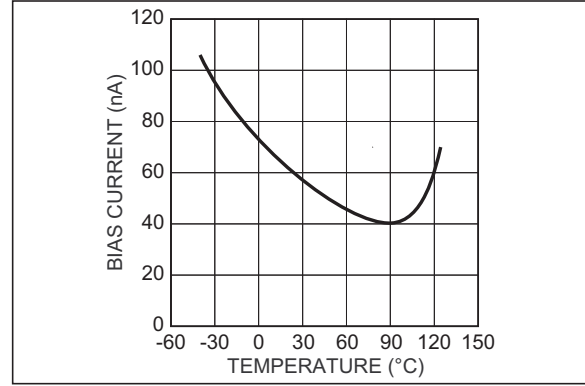


**FIGURE 2-6:** Feedback Input Bias Current vs. Temperature.

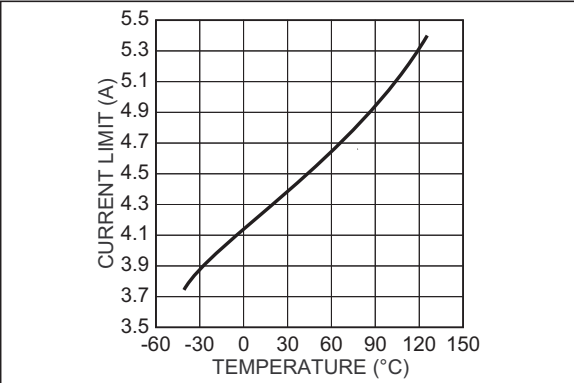


**FIGURE 2-7:** Current Limit vs. Temperature.

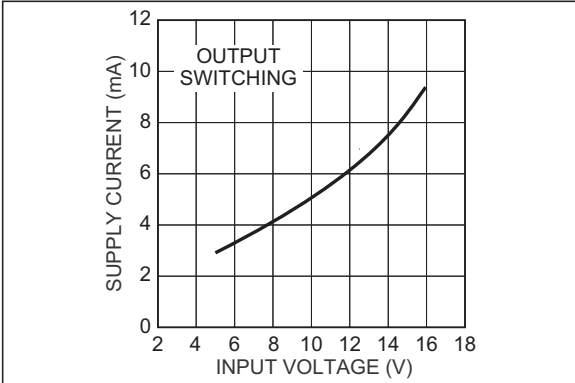


**FIGURE 2-10:** PWM-Mode Supply Current.

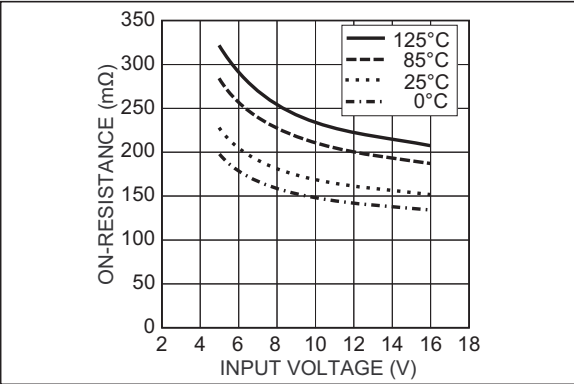

**FIGURE 2-8:** High-Side Switch On-Resistance.

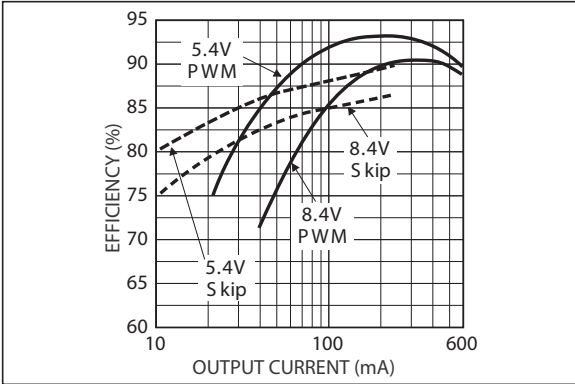

**FIGURE 2-11:** Skip-Mode and PWM-Mode Efficiency.

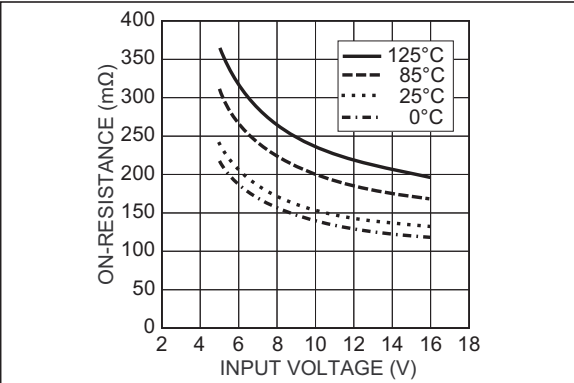

**FIGURE 2-9:** Low-Side Switch On-Resistance.

### 3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in [Table 3-1](#).

**TABLE 3-1: PIN FUNCTION TABLE**

| Pin Number    | Pin Name | Description                                                                                                                                                                                             |
|---------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1, 2, 19, 20  | PGND     | Power ground: Connect all pins to central ground point.                                                                                                                                                 |
| 3             | SW       | Switch (output): Internal power MOSFET output switches.                                                                                                                                                 |
| 4, 18         | NC       | Not internally connected.                                                                                                                                                                               |
| 5             | PWM      | PWM/Skip Mode Control (input): Logic-level input. Controls regulator operating mode. Logic low enables PWM mode. Logic high enables skip mode. Do not allow pin to float.                               |
| 6             | PWRGD    | Error flag (output): Open-drain output. Active-low when FB input is 10% below the reference voltage ( $V_{REF}$ ).                                                                                      |
| 7             | FB       | Feedback (input): Connect to output voltage divider resistors.                                                                                                                                          |
| 8             | COMP     | Compensation: Output of internal error amplifier. Connect capacitor or series RC network to compensate the regulator control loop.                                                                      |
| 9, 10, 11, 12 | SGND     | Signal ground: Connect all pins to ground, PGND.                                                                                                                                                        |
| 13            | SYNC     | Frequency synchronization (input): Optional. Connect an external clock signal to synchronize the oscillator. Leading edge of signal above 1.7V terminates switching cycle. Connect to SGND if not used. |
| 14            | BIAS     | Internal 3.3V bias supply: Decouple with 0.01 $\mu$ F bypass capacitor to SGND. Do not apply any external load.                                                                                         |
| 15            | EN       | Enable (input): Logic high enables operation. Logic low shuts down regulator. Do not allow pin to float.                                                                                                |
| 16, 17        | VIN      | Supply voltage (input): Requires bypass capacitor to PGND. Both pins must be connected to VIN.                                                                                                          |

## 4.0 FUNCTIONAL DESCRIPTION

The MIC2179 is a synchronous buck regulator that operates from an input voltage of 4.5V to 16.5V and provides a regulated output voltage of 1.25V to 16.5V. It has internal power MOSFETs that supply up to 1.5A load current and operates with up to 100% duty cycle to allow low-dropout operation. To optimize efficiency, the MIC2179 operates in PWM and skip mode. Skip mode provides the best efficiency when load current is less than 150 mA, while PWM mode is more efficient at higher current. PWM or skip mode operation is selected externally, allowing an intelligent system (i.e. microprocessor controlled) to select the correct operating mode for efficiency and noise requirements.

During PWM operation, the MIC2179 uses current-mode control that provides superior line regulation and makes the control loop easier to compensate. The PWM switching frequency is set internally to 200 kHz and can be synchronized to an external clock frequency up to 300 kHz. Other features include a low-current shutdown mode, current limit, undervoltage lockout, and thermal shutdown. See the following sections for more detail.

### 4.1 Switch Output

The switch output (SW) is a half H-bridge consisting of a high-side P-channel and low-side N-channel power MOSFET. These MOSFETs have a typical on-resistance of 150 m $\Omega$  when the MIC2179 operates from a 12V supply. Anti-shoot-through circuitry prevents the P-channel and N-channel from turning on at the same time.

### 4.2 Current Limit

The MIC2179 uses pulse-by-pulse current limiting to protect the output. During each switching period, a current limit comparator detects if the P-channel current exceeds 4.3A. When it does, the P-channel is turned off until the next switching period begins.

### 4.3 Undervoltage Lockout

Undervoltage lockout (UVLO) turns off the output when the input voltage ( $V_{IN}$ ) is too low to provide sufficient gate drive for the output MOSFETs. It prevents the output from turning on until  $V_{IN}$  exceeds 4.3V. Once operating, the output will not shut off until  $V_{IN}$  drops below 4.2V.

### 4.4 Thermal Shutdown

Thermal shutdown turns off the output when the MIC2179 junction temperature exceeds the maximum value for safe operation. After thermal shutdown occurs, the output will not turn on until the junction temperature drops approximately 10°C.

### 4.5 Shutdown Mode

The MIC2179 has a low-current shutdown mode that is controlled by the enable input (EN). When a logic 0 is applied to EN, the MIC2179 is in shutdown mode, and its quiescent current drops to less than 5  $\mu$ A.

### 4.6 Internal Bias Regulator

An internal 3.3V regulator provides power to the MIC2179 control circuits. This internal supply is brought out to the BIAS pin for bypassing by an external 0.01  $\mu$ F capacitor. Do not connect an external load to the BIAS pin. It is not designed to provide an external supply voltage.

### 4.7 Frequency Synchronization

The MIC2179 operates at a preset switching frequency of 200 kHz. It can be synchronized to a higher frequency by connecting an external clock to the SYNC pin. The SYNC pin is a logic level input that synchronizes the oscillator to the rising edge of an external clock signal. It has a frequency range of 220 kHz to 300 kHz, and can operate with a minimum pulse width of 500 ns. If synchronization is not required, connect SYNC to ground.

### 4.8 Power Good Flag

The power good flag (PWRGD) is an error flag that alerts a system when the output is not in regulation. When the output voltage is 10% below its nominal value, PWRGD is logic low, signaling that  $V_{OUT}$  is too low. PWRGD is an open-drain output that can sink 1 mA from a pull-up resistor connected to  $V_{IN}$ .

### 4.9 Low-Dropout Operation

Output regulation is maintained in PWM or skip mode even when the difference between  $V_{IN}$  and  $V_{OUT}$  decreases below 1V. As  $V_{IN} - V_{OUT}$  decreases, the duty cycle increases until it reaches 100%. At this point, the P-channel is kept on for several cycles at a time, and the output stays in regulation until  $V_{IN} - V_{OUT}$  falls below the dropout voltage (dropout voltage = P-channel on-resistance  $\times$  load current).

### 4.10 PWM-Mode Operation

Refer to the [PWM Mode Functional Diagram](#) which is a simplified block diagram of the MIC2179 operating in PWM mode and its associated waveforms.

When operating in PWM mode, the output P-channel and N-channel MOSFETs are alternately switched on at a constant frequency and variable duty cycle. A switching period begins when the oscillator generates a reset pulse. This pulse resets the RS latch which turns on the P-channel and turns off the N-channel. During this time, inductor current ( $I_{L1}$ ) increases and



energy is stored in the inductor. The current sense amplifier ( $I_{\text{SENSE}}$  Amp) measures the P-channel drain-to-source voltage and outputs a voltage proportional to  $I_{L1}$ . The output of  $I_{\text{SENSE}}$  Amp is added to a sawtooth waveform (corrective ramp) generated by the oscillator, creating a composite waveform labeled  $I_{\text{SENSE}}$  on the timing diagram. When  $I_{\text{SENSE}}$  is greater than the error amplifier output, the PWM comparator will set the RS latch which turns off the P-channel and turns on the N-channel. Energy is then discharged from the inductor and  $I_{L1}$  decreases until the next switching cycle begins. By varying the P-channel on-time (duty cycle), the average inductor current is adjusted to whatever value is required to regulate the output voltage.

The MIC2179 uses current-mode control to adjust the duty cycle and regulate the output voltage. Current-mode control has two signal loops that determine the duty cycle. One is an outer loop that senses the output voltage, and the other is a faster inner loop that senses the inductor current. Signals from these two loops control the duty cycle in the following way:  $V_{\text{OUT}}$  is fed back to the error amplifier which compares the feedback voltage ( $V_{\text{FB}}$ ) to an internal reference voltage ( $V_{\text{REF}}$ ). When  $V_{\text{OUT}}$  is lower than its nominal value, the error amplifier output voltage increases. This voltage then intersects the current sense waveform later in switching period which increases the duty cycle and the average inductor current. If  $V_{\text{OUT}}$  is higher than nominal, the error amplifier output voltage decreases, reducing the duty cycle.

The PWM control loop is stabilized in two ways. First, the inner signal loop is compensated by adding a corrective ramp to the output of the current sense amplifier. This allows the regulator to remain stable when operating at greater than 50% duty cycle. Second, a series resistor-capacitor load is connected to the error amplifier output (COMP pin). This places a pole-zero pair in the regulator control loop.

One more important item is synchronous rectification. As mentioned earlier, the N-channel output MOSFET is turned on after the P-channel turns off. When the N-channel turns on, its on-resistance is low enough to create a short across the output diode. As a result, inductor current flows through the N-channel and the voltage drop across it is significantly lower than a diode forward voltage. This reduces power dissipation and improves efficiency to greater than 95% under certain operating conditions.

To prevent shoot-through current, the output stage employs break-before-make circuitry that provides approximately 50 ns of delay from the time one MOSFET turns off and the other turns on. As a result, inductor current briefly flows through the output diode during this transition.

## 4.11 Skip Mode Operation

Refer to the [Skip Mode Functional Diagram](#) which is a simplified block diagram of the MIC2179 operating in skip mode and its associated waveforms.

Skip mode operation turns on the output P-channel at a frequency and duty cycle that is a function of  $V_{\text{IN}}$ ,  $V_{\text{OUT}}$ , and the output inductor value. While in skip mode, the N-channel is kept off to optimize efficiency by reducing gate charge dissipation.  $V_{\text{OUT}}$  is regulated by skipping switching cycles that turn on the P-channel.

To begin analyzing MIC2179 skip mode operation, assume the skip mode comparator output is high and the latch output has been reset to a logic 1. This turns on the P-channel and causes  $I_{L1}$  to increase linearly until it reaches a current limit of 400 mA. When  $I_{L1}$  reaches this value, the current limit comparator sets the RS latch output to logic 0, turning off the P-channel. The output switch voltage ( $V_{\text{SW}}$ ) then swings from  $V_{\text{IN}}$  to 0.4V below ground, and  $I_{L1}$  flows through the Schottky diode.  $L1$  discharges its energy to the output and  $I_{L1}$  decreases to zero. When  $I_{L1} = 0$ ,  $V_{\text{SW}}$  swings from -0.4V to  $V_{\text{OUT}}$ , and this triggers a one-shot that resets the RS latch. Resetting the RS latch turns on the P-channel, and this begins another switching cycle.

The skip-mode comparator regulates  $V_{\text{OUT}}$  by controlling when the MIC2179 skips cycles. It compares  $V_{\text{FB}}$  to  $V_{\text{REF}}$  and has 10 mV of hysteresis to prevent oscillations in the control loop. When  $V_{\text{FB}}$  is less than  $V_{\text{REF}} - 5$  mV, the comparator output is logic 1, allowing the P-channel to turn on. Conversely, when  $V_{\text{FB}}$  is greater than  $V_{\text{REF}} + 5$  mV, the P-channel is turned off.

Note that this is a self-oscillating topology that explains why the switching frequency and duty cycle are a function of  $V_{\text{IN}}$ ,  $V_{\text{OUT}}$ , and the value of  $L1$ . It has the unique feature (for a pulse-skipping regulator) of supplying the same value of maximum load current for any value of  $V_{\text{IN}}$ ,  $V_{\text{OUT}}$ , or  $L1$ . This allows the MIC2179 to always supply up to 300 mA of load current when operating in skip mode.

## 4.12 Selecting PWM- or Skip-Mode Operation

PWM or skip mode operation is selected by an external logic signal applied to the PWM pin. A logic low places the MIC2179 into PWM mode, and logic high places it into skip mode. Skip mode operation provides the best efficiency when load current is less than 150 mA, and PWM operation is more efficient at higher currents.


The MIC2179 was designed to be used in intelligent systems that determine when it should operate in PWM or skip mode. This makes the MIC2179 ideal for applications where a regulator must guarantee low noise operation when supplying light load currents, such as cellular telephone, audio, and multimedia circuits.

# MIC2179


There are two important items to be aware of when selecting PWM or skip mode. First, the MIC2179 can start-up only in PWM mode, and therefore requires a logic low at  $\overline{\text{PWM}}$  during start-up. Second, in skip mode, the MIC2179 will supply a maximum load

current of approximately 300 mA, so the output will drop out of regulation when load current exceeds this limit. To prevent this from occurring, the MIC2179 should change from skip to PWM mode when load current exceeds 200 mA.

## PWM Mode Functional Diagram

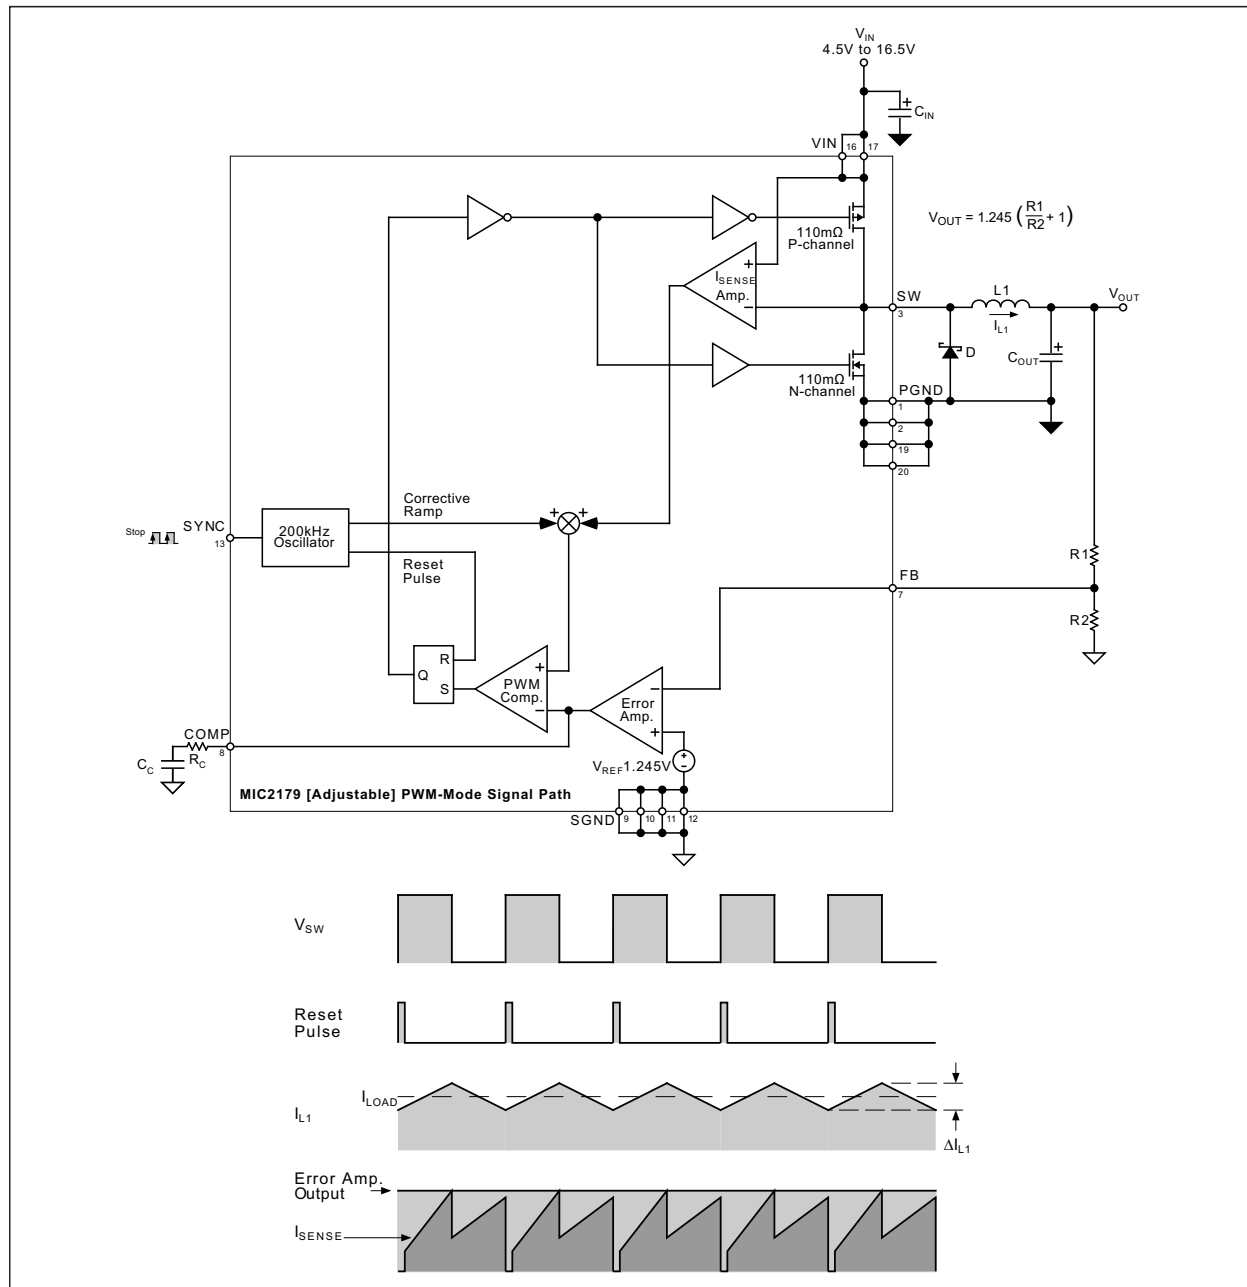

## Skip Mode Functional Diagram

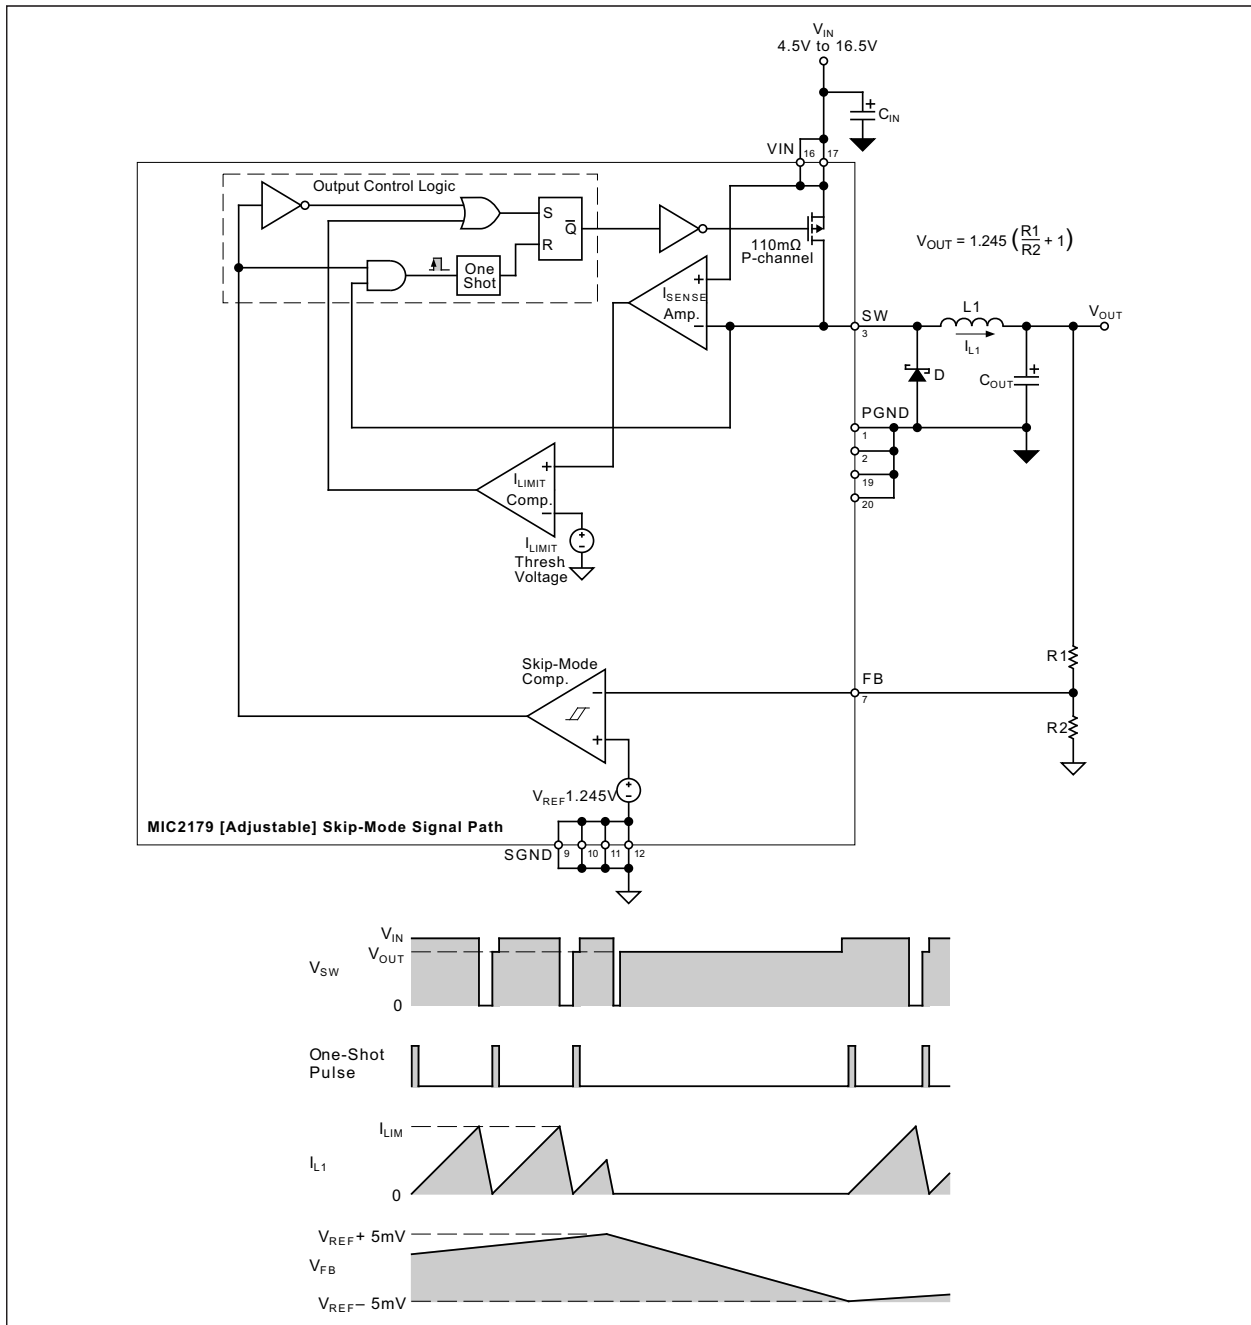

## 5.0 APPLICATION INFORMATION

### 5.1 Feedback Resistor Selection (Adjustable Version)

The output voltage is programmed by connecting an external resistive divider to the FB pin as shown in the [Functional Block Diagram](#). The ratio of R1 to R2 determines the output voltage. To optimize efficiency during low output current operation, R2 should not be less than 20 kΩ. However, to prevent feedback error due to input bias current at the FB pin, R2 should not be greater than 100 kΩ. After selecting R2, calculate R1 with the following formula:

#### EQUATION 5-1:

$$R1 = R2 \times \left( \left( \frac{V_{OUT}}{1.245V} \right) - 1 \right)$$

### 5.2 Input Capacitor Selection

The input capacitor is selected for its RMS current and voltage rating and should be a low ESR (equivalent series resistance) electrolytic or tantalum capacitor. As a rule of thumb, the voltage rating for a tantalum capacitor should be twice the value of  $V_{IN}$ , and the voltage rating for an electrolytic should be 40% higher than  $V_{IN}$ . The RMS current rating must be equal or greater than the maximum RMS input ripple current. A simple, worst case formula for calculating this RMS current is:

#### EQUATION 5-2:

$$I_{RMS(MAX)} = \frac{I_{LOAD(MAX)}}{2}$$

Tantalum capacitors are a better choice for applications that require the most compact layout or operation below 0°C. The input capacitor must be located very close to the VIN pin (within 0.2 in, 5 mm). Also, place a 0.1 μF ceramic bypass capacitor as close as possible to VIN.

### 5.3 Inductor Selection

The MIC2179 is a current-mode controller with internal slope compensation. As a result, the inductor must be at least a minimum value to prevent subharmonic oscillations. This minimum value is calculated by the following formula:

#### EQUATION 5-3:

$$L_{MIN} = V_{OUT} \times 3.0 \mu H / V$$

In general, a value at least 20% greater than  $L_{MIN}$  should be selected because inductor values have a tolerance of ±20%.

Two other parameters to consider in selecting an inductor are winding resistance and peak current rating. The inductor must have a peak current rating equal or greater than the peak inductor current. Otherwise, the inductor may saturate, causing excessive current in the output switch. Also, the inductor's core loss may increase significantly. Both of these effects will degrade efficiency. The formula for peak inductor current is:

#### EQUATION 5-4:

$$I_{L(PEAK)} = I_{LOAD(MAX)} + \frac{\Delta I_{L(MAX)}}{2}$$

Where:

$$\Delta I_{L(MAX)} = V_{OUT} \times \left( 1 - \frac{V_{OUT}}{V_{IN(MAX)}} \right) \times \frac{1}{L \times f}$$

To maximize efficiency, the inductor's resistance must be less than the output switch on-resistance (preferably, 50 mΩ or less).

### 5.4 Output Capacitor Selection

Select an output capacitor that has a low value of ESR. This parameter determines a regulator's output ripple voltage ( $V_{RIPPLE}$ ) which is generated by  $\Delta I_L \times ESR$ . Therefore, ESR must be equal or less than a maximum value calculated for a specified  $V_{RIPPLE}$  (typically less than 1% of the output voltage) and  $\Delta I_{L(MAX)}$ :

#### EQUATION 5-5:

$$ESR_{MAX} = \frac{V_{RIPPLE}}{\Delta I_{L(MAX)}}$$

Typically, capacitors in the range of 100 μF to 220 μF have ESR less than this maximum value. The output capacitor can be a low ESR electrolytic or tantalum capacitor, but tantalum is a better choice for compact

layout and operation at temperatures below 0°C. The voltage rating of a tantalum capacitor must be  $2 \times V_{OUT}$ , and the voltage rating of an electrolytic must be  $1.4 \times V_{OUT}$ .

## 5.5 Output Diode Selection

In PWM operation, inductor current flows through the output diode approximately 50 ns during the dead time when one output MOSFET turns off the other turns on. In skip mode, the inductor current flows through the diode during the entire P-channel off time. The correct diode for both of these conditions is a 1A diode with a reverse voltage rating greater than  $V_{IN}$ . It must be a Schottky or ultrafast-recovery diode ( $t_R < 100$  ns) to minimize power dissipation from the diode's reverse-recovery charge.

## 5.6 Compensation

Compensation is provided by connecting a series RC load to the COMP pin. This creates a pole-zero pair in the regulator control loop, allowing the regulator to remain stable with enough low frequency loop-gain for good load and line regulation. At higher frequencies, the pole-zero reduces loop-gain to a level referred to as the mid-band gain. The midband gain is low enough so that the loop gain crosses 0 dB with sufficient phase margin. Typical values for the RC load are 4.7 nF to 10 nF for the capacitor and 5 k $\Omega$  to 20 k $\Omega$  for the resistor.

## 5.7 Printed Circuit Board Layout

A well designed PC board will prevent switching noise and ground bounce from interfering with the operation of the MIC2179. A good design takes into consideration component placement and routing of power traces.

The first thing to consider is the locations of the input capacitor, inductor, output diode, and output capacitor. The input capacitor must be placed very close to the VIN pin, the inductor and output diode very close to the SW pin, and the output capacitor near the inductor. These components pass large high-frequency current pulses, so they must use short, wide power traces. In addition, their ground pins and PGND are connected to a ground plane that is nearest the power supply ground bus.

The feedback resistors, RC compensation network, and BIAS pin bypass capacitor should be located close to their respective pins. To prevent ground bounce, their ground traces and SGND should not be in the path of switching currents returning to the power supply ground bus. SGND and PGND should be tied together by a ground plane that extends under the MIC2179.


## 6.0 PACKAGING INFORMATION

### 6.1 Package Marking Information

20-Lead Fixed SSOP\*



Example



20-Lead Adj. SSOP\*



Example



**Legend:**

|         |                                                                                                                    |
|---------|--------------------------------------------------------------------------------------------------------------------|
| XX...X  | Product code or customer-specific information                                                                      |
| Y       | Year code (last digit of calendar year)                                                                            |
| YY      | Year code (last 2 digits of calendar year)                                                                         |
| WW      | Week code (week of January 1 is week '01')                                                                         |
| NNN     | Alphanumeric traceability code                                                                                     |
| (e3)    | Pb-free JEDEC® designator for Matte Tin (Sn)                                                                       |
| *       | This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package. |
| •, ▲, ▼ | Pin one index is identified by a dot, delta up, or delta down (triangle mark).                                     |

**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.  
  
Underbar ( \_ ) and/or Overbar ( ¯ ) symbol may not be to scale.


## 20-Lead SSOP Package Outline and Recommended Land Pattern

### TITLE

20 LEAD SSOP PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

DRAWING # SSOP-20LD-PL-1

UNIT MM

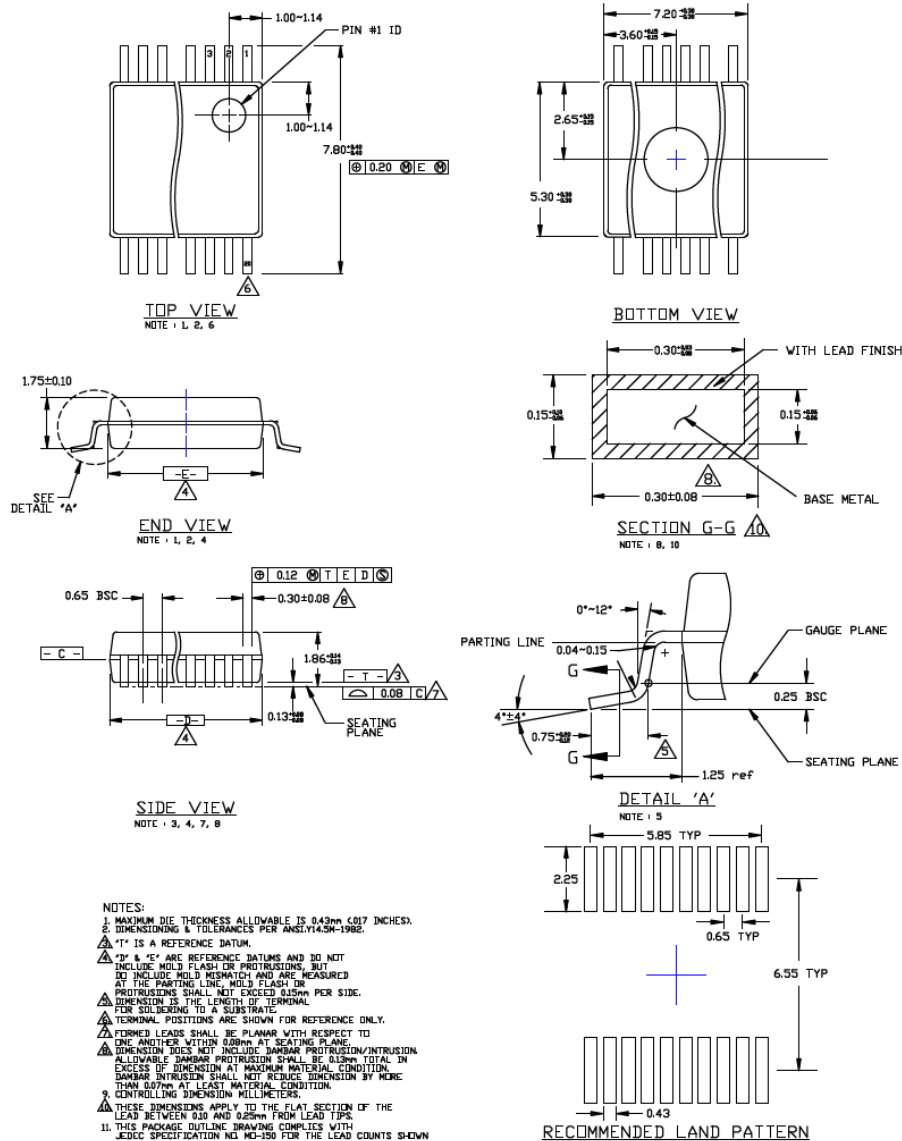

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>.

NOTES:



## APPENDIX A: REVISION HISTORY

### Revision A (January 2020)

- Converted Micrel document MIC2179 to Microchip data sheet template DS20006284A.
- Minor grammatical text changes throughout.
- Multiple values unbolded in the [Electrical Characteristics](#) section.

NOTES:

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

| <u>Device</u> | <u>-X.X</u>    | <u>X</u>             | <u>XX</u> | <u>-XX</u> |
|---------------|----------------|----------------------|-----------|------------|
| Part No.      | Output Voltage | Junction Temp. Range | Package   | Media Type |

|                                    |                      |                                  |
|------------------------------------|----------------------|----------------------------------|
| <b>Device:</b>                     | MIC2179:             | 1.5A Synchronous Buck Regulator  |
|                                    | <blank> = Adjustable |                                  |
| <b>Output Voltage:</b>             | 3.3                  | = 3.3V                           |
|                                    | 5.0                  | = 5.0V                           |
| <b>Junction Temperature Range:</b> | Y                    | = -40°C to +85°C, RoHS-Compliant |
| <b>Package:</b>                    | SM                   | = 20-Lead SSOP                   |
| <b>Media Type:</b>                 | <blank>=             | 67/Tube                          |
|                                    | TR                   | = 1,000/Reel                     |

|                       |                                                                                                                                                                                                                                                                      |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Examples:</b>      |                                                                                                                                                                                                                                                                      |
| a) MIC2179YSM:        | MIC2179, Adjustable Output Voltage, -40°C to +85°C Temperature Range, 20-Lead SSOP, 67/Tube                                                                                                                                                                          |
| b) MIC2179YSM-TR:     | MIC2179, Adjustable Output Voltage, -40°C to +85°C Temperature Range, 20-Lead SSOP, 1,000/Reel                                                                                                                                                                       |
| c) MIC2179-3.3YSM:    | MIC2179, 3.3V Output Voltage, -40°C to +85°C Temperature Range, 20-Lead SSOP, 67/Tube                                                                                                                                                                                |
| d) MIC2179-3.3YSM-TR: | MIC2179, 3.3V Output Voltage, -40°C to +85°C Temperature Range, 20-Lead SSOP, 1,000/Reel                                                                                                                                                                             |
| e) MIC2179-5.0YSM:    | MIC2179, 5.0V Output Voltage, -40°C to +85°C Temperature Range, 20-Lead SSOP, 67/Tube                                                                                                                                                                                |
| f) MIC2179-5.0YSM-TR: | MIC2179, 5.0V Output Voltage, -40°C to +85°C Temperature Range, 20-Lead SSOP, 1,000/Reel                                                                                                                                                                             |
| <b>Note 1:</b>        | Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option. |

NOTES:

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as “unbreakable.”

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

### Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2020, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-5481-6

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**  
Tel: 919-844-7510

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**  
Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4450-2828  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820