







### ■ Function Block Diagram

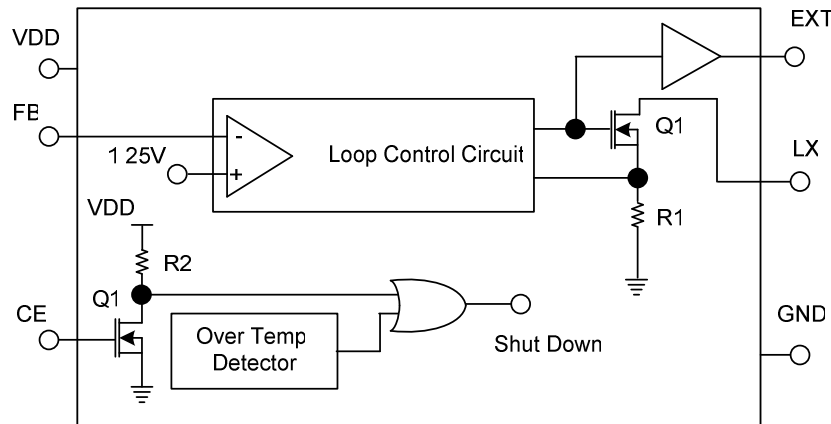


### ■ Marking Information

|     | Symbol | Description                                                        |
|-----|--------|--------------------------------------------------------------------|
| ① ② | E1     | Product Code                                                       |
| ③ ④ | XX     | XX = (00-ZZ) is the code to indicate wafer lot and production date |




SOT-26



SOT-89-5

### ■ Test Circuit

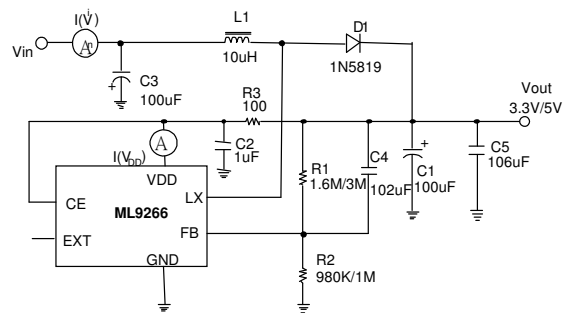



### ■ Absolute Maximum Ratings (Ta=25°C)

| Parameter                      |          | Symbol           | Ratings               | Unit |
|--------------------------------|----------|------------------|-----------------------|------|
| Supply Voltage                 |          | V <sub>in</sub>  | - 0.3V ~ 7V           | V    |
| LX Pin Switch Voltage          |          | V <sub>LX</sub>  | - 0.3 ~ (VDD + 0.8V)  | V    |
| Other I/O Pin Voltages         |          | V <sub>ss</sub>  | - 0.3V ~ (VDD + 0.3V) | V    |
| Lx Pin Switch Current          |          | I <sub>LX</sub>  | 2.5                   | A    |
| EXT Pin Driver Current         |          | I <sub>EXT</sub> | 200                   | mA   |
| Package Thermal Resistance     | SOT-26   | Pd               | 145                   | °C/W |
|                                | SOT-89-5 |                  | 45                    | °C/W |
| Operating Junction Temperature |          | T <sub>j</sub>   | 125                   | °C   |
| Storage Temperature Range      |          | T <sub>stg</sub> | - 65 ~ +150           | °C   |


### ■ Electrical Characteristics (V<sub>in</sub> = 1.5V, VDD = 3.3V, I = 0, Ta = 25°C, unless otherwise specified)

| Parameter                             | Symbol                  | Test Conditions                                    | Min   | Typ  | Max   | Units  |
|---------------------------------------|-------------------------|----------------------------------------------------|-------|------|-------|--------|
| Start-UP Voltage                      | V <sub>ST</sub>         | I <sub>L</sub> = 1mA                               | --    | 0.98 | 1.05  | V      |
| Operating VDD Range                   | V <sub>DD</sub>         | VDD pin voltage                                    | 2     | --   | 6.5   | V      |
| No Load Current I (V <sub>IN</sub> )  | I <sub>NO LOAD</sub>    | V <sub>IN</sub> = 1.5V, V <sub>OUT</sub> = 3.3V    | --    | 75   | --    | μA     |
| Switch-off Current I (VDD)            | I <sub>SWITCH OFF</sub> | V <sub>IN</sub> = 6V                               | --    | 17   | --    | μA     |
| Shutdown Current I (V <sub>IN</sub> ) | I <sub>OFF</sub>        | CE Pin = 0V, V <sub>IN</sub> = 4.5V                | --    | 0.01 | 1     | μA     |
| Feedback Reference Voltage            | V <sub>REF</sub>        | Close Loop, VDD = 3.3V                             | 1.225 | 1.25 | 1.275 | V      |
| Switching Frequency                   | F <sub>S</sub>          | VDD = 3.3V                                         | --    | 450  | --    | KHz    |
| Maximum Duty                          | D <sub>MAX</sub>        | VDD = 3.3V                                         | --    | 95   | --    | %      |
| LX ON Resistance                      |                         | VDD = 3.3V                                         | --    | 0.3  | --    | Ω      |
| Current Limit Setting                 | I <sub>LIMIT</sub>      | VDD = 3.3V                                         | --    | 2    | --    | A      |
| EXT ON Resistance to VDD              |                         | VDD = 3.3V                                         | --    | 5    | --    | Ω      |
| EXT ON Resistance to GND              |                         | VDD = 3.3V                                         | --    | 5    | --    | Ω      |
| Line Regulation                       | ΔV <sub>LINE</sub>      | V <sub>IN</sub> = 1.5 ~ 2.5V, I <sub>L</sub> = 1mA | --    | 10   | --    | mV/V   |
| Load Regulation                       | ΔV <sub>LOAD</sub>      | V <sub>IN</sub> = 2.5V, I <sub>L</sub> = 1 ~ 100mA | --    | 0.25 | --    | mV/mA  |
| CE Pin Trip Level                     |                         | VDD = 3.3V                                         | 0.4   | 0.8  | 1.2   | V      |
| Temperature Stability for Vout        | T <sub>S</sub>          |                                                    | --    | 50   | --    | ppm/°C |
| Thermal Shutdown                      | T <sub>SD</sub>         |                                                    | --    | 165  | --    | °C     |
| Thermal Shutdown Hysteresis           | ΔT <sub>SD</sub>        |                                                    | --    | 10   | --    | °C     |


\* Note: The CE pin shall be tied to VDD pin and inhibit to act the ON/OFF state whenever the VDD pin voltage may reach to 5.5V or above.

### ■ Applications


#### ● High Current Application

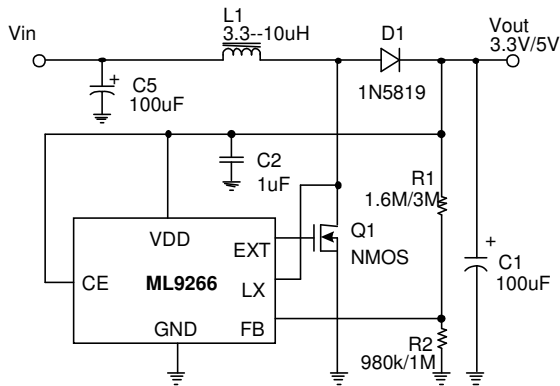

#### ● High Voltage Application

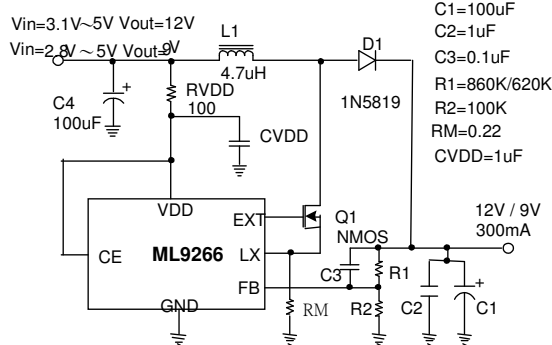

#### ● Multi-Output Applications

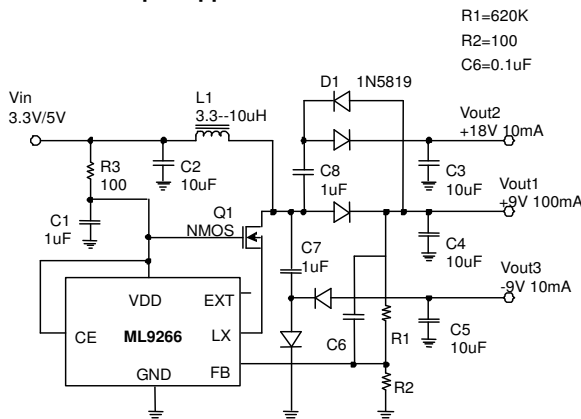

### ■ Application Note

#### ● Output Voltage Setting


Referring to application circuits, the output voltage of the switching regulator ( $V_{OUT}$ ) can be set

$$V_{OUT1} = \left(1 + \frac{R1}{R2}\right) \times 1.25V \quad \dots A$$

#### ● Feedback Loop Design

Referring to application circuits, The selection of R1 and R2 based on the trade-off between quiescent current consumption and interference immunity is stated below:

- ◆ Follow Equation A
- ◆ Higher R reduces the quiescent current (Path current  $\approx 1.25V/R2$ ), however resistors beyond  $5M\Omega$  are not recommended.
- ◆ Lower R gives better noise immunity, and is less sensitive to interference, layout parasitics, FB node leakage, and improper probing to FB pins.

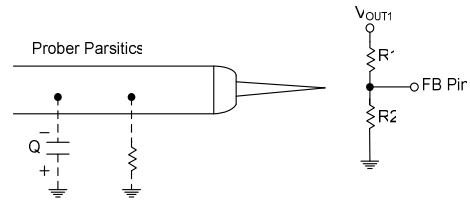


- ◆ A proper value of feed forward capacitor parallel with R1 can improve the noise immunity of the feedback loops, especially in an improper layout. An empirical suggestion is around  $0\sim 33pF$  for feedback resistors of  $M\Omega$ , and  $10nF\sim 0.1\mu F$  for feedback resistors of tens to hundreds  $K\Omega$ .

For applications without standby or suspend modes, lower values of R1 and R2 are preferred. For applications concerning the current consumption in standby or suspend modes, the higher values of R1 and R2 are feedback needed. Such "high impedance loops" are sensitive to any interference, which require careful layout and avoid any interference, e.g. probing to FB pin.



## ■ Package Dimensions


### ● SOT-89-5

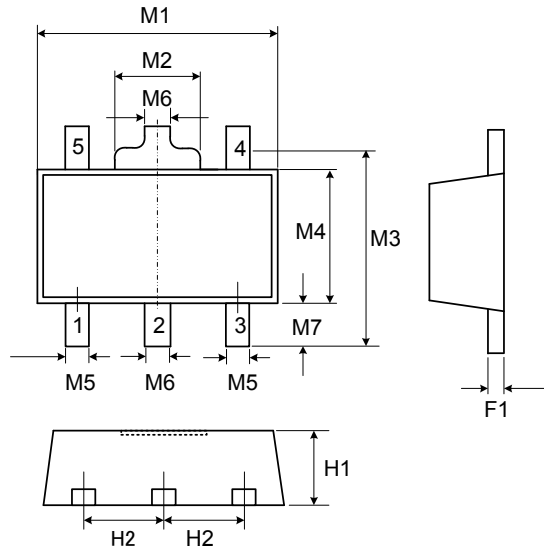

Units: mm

| Symbol | Min   | Max   |
|--------|-------|-------|
| A      | 1.400 | 1.600 |
| b      | 0.360 | 0.520 |
| B      | 2.400 | 2.600 |
| b1     | 0.406 | 0.533 |
| C      | --    | 4.250 |
| C1     | 0.800 | --    |
| D      | 4.400 | 4.600 |
| D1     | --    | 1.700 |
| e      | 1.400 | 1.600 |
| H      | 0.380 | 0.430 |

### ● SOT-26

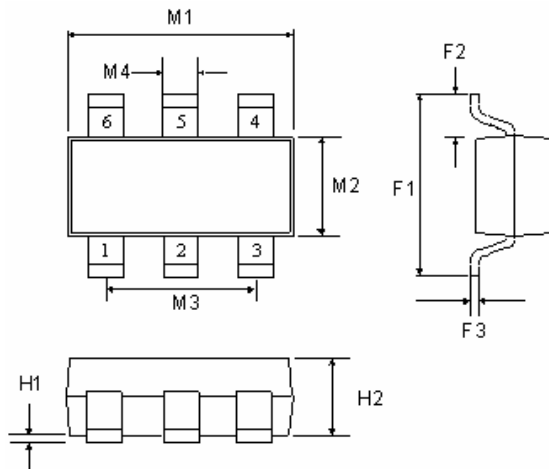

Units: mm

| Symbol | Min   | Max   |
|--------|-------|-------|
| A      | 0.889 | 1.295 |
| A1     | --    | 0.152 |
| B      | 1.397 | 1.803 |
| b      | 0.356 | 0.559 |
| C      | 2.591 | 2.997 |
| D      | 2.692 | 3.099 |
| e      | 0.838 | 1.041 |
| H      | 0.102 | 0.254 |
| L      | 0.356 | 0.610 |

#### DISCLAIMER:

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any