# MP2371

**1.8A, 24V, 700KHz Step-Down Converter**

The Future of Analog IC Technology

## DESCRIPTION

The MP2371 is a monolithic step-down switch mode converter with a built-in internal power MOSFET. It achieves 1.8A continuous output current over a wide input supply range with excellent load and line regulation. Current mode operation provides fast transient response and eases loop stabilization. Fault condition protection includes cycle-by-cycle current limiting and thermal shutdown.

The MP2371 requires a minimum number of readily available standard external components. The MP2371 is available in a 2mm x 2mm QFN8 package.

## FEATURES

- 2.5A Peak Output Current
- 1.8A Continuous Output Current
- 0.3Ω Internal Power MOSFET Switch
- Stable with Low ESR Output Ceramic Capacitors
- 0.1μA Shutdown Mode
- Fixed 700KHz Frequency
- Thermal Shutdown
- Cycle-by-Cycle Over Current Protection
- Wide 4.5V to 24V Operating Input Range
- Output Adjustable from 0.81V to 15V
- Available in 2x2 QFN8 Package

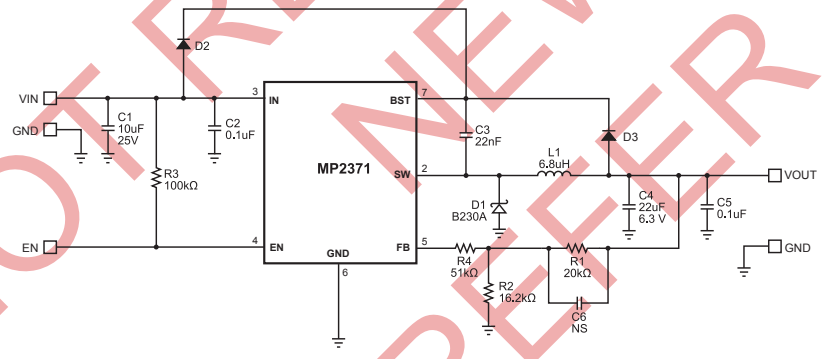
## APPLICATIONS

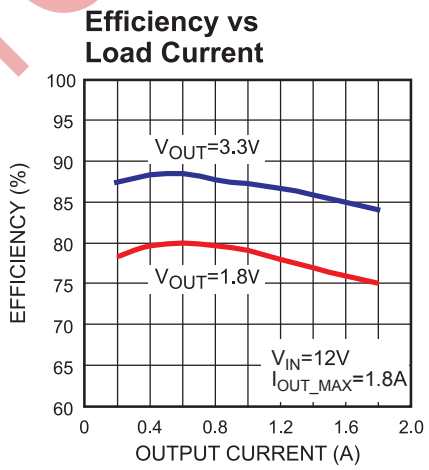
- Broadband Communications Equipment
- Digital Entertainment Systems
- Distributed Power Systems
- Battery Charger
- Pre-Regulator for Linear Regulators

"MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.

NOT RECOMMENDED FOR NEW DESIGNS REFER TO MP2392

## TYPICAL APPLICATION

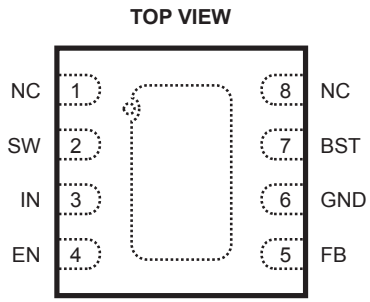




MPS Proprietary Information. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## PACKAGE REFERENCE




| Part Number* | Package | Temperature |
|---|---|---|
| MP2371DG | 2x2 QFN8 | –40°C to +85°C |

* For Tape & Reel, add suffix –Z (eg. MP2371DG–Z)
For RoHS compliant packaging, add suffix –LF (eg. MP2371DG–LF–Z)

## ABSOLUTE MAXIMUM RATINGS (1)

Supply Voltage $V_{IN}$ ..... 26V
$V_{SW}$ ..... –0.3V to $V_{IN}$ + 0.3V
$V_{BS}$ ..... $V_{SW}$ + 6V
All Other Pins ..... –0.3V to +6V
Junction Temperature ..... 150°C
Lead Temperature ..... 260°C
Storage Temperature ..... –65°C to +150°C

### *Recommended Operating Conditions* (2)

Supply Voltage $V_{IN}$ ..... 4.5V to 24V
Output Voltage $V_{OUT}$ ..... 0.81V to 15V
Operating Temperature ..... –40°C to +85°C

| *Thermal Resistance* (3) | $\theta_{JA}$ | $\theta_{JC}$ |
|---|---|---|
| 2x2 QFN8 | 80 | 16 °C/W |

**Notes:**
1) Exceeding these ratings may damage the device.
2) The device is not guaranteed to function outside of its operating conditions.
3) Measured on approximately 1" square of 1 oz copper.

## ELECTRICAL CHARACTERISTICS

**$V_{IN}$ = 12V, $T_A$ = +25°C, unless otherwise noted.**

| Parameters | Symbol | Condition | Min | Typ | Max | Units |
|---|---|---|---|---|---|---|
| Feedback Voltage | $V_{FB}$ | 4.5V ≤ $V_{IN}$ ≤ 24V | 0.790 | 0.810 | 0.830 | V |
| Feedback Current | $I_{FB}$ | $V_{FB}$ = 0.8V | | 10 | | nA |
| Switch On-Resistance (4) | $R_{DS(ON)}$ | | | 0.3 | | Ω |
| Switch Leakage | | $V_{EN}$ = 0V, $V_{SW}$ = 0V | | 0 | 10 | μA |
| Current Limit (4) | | Duty Cycle = 40% | 2.0 | 2.5 | | A |
| Oscillator Frequency | $f_{SW}$ | $V_{FB}$ = 0.6V | | 700 | | KHz |
| Fold-back Frequency | | $V_{FB}$ = 0V | | 230 | | KHz |
| Maximum Duty Cycle | | $V_{FB}$ = 0.6V | | 87 | | % |
| Minimum On-Time (4) | $t_{ON}$ | | | 100 | | ns |
| Under-Voltage Lockout Threshold Rising | | | 2.5 | 2.8 | 3.1 | V |
| Under-Voltage Lockout Threshold Hysteresis | | | | 150 | | mV |
| EN Input Low Voltage | | | | | 0.4 | V |
| EN Input High Voltage | | | 1.5 | | | V |
| EN Input Current | | $V_{EN}$ = 2V | | 2.1 | | μA |
| | | $V_{EN}$ = 0V | | 0.01 | | |
| Supply Current (Shutdown) | | $V_{EN}$ = 0V | | 0.1 | 1.0 | μA |
| Supply Current (Quiescent) | | $V_{EN}$ = 2V, $V_{FB}$ = 1V | | 0.8 | 1.0 | mA |
| Thermal Shutdown (4) | | | | 150 | | °C |

**Note:**
4) Guaranteed by design.

NOT RECOMMENDED FOR NEW DESIGNS REFER TO MP2392


MPS Proprietary Information. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## PIN FUNCTIONS

| Pin # | Name | Description |
|---|---|---|
| 1, 8 | NC | No Connect. |
| 2 | SW | Switch Output. |
| 3 | IN | Supply Voltage. The MP2371 operates from a +4.5V to +24V unregulated input. C1 is needed to prevent large voltage spikes from appearing at the input. |
| 4 | EN | On/Off Control Input. Pull above 1.5V to turn the device on. |
| 5 | FB | Feedback. An external resistor divider from the output to GND, tapped to the FB pin sets the output voltage. To prevent current limit run away during a short circuit fault condition the frequency foldback comparator lowers the oscillator frequency when the FB voltage is below 250mV. |
| 6 | GND | Ground. This pin is the voltage reference for the regulated output voltage. For this reason care must be taken in its layout. This node should be placed outside of the D1 to C1 ground path to prevent switching current spikes from inducing voltage noise into the part. |
| 7 | BST | Bootstrap. This capacitor is needed to drive the power switch's gate above the supply voltage. It is connected between SW and BST pins to form a floating supply across the power switch driver. |

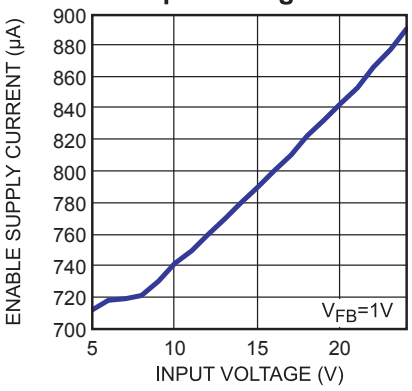
NOT RECOMMENDED FOR NEW DESIGNS REFER TO MP2392


MPS Proprietary Information. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

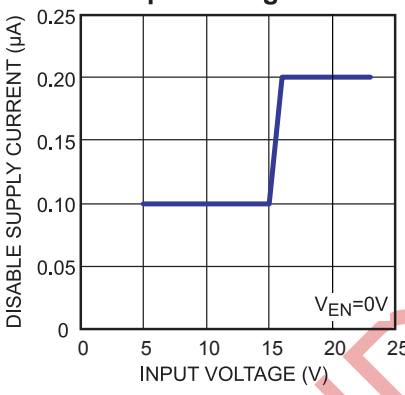
## TYPICAL PERFORMANCE CHARACTERISTICS

**$V_{IN}$ = 12V, $V_{OUT}$ = 1.8V, L=6.8µH, $I_{LOAD}$=0.5A – 1.8A, $T_A$ = +20°C, unless otherwise noted.**

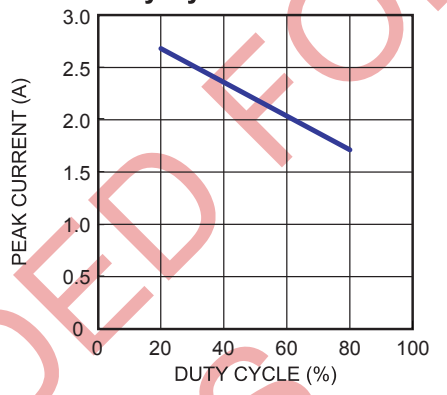
### Enable Supply Current vs. Input Voltage



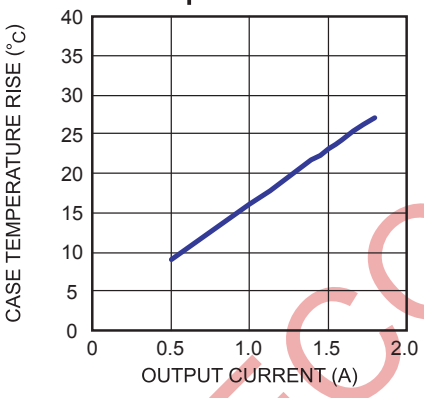

### Disable Supply Current vs. Input Voltage



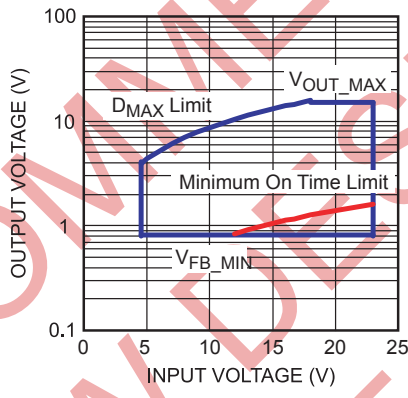

### Peak Current vs. Duty Cycle



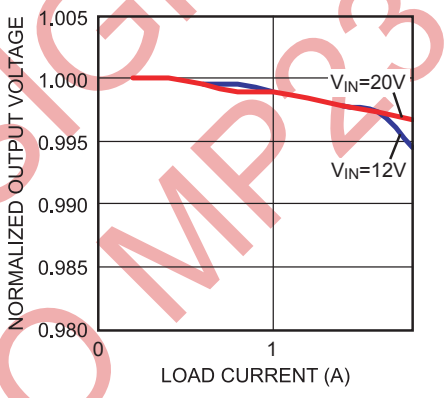

### Case Temperature Rise vs. Output Current



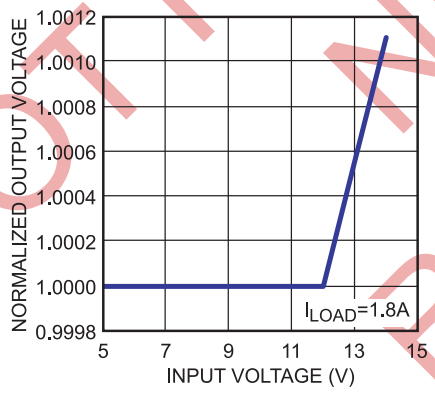

### Operating Range




### Load Regulation




### Line Regulation



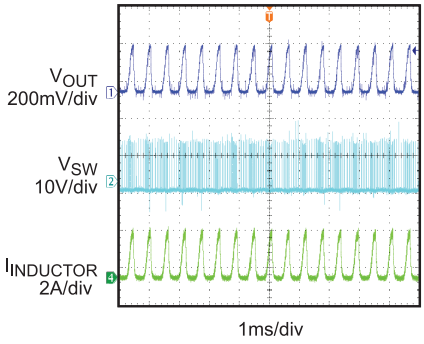

NOT RECOMMENDED FOR NEW DESIGNS REFER TO MP2392


MPS Proprietary Information. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

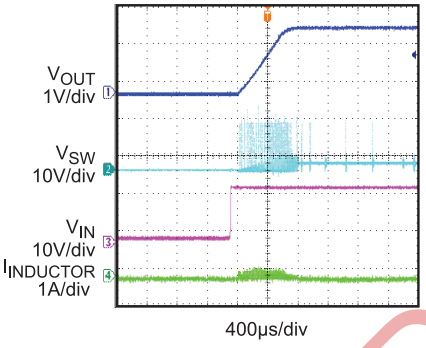
## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

**$V_{IN}$ = 12V, $V_{OUT}$ = 1.8V, L=6.8µH, $I_{LOAD}$=0.5A – 1.8A, $T_A$ = +20°C, unless otherwise noted.**

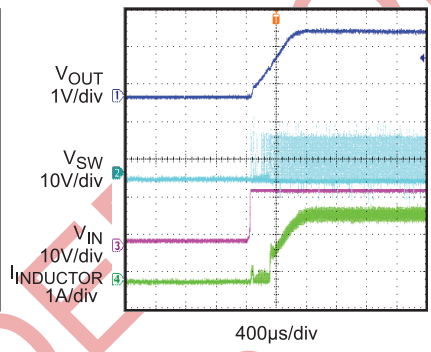
**Hiccup with Output Short Circuit**



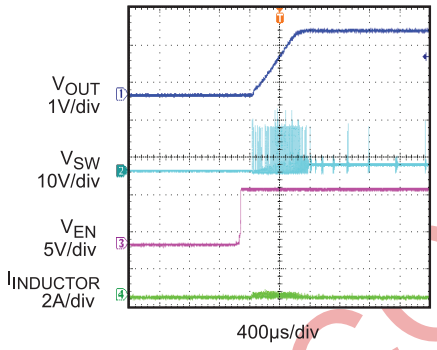

**Power Up**
No Load



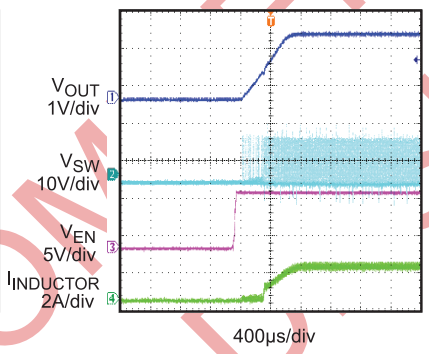

**Power Up**
Full Load



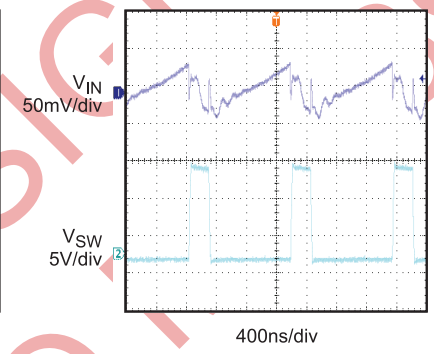

**Enable Startup**
No Load



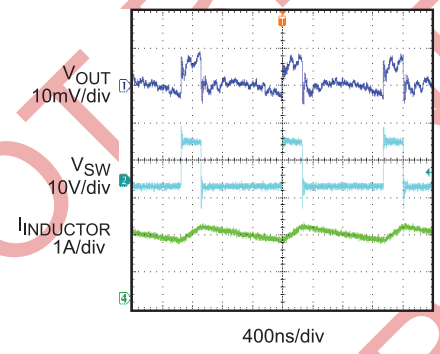

**Enable Startup**
Full Load



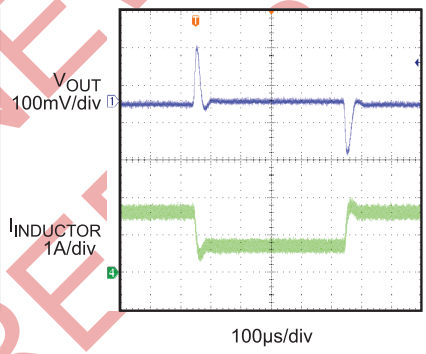

**Input Ripple Voltage**
$I_{OUT}$=1.8A




**Output Ripple Voltage**
$I_{OUT}$=1.8A




**Load Transient Response**




NOT RECOMMENDED FOR NEW DESIGNS REFER TO MP2392


MPS Proprietary Information. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## OPERATION

The MP2371 is a current mode buck regulator. That is, the EA output voltage is proportional to the peak inductor current.

At the beginning of a cycle, M1 is off. The EA output voltage is higher than the current sense amplifier output, and the current comparator's output is low. The rising edge of the 700KHz CLK signal sets the RS Flip-Flop. Its output turns on M1 thus connecting the SW pin and inductor to the input supply.

The increasing inductor current is sensed and amplified by the Current Sense Amplifier. Ramp compensation is summed to Current Sense Amplifier output and compared to the Error Amplifier output by the PWM Comparator. When the sum of the Current Sense Amplifier output and the Slope Compensation signal exceeds the EA output voltage, the RS Flip-Flop is reset and the M1 is turned off. The external Schottky rectifier diode (D1) conducts the inductor current.

If the sum of the Current Sense Amplifier output and the Slope Compensation signal does not exceed the EA output for a whole cycle, then the falling edge of the CLK resets the Flip-Flop.

The output of the Error Amplifier integrates the voltage difference between the feedback and the 0.81V bandgap reference. The polarity is such that a FB pin voltage lower than 0.8V increases the EA output voltage. Since the EA output voltage is proportional to the peak inductor current, an increase in its voltage also increases current delivered to the output.

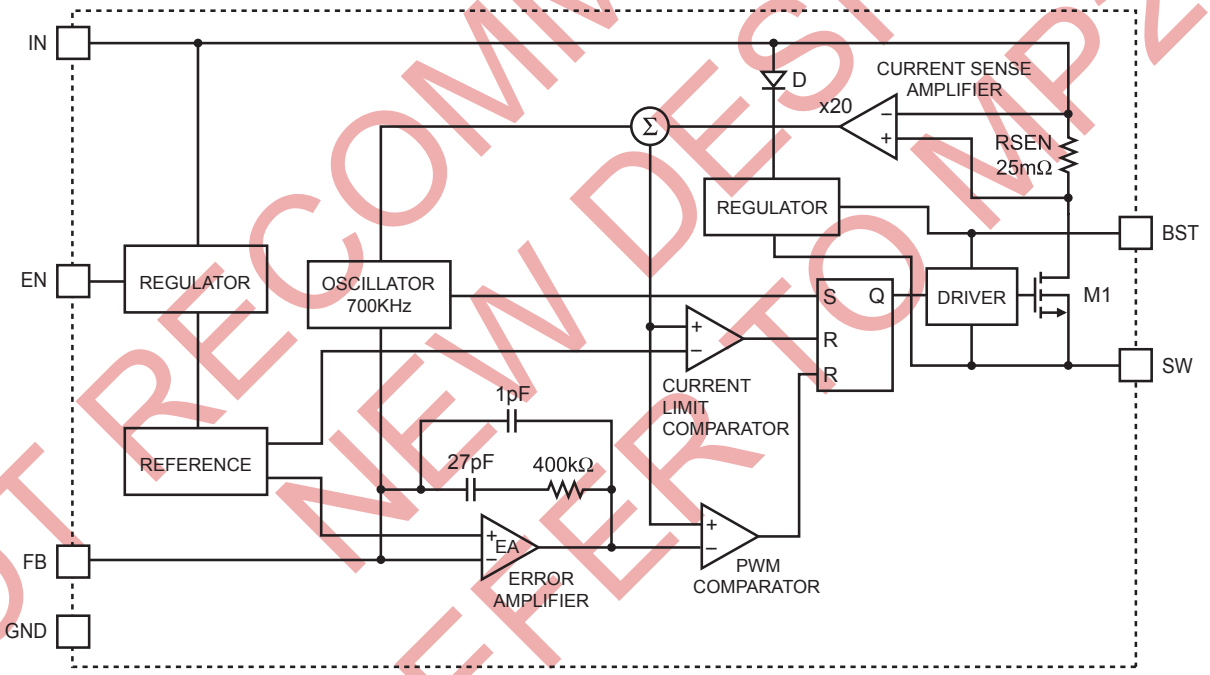



**Figure 1—Functional Block Diagram**

NOT RECOMMENDED FOR NEW DESIGNS REFER TO MP2392


MPS Proprietary Information. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## APPLICATION INFORMATION

### Setting Output Voltage

The external resistor divider is used to set the output voltage (see the schematic on front page). The feedback resistor R1 also sets the feedback loop bandwidth with the internal compensation capacitor (see Figure 1). R2 can be determined by:

$$R2 = \frac{R1}{\frac{V_{OUT}}{0.81V} - 1}$$

**Table 1—Resistor Selection for Common Output Voltages**

| $V_{OUT}$ (V) | R1 (kΩ) | R2 (kΩ) |
|---|---|---|
| 1.8 | 80.6 (1%) | 64.9 (1%) |
| 2.5 | 49.9 (1%) | 23.7 (1%) |
| 3.3 | 49.9 (1%) | 16.2 (1%) |
| 5 | 49.9 (1%) | 9.53 (1%) |

### Selecting the Inductor

A 1μH to 10μH inductor with a DC current rating of at least 25% percent higher than the maximum load current is recommended for most applications. For highest efficiency, the inductor's DC resistance should be less than 200mΩ. For most designs, the required inductance value can be derived from the following equation.

$$L1 = \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times \Delta I_L \times f_{OSC}}$$

Where $\Delta I_L$ is the inductor ripple current.

Choose an inductor with a rating current of approximately 30% higher than the maximum load current if the maximum load current is ≥1.8A. The maximum inductor peak current is calculated from:

$$I_{L(MAX)} = I_{LOAD} + \frac{\Delta I_L}{2}$$

Under light load conditions below 100mA, a larger inductance is recommended for improved efficiency. See Table 2 for suggested inductors.

### Selecting the Input Capacitor

The input capacitor reduces the surge current drawn from the input and the switching noise from the device. The input capacitor impedance at the switching frequency should be less than the input source impedance to prevent high frequency switching current from passing through the input. Ceramic capacitors with X5R or X7R dielectrics are highly recommended because of their low ESR and small temperature coefficients. For most applications, a 10μF capacitor is sufficient.

### Selecting the Output Capacitor

The output capacitor keeps output voltage ripple small and ensures loop stability. The output capacitor impedance should be low at the switching frequency. Ceramic capacitors with X5R or X7R dielectrics are recommended for their low ESR characteristics. For most applications, a 22μF ceramic capacitor will be sufficient.

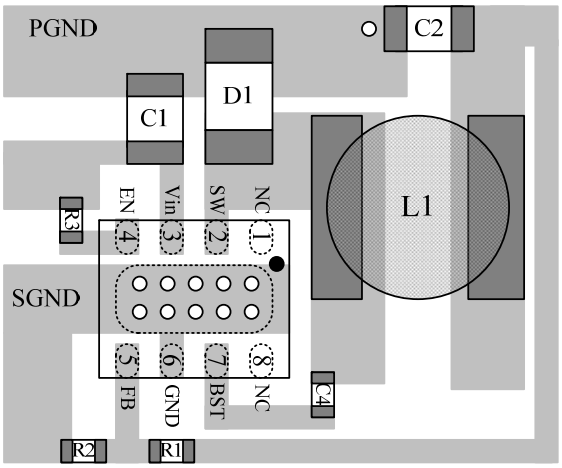
### PCB Layout Guide

PCB layout is very important to achieve stable operation. Please follow these guidelines and take Figure2 for references.

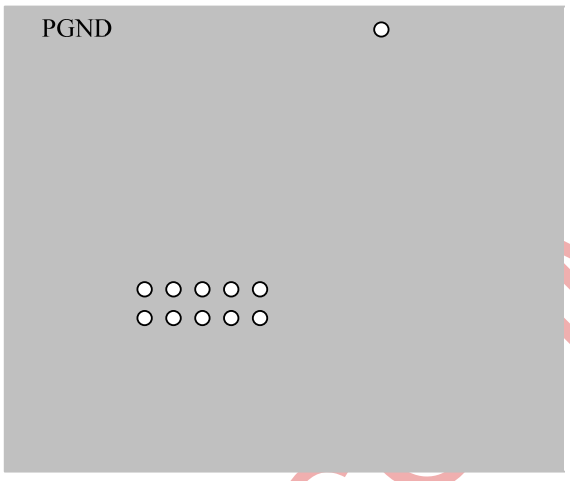
1) Keep the path of switching current short and minimize the loop area formed by Input cap, high-side MOSFET and schottky diode.
2) Keep the connection of schottky diode between SW pin and input power ground as short and wide as possible.
3) Ensure all feedback connections are short and direct. Place the feedback resistors and compensation components as close to the chip as possible.
4) Route SW away from sensitive analog areas such as FB.
5) Connect IN, SW, and especially GND respectively to a large copper area to cool the chip to improve thermal performance and long-term reliability. For single layer, do not solder exposed pad of the IC.

NOT RECOMMENDED FOR NEW DESIGNS REFER TO MP2392


MPS Proprietary Information. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.




Top Layer




Bottom Layer

Figure2—PCB Layout

### External Bootstrap Diode

An external bootstrap diode may enhance the efficiency of the regulator, the applicable conditions of external BST diode are:

- $V_{OUT}$=5V or 3.3V; and
- Duty cycle is high: D= $\frac{V_{OUT}}{V_{IN}}$ >65%

In these cases, an external BST diode is recommended from the output of the voltage regulator to BST pin, as shown in Fig.3

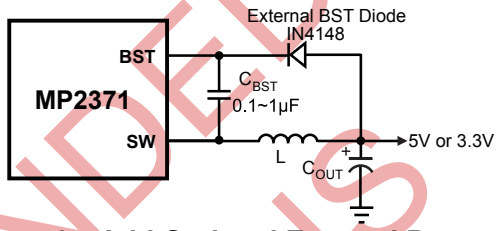



**Figure 3—Add Optional External Bootstrap Diode to Enhance Efficiency**

The recommended external BST diode is IN4148, and the BST cap is 0.1~1μF.

**Table 2—Suggested Surface Mount Inductors**

| Manufacturer | Part Number | Inductance(μH) | Max DCR(Ω) | Current Rating (A) | Dimensions L x W x H (mm³) |
|---|---|---|---|---|---|
| Wurth Electronics | 7447785004 | 4.7 | 0.060 | 2.5 | 5.9 x 6.2 x 3.3 |
| Toko | A916CY-4R7M | 4.7 | 0.026 | 2.5 | 6.2 x 6.3 x 3.5 |
| Coiltronics | DR73-4R7 | 4.7 | 0.03 | 3 | 6.0 x 7.6 x 3.5 |

NOT RECOMMENDED FOR NEW DESIGNS REFER TO MP2392


MPS Proprietary Information. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## TYPICAL APPLICATION CIRCUIT

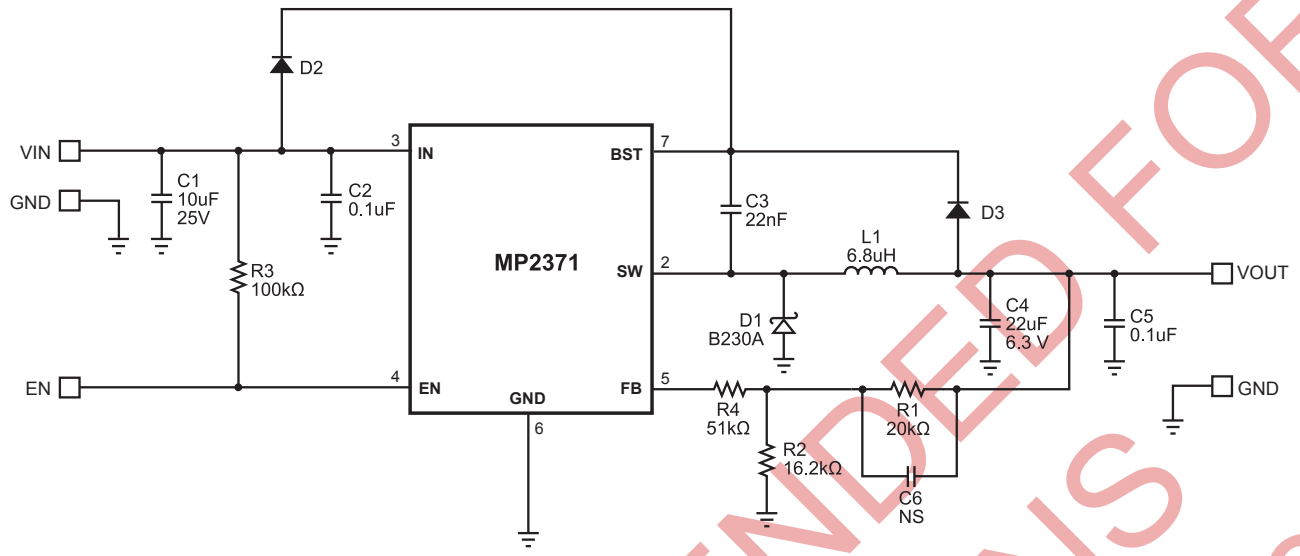


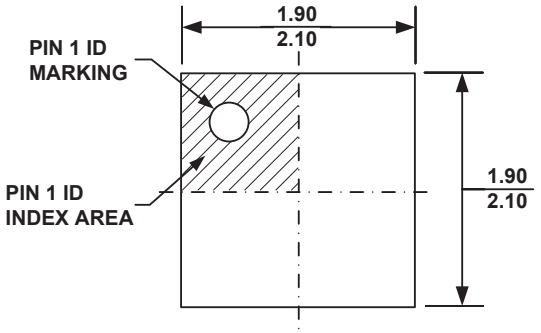

**Figure 4—700KHz, 3.3V Output Step-Down Converter**

NOT RECOMMENDED FOR NEW DESIGNS REFER TO MP2392

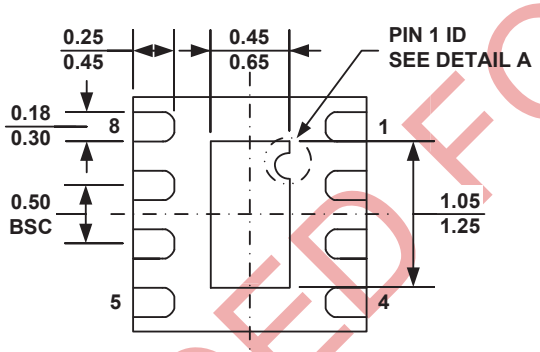

MPS Proprietary Information. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## PACKAGE INFORMATION

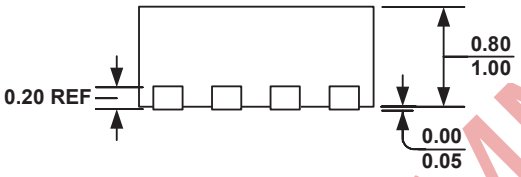
### 2mm x 2mm QFN8



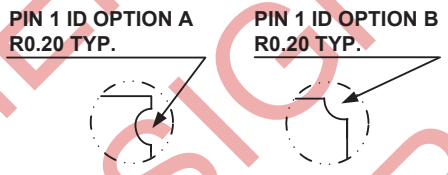

TOP VIEW



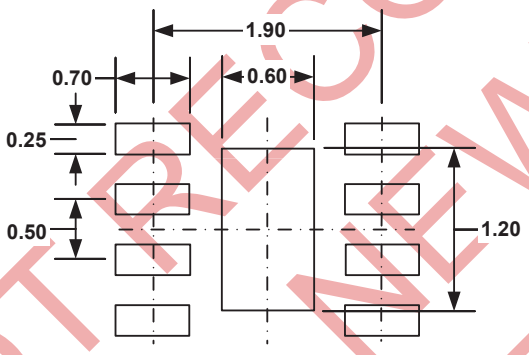

BOTTOM VIEW




SIDE VIEW




DETAIL A




RECOMMENDED LAND PATTERN

**NOTE:**

1) ALL DIMENSIONS ARE IN MILLIMETERS.
2) EXPOSED PADDLE SIZE DOES NOT INCLUDE MOLD FLASH.
3) LEAD COPLANARITY SHALL BE 0.10 MILLIMETER MAX.
4) DRAWING CONFORMS TO JEDEC MO-229, VARIATION VCCD-3.
5) DRAWING IS NOT TO SCALE.

NOT RECOMMENDED FOR NEW DESIGNS REFER TO MP2392

**NOTICE:** The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.


MPS Proprietary Information. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.