



# MP2662

## 500mA Single-Cell Li-ion Battery Charger with Power Path Management, 1mA Termination and <1 $\mu$ A Battery Leakage

### DESCRIPTION

The MP2662 is a highly integrated, single-cell, Li-ion/Li-polymer battery charger with system power path management for space-limited portable applications. The MP2662 takes input power from either an AC adapter or a USB port to supply the system load and charge the battery simultaneously. The charger function features pre-charge (PRE.C), fast current (CC) and constant voltage (CV) regulation, charge termination, and auto-recharge.

The power path management function ensures continuous power to the system by automatically selecting the input, battery, or both to power the system. This function features a low dropout regulator from the input to the system and a 100m $\Omega$  switch from the battery to the system. Power path management separates the charging current from the system load, which allows for proper charge termination and keeps the battery in full-charge mode.

The MP2662 provides a system short-circuit protection (SCP) function by limiting the current from the input to the system and the battery to the system. This feature is especially critical for preventing the Li-ion battery from being damaged due to an excessively high current. An on-chip battery under-voltage lockout (UVLO) cuts off the path between the battery and the system if the battery voltage drops below a programmable battery UVLO threshold. This prevents the Li-ion battery from being over-discharged. An integrated I<sup>2</sup>C control interface allows the MP2662 to program the charging parameters, such as input current limit, input minimum voltage regulation, charging current, battery regulation voltage, safety timer, and battery UVLO.

The MP2662 is available in a 9-pin WCSP (1.75mmx1.75mm) package.

### FEATURES


- Fully Autonomous Charger for Single-Cell Li-Ion/Polymer Batteries
- 21V Maximum Input Voltage Rating with Over-Voltage Protection (OVP)
- $\pm 0.5\%$  Charging Voltage Accuracy
- I<sup>2</sup>C Interface for Setting Charging Parameters and Status Reporting
- Fully Integrated Power Switches and No External Blocking Diode Required
- Built-In Robust Charging Protection Including Battery Temperature Monitoring and Programmable Timer
- PCB Over-Temperature Protection (PCB\_OTP)
- System Reset Function
- Built-In Battery Disconnection Function for Shipping Mode
- Thermal Limiting Regulation On-Chip
- Available in a WCSP-9 (1.75mmx1.75mm) Package

### APPLICATIONS

- Wearable Devices
- Smart Handheld Devices
- Fitness Accessories
- Smart Watches

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

# TYPICAL APPLICATION

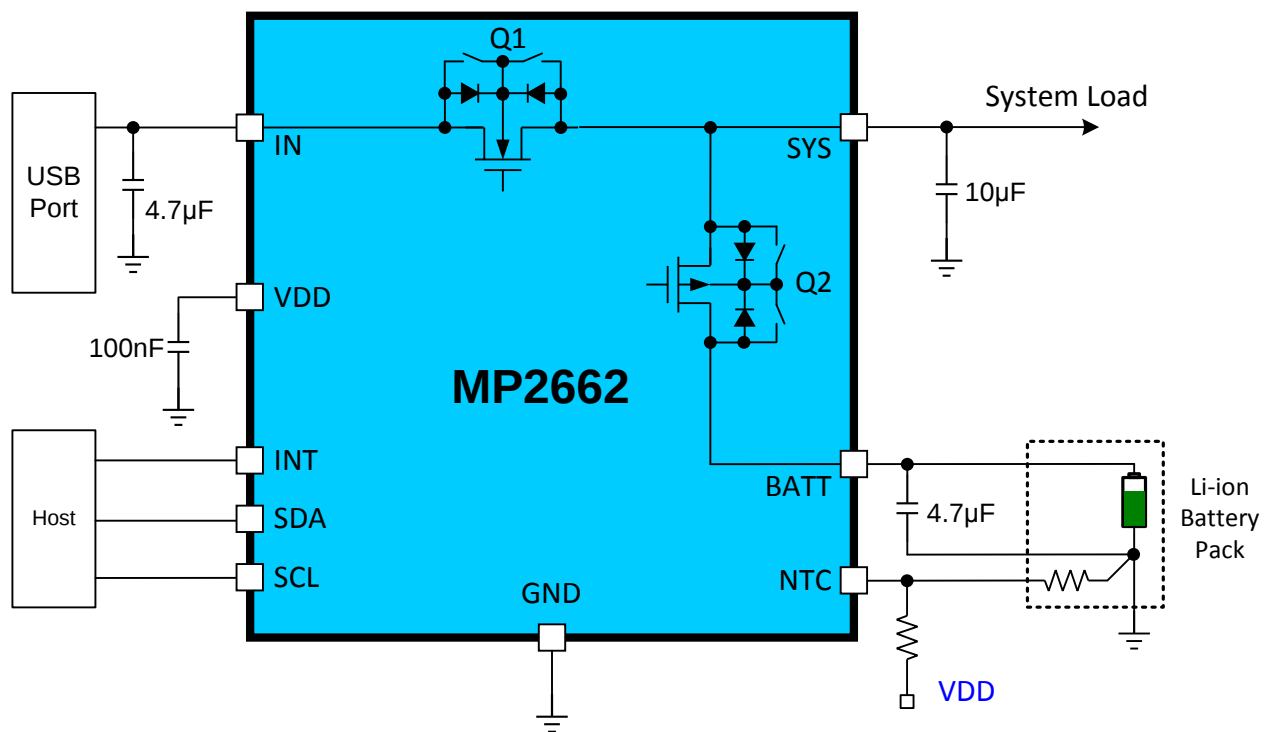

## ORDERING INFORMATION

| Part Number*    | Package                 | Top Marking |
|-----------------|-------------------------|-------------|
| MP2662GC-xxxx** | WLCSP-9 (1.75mmx1.75mm) | See Below   |
| EVKT-MP2662     | Evaluation Kit          |             |

\*For Tape & Reel, add suffix -Z (e.g. MP2662GC-xxxx-Z).

\*\*“xxxx” is the register setting option. The factory default is “0000.” This content can be viewed in the I<sup>2</sup>C register map. Please contact an MPS FAE to obtain an “xxxx” value.

## TOP MARKING

**JAY**

**LLL**

JA: Product code of MP2662GC

Y: Year code


LLL: Lot number

## EVALUATION KIT EVKT-MP2662

EVKT-MP2662 kit contents: (Items below can be ordered separately)


| # | Part Number        | Item                                                                   | Quantity |
|---|--------------------|------------------------------------------------------------------------|----------|
| 1 | EV2662-C-01A       | MP2662 evaluation board                                                | 1        |
| 2 | EVKT-USBI2C-02-Bag | Include one USB to I2C USB dongle, one USB cable, and one ribbon cable | 1        |
| 3 | Online resources   | Include datasheet, user guide, product brief, and GUI                  | 1        |

Order direct from [MonolithicPower.com](http://MonolithicPower.com) or our distributors.

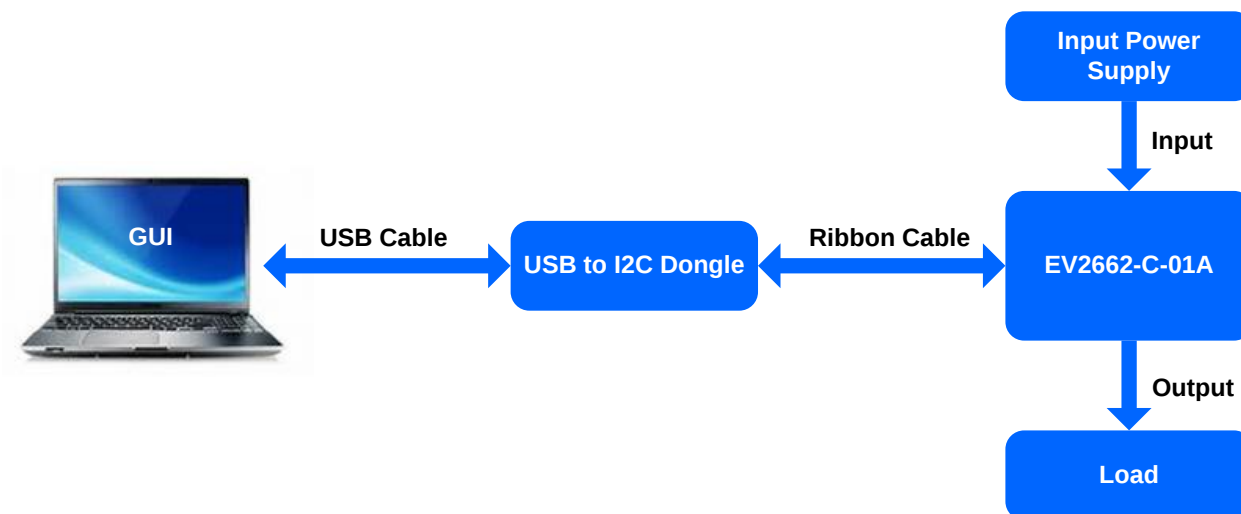

EVKT-MP2662 Evaluation Kit Set-Up

## PACKAGE REFERENCE

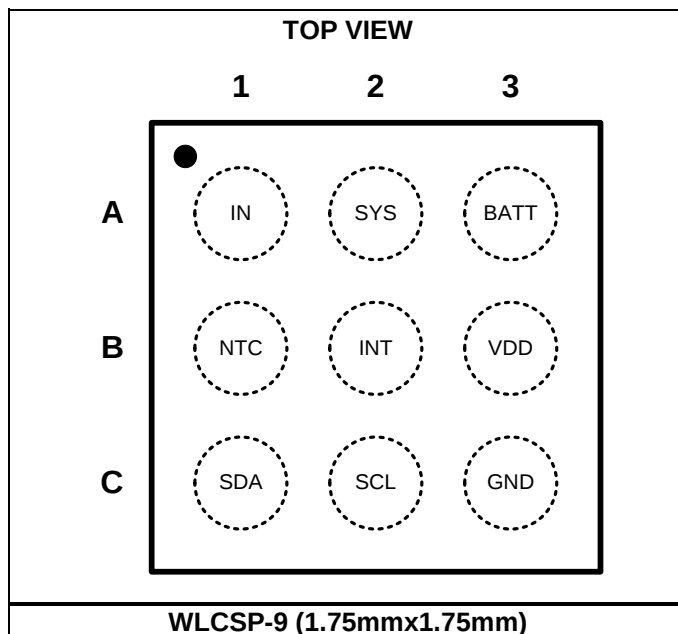

## PIN FUNCTIONS

| Package Pin # | Name | I/O   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A1            | IN   | Power | <b>Input power pin.</b> Place a ceramic capacitor from IN to GND as close to the IC as possible.                                                                                                                                                                                                                                                                                                                                                            |
| A2            | SYS  | Power | <b>System power supply.</b> Place a ceramic capacitor from SYS to GND as close to the IC as possible.                                                                                                                                                                                                                                                                                                                                                       |
| A3            | BATT | Power | <b>Battery pin.</b> Place a ceramic capacitor from BATT to GND as close to the IC as possible.                                                                                                                                                                                                                                                                                                                                                              |
| B1            | NTC  | I     | <b>Temperature sense input.</b> Connect a negative temperature coefficient thermistor to NTC. Program the hot and cold temperature window with a resistor divider from VDD to NTC to GND. Charging is suspended when NTC is out of the range. Pull NTC to VDD if NTC function is not used.                                                                                                                                                                  |
| B2            | INT  | O     | <b>Interrupt output.</b> INT can send a charging status and fault interrupt signal to the host. INT is also used to disconnect the system from the battery. Pull INT from high to low for >t <sub>RST_DGL</sub> (16s default). The battery FET turns off and turns on again automatically after >t <sub>RST_DUR</sub> (4s default) regardless of the INT state. Both t <sub>RST_DGL</sub> and t <sub>RST_DUR</sub> can be programmed via the I2C interface. |
| B3            | VDD  | I     | <b>Internal control power supply pin.</b> Connect a 100nF ceramic capacitor from VDD to GND. No external load is allowed.                                                                                                                                                                                                                                                                                                                                   |
| C1            | SDA  | I/O   | <b>I<sup>2</sup>C interface data.</b> Connect SDA to the logic rail through a 10kΩ resistor.                                                                                                                                                                                                                                                                                                                                                                |
| C2            | SCL  | I/O   | <b>I<sup>2</sup>C interface clock.</b> Connect SCL to the logic rail through a 10kΩ resistor.                                                                                                                                                                                                                                                                                                                                                               |
| C3            | GND  | Power | <b>Ground.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## ABSOLUTE MAXIMUM RATINGS <sup>(1)</sup>

|                                                                      |                                 |
|----------------------------------------------------------------------|---------------------------------|
| IN .....                                                             | -0.3V to +21V                   |
| SYS .....                                                            | -0.3V to +5.3V (5.5V for 500μs) |
| All other pins to GND .....                                          | -0.3V to +6V                    |
| Continuous power dissipation (T <sub>A</sub> = +25°C) <sup>(2)</sup> | 0.88W                           |
| Junction temperature .....                                           | 150°C                           |
| Lead temperature (solder) .....                                      | 260°C                           |
| Storage temperature .....                                            | -65°C to +150°C                 |

## Recommended Operating Conditions <sup>(3)</sup>

|                                                |                           |
|------------------------------------------------|---------------------------|
| Supply voltage (V <sub>IN</sub> ) ..           | 4.35V to 5.5V (USB input) |
| I <sub>IN</sub> .....                          | Up to 500mA               |
| I <sub>DSCHG</sub> .....                       | Up to 3.2A <sup>(5)</sup> |
| I <sub>CHG</sub> .....                         | Up to 456mA               |
| V <sub>BATT_REG</sub> .....                    | Up to 4.545V              |
| Operating junction temp. (T <sub>J</sub> ) ... | -40°C to +125°C           |

## Thermal Resistance <sup>(4)</sup>

|                             | θ <sub>JA</sub> | θ <sub>JC</sub> |
|-----------------------------|-----------------|-----------------|
| WLCSP-9 (1.75mmx1.75mm) ... | 114 ..          | 12.. °C/W       |

### NOTES:

- 1) Exceeding these ratings may damage the device.
- 2) The maximum allowable power dissipation is a function of the maximum junction temperature T<sub>J</sub> (MAX), the junction-to-ambient thermal resistance θ<sub>JA</sub>, and the ambient temperature T<sub>A</sub>. The maximum allowable continuous power dissipation at any ambient temperature is calculated by P<sub>D</sub> (MAX) = (T<sub>J</sub> (MAX)-T<sub>A</sub>)/θ<sub>JA</sub>. Exceeding the maximum allowable power dissipation produces an excessive die temperature, causing the regulator to go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
- 3) The device is not guaranteed to function outside of its operating conditions.
- 4) Measured on JESD51-7, 4-layer PCB.
- 5) Guaranteed by design.

## ELECTRICAL CHARACTERISTICS

V<sub>IN</sub> = 5.0V, V<sub>BATT</sub> = 3.5V, T<sub>A</sub> = +25°C, unless otherwise noted.

| Parameter                                               | Symbol                   | Condition                                                                                                               | Min  | Typ  | Max  | Units |
|---------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------|------|------|------|-------|
| Input Source and Battery Protection                     |                          |                                                                                                                         |      |      |      |       |
| Input under-voltage lockout threshold                   | V <sub>IN_UVLO</sub>     | Input falling                                                                                                           | 3.63 | 3.73 | 3.83 | V     |
| Input under-voltage lockout threshold hysteresis        |                          | Input rising                                                                                                            |      | 170  |      | mV    |
| Input over-voltage protection threshold                 | V <sub>IN_OVP</sub>      | Input rising threshold                                                                                                  | 5.85 | 6    | 6.15 | V     |
| Input over-voltage protection threshold hysteresis      |                          |                                                                                                                         |      | 350  |      | mV    |
| Input vs. battery voltage headroom threshold            | V <sub>HDRM</sub>        | Input rising vs. battery                                                                                                | 80   | 130  | 170  | mV    |
| Input vs. battery voltage headroom threshold hysteresis |                          |                                                                                                                         |      | 90   |      | mV    |
| BATT input voltage <sup>(5)</sup>                       | V <sub>BATT</sub>        |                                                                                                                         |      |      | 4.5  | V     |
| Battery under-voltage lockout threshold                 | V <sub>BATT_UVLO</sub>   | BATT voltage falling, REG01[2:0] = 000                                                                                  | 2.3  | 2.4  | 2.5  | V     |
|                                                         |                          | BATT voltage falling, REG01[2:0] = 100                                                                                  | 2.66 | 2.76 | 2.86 |       |
|                                                         |                          | BATT voltage falling, REG01[2:0] = 111                                                                                  | 2.93 | 3.03 | 3.13 |       |
| BATT under-voltage threshold hysteresis                 |                          | V <sub>BATT_UVLO</sub> = 2.76V                                                                                          |      | 190  |      | mV    |
| Battery over-voltage protection threshold               | V <sub>BATT_OVP</sub>    | Rising, higher than V <sub>BATT_REG</sub>                                                                               |      | 130  |      | mV    |
| Battery over-voltage protection hysteresis              |                          |                                                                                                                         |      | 60   |      |       |
| Power Path Management                                   |                          |                                                                                                                         |      |      |      |       |
| Regulated system output voltage accuracy                | V <sub>SYS_REG_ACC</sub> | V <sub>IN</sub> = 5.5V, R <sub>SYS</sub> = 100Ω, I <sub>CHG</sub> = 0A, REG07[3:0] = 0000, V <sub>SYS_REG</sub> = 4.2V  | -2   |      | 2    | %     |
|                                                         |                          | V <sub>IN</sub> = 5.5V, R <sub>SYS</sub> = 100Ω, I <sub>CHG</sub> = 0A, REG07[3:0] = 1001, V <sub>SYS_REG</sub> = 4.65V | -2   |      | 2    | %     |
|                                                         |                          | V <sub>IN</sub> = 5.5V, R <sub>SYS</sub> = 100Ω, I <sub>CHG</sub> = 0A, REG07[3:0] = 1111, V <sub>SYS_REG</sub> = 4.95V | -2   |      | 2    | %     |
| Input current limit                                     | I <sub>IN_LIM</sub>      | REG00[3:0] = 0000, I <sub>IN_LIM</sub> = 50mA                                                                           | 30   | 40   | 50   | mA    |
|                                                         |                          | REG00[3:0] = 0011, I <sub>IN_LIM</sub> = 140mA                                                                          | 112  | 126  | 140  |       |
|                                                         |                          | REG00[3:0] = 1001, I <sub>IN_LIM</sub> = 320mA                                                                          | 275  | 300  | 325  |       |
|                                                         |                          | REG00[3:0] = 1111, I <sub>IN_LIM</sub> = 500mA                                                                          | 440  | 470  | 500  |       |
| Input minimum voltage regulation                        | V <sub>IN_MIN</sub>      | REG00[7:4] = 0000, V <sub>IN_MIN</sub> = 3.88V                                                                          | 3.68 | 3.88 | 4.18 | V     |
|                                                         |                          | REG00[7:4] = 1001, V <sub>IN_MIN</sub> = 4.60V                                                                          | 4.40 | 4.60 | 4.75 |       |
|                                                         |                          | REG00[7:4] = 1111, V <sub>IN_MIN</sub> = 5.08V                                                                          | 4.88 | 5.08 | 5.35 |       |

# ELECTRICAL CHARACTERISTICS (continued)

V<sub>IN</sub> = 5.0V, V<sub>BATT</sub> = 3.5V, T<sub>A</sub> = +25°C, unless otherwise noted.

| Parameter                                            | Symbol                | Condition                                                                                                                                                                            | Min | Typ                 | Max | Units |
|------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|---------------------|-----|-------|
| IN to SYS switch on resistance                       | R <sub>ON_Q1</sub>    | V <sub>IN</sub> = 4.5V, I <sub>SYS</sub> = 100mA                                                                                                                                     |     | 290                 |     | mΩ    |
| Input quiescent current                              | I <sub>IN_Q</sub>     | V <sub>IN</sub> = 5.5V, EN_HIZ = 0, CEB = 0, charge enable, I <sub>CHG</sub> = 0A, I <sub>SYS</sub> = 0A                                                                             |     | 1.9                 |     | mA    |
|                                                      |                       | V <sub>IN</sub> = 5.5V, EN_HIZ = 0, CEB = 1, charge disabled                                                                                                                         |     | 1.7                 |     |       |
| Battery quiescent current                            | I <sub>BATT_Q</sub>   | V <sub>IN</sub> = 5V, CEB = 0, I <sub>SYS</sub> = 0A, charge done, V <sub>BATT</sub> = 4.35V                                                                                         |     | 43                  |     | μA    |
|                                                      |                       | V <sub>IN</sub> = GND, CEB = 1, I <sub>SYS</sub> = 0A, V <sub>BATT</sub> = 4.35V, disable PCB_OTP function, not including the current from the external NTC resistor                 |     | 6.5                 | 7.5 |       |
|                                                      |                       | V <sub>IN</sub> = GND, CEB = 1, I <sub>SYS</sub> = 0A, V <sub>BATT</sub> = 4.35V, enable PCB_OTP function, not including the current from the external NTC resistor                  |     | 14.5                | 21  |       |
|                                                      |                       | V <sub>IN</sub> = GND, CEB = 1, I <sub>SYS</sub> = 0A, V <sub>BATT</sub> = 4.35V, enable PCB_OTP function, not including the current from the external NTC resistor, enable watchdog |     | 22.5                |     |       |
|                                                      |                       | V <sub>BATT</sub> = 4.5V, V <sub>IN</sub> = V <sub>SYS</sub> = GND, FET_DIS = 1, shipping mode                                                                                       |     |                     | 350 | nA    |
| B-FET on resistance                                  | R <sub>ON_Q2</sub>    | V <sub>IN</sub> < 2V, V <sub>BATT</sub> = 3.5V, I <sub>SYS</sub> = 100mA                                                                                                             |     | 100                 |     | mΩ    |
| B-FET discharge current limit                        | I <sub>DSCHG</sub>    | REG03[7:4] = 0001, I <sub>DSCHG</sub> = 400mA                                                                                                                                        | 370 | 490                 | 585 | mA    |
|                                                      |                       | REG03[7:4] = 1001, I <sub>DSCHG</sub> = 2000mA                                                                                                                                       |     | 2400 <sup>(5)</sup> |     |       |
| SYS reverse to BATT switch leakage                   |                       | V <sub>SYS</sub> = 4.65V, V <sub>IN</sub> = 5V, V <sub>BATT</sub> = GND, EN_HIZ = 1, CEB = 1, charge disabled                                                                        |     |                     | 100 | nA    |
| Ideal diode forward voltage in supplement mode       | V <sub>FWD</sub>      | 50mA discharge current                                                                                                                                                               |     | 30                  |     | mV    |
| <b>Shipping Mode</b>                                 |                       |                                                                                                                                                                                      |     |                     |     |       |
| Enter shipping mode deglitch time                    | t <sub>SMEN_DGL</sub> | REG06[5] is set from 0 to 1, REG09[7:6] = 00                                                                                                                                         |     | 1                   |     | s     |
| Exit shipping mode by INT or V <sub>IN</sub> plug-in | t <sub>SMEX_DGL</sub> | INT is pulled low                                                                                                                                                                    |     | 2                   |     | s     |
| <b>Auto-Reset Mode</b>                               |                       |                                                                                                                                                                                      |     |                     |     |       |
| Reset by INT                                         | t <sub>RST_DGL</sub>  | REG01H[7:6] = 00                                                                                                                                                                     |     | 8                   |     | s     |
|                                                      |                       | REG01H[7:6] = 10                                                                                                                                                                     |     | 16                  |     |       |
| BFET off lasting time                                | t <sub>RST_DUR</sub>  | REG01H[5] = 0                                                                                                                                                                        |     | 2                   |     | s     |
|                                                      |                       | REG01H[5] = 1                                                                                                                                                                        |     | 4                   |     |       |

# ELECTRICAL CHARACTERISTICS (continued)

V<sub>IN</sub> = 5.0V, V<sub>BATT</sub> = 3.5V, T<sub>A</sub> = +25°C, unless otherwise noted.

| Parameter                                      | Symbol                | Condition                                                            | Min   | Typ  | Max   | Units |
|------------------------------------------------|-----------------------|----------------------------------------------------------------------|-------|------|-------|-------|
| <b>Battery Charger</b>                         |                       |                                                                      |       |      |       |       |
| Battery charge voltage regulation              | V <sub>BATT_REG</sub> | REG04[7:2] = 000000, V <sub>BATT_REG</sub> = 3.6V                    | 3.582 | 3.6  | 3.618 | V     |
|                                                |                       | REG04[7:2] = 101000, V <sub>BATT_REG</sub> = 4.2V                    | 4.179 | 4.2  | 4.221 |       |
|                                                |                       | REG04[7:2] = 110010, V <sub>BATT_REG</sub> = 4.38V                   | 4.358 | 4.38 | 4.4   |       |
|                                                |                       | REG04[7:2] = 111110, V <sub>BATT_REG</sub> = 4.53V                   | 4.522 | 4.53 | 4.568 |       |
| Fast charge current                            | I <sub>CC</sub>       | REG02[5:0] = 000000, I <sub>CC</sub> = 8mA                           | 6.9   | 8    | 8.5   | mA    |
|                                                |                       | REG02[5:0] = 001011, I <sub>CC</sub> = 96mA                          | 89    | 96   | 103   |       |
|                                                |                       | REG02[5:0] = 100000, I <sub>CC</sub> = 264mA                         | 251   | 264  | 285   |       |
|                                                |                       | REG02[5:0] = 111000, I <sub>CC</sub> = 456mA                         | 420   | 456  | 484   |       |
| Junction temperature regulation <sup>(5)</sup> | T <sub>J_REG</sub>    | Thermal_Limit = 120°C                                                |       | 120  |       | °C    |
| Pre-charge current                             | I <sub>PRE</sub>      | I <sub>PRE</sub> = I <sub>TERM</sub>                                 | 1     |      | 31    | mA    |
| Charge termination current threshold           | I <sub>TERM</sub>     | REG03[3:0] = 0000, I <sub>TERM</sub> = 1mA                           | 0.8   | 0.93 | 1.05  | mA    |
|                                                |                       | REG03[3:0] = 0001, I <sub>TERM</sub> = 3mA                           | 2.7   | 3    | 3.3   |       |
|                                                |                       | REG03[3:0] = 0101, I <sub>TERM</sub> = 11mA                          | 10    | 11   | 12    |       |
|                                                |                       | REG03[3:0] = 0101, I <sub>TERM</sub> = 31mA                          | 28    | 31   | 34    |       |
| Termination deglitch time                      | t <sub>TERM_DGL</sub> |                                                                      |       | 3.2  |       | s     |
| Pre-charge to fast charge threshold            | V <sub>BATT_PRE</sub> | V <sub>BATT</sub> rising, REG04[1] = 1, V <sub>BATT_PRE</sub> = 3.0V | 2.9   | 3.0  | 3.1   | V     |
| Pre-charge to fast charge threshold hysteresis |                       |                                                                      |       | 90   |       | mV    |
| Battery auto-recharge voltage threshold        | V <sub>RECH</sub>     | Below V <sub>BATT_REG</sub> , REG04[0] = 0                           | 60    | 100  | 140   | mV    |
|                                                |                       | Below V <sub>BATT_REG</sub> , REG04[0] = 1                           | 160   | 200  | 240   |       |
| Battery auto-recharge deglitch time            | t <sub>RECH_DGL</sub> |                                                                      |       | 200  |       | ms    |
| <b>Thermal Protection</b>                      |                       |                                                                      |       |      |       |       |
| Thermal shutdown threshold <sup>(5)</sup>      | T <sub>J_SHDN</sub>   |                                                                      |       | 150  |       | °C    |
| Thermal shutdown hysteresis <sup>(5)</sup>     |                       |                                                                      |       | 20   |       | °C    |
| NTC output current                             | I <sub>NTC</sub>      | CEB = 0, NTC = 3V                                                    | -1    | 0    | 1     | μA    |
| NTC cold temp rising threshold                 | V <sub>COLD</sub>     | As a percentage of V <sub>DD</sub>                                   | 63    | 65   | 67    | %     |
| NTC cold temp rising threshold hysteresis      |                       |                                                                      |       | 60   |       | mV    |

# ELECTRICAL CHARACTERISTICS (continued)

V<sub>IN</sub> = 5V, T<sub>A</sub> = 25°C, unless otherwise noted.

| Parameter                                             | Symbol               | Condition                                | Min | Typ | Max | Units |
|-------------------------------------------------------|----------------------|------------------------------------------|-----|-----|-----|-------|
| NTC hot temp falling threshold                        | V <sub>HOT</sub>     | As a percentage of V <sub>DD</sub>       | 31  | 33  | 35  | %     |
| NTC hot temp falling threshold hysteresis             |                      |                                          |     | 70  |     | mV    |
| NTC hot temp falling threshold for PCB_OTP            | V <sub>HOT_PCB</sub> | As a percentage of V <sub>DD</sub>       | 30  | 32  | 35  | %     |
| NTC hot temp falling threshold hysteresis for PCB_OTP |                      |                                          |     | 90  |     | mV    |
| <b>Logic I/O Pin Characteristics</b>                  |                      |                                          |     |     |     |       |
| Low logic voltage threshold                           | V <sub>L</sub>       |                                          |     |     | 0.4 | V     |
| High logic voltage threshold                          | V <sub>H</sub>       |                                          | 1.3 |     |     | V     |
| <b>I<sup>2</sup>C Interface (SDA, SCL)</b>            |                      |                                          |     |     |     |       |
| Input high threshold level                            | V <sub>IH</sub>      | V <sub>PULL_UP</sub> = 1.8V, SDA and SCL | 1.3 |     |     | V     |
| Input low threshold level                             | V <sub>IL</sub>      | V <sub>PULL_UP</sub> = 1.8V, SDA and SCL |     |     | 0.4 | V     |
| Output low threshold level                            | V <sub>OL</sub>      | I <sub>SINK</sub> = 5mA                  |     |     | 0.4 | V     |
| I <sup>2</sup> C clock frequency                      | F <sub>SCL</sub>     |                                          |     |     | 400 | kHz   |
| <b>Clock Frequency and Watchdog Timer</b>             |                      |                                          |     |     |     |       |
| Clock frequency                                       | F <sub>CLK</sub>     |                                          |     | 131 |     | kHz   |
| Watchdog timer                                        | t <sub>WDT</sub>     | REG05[6:5] = 11                          |     | 160 |     | s     |

## NOTE:


- 5) Guaranteed by design

# TYPICAL PERFORMANCE CHARACTERISTICS

V<sub>IN</sub> = 5V, T<sub>A</sub> = 25°C, I<sub>IN\_LIM</sub> = 500mA, I<sub>CC</sub> = 128mA, V<sub>IN\_MIN</sub> = 4.6V, unless otherwise noted.


**Battery Regulation Voltage vs. Temperature**

V<sub>BATT\_REG</sub> = 4.2V

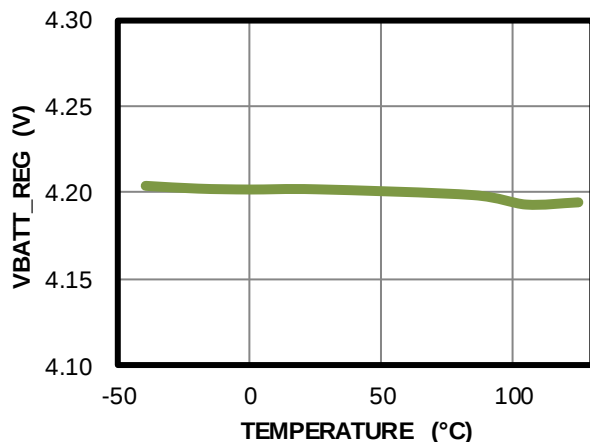


**System Regulation Voltage vs. Temperature**

V<sub>SYST\_REG</sub> = 4.65V

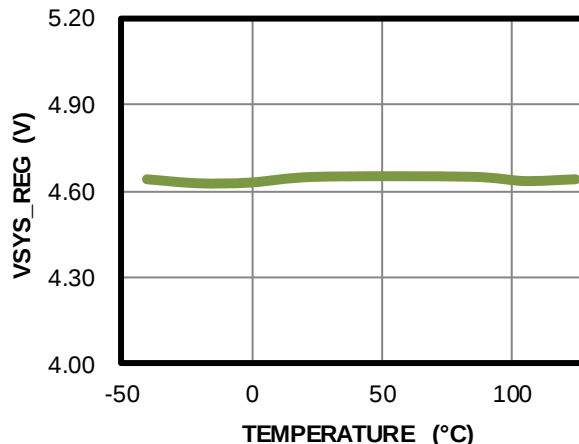


**Battery Current under Shipping Mode vs. Temperature**

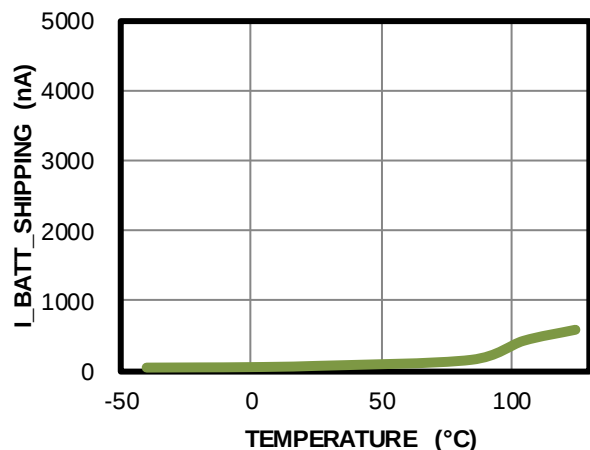


**Pre-Charge Current vs. Temperature**

I<sub>PRE</sub> = 3mA

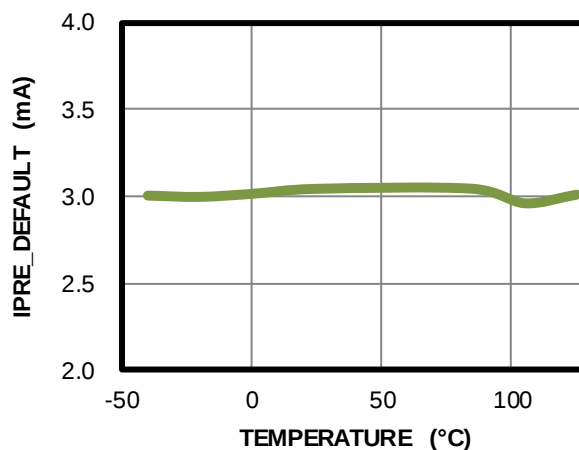


**Fast Charge Current vs. Temperature**

I<sub>CC</sub> = 128mA

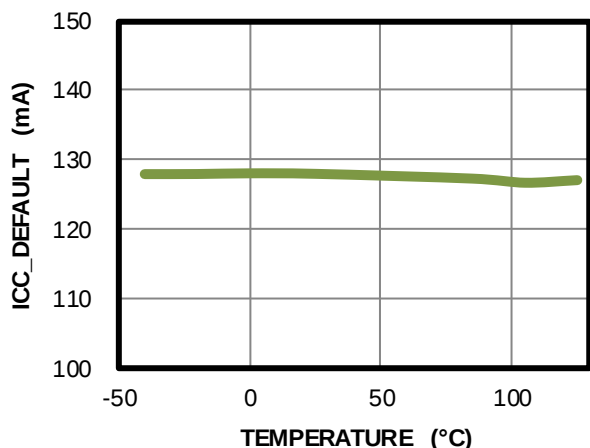

**Battery Termination Current vs. Temperature**

I<sub>TERM</sub> = 3mA

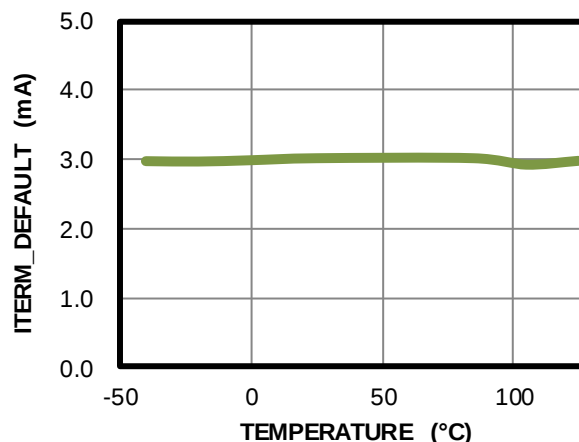


# TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

V<sub>IN</sub> = 5V, T<sub>A</sub> = 25°C, I<sub>IN\_LIM</sub> = 500mA, I<sub>CC</sub> = 128mA, V<sub>IN\_MIN</sub> = 4.6V, unless otherwise noted.


**Battery OVP Voltage vs. Temperature**

V<sub>BATT\_REG</sub> = 4.2V

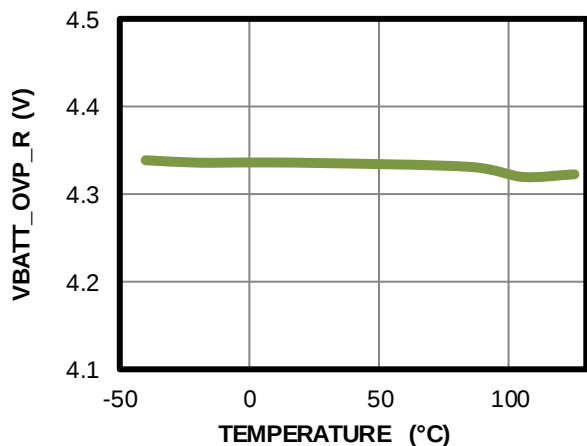


**Input Current Limit vs. Temperature**

I<sub>IN\_LIM</sub> = 500mA

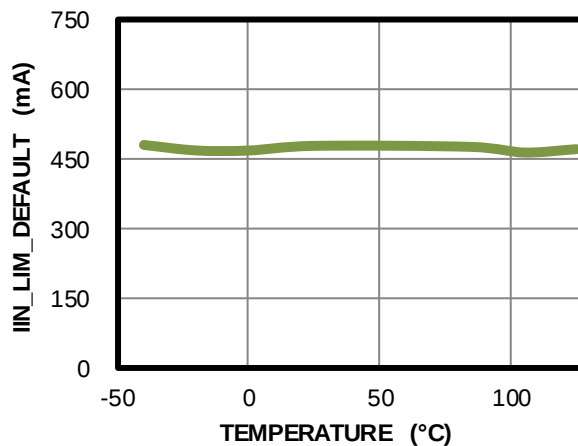

**Input Minimum Voltage vs. Temperature**

V<sub>IN\_MIN</sub> = 4.60V

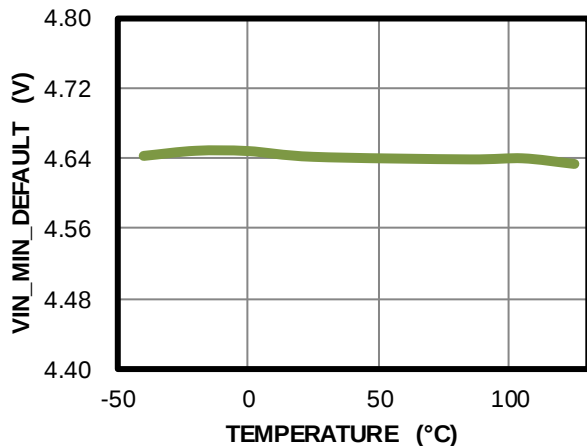


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 5V$ ,  $T_A = 25^\circ C$ ,  $I_{IN\_LIM} = 500mA$ ,  $I_{CC} = 128mA$ ,  $V_{IN\_MIN} = 4.6V$ , unless otherwise noted.


## Battery Charge Curve

$I_{SYS} = 0A$

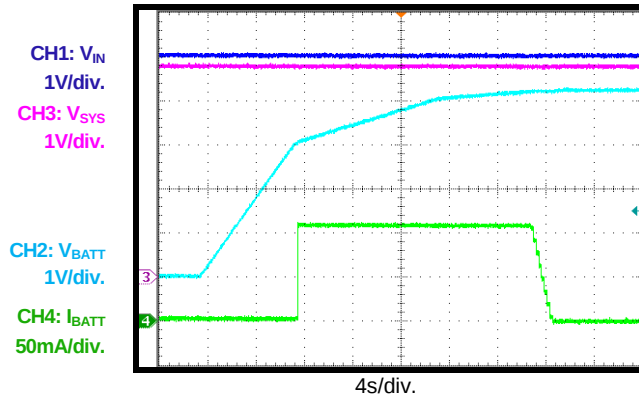


## Auto-Recharge

$I_{SYS} = 0A$

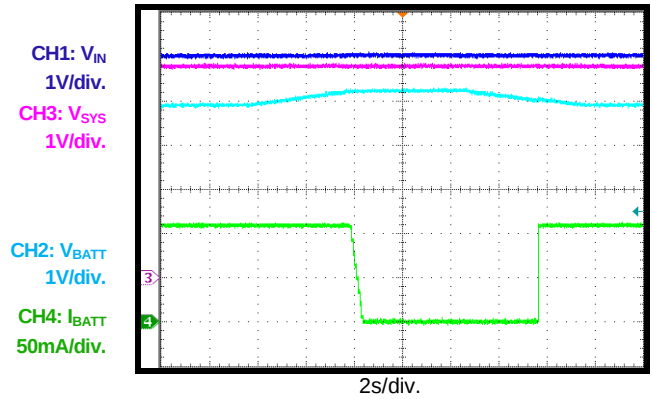


## CC Charge Steady State

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

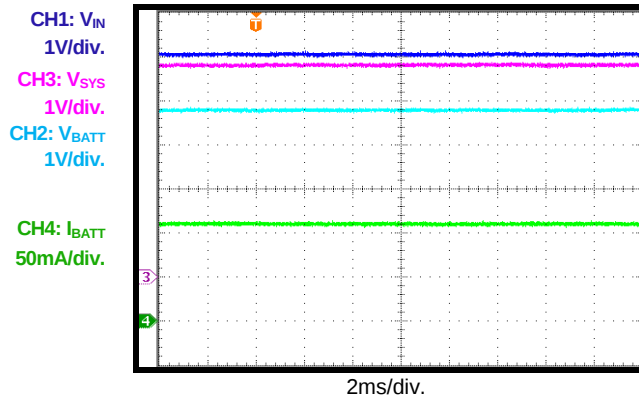


## Input Current Limit-Based PPM

$V_{BATT} = 3.7V$

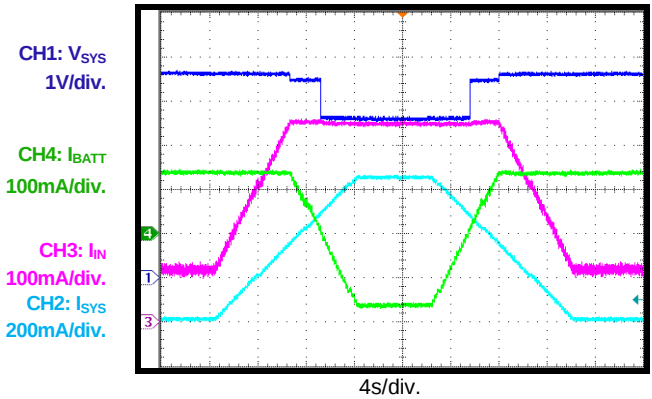


## Input Voltage Regulation-Based PPM

$V_{IN} = 5V/200mA$ ,  $V_{BATT} = 3.7V$

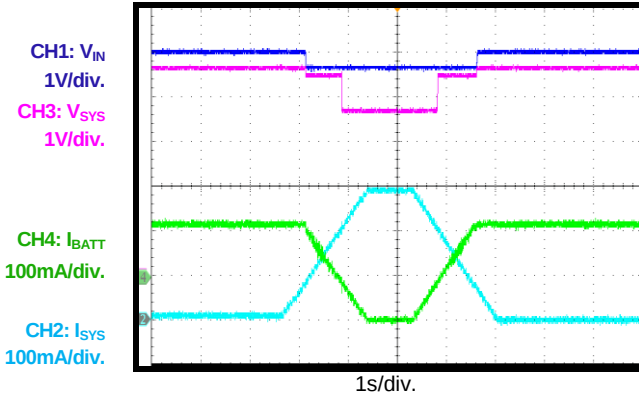

## SYS Load Transient

$V_{IN} = 5V$ ,  $V_{BATT} = 3.7V$ ,  $I_{CC} = 456mA$ ,  
 $I_{SYS} = 0 - 1A$

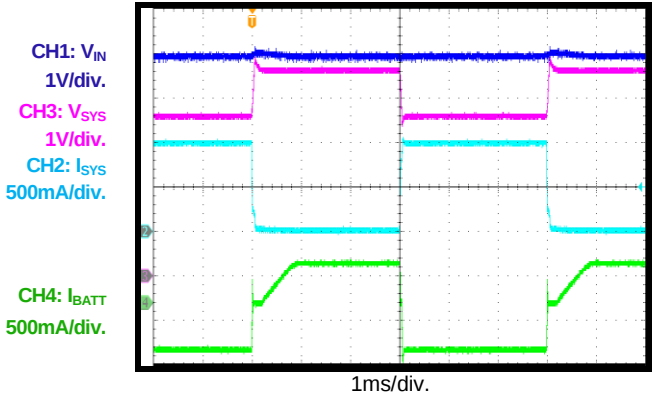


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 5V$ ,  $T_A = 25^{\circ}C$ ,  $I_{IN\_LIM} = 500mA$ ,  $I_{CC} = 128mA$ ,  $V_{IN\_MIN} = 4.6V$ , unless otherwise noted.


## Power On

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

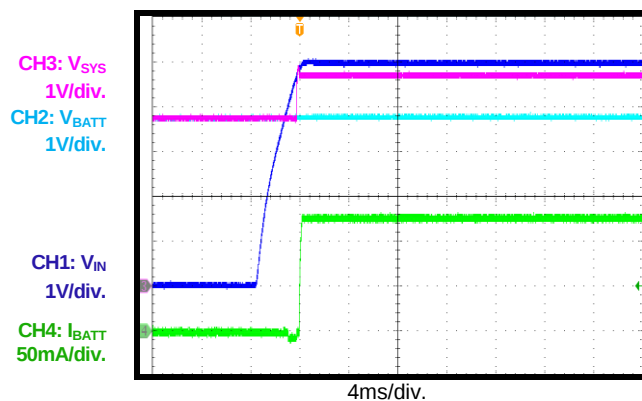


## Power Off

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

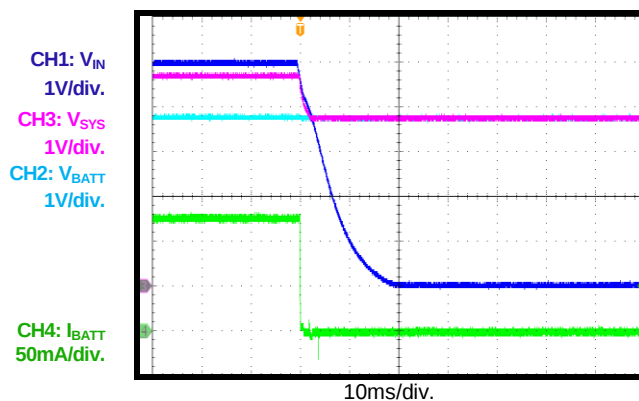


## Charge Enable

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

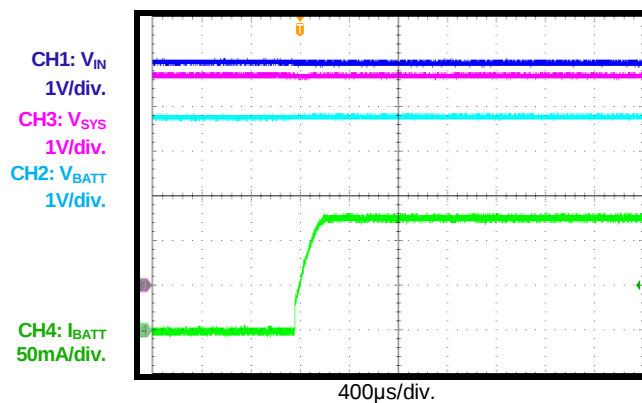


## Charge Disable

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

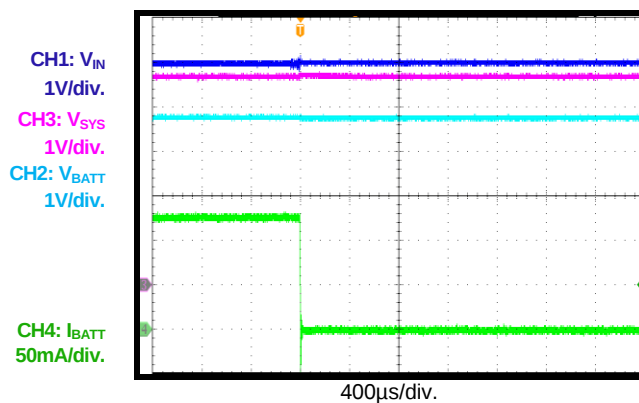


## BATT Insertion

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

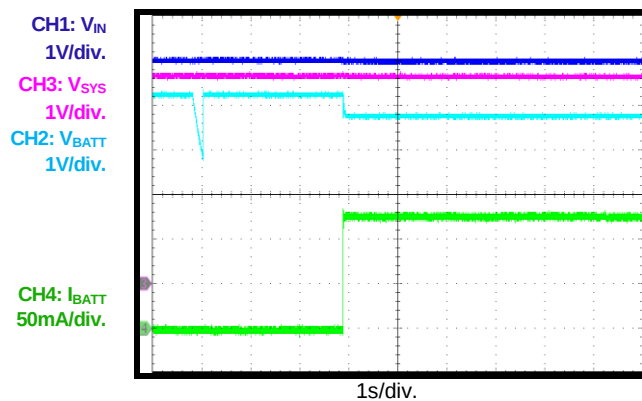

## BATT Removal

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

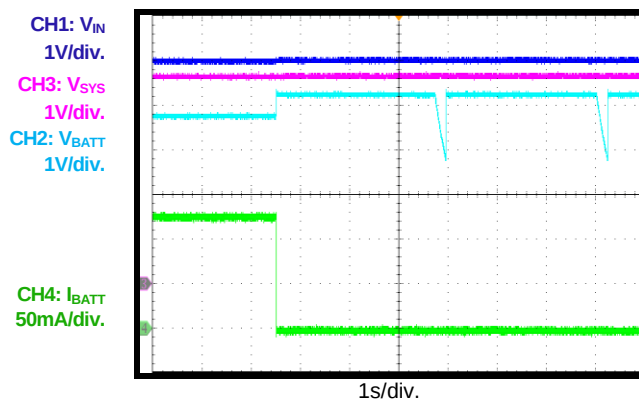


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 5V$ ,  $T_A = 25^{\circ}C$ ,  $I_{IN\_LIM} = 500mA$ ,  $I_{CC} = 128mA$ ,  $V_{IN\_MIN} = 4.6V$ , unless otherwise noted.


## NTC Rising

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$ , PCB\_OTP disable

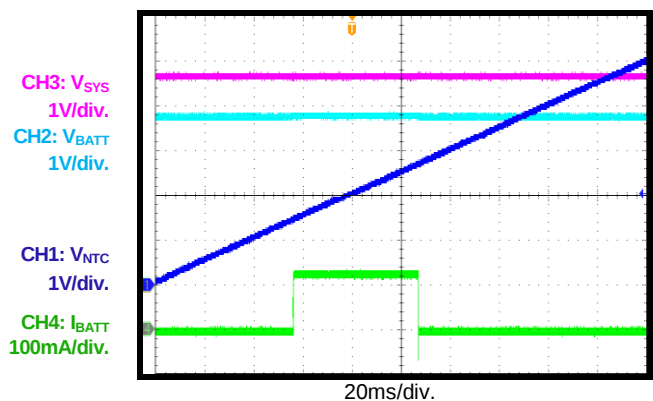


## NTC Falling

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$ , PCB\_OTP disable

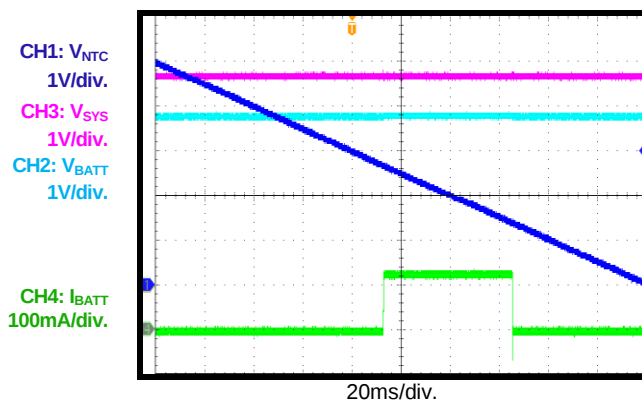


## PCB\_OTP @ Charge Mode

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

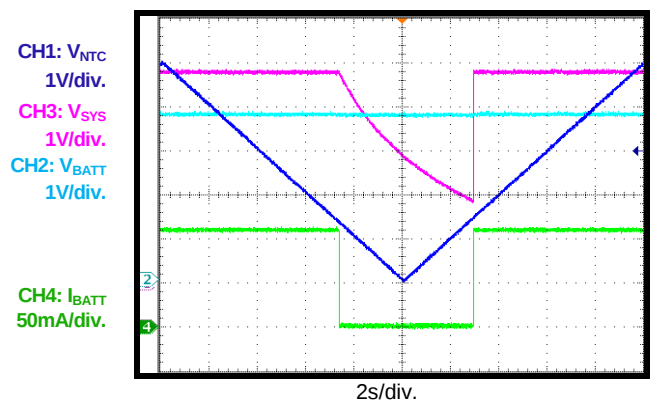


## PCB\_OTP @ Discharge Mode

$V_{IN} = 0V$ ,  $V_{BATT} = 3.7V$ ,  $I_{SYS} = 1A$

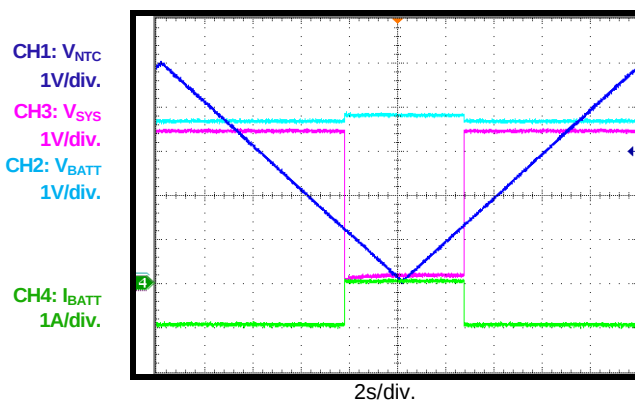

## $V_{IN}$ OVP Operation

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

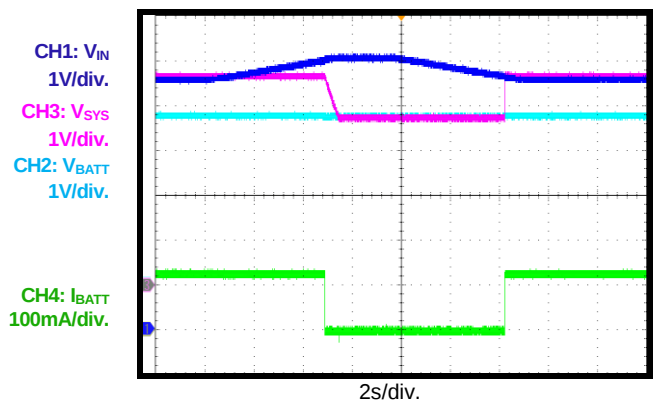

# BLOCK DIAGRAM

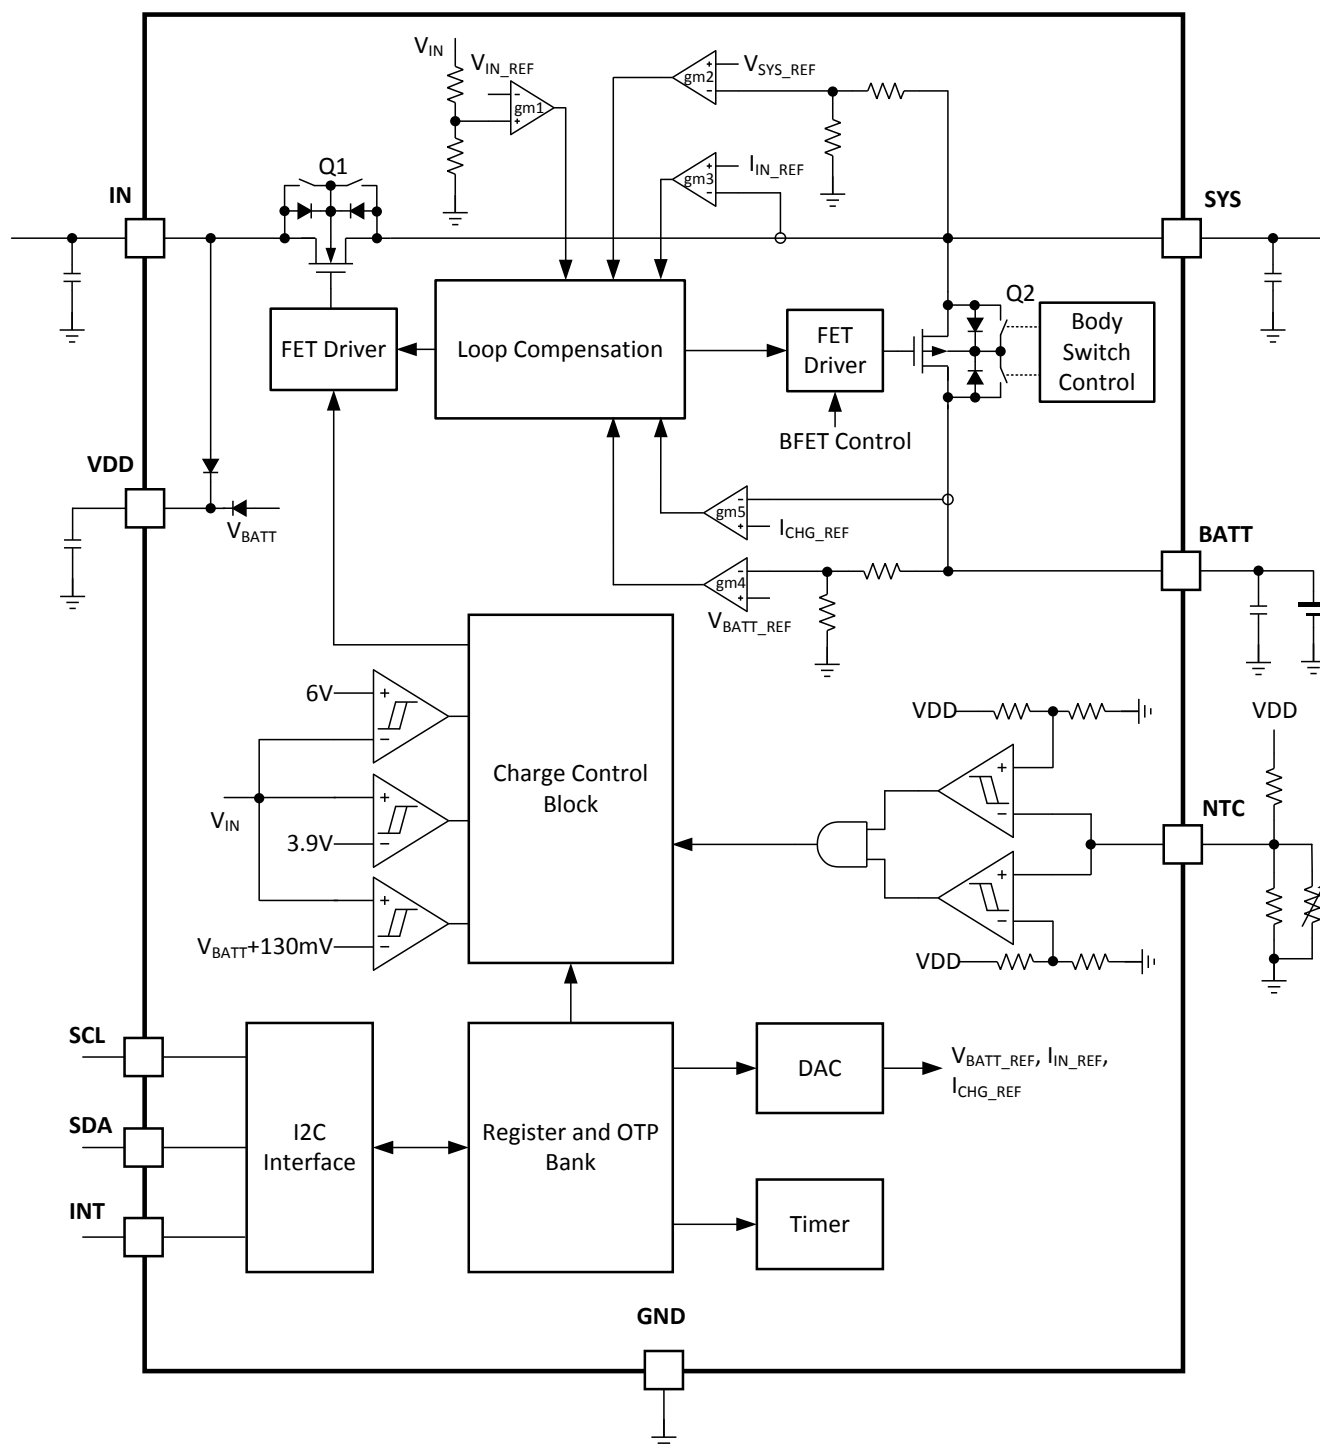


Figure 1: Functional Block Diagram

## OPERATION

The MP2662 is an I<sup>2</sup>C-controlled, single-cell, Li-ion or Li-polymer battery charger with a complete power path management function. The full-charge function includes constant-current pre-charge, constant-current fast charge (CC) and constant voltage (CV) regulation, charge termination, auto-recharge, and a built-in timer. The power path function allows the input source to power the system and charge the battery simultaneously. The system load requirement always has priority to the charge current. When the input power is limited due to an input current limit or input voltage limit, the IC reduces the charge current automatically until the battery supplements the system load.

The IC integrates a 290mΩ LDO FET between IN and SYS and a 100mΩ battery FET between SYS and BATT.

In charging mode, the on-chip 100mΩ battery FET works as a fully featured linear charger with pre-charge, fast charge, constant voltage charge, charge termination, auto-recharge, NTC monitoring, built-in timer control, and thermal protection. The charge current can be programmed via the I<sup>2</sup>C interface. The IC adjusts the charge current when the die temperature exceeds the thermal regulation threshold (120°C default).

In supplement mode, the 100mΩ battery FET is turned on to connect the battery to the system load when the input power is not sufficient enough to power the system load. When the input is removed, the 100mΩ battery FET is also fully turned on to allow the battery to power up the system.

The system load is satisfied in priority, and the remaining current is used to charge the smart power path management battery. The MP2662 reduces the charging current or uses power from the battery to satisfy the system load when its demand is over the input power capacity.

Figure 2 shows the power path management structure for the MP2662.

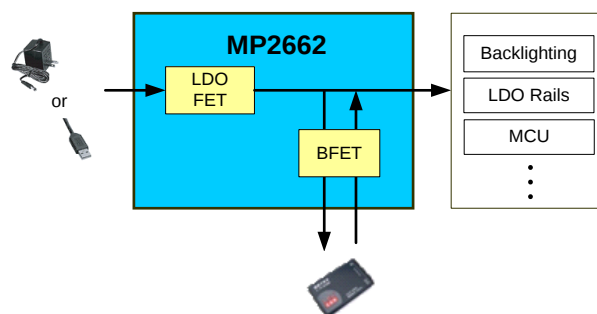


Figure 2: Power Path Management Structure

### Power Supply

The internal bias circuit of the IC is powered from the higher voltage of either IN or BATT. When IN or BATT rises above its respective under-voltage lockout (UVLO) threshold, the sleep comparator, battery depletion comparator, and battery FET driver are all active. The I<sup>2</sup>C interface is ready for communication, and all registers are reset to the default value. The host can access all of the registers.

### Input OVP and UVLO

The MP2662 has an input over-voltage protection (OVP) threshold and input UVLO threshold. Once the input voltage is out of its normal range, the LDO FET (Q1) is turned off immediately.

When the input voltage is identified as a good source, a 200μs immunity timer becomes active. If the input power is normal until the 200μs expires, the system starts up. Otherwise, Q1 remains off (see Figure 3).

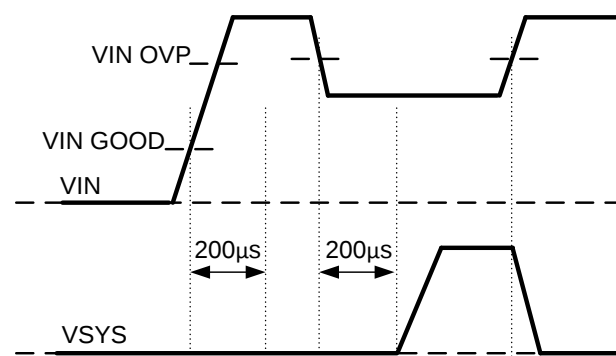


Figure 3: Input Power Detection Operation Profile

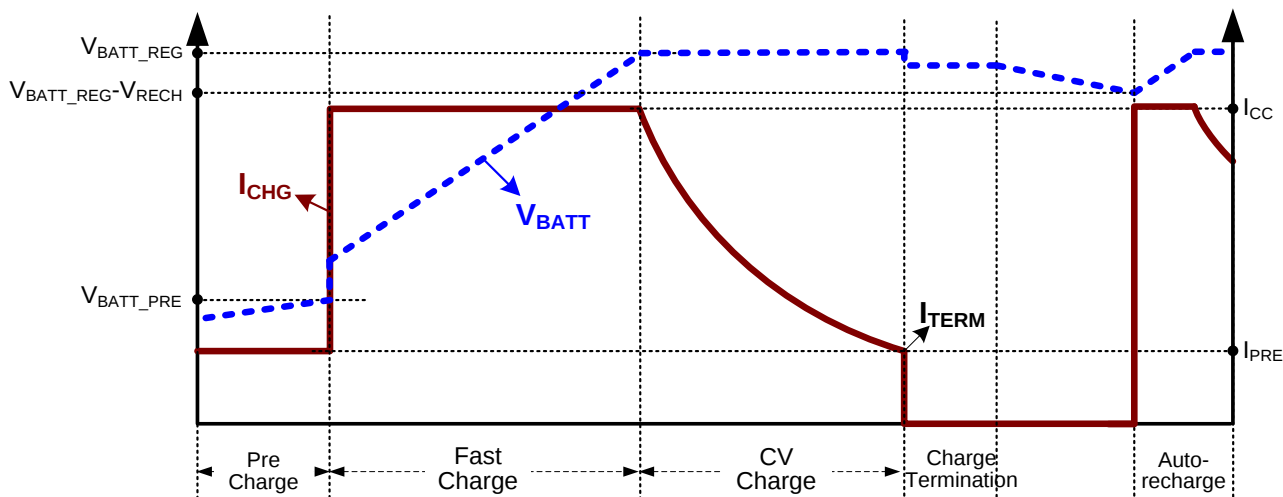


Figure 4: Battery Charge Profile

### Power Path Management

The MP2662 employs a pass-through power path structure with the battery FET (Q2) to decouple the system from the battery. This allows for separate control between the system and the battery. The system is given the priority to start up, even with a deeply discharged or missing battery. When the input power is available, even with a depleted battery, the system voltage is always regulated to  $V_{SYS\_REG}$  by the integrated LDO FET.

The direct power structure consists of a front-end LDO FET between IN and SYS and a battery FET between SYS and BATT. The LDO FET and battery FET can be controlled by the I<sup>2</sup>C.

Table 1: FET Control via I<sup>2</sup>C

| FET On/Off<br>Changed by<br>Control | Hi-Z Mode and Charge Control |              |
|-------------------------------------|------------------------------|--------------|
|                                     | Set EN_HIZ to 1              | Set CEB to 1 |
| LDO FET                             | OFF                          | X            |
| Battery FET<br>(charging)           | X                            | OFF          |
| Battery FET<br>(discharging)        | X                            | X            |

NOTE: x = Don't care.

For the system voltage control, when the input voltage is higher than  $V_{SYS\_REG}$ , the system voltage is regulated to  $V_{SYS\_REG}$ . When the input voltage is lower than  $V_{SYS\_REG}$ , the LDO FET is fully on with the input current limit.

$V_{SYS\_REG}$  can be programmed through REG07H bit[3:0].

### Battery Charge Profile

The MP2662 provides three main charging phases: pre-charge, fast-current charge, and constant-voltage charge (see Figure 4).

- Phase 1 (pre-charge):** The MP2662 can safely pre-charge the deeply depleted battery until the battery voltage reaches the pre-charge to fast-charge threshold ( $V_{BATT\_PRE}$ ). The pre-charge current is also programmed through REG03H bit[3:0]. If  $V_{BATT\_PRE}$  is not reached before the pre-charge timer (1hr) expires, the charge cycle stops, and a corresponding timeout fault signal is asserted.
- Phase 2 (fast charge):** When the battery voltage exceeds  $V_{BATT\_PRE}$ , the MP2662 enters a fast-charge phase. The fast-charge current can be programmed via REG02H bit[5:0].
- Phase 3 (constant-voltage charge):** When the battery voltage rises to the battery-full voltage ( $V_{BATT\_REG}$ ) set via REG04H bit[7:2], the charge mode changes from CC mode to CV mode, and the charge current starts decreasing.

Assuming that the termination function EN\_TERM is set via REG05H bit[4] = 1, the charge cycle is considered to be completed when the charge current ( $I_{CHG}$ ) reaches the termination current threshold ( $I_{TERM}$ ) and a 3.2s delay timer is initiated. During this 3.2s delay period,  $I_{CHG}$  is always smaller than  $I_{TERM} + I_{TERM\_HYS}$ .

The charge status is updated to charge done once the 3.2s delay timer expires.

The termination charge current threshold ( $I_{TERM}$ ) can be programmed via REG03H bit[3:0].

The charge current can also be terminated when the termination conditions are met if TERM\_TMR set via REG05H bit[0] = 0. Otherwise, the charge current continues to taper off.

If EN\_TERM = 0, the termination function is disabled and all of the above actions are invalid (see Table 2).

**Table 2: Termination Function Selection Table**

| EN_TERM | TERM_TMR | After $I_{BATT}$ Reaches $I_{TERM}$ in CV Mode |               |
|---------|----------|------------------------------------------------|---------------|
|         |          | Operation                                      | Charge Status |
| 0       | x        | Keep CV charge                                 | Charge        |
| 1       | 0        | Charge done                                    | Charge done   |
| 1       | 1        | Keep CV charge                                 | Charge        |

**NOTE:** x = Don't care.

During the entire charging process, the actual charge current may be less than the register setting due to other loop regulations, such as dynamic power management (DPM) regulation (input voltage, input current) or thermal regulation.

A new charge cycle starts when any of the following conditions are valid:

- The input power is recycled .
- Battery charging is enabled via the I<sup>2</sup>C.
- Auto-recharge kicks in.

Under the following conditions:

- No thermistor fault at NTC.
- No safety timer fault.

- No battery over-voltage event.
- BATT FET is not forced off.

### Automatic Recharge

When the battery is fully charged and charging is terminated, the battery may be discharged due to system consumption or self-discharge. When the battery voltage is discharged below the recharge threshold and  $V_{IN}$  is still in the operating range, the MP2662 begins another new charging cycle automatically without having to restart a charging cycle manually.

The auto-recharge function is valid only when EN\_TERM = 1 and TERM\_TMR = 0.

### Battery OVP

The MP2662 is designed with a built-in battery over-voltage limit (about 130mV higher than  $V_{BATT\_REG}$ ). When a battery over-voltage event occurs, the MP2662 suspends charging immediately and asserts a fault.

### Input Current- and Input Voltage-Based Power Management

To meet the input source's (typically USB) maximum current limit specification, the MP2662 uses an input current-based power management by monitoring the input current continuously. The total input current limit can be programmed via the I<sup>2</sup>C to prevent the input source from being over-loaded.

If the preset input current limit is higher than the rating of the input source, the back-up input voltage-based power management also works to prevent the input source from being over-loaded. Either the input current limit or the input voltage limit is reached, the Q1 FET between IN and SYS are regulated so that the total input power is limited. As a result, the system voltage drops. Once the system declines to a minimum value of  $V_{SYS\_REG} - 135mV$  and  $V_{IN} - 345mV$ , the charge current is reduced to prevent the system voltage from dropping further.


The voltage-based DPM regulates the input voltage to  $V_{IN\_MIN}$  when the load is over the input power capacity.

$V_{IN\_MIN}$  set via the I<sup>2</sup>C should be at least 250mV higher than  $V_{BATT\_REG}$  to ensure the stable operation of the regulator. The input voltage limit function can be disabled by REG07H bit[6].

## Battery Supplement Mode

The charge current is reduced to keep the input current or input voltage in regulation when DPM occurs. If the charge current is reduced to zero and the input source is still overloaded due to a heavy system load, the system voltage begins decreasing. Once the system voltage drops to 37mV below the battery voltage, the MP2662 enters battery supplement mode, and the ideal diode mode is enabled. The battery FET is regulated to keep  $V_{BATT} - V_{SYS}$  at 30mV when  $I_{DSCHG}$  (supplement current) \*  $R_{ON\_BATT}$  is lower than 30mV. In the case that  $I_{DSCHG} * R_{ON\_BATT}$  is higher than 30mV, the battery FET is fully turned on to maintain the ideal forward voltage. When the system load decreases, once  $V_{SYS}$  is higher than  $V_{BATT} + 20mV$ , the ideal diode mode is disabled. Figure 5 shows the dynamic power management and battery supplement mode operation profile.

When  $V_{IN}$  is not available, the MP2662 operates in discharge mode, and the battery FET is always fully on to reduce loss.

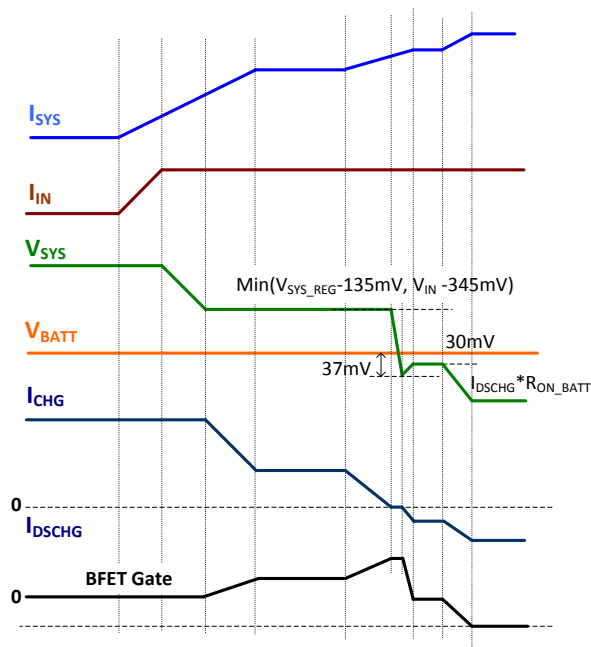

**Figure 5: Dynamic Power Management and Battery Supplement Operation Profile**  
**Battery Regulation Voltage**

The battery voltage for the constant voltage regulation phase is  $V_{BATT\_REG}$ . When  $V_{BATT\_REG} = 4.2V$ , it has a  $\pm 0.5\%$  accuracy over the ambient temperature range of  $0^{\circ}C$  to  $+50^{\circ}C$ .

## Thermal Regulation and Thermal Shutdown

The MP2662 monitors the internal junction temperature continuously to maximize power delivery and avoid overheating the chip. When the internal junction temperature reaches the preset limit of  $T_{J\_REG}$  ( $120^{\circ}C$  default), the IC starts to reduce the charge current to prevent higher power dissipation. The multiple thermal regulation thresholds from  $60 - 120^{\circ}C$  help the system design meet the thermal requirements in different applications. The junction temperature regulation threshold can be set via REG07H bit[5:4].

When the junction temperature reaches  $150^{\circ}C$ , both Q1 and Q2 turn off.

## Negative Temperature Coefficient (NTC) Temperature Sensor

NTC allows the MP2662 to sense the battery temperature using the thermistor (usually available in the battery pack) to ensure a safe operating environment for the battery. Connect appropriately valued resistors from VDD to NTC to ground. The resistor divider works with a thermistor connected from NTC to ground. The NTC voltage is determined by the resistor divider whose divide ratio depends on the temperature. The M2662 sets a pre-determined upper and lower bound of the divide ratio for NTC cold and NTC hot internally.

In the MP2662, the I<sup>2</sup>C default setting is PCB\_OTP. This function can be changed through the I<sup>2</sup>C (see Table 3).

**Table 3: NTC Function Selection Table**

| I <sup>2</sup> C Control |            | Function |
|--------------------------|------------|----------|
| EN_NTC                   | EN_PCB_OTP |          |
| 0                        | x          | Disable  |
| 1                        | 1          | NTC      |
| 1                        | 0          | PCB_OTP  |

NOTE: x = Don't care.

When PCB\_OTP is selected and the NTC voltage is lower than the NTC hot threshold, both the LDO FET and battery FET are off. The PCB\_OTP fault also sets the NTC\_FAULT status (REG09H bit[1]) to 1 to show the fault. Operation resumes once the NTC voltage is higher than the NTC hot threshold.

The NTC function works only in charge mode. Once the NTC voltage falls out of this divide ratio, the temperature is outside of the safe operating range, and the MP2662 stops charging and report it on the status bits. Charging resumes automatically after the temperature falls back into the safe range.

### Safety Timer

The MP2662 provides both a pre-charge and fast-charge safety timer to prevent an extended charging cycle due to abnormal battery conditions. The safety timer is 1hr when the battery voltage is lower than  $V_{BATT\_PRE}$ . The fast-charge safety timer starts when the battery enters fast-charge mode. The fast-charge safety timer can be programmed through the I<sup>2</sup>C. The safety timer can be disabled via the I<sup>2</sup>C.

The following actions can restart the safety timer:

- A new charge cycle is kicked in.
- Write REG01H bit[3] from 1 to 0 (charge enable).
- Write REG01H bit[4] from 1 to 0 (HIZ disable).

### Host Mode and Default Mode

The MP2662 is a host-controlled device. After the power-on reset, the MP2662 starts up in a watchdog timer expiration state or default mode. All registers are in their default settings.

The watchdog timer works in both charge and discharge mode. When the watchdog timer runs out, most registers return to the default value (refer to the I<sup>2</sup>C Register Map section on page 23). When the watchdog timer is out in both charge and discharge mode, both the LDO FET and battery FET are turned off. They turn on again automatically after  $t_{RST\_DUR}$ , which can be programmed by REG01H bit[5].

To save quiescent current during discharge mode, the watchdog timer can be turned off during by setting REG05H bit[7] to 0.

Any write to the MP2662 switches it to host mode. All charge parameters are programmable. If the watchdog timer (REG05H bit[6:5]) is not disabled, the host must reset the watchdog timer regularly by writing 1 to REG02H bit[6] before the watchdog timer expires to keep the device in host mode. Once the watchdog timer expires, the MP2662 goes back to default mode. The watchdog timer limit can also be programmed or disabled by the host control.

When the REG05H bit[6:5] is set to 00, then the watchdog timer is disabled under both charge mode and discharge mode regardless of the status of REG05H bit[7].

Operation can also be switched to default mode when one of the following conditions are valid:

- Refresh input without battery.
- Re-insert battery with no  $V_{IN}$ .
- Register REG02H bit[7] is reset.

### Battery Discharge Function

If the battery is connected and the input source is missing, the battery FET is fully on when  $V_{BATT}$  is above the  $V_{BATT\_UVLO}$  threshold. The 100mΩ battery FET minimizes conduction loss during discharge. The quiescent current of the MP2662 is as low as 6.5μA in this mode. The low on resistance and low quiescent current help extend the running time of the battery.

### Over-Discharge Current Protection

The MP2662 has an over-discharge current protection in discharge mode and supplement mode. Once  $I_{DSCHG}$  exceeds the programmable discharge current limit (2A default), the battery FET turns off after a 60μs delay. The MP2662 enters hiccup mode as part of the over-current protection (OCP). The discharge current limit can be programmed high to 3.2A through the I<sup>2</sup>C. If the discharge current goes high and reaches the internal fixed current limit (about 3.7A), the battery FET turns off and begins hiccup mode immediately.

Similarly, when the battery voltage falls below the programmable  $V_{BATT\_UVLO}$  threshold (2.76V default), the battery FET turns off to prevent an over-discharge.

### System Short-Circuit Protection (SCP)

The MP2662 features SYS node short-circuit protection (SCP) for both the IN to SYS path and the BATT to SYS path.

The system voltage is monitored continuously. If  $V_{SYS}$  is lower than 1.5V, system SCP for both the IN to SYS path and the BATT to SYS path is active.  $I_{DSCHG}$  decreases to half of the original value.

For the IN to SYS path, once  $I_{IN}$  is over the protection threshold, both the LDO FET and battery FET are turned off immediately, and the MP2662 enters hiccup mode. Otherwise, the maximum current limit is not reached. When  $V_{SYS}$  is lower than 1.5V and the setting input current limit is reached, the hiccup mode also starts after a 60 $\mu$ s delay. The hiccup mode interval is 800 $\mu$ s.

For the BATT to SYS path, once  $I_{BATT}$  is over the 3.7A protection threshold, both the LDO FET and battery FET are turned off immediately, and the MP2662 enters hiccup mode. When the battery discharge current limit threshold is reached, hiccup mode starts after a 60 $\mu$ s delay. The hiccup mode interval is 800 $\mu$ s.

For details, please refer to the flow chart shown in Figure 17.

Particularly, if a system short-circuit occurs when both the input and battery are present, the protection mechanism of both paths works. The faster one of the two dominates the hiccup operation.

### Interrupt to Host (INT)

The MP2662 also has an alert mechanism that can output an interrupt signal via INT to notify the system of the operation by outputting a 256 $\mu$ s low-state INT pulse. All of the below events can trigger an INT output:

- Good input source detected (PG\_STAT)
- Charge completed
- Charging status change
- Faults in REG09H (watchdog timer fault, thermal fault, safety timer fault, battery OVP fault, NTC fault)

When fault occurs, the MP2662 sends out an INT pulse and latches the fault state in REG09H. After the MP2662 exits the fault state, the fault bit is reset to 0 after the host reads REG09H. The NTC fault bit is not latched and always reports the current thermistor conditions.

The INT signal can be masked when the corresponding control bit is set in REG06H bit[4:0]. When an INT condition is masked, this means that the INT pin signal (and register bit) will not trigger when the corresponding condition occurs. Masking INTs is useful when writing software code to avoid unnecessary interruptions due to these events.

### Battery Disconnection Function

In applications where the battery is not removable, it is essential to disconnect the battery from the system for shipping mode or to allow the system power to be reset during the application. The MP2662 provides both shipping mode (shown in Table 4) and system reset mode for different applications.

**Table 4: Shipping Mode Control**


| Items                     | Enter Shipping Mode         | Exit Shipping Mode |                         |
|---------------------------|-----------------------------|--------------------|-------------------------|
|                           | Set FET_DIS to 1            | INT H to L for 2s  | V <sub>IN</sub> Plug-In |
| LDO FET                   | X                           | X                  | On                      |
| Battery FET (charging)    | Off( $t_{SMEN\_DGL}$ later) | On                 | On (2s later)           |
| Battery FET (discharging) | Off( $t_{SMEN\_DGL}$ later) | On                 | On (2s later)           |

**NOTE:** x = Don't care.


The IC has a register bit for battery disconnection control (FET\_DIS). If this bit is set to 1, the MP2662 enters shipping mode after a delay time, which can be programmed by REG09H bit[7:6]. The battery FET turns off, and the FET\_DIS bit refreshes to 0 after the battery FET turns off. Pull the INT pin down or plug in the input adapter for 2s to wake the MP2662 up from shipping mode.

The MP2662 can also reuse an INT pin to cut off the path from the battery to the system under the condition needed to reset the system manually. Once the logic at INT is set low for longer than  $t_{RST\_DGL}$  (which can be programmed by REG01H bit[7:6]), the battery is disconnected from the system by turning off the battery FET. The off state lasts for  $t_{RST\_DUR}$ , which can be programmed by REG01H bit[5]. Then the battery FET is turned on automatically, and the system is powered by the battery again. During the off period, the INT pin is not limited to be high or low.

The MP2662 can reset the system by controlling the INT pin (see Figure 6).

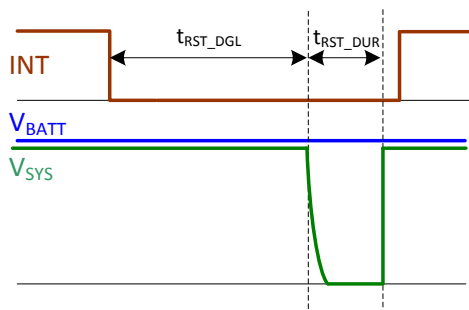

**Figure 6: System Reset Function Operation Profile**

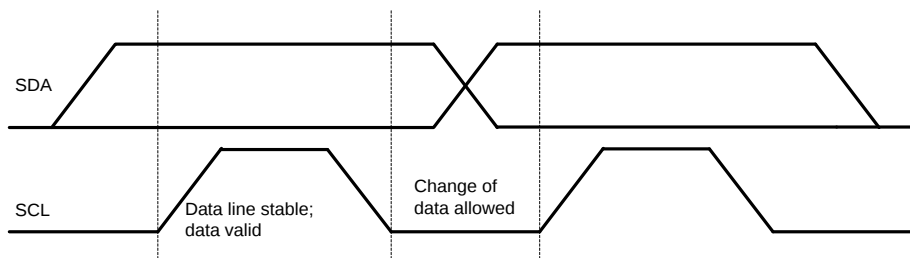

**Figure 7: Bit Transfer on the I2C Bus**

All the transactions begin with a START(S) and can be terminated by a STOP (P). A HIGH to LOW transition on the SDA line while SCL is HIGH defines a START condition. A LOW to HIGH transition on the SDA line when the SCL

## SERIES INTERFACE


The IC uses an I<sup>2</sup>C compatible interface for flexible charging parameters setting and instantaneous device status reporting. I<sup>2</sup>C™ is a bidirectional 2-wire serial interface developed by Philips Semiconductor (now NXP Semiconductors). Only two bus lines are required: a serial data line (SDA) and a serial clock line (SCL). The device can be considered a master or a slave when performing data transfers. A master is the device which initiates a data transfer on the bus and generates the clock signals to permit the transfer. At that time, any device addressed is considered as a slave.

MP2662 operates as a slave device with the address 07H, receiving control inputs from the master device, like a micro controller or a digital signal processor. MP2662 is made to ignore general call address.

The I<sup>2</sup>C interface supports both standard mode (up to 100kbits), and fast mode (up to 400kbits). Both SDA and SCL are bi-direction lines, connecting to the positive supply voltage via a current source or pull-up resistor. When the bus is free, both lines are HIGH. The SDA and SCL pins are open drain.

The Data on the SDA line must be stable during the HIGH period of the clock. The HIGH or LOW state of the data line can only change when the clock signal on the SCL line is LOW. One clock pulse is generated for each data bit transferred (see Figure 7).


is HIGH defines a STOP condition. START and STOP conditions are always generated by the master. The bus is considered busy after the START condition, and free after the STOP condition (see Figure 8).

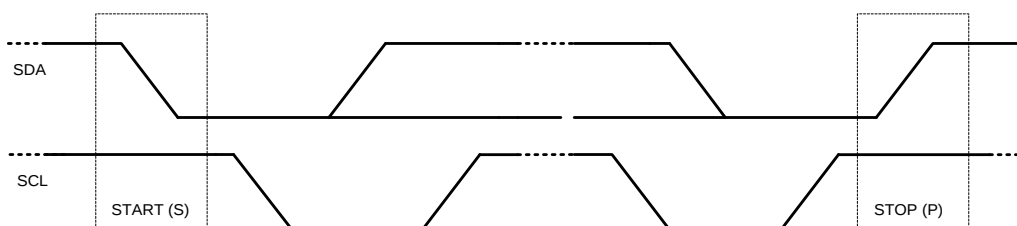

### Figure 8: START and STOP Conditions

Every byte on the SDA line must be 8 bits long. Each byte has to be followed by an Acknowledge bit. Data is transferred with the Most Significant Bit (MSB) first. If a slave cannot receive or transmit another complete byte of data until it has performed some other

function, it can hold the clock line SCL low to force the master into a wait state (clock stretching). Data transfer then continues when the slave is ready for another byte of data and release the clock line SCL (see Figure 9).

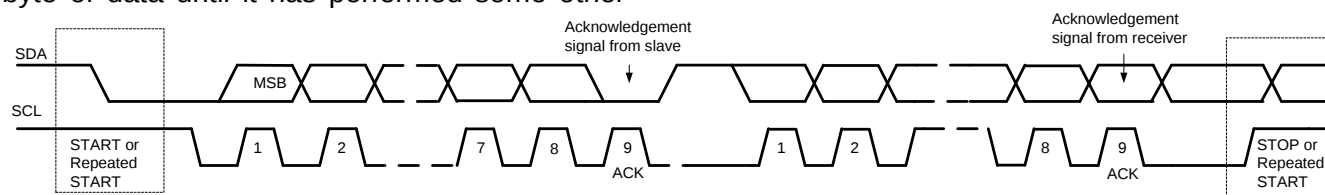

### Figure 9: Data transfer on the I2C BUS

The acknowledge takes place after every byte. The acknowledge bit allows the receiver to signal the transmitter that the byte was successfully received and another byte may be sent. All clock pulses, including the acknowledge 9<sup>th</sup> clock pulse, are generated by the master.


The transmitter releases the SDA line during the acknowledge clock pulse, so the receiver can pull the SDA line LOW. The SDA line remains HIGH during the 9<sup>th</sup> clock pulse, this is the Not Acknowledge signal. The master can then generate either a STOP to abort the

transfer or a repeated START to start a new transfer.


After the START, a slave address is sent. This address is 7 bits long followed by the 8<sup>th</sup> a data direction bit (bit R/W), A zero indicates a transmission (WRITE) and a one indicates a request for data (READ). The complete data transfer is shown in Figure 10.

If the register address is not defined, MP2662 sends back NACK and go back to the idle state.


MP2662 supports single-write and single-read, shown in Figure 11 and Figure 12.

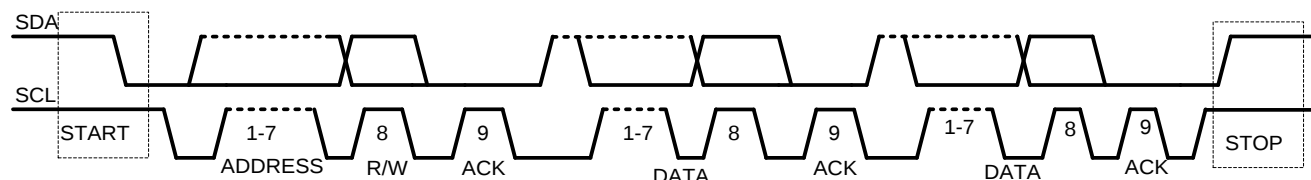

### Figure 10: Complete Data Transfer

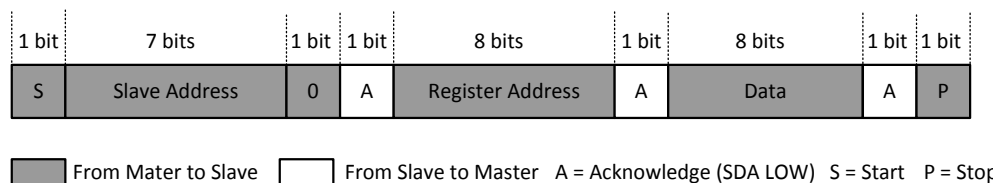

### Figure 11: Single Write



From Mater to Slave      A = Acknowledge (SDA LOW)      S = Start  
 From Slave to Master      /A = not Acknowledge (SDA HIGH)      P = Stop

**Figure 12: Single Read**

## I<sup>2</sup>C REGISTER MAP

IC Address: 07H (reserved some trim options)

| Register Name | Address | R/W | Description                               | Default   |
|---------------|---------|-----|-------------------------------------------|-----------|
| REG00         | 0x00    | r/w | Input source control register             | 1001 1111 |
| REG01         | 0x01    | r/w | Power on configuration register           | 1010 1100 |
| REG02         | 0x02    | r/w | Charge current control register           | 0000 1111 |
| REG03         | 0x03    | r/w | Discharge/termination current             | 1001 0001 |
| REG04         | 0x04    | r/w | Charge voltage control register           | 1010 0011 |
| REG05         | 0x05    | r/w | Charge termination/timer control register | 0011 1010 |
| REG06         | 0x06    | r/w | Miscellaneous operation control register  | 1100 0000 |
| REG07         | 0x07    | r/w | System voltage regulation register        | 0011 1001 |
| REG08         | 0x08    | r   | System status register                    | 0100 0000 |
| REG09         | 0x09    | r/w | Fault register                            | 0000 0000 |
| REG0A         | 0x0A    | N/A | Address register                          | 1110 0000 |

### REG 00H (Default: 1001 1111)

| Bit | Name                    | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description | Comment                                                        |
|-----|-------------------------|-----|---------------------|-----------------|-----|-------------|----------------------------------------------------------------|
| 7   | V <sub>IN_MIN</sub> [3] | 1   | Y                   | N               | r/w | 640mV       | Offset: 3.88V<br>Range: 3.88V - 5.08V<br>Default: 4.60V (1001) |
| 6   | V <sub>IN_MIN</sub> [2] | 0   | Y                   | N               | r/w | 320mV       |                                                                |
| 5   | V <sub>IN_MIN</sub> [1] | 0   | Y                   | N               | r/w | 160mV       |                                                                |
| 4   | V <sub>IN_MIN</sub> [0] | 1   | Y                   | N               | r/w | 80mV        |                                                                |
| 3   | I <sub>IN_LIM</sub> [3] | 1   | Y                   | N               | r/w | 240mA       | Offset: 50mA<br>Range: 50mA - 500mA<br>Default: 500mA (1111)   |
| 2   | I <sub>IN_LIM</sub> [2] | 1   | Y                   | N               | r/w | 120mA       |                                                                |
| 1   | I <sub>IN_LIM</sub> [1] | 1   | Y                   | N               | r/w | 60mA        |                                                                |
| 0   | I <sub>IN_LIM</sub> [0] | 1   | Y                   | N               | r/w | 30mA        |                                                                |

**REG 01H (Default: 1010 1100)**

| Bit | Name                       | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description                            | Comment                                                                               |
|-----|----------------------------|-----|---------------------|-----------------|-----|----------------------------------------|---------------------------------------------------------------------------------------|
| 7   | t <sub>RST_DGL</sub> [1]   | 1   | Y                   | Y               | r/w | 00: 8s<br>01: 12s                      | Pull INT low to disconnect the battery.<br>Default: 16s (10)                          |
| 6   | t <sub>RST_DGL</sub> [0]   | 0   | Y                   | Y               | r/w | 10: 16s<br>11: 20s                     |                                                                                       |
| 5   | t <sub>RST_DUR</sub>       | 1   | Y                   | Y               | r/w | 0: 2s<br>1: 4s                         | Battery FET is off for a period of time before auto-on<br>Default: 4s (1)             |
| 4   | EN_HIZ <sup>(6)</sup>      | 0   | Y                   | Y               | r/w | 0: Disable<br>1: Enable                | Default: Disable (0)                                                                  |
| 3   | CEB                        | 1   | Y                   | Y               | r/w | 0: Charge enable<br>1: Charge disabled | Charge configuration<br>Default: charge disabled (1)                                  |
| 2   | V <sub>BATT_UVLO</sub> [2] | 1   | Y                   | Y               | r/w | 360mV                                  | Battery UVLO threshold<br>Offset: 2.4V<br>Range: 2.4V - 3.03V<br>Default: 2.76V (100) |
| 1   | V <sub>BATT_UVLO</sub> [1] | 0   | Y                   | Y               | r/w | 180mV                                  |                                                                                       |
| 0   | V <sub>BATT_UVLO</sub> [0] | 0   | Y                   | Y               | r/w | 90mV                                   |                                                                                       |

**NOTE:**

6) This bit only controls the on and off function of the LDO FET.

**REG 02H (Default: 0000 1111)**

| Bit | Name                                  | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description                         | Comment                                                                                                        |
|-----|---------------------------------------|-----|---------------------|-----------------|-----|-------------------------------------|----------------------------------------------------------------------------------------------------------------|
| 7   | Register Reset                        | 0   | Y                   | N               | r/w | 0: Keep current setting<br>1: Reset | Default: Keep current register setting (0)                                                                     |
| 6   | I <sup>2</sup> C Watchdog Timer Reset | 0   | Y                   | Y               | r/w | 0: Normal<br>1: Reset               | Default: Normal (0)                                                                                            |
| 5   | I <sub>CC</sub> [4]                   | 0   | Y                   | Y               | r/w | 256mA                               | Fast charge current setting.<br>Offset: 8mA<br>Range: 8mA (000000) - 456mA (111000)<br>Default: 128mA (001111) |
| 4   | I <sub>CC</sub> [3]                   | 0   | Y                   | Y               | r/w | 128mA                               |                                                                                                                |
| 3   | I <sub>CC</sub> [2]                   | 1   | Y                   | Y               | r/w | 64mA                                |                                                                                                                |
| 2   | I <sub>CC</sub> [1]                   | 1   | Y                   | Y               | r/w | 32mA                                |                                                                                                                |
| 1   | I <sub>CC</sub> [0]                   | 1   | Y                   | Y               | r/w | 16mA                                |                                                                                                                |
| 0   | I <sub>CC</sub> [4]                   | 1   | Y                   | Y               | r/w | 8mA                                 |                                                                                                                |

**REG 03H (Default: 1001 0001)**

| Bit | Name      | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description | Comment                                                                                                                                |
|-----|-----------|-----|---------------------|-----------------|-----|-------------|----------------------------------------------------------------------------------------------------------------------------------------|
| 7   | IDSCHG[3] | 1   | Y                   | Y               | r/w | 1600mA      | BATT to SYS discharge current limit.<br><br>Offset: 200mA<br>Range: 400mA - 3.2A<br>Valid range: 0001 - 1111<br>Default: 2000mA (1001) |
| 6   | IDSCHG[2] | 0   | Y                   | Y               | r/w | 800mA       |                                                                                                                                        |
| 5   | IDSCHG[1] | 0   | Y                   | Y               | r/w | 400mA       |                                                                                                                                        |
| 4   | IDSCHG[0] | 1   | Y                   | Y               | r/w | 200mA       |                                                                                                                                        |
| 3   | ITERM [3] | 0   | Y                   | Y               | r/w | 16mA        | Termination current.<br><br>Offset: 1mA<br>Range: 1mA - 31mA<br>Default: 3mA (0001)                                                    |
| 2   | ITERM [2] | 0   | Y                   | Y               | r/w | 8mA         |                                                                                                                                        |
| 1   | ITERM [1] | 0   | Y                   | Y               | r/w | 4mA         |                                                                                                                                        |
| 0   | ITERM [0] | 1   | Y                   | Y               | r/w | 2mA         |                                                                                                                                        |

**REG 04H (DEFAULT: 1010 0011)**

| Bit | Name          | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description          | Comment                                                                                             |
|-----|---------------|-----|---------------------|-----------------|-----|----------------------|-----------------------------------------------------------------------------------------------------|
| 7   | VBATT_REG [5] | 1   | Y                   | Y               | r/w | 480mV                | Battery regulation voltage.<br><br>Offset: 3.60V<br>Range: 3.60V - 4.545V<br>Default: 4.2V (101000) |
| 6   | VBATT_REG [4] | 0   | Y                   | Y               | r/w | 240mV                |                                                                                                     |
| 5   | VBATT_REG [3] | 1   | Y                   | Y               | r/w | 120mV                |                                                                                                     |
| 4   | VBATT_REG [2] | 0   | Y                   | Y               | r/w | 60mV                 |                                                                                                     |
| 3   | VBATT_REG [1] | 0   | Y                   | Y               | r/w | 30mV                 |                                                                                                     |
| 2   | VBATT_REG [0] | 0   | Y                   | Y               | r/w | 15mV                 |                                                                                                     |
| 1   | VBATT_PRE     | 1   | Y                   | Y               | r/w | 0: 2.8V<br>1: 3.0V   | Pre-charge to fast charge threshold.<br>Default: 3.0V (1)                                           |
| 0   | VRECH         | 1   | Y                   | Y               | r/w | 0: 100mV<br>1: 200mV | Battery recharge threshold (below VBATT_REG).<br>Default: 200mV (1)                                 |

## REG 05H (Default: 0011 1010)

| Bit | Name         | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description                                         | Comment                                                                                                                                                                      |
|-----|--------------|-----|---------------------|-----------------|-----|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | EN_WD_DISCHG | 0   | Y                   | N               | r/w | 0: Disable<br>1: Enable                             | Watchdog control in<br>discharge mode.<br>Default: Disable (0)                                                                                                               |
| 6   | WATCHDOG [1] | 0   | Y                   | N               | r/w | 00: Disable timer<br>01: 40s<br>10: 80s<br>11: 160s | I <sup>2</sup> C watchdog timer limit.<br>Default: 40s (01)<br><br>If Bit[6:5] = 00, then<br>watchdog timer is<br>disabled regardless of<br>whether bit[7] is set or<br>not. |
| 5   | WATCHDOG [0] | 1   | Y                   | N               | r/w |                                                     |                                                                                                                                                                              |
| 4   | EN_TERM      | 1   | Y                   | Y               | r/w | 0: Disable<br>1: Enable                             | Termination setting<br>(controlling the<br>termination is allowed or<br>not).<br>Default: Enable (1)                                                                         |
| 3   | EN_TIMER     | 1   | Y                   | Y               | r/w | 0: Disable<br>1: Enable                             | Safety timer setting.<br>Default: Enable timer (1)                                                                                                                           |
| 2   | CHG_TMR [1]  | 0   | Y                   | Y               | r/w | 00: 3hrs<br>01: 5hrs<br>10: 8hrs<br>11: 12hrs       | Fast charge timer.<br>Default: 5hrs (01)                                                                                                                                     |
| 1   | CHG_TMR [0]  | 1   | Y                   | Y               | r/w |                                                     |                                                                                                                                                                              |
| 0   | TERM_TMR     | 0   | Y                   | Y               | r/w | 0: Disable<br>1: Enable                             | Termination timer control<br>(when TERM_TMR is<br>enabled, the IC will not<br>suspend the charge<br>current after the charge<br>termination).<br>Default: (0)                |

## REG 06H (Default: 1100 0000)

| Bit | Name                       | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description                                                                                           | Comment                                                                                                                                |
|-----|----------------------------|-----|---------------------|-----------------|-----|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| 7   | EN_NTC                     | 1   | Y                   | Y               | r/w | 0: Disable<br>1: Enable                                                                               | Default: Enable (1)                                                                                                                    |
| 6   | TMR2X_EN                   | 1   | Y                   | Y               | r/w | 0: Disable 2X extended<br>safety timer during PPM<br>1: Enable 2X extended<br>safety timer during PPM | Default: Enable (1)                                                                                                                    |
| 5   | FET_DIS <sup>(7)</sup>     | 0   | Y                   | N               | r/w | 0: Enable<br>1: Turn off                                                                              | Default: Enable (0)                                                                                                                    |
| 4   | PG_INT_Control             | 0   | Y                   | Y               | r/w | 0: On<br>1: Off                                                                                       | Default: On (0)                                                                                                                        |
| 3   | EOC_INT_Control            | 0   | Y                   | Y               | r/w | 0: On<br>1: Off                                                                                       | Charge completed INT<br>mask control<br>Default: On (0)                                                                                |
| 2   | CHG STATUS_<br>INT_Control | 0   | Y                   | Y               | r/w | 0: On<br>1: Off                                                                                       | Charging status change<br>INT mask control<br>(charging status contain:<br>not charging, pre charge<br>and charge).<br>Default: On (0) |
| 1   | NTC_INT_Control            | 0   | Y                   | Y               | r/w | 0: On<br>1: Off                                                                                       | Default: On (0)                                                                                                                        |
| 0   | BATTOVP_INT_Control        | 0   | Y                   | Y               | r/w | 0: On<br>1: Off                                                                                       | Default: On (0)                                                                                                                        |

**NOTE:**

7) This bit only controls the turn off function of the battery FET, including charge and discharge.

**REG 07H (Default: 0011 1001)**

| Bit | Name                      | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description                                    | Comment                                                                                       |
|-----|---------------------------|-----|---------------------|-----------------|-----|------------------------------------------------|-----------------------------------------------------------------------------------------------|
| 7   | EN_PCB_OTP                | 0   | Y                   | Y               | r/w | 0: Enable<br>1: Disable                        | PCB_OTP enable.<br>Default: Enable (0)                                                        |
| 6   | EN_VINLOOP                | 0   | Y                   | Y               | r/w | 0: Enable<br>1: Disable                        | Default: Enable (0)                                                                           |
| 5   | T <sub>J</sub> _REG [1]   | 1   | Y                   | Y               | r/w | 00: 60°C<br>01: 80°C<br>10: 100°C<br>11: 120°C | Thermal regulation<br>threshold.<br>Default: 120°C (11)                                       |
| 4   | T <sub>J</sub> _REG [0]   | 1   | Y                   | Y               | r/w |                                                |                                                                                               |
| 3   | V <sub>SYS</sub> _REG [3] | 1   | Y                   | N               | r/w | 400mV                                          | System voltage<br>regulation.<br>Offset: 4.2V<br>Range: 4.2V - 4.95V<br>Default: 4.65V (1001) |
| 2   | V <sub>SYS</sub> _REG [2] | 0   | Y                   | N               | r/w | 200mV                                          |                                                                                               |
| 1   | V <sub>SYS</sub> _REG [1] | 0   | Y                   | N               | r/w | 100mV                                          |                                                                                               |
| 0   | V <sub>SYS</sub> _REG [0] | 1   | Y                   | N               | r/w | 50mV                                           |                                                                                               |

**REG 08H (Default: 0100 0000)**

| Bit | Name           | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description                                                         | Comment                           |
|-----|----------------|-----|---------------------|-----------------|-----|---------------------------------------------------------------------|-----------------------------------|
| 7   | WATCHDOG_FAULT | 0   | N/A                 | N/A             | r   | 0: Normal<br>1: Watchdog timer<br>expiration                        | Normal (0)                        |
| 6   | Rev [1]        | 1   | N/A                 | N/A             | r   | 00: reserved<br>01: reserved<br>10: MP2662<br>11: reserved          | Revision number.<br>Default: (10) |
| 5   | Rev [0]        | 0   | N/A                 | N/A             | r   |                                                                     |                                   |
| 4   | CHG_STAT [1]   | 0   | N/A                 | N/A             | r   | 00: Not charging<br>01: Pre charge<br>10: Charge<br>11: Charge done | Not charging (00)                 |
| 3   | CHG_STAT [0]   | 0   | N/A                 | N/A             | r   |                                                                     |                                   |
| 2   | PPM_STAT       | 0   | N/A                 | N/A             | r   | 0: No PPM<br>1: In PPM                                              | No PPM (0)                        |
| 1   | PG_STAT        | 0   | N/A                 | N/A             | r   | 0: Power fail<br>1: Power good                                      | No power good (0)                 |
| 0   | THERM_STAT     | 0   | N/A                 | N/A             | r   | 0: No thermal regulation<br>1: In thermal regulation                | Normal (0)                        |

**REG 09H (Default: 0000 0000)**

| Bit | Name               | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description                                     | Comment                                                  |
|-----|--------------------|-----|---------------------|-----------------|-----|-------------------------------------------------|----------------------------------------------------------|
| 7   | EN_SHIPPING_DGL[1] | 0   | Y                   | N               | r/w | 00: 1s<br>01: 2s<br>10: 4s<br>11: 8s            | Enter shipping mode<br>deglitch time<br>Default: 1s (00) |
| 6   | EN_SHIPPING_DGL[0] | 0   | Y                   | N               | r/w |                                                 |                                                          |
| 5   | VIN_FAULT          | 0   | N/A                 | N/A             | r   | 0: Normal<br>1: Input fault (OVP or bad source) | Normal (0)                                               |
| 4   | THEM_SD            | 0   | N/A                 | N/A             | r   | 0: Normal<br>1: Thermal shutdown                | Normal (0)                                               |
| 3   | BAT_FAULT          | 0   | N/A                 | N/A             | r   | 0: Normal<br>1: Battery OVP                     | Normal (0)                                               |
| 2   | STMR_FAULT         | 0   | N/A                 | N/A             | r   | 0: Normal<br>1: Safety timer expiration         | Normal (0)                                               |
| 1   | NTC_FAULT [1]      | 0   | N/A                 | N/A             | r   | 0: Normal<br>1: NTC hot                         | Normal (0)                                               |
| 0   | NTC_FAULT [0]      | 0   | N/A                 | N/A             | r   | 0: Normal<br>1: NTC cold                        | Normal (0)                                               |

**REG 0AH (Default: 1110 0000) <sup>(8)</sup>**

| Bit | Name     | POR | Reset by<br>REG_RST | Reset by<br>WTD | R/W | Description                                                                      | Comment                           |
|-----|----------|-----|---------------------|-----------------|-----|----------------------------------------------------------------------------------|-----------------------------------|
| 7   | ADDR[2]  | 1   | N/A                 | N/A             | N/A | 001: 01H<br>010: 02H<br>011: 03H<br>100: 04H<br>101: 05H<br>110: 06H<br>111: 07H | IC Address.<br>Default: 111 (07H) |
| 6   | ADDR[1]  | 1   | N/A                 | N/A             | N/A |                                                                                  |                                   |
| 5   | ADDR[0]  | 1   | N/A                 | N/A             | N/A |                                                                                  |                                   |
| 4   | Reserved | 0   | N/A                 | N/A             | N/A |                                                                                  |                                   |
| 3   | Reserved | 0   | N/A                 | N/A             | N/A |                                                                                  |                                   |
| 2   | Reserved | 0   | N/A                 | N/A             | N/A |                                                                                  |                                   |
| 1   | Reserved | 0   | N/A                 | N/A             | N/A |                                                                                  |                                   |
| 0   | Reserved | 0   | N/A                 | N/A             | N/A |                                                                                  |                                   |

**NOTE:**

8) This register is for one-time programming only and is not accessible.

## ONE-TIME PROGRAMMING MAP

| #    | Bit7                                              | Bit6       | Bit5                                     | Bit4 | Bit3                                    | Bit2 | Bit1 | Bit0 |
|------|---------------------------------------------------|------------|------------------------------------------|------|-----------------------------------------|------|------|------|
| 0x01 | N/A                                               |            |                                          |      | CEB                                     | N/A  |      |      |
| 0x02 | N/A                                               |            | I <sub>CC</sub> : 8mA - 456mA / 8mA step |      |                                         |      |      |      |
| 0x03 | N/A                                               |            |                                          |      | I <sub>TERM</sub> : 1mA - 31mA/2mA step |      |      |      |
| 0x04 | V <sub>BATT_REG</sub> : 3.6V - 4.545V / 15mV step |            |                                          |      |                                         |      | N/A  |      |
| 0x05 | N/A                                               | WATCHDOG   |                                          |      | N/A                                     |      |      |      |
| 0x07 | N/A                                               | EN_VINLOOP | N/A                                      |      |                                         |      |      |      |
| 0x0A | Address                                           |            |                                          | N/A  |                                         |      |      |      |

## ONE-TIME PROGRAMMING DEFAULT

| One-Time Programmable Items | Default         |
|-----------------------------|-----------------|
| CEB                         | Charge disabled |
| I <sub>CC</sub>             | 128mA           |
| I <sub>TERM</sub>           | 3mA             |
| V <sub>BATT_REG</sub>       | 4.2V            |
| WATCHDOG                    | 40s             |
| EN_VINLOOP                  | Enable          |
| Address                     | 07H             |

## STATE CONVERSION CHART


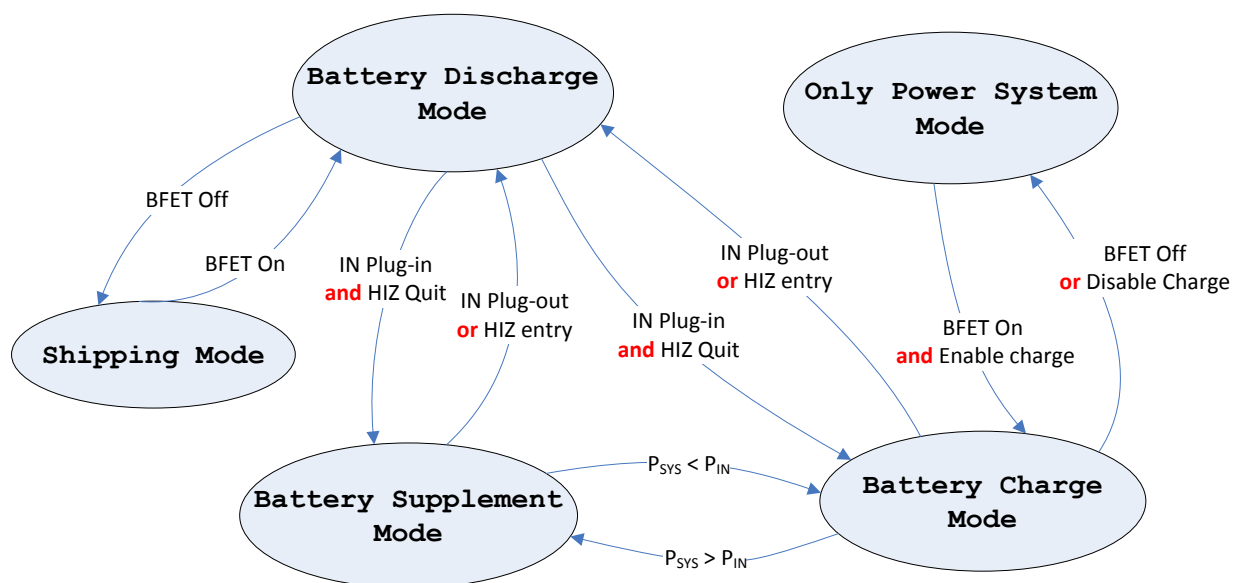


Figure 13: State Machine Conversion

# CONTROL FLOW CHART

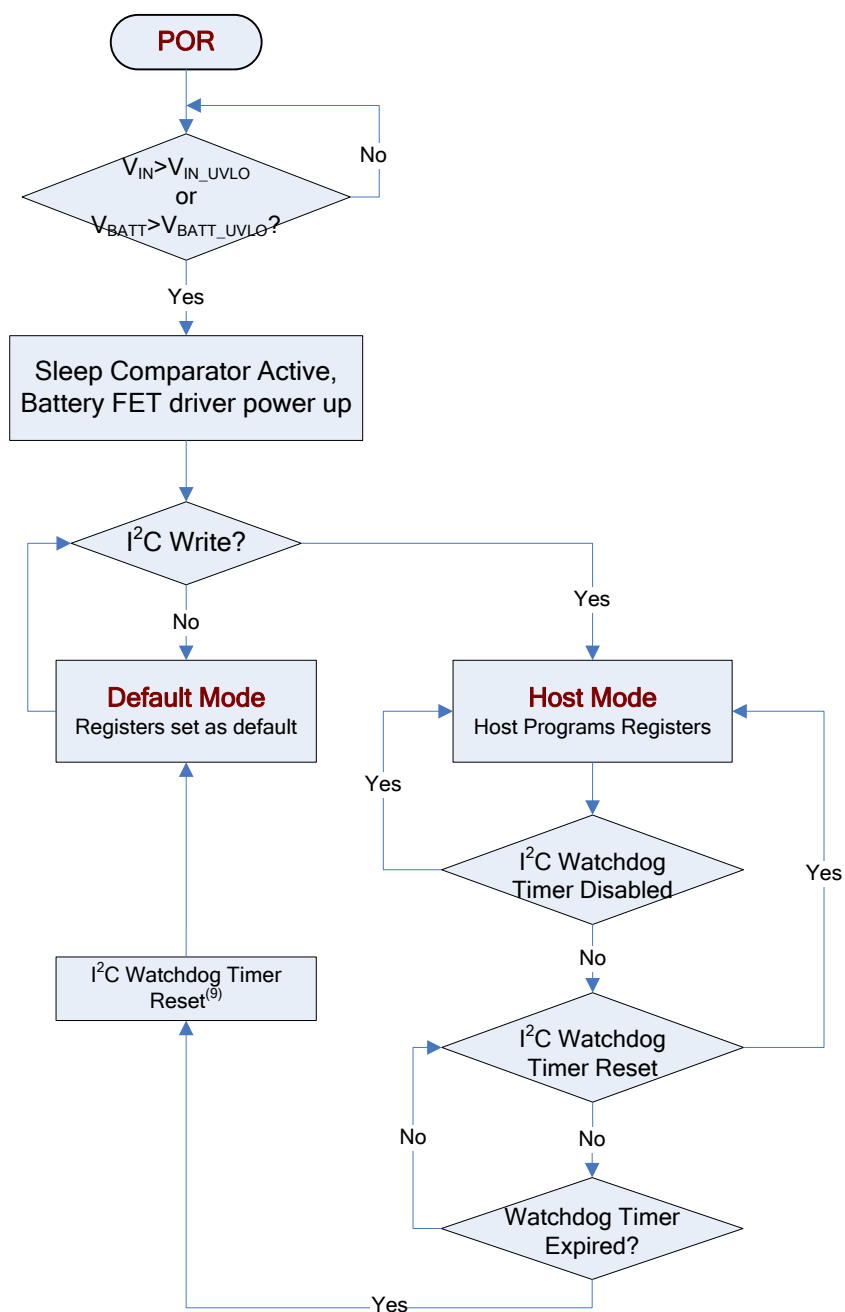

**Figure 14: Default Mode and Host Mode Selection**

**NOTE:**

9) Once the watchdog timer expires, the I<sup>2</sup>C watchdog timer must be reset or will not be valid in the next cycle.

# CONTROL FLOW CHART (continued)

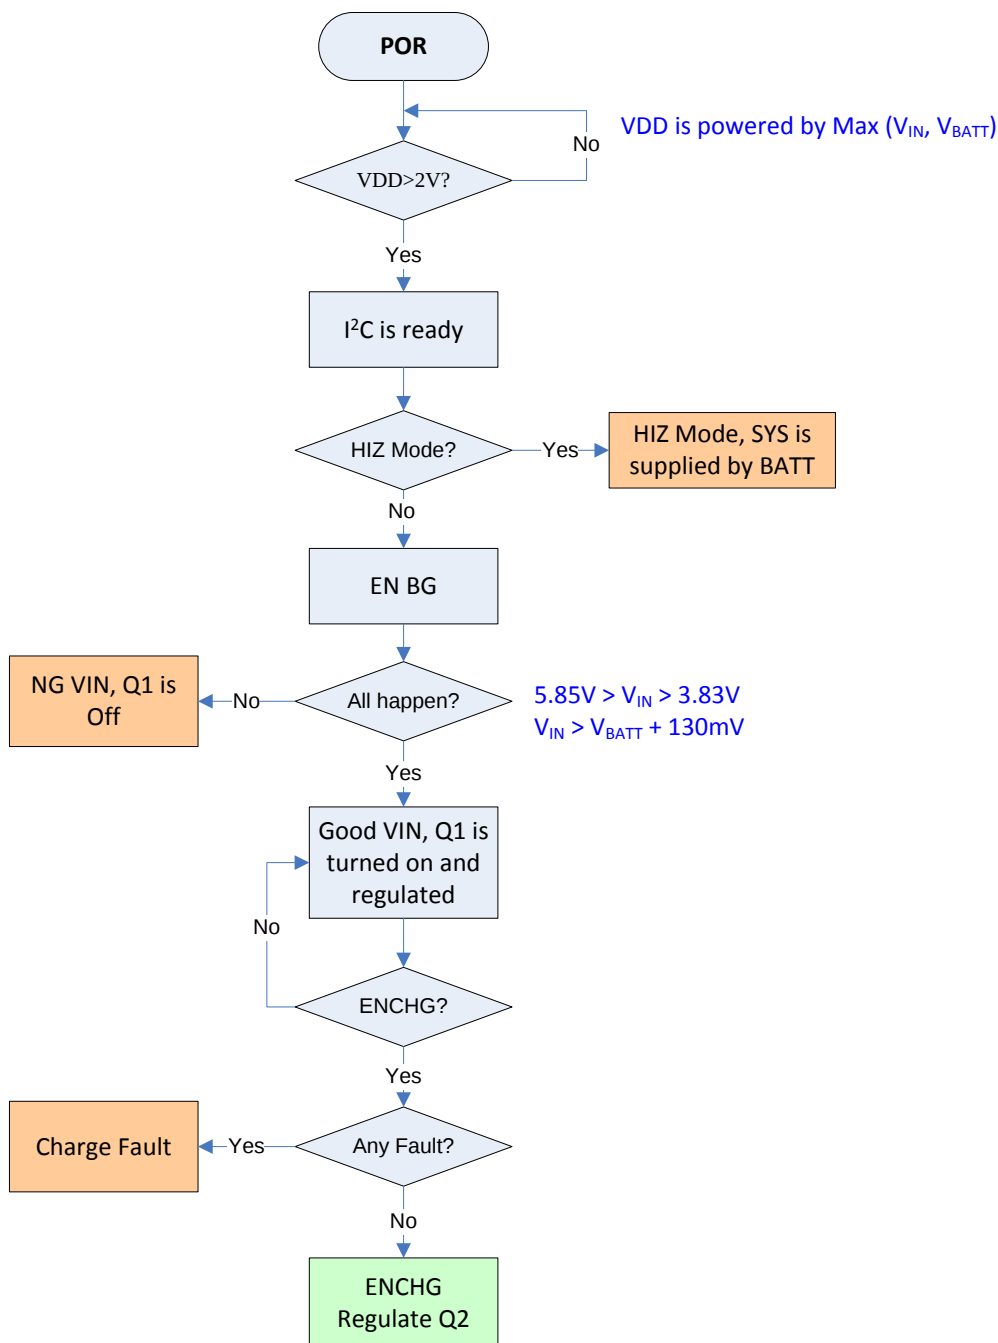


Figure 15: Input Power Start-Up Flow Chart

```


graph TD
    ENCHG[ENCHG] --> CM{Charge Mode?}
    CM -- "V<sub>BATT</sub>>V<sub>BATT</sub>_REG" --> CVC[C.V.C]
    CM -- "V<sub>BATT</sub>_PRE<V<sub>BATT</sub><V<sub>BATT</sub>_REG" --> CCC[C.C.C]
    CM -- "V<sub>BATT</sub><V<sub>BATT</sub>_PRE" --> PREC[PRE.C]
    
    CVC --> BF{I<sub>CHG</sub><I<sub>TERM</sub>  
Battery Full}
    BF -- Yes --> CD[Charge Done]
    BF -- No --> CVC
    
    CD --> VR{V<sub>BATT</sub><V<sub>RECH</sub>?}
    VR -- Yes --> ENCHG
    VR -- No --> CD
    
    CCC --> VB{V<sub>BATT</sub>>V<sub>BATT</sub>_REG}
    VB -- Yes --> CVC
    VB -- No --> CCC
    
    PREC --> VP{V<sub>BATT</sub>>V<sub>BATT</sub>_PRE}
    VP -- Yes --> CCC
    VP -- No --> PREC
    
    subgraph Normal_Charge [Normal Charge]
        ENCHG
        CM
        CVC
        CCC
        PREC
        BF
        CD
        VR
        VB
        VP
    end
    
    Normal_Charge --> Fault_Protection
    
    subgraph Fault_Protection [Fault Protection]
        TO{Timer Out?}
        NTF{NTC Fault?}
        TJ1{T<sub>J</sub>≥T<sub>J</sub>_REG?}
        CS1[Charge Suspend]
        CS2[Charge Suspend]
        DICHG[Decrease I<sub>CHG</sub> to  
maintain T<sub>J</sub> at T<sub>J</sub>_REG]
        RT{Reset Timer?}
        NTO{NTC OK?}
        TJ2{T<sub>J</sub>=?}
        CRR[Charger Recovery,  
Return to Normal  
Operation]
        TS[Thermal Shutdown]
        TJ3{T<sub>J</sub>=?}
        
        TO -- Yes --> CS1
        TO -- No --> Normal_Charge
        CS1 --> RT
        RT -- Yes --> CRR
        RT -- No --> TO
        
        NTF -- Yes --> CS2
        NTF -- No --> Normal_Charge
        CS2 --> NTO
        NTO -- Yes --> CRR
        NTO -- No --> NTF
        
        TJ1 -- Yes --> DICHG
        TJ1 -- No --> Normal_Charge
        DICHG --> TJ2
        TJ2 -- "≥150°C" --> TS
        TJ2 -- "<T<sub>J</sub>_REG" --> CRR
        TJ2 -- "Others" --> TJ2
        TS --> TJ3
        TJ3 -- "≥130°C" --> TS
        TJ3 -- "<T<sub>J</sub>_REG" --> CRR
        TJ3 -- "Others" --> TJ2
    end
  
```

**Normal Charge**

**Fault Protection**

### Figure 16: Charging Process

**CONTROL FLOW CHART (continued)**

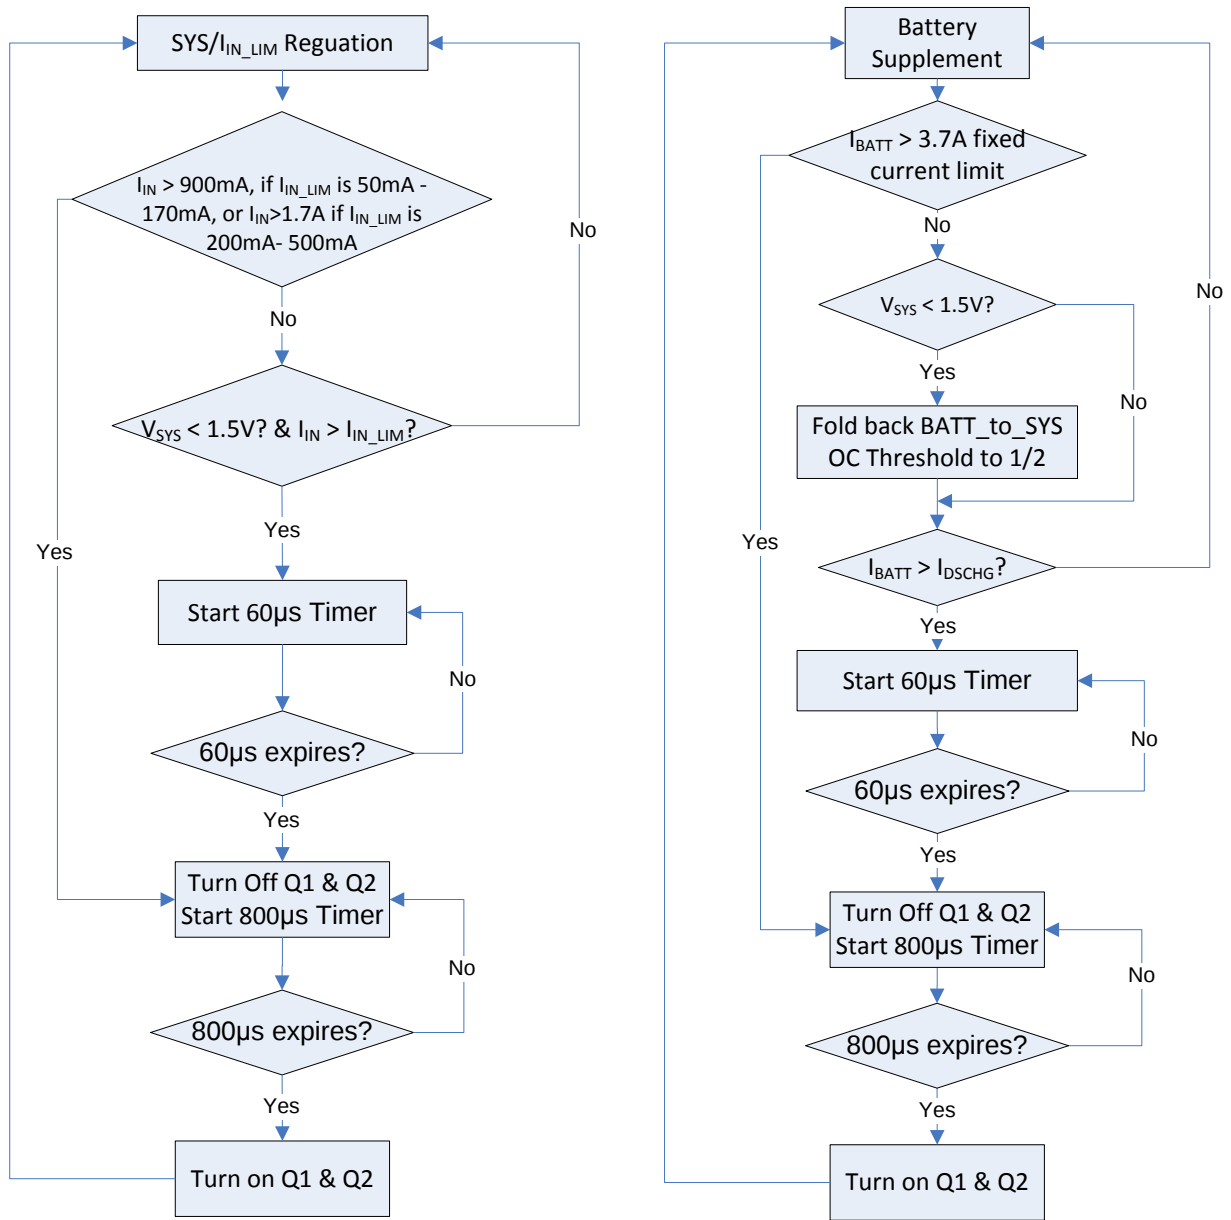


**Figure 17: System Short-Circuit Protection**

## APPLICATION INFORMATION

## Selecting a Resistor Divider for the NTC Sensor

The NTC pin uses a resistor divider from the input source (VDD) to sense the battery temperature. The two resistors ( $R_{T1}$  and  $R_{T2}$ ) allow the high temperature limit and low temperature limit to be programmed independently (see Figure 18). The IC can fit most types of NTC resistors and different temperature operation range requirements with the two extra resistors.

For a given NTC thermistor, the  $R_{T1}$  and  $R_{T2}$  values depend on the type of NTC resistor used and can be calculated with Equation (1) and Equation (2):

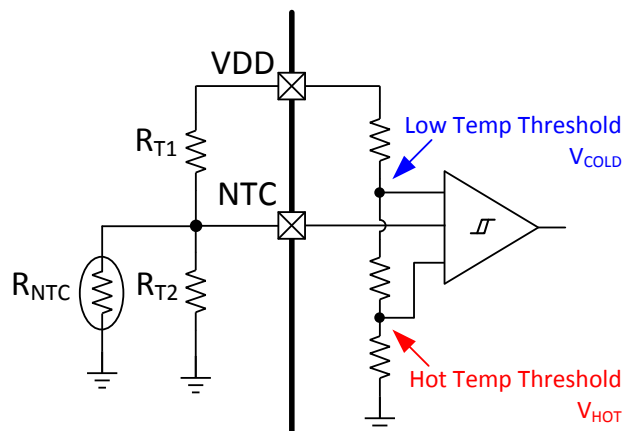

### Figure 18: NTC Function Block

$$R_{T2} = \frac{(V_{COLD} - V_{HOT}) \times R_{NTCH} \times R_{NTCL}}{(V_{HOT} - V_{COLD} V_{HOT}) \times R_{NTCL} - (V_{COLD} - V_{COLD} V_{HOT}) \times R_{NTCH}} \quad (1)$$

$$R_{T1} = \frac{1 - V_{\text{COLD}}}{V_{\text{COLD}}} \times (R_{T2} // R_{\text{NTCL}}) \quad (2)$$

Where  $R_{NTCH}$  is the value of the NTC resistor at the high temperature of the required operating temperature range, and  $R_{NTCL}$  is the value of the NTC resistor at a low temperature.

For example, for a NCP18XH103 thermistor,  $R_{NTCL}$  is 27.219k $\Omega$  at 0°C, and  $R_{NTCH}$  is 4.161k $\Omega$  at 50°C. Using Equation (1) and Equation (2), calculate  $R_{T1} = 7.33k\Omega$  and  $R_{T2} = 27.22k\Omega$ , assuming that the NTC window is between 0°C and 50°C and using the  $V_{COLD}$  and  $V_{HOT}$  values from the EC table.

## Selecting the External Capacitor

Like most low dropout regulators, the MP2662 requires external capacitors for regulator stability and voltage spike immunity. The device is specifically designed for portable applications requiring minimal board space and few components, so these capacitors must be selected correctly for optimal performance.

An input capacitor is required for stability. Connect a at least 4.7 $\mu$ F ceramic capacitor (dielectric types X5R or X7R) between IN to GND for stable operation over the full load current range.

The IC is designed specifically to work with a very small ceramic output capacitor. A ceramic

capacitor (dielectric types X5R or X7R) at least 10μF is suitable for the application circuit. For the MP2662, the output capacitor should be connected between SYS and GND with thick traces and a small loop area.

A capacitor from BATT to GND is required. A at least 4.7 $\mu$ F ceramic capacitor (dielectric types X5R or X7R) is suitable for the MP2662 application circuit.

A capacitor between VDD and GND is used to stabilize the VDD voltage to power the internal control and logic circuit. The typical value of this capacitor is 100nF.

**PCB Layout Guidelines**

Efficient PCB layout is critical for stable operation. For best results, follow the guidelines below.

1. Place the external capacitors as close to the IC as possible to ensure the smallest input inductance and ground impedance.
2. Place the PCB trace connecting the capacitor between VDD and GND very close to the IC.
3. Keep GND for the I<sup>2</sup>C wire clean.
4. Place the I<sup>2</sup>C wire in parallel.

# TYPICAL APPLICATION CIRCUIT

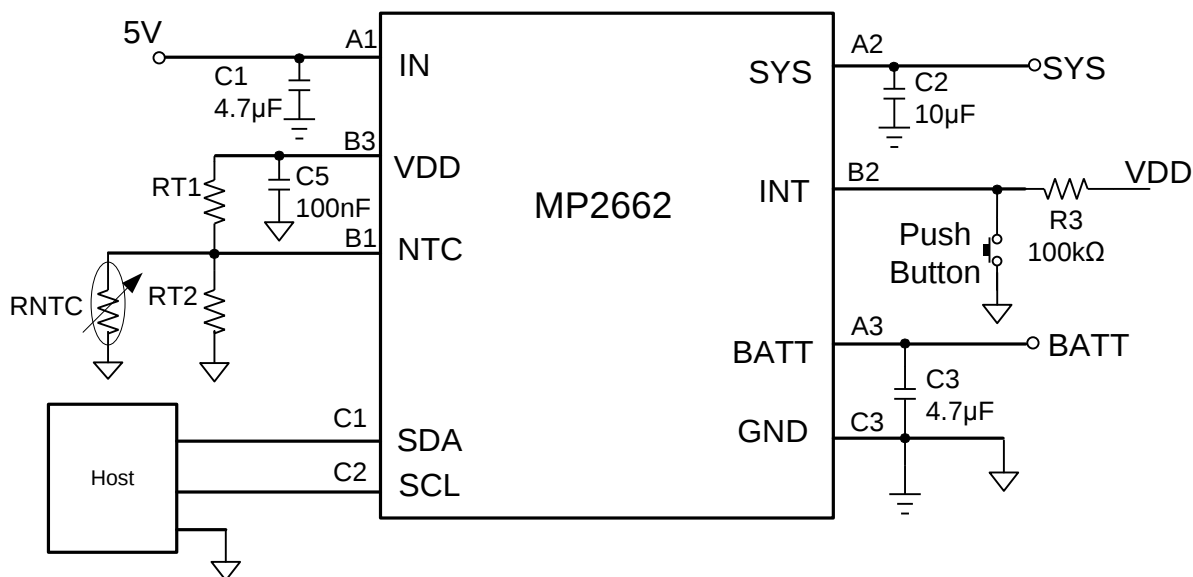



Figure 19: MP2662 Typical Application Circuit with 5V Input

Table 5: Key BOM of Figure 19


| Qty | Ref | Value | Description                           | Package | Manufacture |
|-----|-----|-------|---------------------------------------|---------|-------------|
| 1   | C1  | 4.7µF | Ceramic Capacitor;25V;<br>X5R or X7R  | 0603    | Any         |
| 1   | C3  | 4.7µF | Ceramic Capacitor;16V;<br>X5R or X7R  | 0603    | Any         |
| 1   | C2  | 10µF  | Ceramic Capacitor; 16V;<br>X5R or X7R | 0603    | Any         |
| 1   | C5  | 100nF | Ceramic Capacitor;16V;<br>X5R or X7R  | 0603    | Any         |

# PACKAGE INFORMATION


## WLCSP-9 (1.75mmx1.75mm)

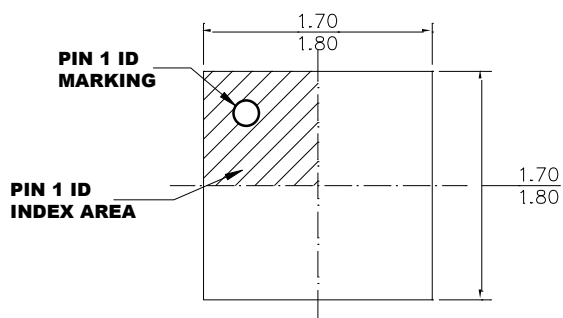

**TOP VIEW**

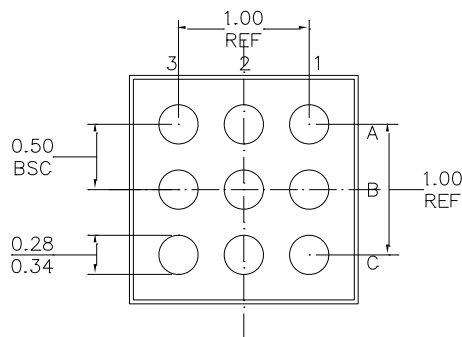


**BOTTOM VIEW**



**SIDE VIEW**

### NOTE:

- 1) ALL DIMENSIONS ARE IN MILLIMETERS.
- 2) BALL COPLANARITY SHALL BE 0.05 MILLIMETER MAX.
- 3) JEDEC REFERENCE IS MO-211.
- 4) DRAWING IS NOT TO SCALE.

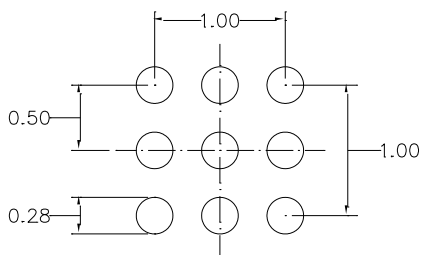

**RECOMMENDED LAND PATTERN**

## REVISION HISTORY

| Revision# | Revision Date | Description                                                                                                                                                                                                                                                    | Page updates                                                                                 |
|-----------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| 1.02      | 5/18/2020     | <ol style="list-style-type: none"><li>1. Change “EV2662-C-00A” to EV2662-C-01A;</li><li>2. Update the reset safety timer actions;</li><li>3. Remove “UVLO or input over-voltage protection” from the INT section;</li><li>4. Add CEB to the OTP map.</li></ol> | <ol style="list-style-type: none"><li>1. Page3</li><li>2. Page20</li><li>3. Page21</li></ol> |

**NOTICE:** The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.