# MP8869S

## 18V, 12A, High-Efficiency, Wide-Input, Synchronous, Step-Down Converter with Integrated Telemetry via I²C Interface

The Future of Analog IC Technology

## DESCRIPTION

The MP8869S is a high-frequency, synchronous, rectified, step-down, switch-mode converter with an I²C control interface. The MP8869S offers a fully integrated solution that achieves 12A of continuous current and 15A of peak output current with excellent load and line regulation over a wide input supply range.

The output voltage level can be controlled on-the-fly through an I²C serial interface. The reference voltage range can be adjusted from 0.6V to 1.108V in 4mV steps. The voltage slew rate, frequency, current limit, hiccup/latch-off protection, enable, and power-saving mode are also selectable through the I²C interface.

Constant-on-time (COT) control operation provides fast transient response. An open-drain power good (PG) pin indicates when the output voltage is in the nominal range. Full protection features include over-voltage protection (OVP), over-current protection (OCP), and thermal shutdown.

The MP8869S is available in a QFN-14 (3mmx4mm) package.

## FEATURES


- Vout Adjustable up to 5.5V using FB pin
- Wide 2.85V to 18V Operating Input Range
- 12A Continuous/15A Peak Output Current
- 1% Internal Reference Accuracy
- I²C-Programmable Reference Range from 0.6V to 1.108V in 4mV Steps with Slew Rate Control
- 5% Accuracy Output Voltage and Output Current Monitoring via I²C
- Selectable PFM/PWM Mode, Adjustable Frequency and Current Limit through I²C
- Four Different Selectable I²C Addresses
- External Soft Start (SS)
- Open-Drain Power Good (PG) Indication
- Output Over-Voltage Protection (OVP)
- Hiccup/Latch-Off Over-Current Protection (OCP)
- Available in a QFN-14 (3mmx4mm) Package

## APPLICATIONS

- Solid-State Drives (SSD)
- Flat-Panel Televisions and Monitors
- Digital Set-Top Boxes
- Distributed Power Systems
- Networking/Servers


All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. “MPS” and “The Future of Analog IC Technology” are registered trademarks of Monolithic Power Systems, Inc.

## TYPICAL APPLICATION

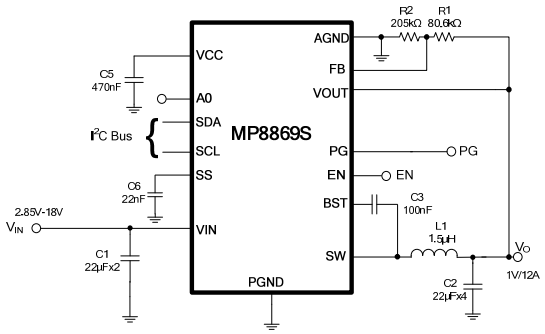


**Efficiency vs. Output Current**

$V_{OUT}$ = 1V, L = 1.5µH, DCR = 2.1mΩ

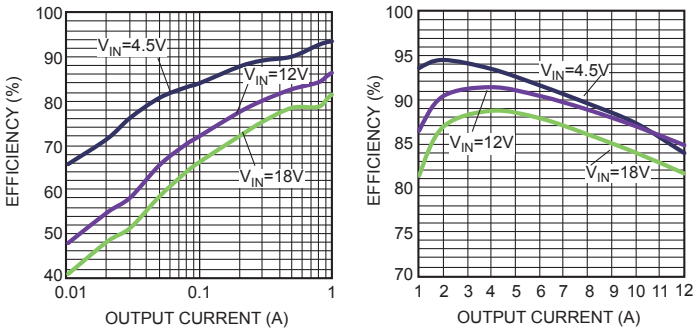



MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## ORDERING INFORMATION

| Part Number | Package | Top Marking |
|---|---|---|
| MP8869SGL* | QFN-14 (3mmx4mm) | *See Below* |
| EVKT-8869S | Evaluation Kit | |

* For Tape & Reel, add suffix –Z (e.g. MP8869SGL–Z)

## TOP MARKING

MPYW
8869
SLLL

MP: Product code of MP8869SGL
Y: Year code
W: Lot number
8869S: First five digits of the part number
LLL: Lot number

## EVALUATION KIT EVKT-8869S

EVKT-8869S Kit contents: (Items can be ordered separately).

| # | Part Number | Item | Quantity |
|---|---|---|---|
| 1 | EV8869S-L-00A | MP8869SGL Evaluation Board | 1 |
| 2 | EVKT-USBI2C-02 | Includes one USB to I2C Dongle, one USB Cable, and one Ribbon Cable | 1 |
| 3 | Tdrive-8869S | USB Flash drive that stores the GUI installation file and supplemental documents | 1 |

Order direct from MonolithicPower.com or our distributors


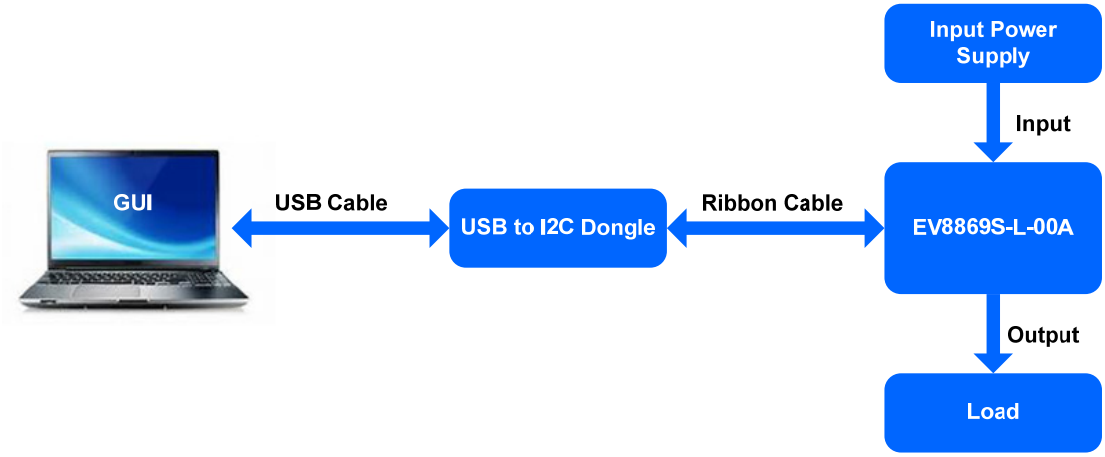



**Figure 1. EVKT-8869S Evaluation Kit Setup**


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## PACKAGE REFERENCE

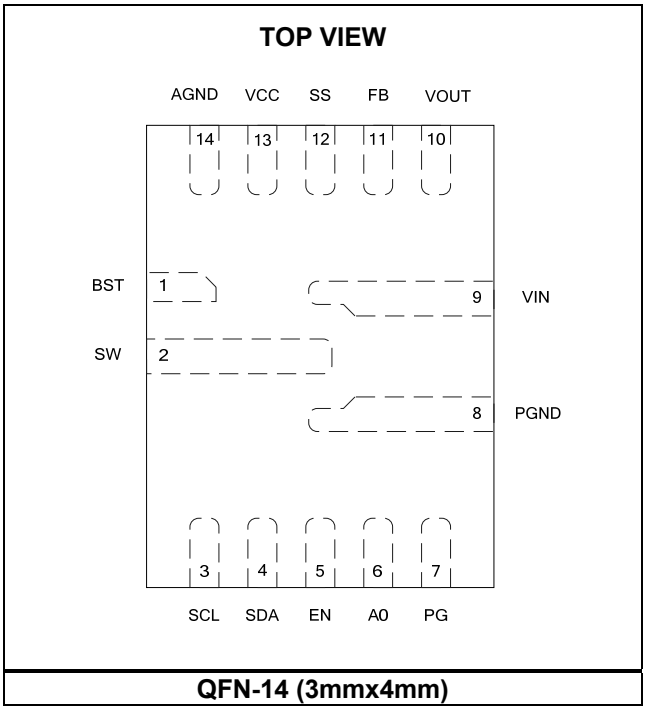


QFN-14 (3mmx4mm)

## ABSOLUTE MAXIMUM RATINGS (1)

VIN ..... -0.3V to 19V
$V_{SW}$ ..... -0.6V (-7V for <10ns) to VIN + 0.7V (25V for <25ns)
$V_{BST}$ ..... $V_{SW}$ + 4V
$V_{EN}$ ..... 18V
VOUT ..... 7V
All other pins ..... -0.3V to 4V
Continuous power dissipation ($T_A$ = +25°C) (2)
QFN-14 (3mmx4mm) ..... 2.5W
Junction temperature ..... 150°C
Lead temperature ..... 260°C
Storage temperature ..... -65°C to 150°C

### *Recommended Operating Conditions* (3)

Supply voltage (VIN) ..... 2.85V to 18V
Output voltage (VOUT) ..... 0.6V to 5.5V
Operating junction temp. ($T_J$) ..... -40°C to +125°C

### *Thermal Resistance* (4) $\theta_{JA}$ $\theta_{JC}$

| | $\theta_{JA}$ | $\theta_{JC}$ | |
|---|---|---|---|
| QFN-14 (3mmx4mm) | 48 | 11 | °C/W |

**NOTES:**

1. Exceeding these ratings may damage the device.
2. The maximum allowable power dissipation is a function of the maximum junction temperature $T_J$ (MAX), the junction-to-ambient thermal resistance $\theta_{JA}$, and the ambient temperature $T_A$. The maximum allowable continuous power dissipation at any ambient temperature is calculated by $P_D$ (MAX) = ($T_J$ (MAX)-$T_A$)/$\theta_{JA}$. Exceeding the maximum allowable power dissipation produces an excessive die temperature, causing the regulator to go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
3. The device is not guaranteed to function outside of its operating conditions.
4. Measured on JESD51-7, 4-layer PCB.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## ELECTRICAL CHARACTERISTICS

**VIN = 12V, $T_J$ = -40°C to +125°C (5), typical value is tested at $T_J$ = +25°C, unless otherwise noted.**

| Parameter | Symbol | Condition | Min | Typ | Max | Units |
|---|---|---|---|---|---|---|
| Supply current (shutdown) | $I_{IN}$ | $V_{EN}$ = 0V | | 2.1 | 4 | μA |
| Supply current (quiescent) | $I_q$ | No switching, FB = 105% $V_{REF}$, PFM mode | | 420 | 600 | μA |
| HS switch on resistance | $HS_{RDS(ON)}$ | $V_{BST - SW}$ = 3.3V | | 15 | | mΩ |
| LS switch on resistance | $LS_{RDS(ON)}$ | VCC = 3.3V | | 4.5 | | mΩ |
| Switch leakage | $SW_{LKG}$ | $V_{EN}$ = 0V, $V_{SW}$ = 12V, $T_J$ = +25°C | | | 1 | μA |
| Low-side valley current limit | $I_{LIMIT_L}$ | Adjustable by I²C | | 14 | | A |
| Low-side negative current limit | $I_{LIMIT_LN}$ | In forced PWM mode or OVP state | | -3 | | A |
| Low-side ZCD threshold | $I_{ZCD}$ | $T_J$ = +25°C | | 200 | | mA |
| Switching frequency | $f_{SW1}$ | VIN = 12V, VOUT = 1V | 400 | 500 | 600 | kHz |
| | $f_{SW2}$ | VIN = 12V, VOUT = 5V | 400 | 500 | 600 | kHz |
| Minimum off time (6) | $T_{OFF_MIN}$ | | | 185 | | ns |
| Minimum on time (6) | $T_{ON_MIN}$ | VOUT = 0.6V | | 50 | | ns |
| Reference voltage | $V_{ref}$ | $T_J$ = 25°C | -1% | 720 | +1% | mV |
| | | -40°C < $T_J$ < 125°C (5) | -1.5% | 720 | +1.5% | |
| FB current | $I_{FB}$ | VFB = 740mV | | 10 | 50 | nA |
| A0 voltage threshold 1 | $V_{ADD_1}$ | Set I²C address 61H | | | 0.24 | VCC |
| A0 voltage threshold 2 | $V_{ADD_2}$ | Set I²C address 63H | 0.28 | | 0.49 | VCC |
| A0 voltage threshold 3 | $V_{ADD_3}$ | Set I²C address 65H | 0.53 | | 0.72 | VCC |
| A0 voltage threshold 4 | $V_{ADD_4}$ | Set I²C address 67H | 0.77 | | | VCC |
| A0 to GND pull-down resistor | $R_{A0_PD}$ | | | 2 | | MΩ |
| EN rising threshold | $V_{EN_RISING}$ | | 1.1 | 1.2 | 1.3 | V |
| EN threshold hysteresis | $V_{EN_HYS}$ | | | 110 | | mV |
| EN to GND pull-down resistor | $R_{EN}$ | | | 1.5 | | MΩ |
| VIN under-voltage lockout threshold rising | $INUV_{Vth_r}$ | | 2.45 | 2.65 | 2.85 | V |
| VIN under-voltage lockout threshold Falling | $INUV_{Vth_f}$ | | 2.3 | 2.5 | 2.7 | V |
| Power good UV threshold rising | PGVth-Hi | Good | 0.86 | 0.9 | 0.94 | VOUT |
| Power good UV threshold falling | PGVth-Lo | Fault | 0.81 | 0.85 | 0.89 | VOUT |
| Power good OV threshold rising | PGVth-Hi | Fault | 1.11 | 1.15 | 1.19 | VOUT |
| Power good OV threshold falling | PGVth-Lo | Good | 1.01 | 1.05 | 1.09 | VOUT |
| Power good deglitch time | PGTd | I²C programmable | | 30 | | μs |
| Power good sink current capability | $V_{PG}$ | Sink 4mA | | | 0.4 | V |


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## ELECTRICAL CHARACTERISTICS *(continued)*

**VIN = 12V, $T_J$ = -40°C to +125°C (5), typical value is tested at $T_J$ = +25°C, unless otherwise noted.**

| Parameter | Symbol | Condition | Min | Typ | Max | Units |
|---|---|---|---|---|---|---|
| OVP rising threshold | $V_{OVP_Rise}$ | FB | 121% | 125% | 129% | $V_{REF}$ |
| OVP falling threshold | $V_{OVP_Falling}$ | FB | 106% | 110% | 114% | $V_{REF}$ |
| OVP delay | $T_{OVP}$ | | | 3.7 | | µs |
| Output pin absolute OV | $V_{OVP2}$ | | 6 | 6.5 | 7 | V |
| UVP threshold | $V_{FB_UV_th}$ | Hiccup entry | 55% | 60% | 65% | $V_{REF}$ |
| UVP delay (6) | $T_{UVP}$ | | | 10 | | µs |
| Soft-start current | $I_{SS}$ | | 5 | 7 | 9 | µA |
| VCC voltage | $V_{CC}$ | | | 3.5 | | V |
| VCC load regulation | $V_{CC_reg}$ | $I_{CC}$ = 20mA | | | 3 | % |
| Thermal shutdown (6) | $T_{TSD}$ | | | 160 | | °C |
| Thermal hysteresis (6) | $T_{TSD_HYS}$ | | | 20 | | °C |

**NOTES:**

5) Not tested in production and guaranteed by over-temperature correlation.

6) Guaranteed by design and characterization test.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## I/O LEVEL CHARACTERISTICS

| Parameter | Symbol | Condition | HS-Mode | | LS-Mode | | Units |
|---|---|---|---|---|---|---|---|
| | | | Min | Max | Min | Max | |
| Low-level input voltage | $V_{IL}$ | | -0.5 | $0.3V_{CC}$ | -0.5 | $0.3V_{CC}$ | V |
| High-level input voltage | $V_{IH}$ | | $0.7V_{CC}$ | $V_{CC}$ + 0.5 | $0.7V_{CC}$ | $V_{CC}$ + 0.5 | V |
| Hysteresis of Schmitt trigger inputs | $V_{HYS}$ | VCC > 2V | $0.05V_{CC}$ | - | $0.05V_{CC}$ | - | V |
| | | VCC < 2V | $0.1V_{CC}$ | - | $0.1V_{CC}$ | - | |
| Low-level output voltage (open drain) at 3mA sink current | $V_{OL}$ | VCC > 2V | 0 | 0.4 | 0 | 0.4 | V |
| | | VCC < 2V | 0 | $0.2V_{CC}$ | 0 | $0.2V_{CC}$ | |
| Low-level output current | $I_{OL}$ | | - | 3 | - | 3 | mA |
| Transfer gate on resistance for currents between SDA and SCAH, or SCL and SCLH | $R_{onL}$ | VOL level, IOL = 3mA | - | 50 | - | 50 | Ω |
| Transfer gate on resistance between SDA and SCAH, or SCL and SCLH | $R_{onH}$ | Both signals (SDA and SDAH, or SCL and SCLH) at VCC level | 50 | - | 50 | - | kΩ |
| Pull-up current of the SCLH current source | $I_{cs}$ | SCLH output levels between 0.3Vcc and $0.7V_{CC}$ | 2 | 6 | 2 | 6 | mA |
| Rise time of the SCLH or SCL signal | $T_{rCL}$ | Output rise time (current source enabled) with an external pull-up current source of 3mA | | | | | |
| | | Capacitive load from 10pF to 100pF | 10 | 40 | | | ns |
| | | Capacitive load of 400pF | 20 | 80 | | | ns |
| Fall time of the SCLH or SCL signal | $T_{fCL}$ | Output fall time (current source enabled) with an external pull-up current source of 3mA | | | | | |
| | | Capacitive load from 10pF to 100pF | 10 | 40 | | | ns |
| | | Capacitive load of 400pF | 20 | 80 | 20 | 250 | ns |
| Rise time of SDAH signal | $T_{rDA}$ | Capacitive load from 10pF to 100pF | 10 | 80 | - | - | ns |
| | | Capacitive load of 400pF | 20 | 160 | 20 | 250 | ns |
| Fall time of SDAH signal | $T_{fDA}$ | Capacitive load from 10pF to 100pF | 10 | 80 | - | - | ns |
| | | Capacitive load of 400pF | 20 | 160 | 20 | 250 | ns |


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## I/O LEVEL CHARACTERISTICS *(continued)*

| Parameter | Symbol | Condition | HS-Mode | | LS-Mode | | Units |
|---|---|---|---|---|---|---|---|
| | | | Min | Max | Min | Max | |
| Pulse width of spikes that must be suppressed by the input filter | $t_{SP}$ | | 0 | 10 | 0 | 50 | ns |
| Input current each I/O pin | $I_i$ | Input voltage between $0.1V_{CC}$ and $0.9V_{CC}$ | - | 10 | -10 | +10 | µA |
| Capacitance for each I/O pin | $C_i$ | | - | 10 | - | 10 | pF |


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## I²C PORT SIGNAL CHARACTERISTICS

| Parameter | Symbol | Condition | Cb = 100pF | | Cb = 400pF | | Units |
|---|---|---|---|---|---|---|---|
| | | | Min | Max | Min | Max | |
| SCLH and SCL clock frequency | $f_{SCHL}$ | | 0 | 3.4 | 0 | 0.4 | MHz |
| Set-up time for a repeated start condition | $T_{SU;STA}$ | | 160 | - | 600 | - | ns |
| Hold time (repeated) start condition | $T_{HD;STA}$ | | 160 | - | 600 | - | ns |
| Low period of the SCL clock | $T_{LOW}$ | | 160 | - | 1300 | - | ns |
| High period of the SCL clock | $T_{HIGH}$ | | 60 | - | 600 | - | ns |
| Data set-up time | $T_{SU:DAT}$ | | 10 | - | 100 | - | ns |
| Data hold time | $T_{HD;DAT}$ | | 0 | 70 | 0 | - | ns |
| Rise time of SCLH signal | $T_{rCL}$ | | 10 | 40 | 20*0.1Cb | 300 | ns |
| Rise time of SCLH signal after a repeated start condition and after an acknowledge bit | $T_{fCL1}$ | | 10 | 80 | 20*0.1Cb | 300 | ns |
| Fall time of SCLH signal | $T_{fCL}$ | | 10 | 40 | 20*0.1Cb | 300 | ns |
| Rise time of SDAH signal | $T_{fDA}$ | | 10 | 80 | 20*0.1Cb | 300 | ns |
| Fall time of SDAH signal | $T_{fDA}$ | | 10 | 80 | 20*0.1Cb | 300 | ns |
| Set-up time for stop condition | $T_{SU;STO}$ | | 160 | - | 600 | - | ns |
| Bus free time between a stop and start condition | $T_{BUF}$ | | 160 | - | 1300 | - | ns |
| Data valid time | $T_{VD;DAT}$ | | - | 16 | - | 90 | ns |
| Data valid acknowledge time | $T_{VD;ACK}$ | | - | 160 | - | 900 | ns |
| Capacitive load for each bus line | $C_b$ | SDAH and SCLH line | - | 100 | - | 400 | pF |
| | | SDAH + SDA line and SCLH + SCL line | - | 400 | - | 400 | pF |
| Noise margin at the low level | $C_i$ | For each connected device | - | $0.1V_{CC}$ | $0.1V_{CC}$ | - | V |
| Noise margin at the high level | $V_{nH}$ | For each connected device | - | $0.2V_{CC}$ | $0.2V_{CC}$ | - | V |


**NOTE:** VCC is the I²C bus voltage, 1.8V to 3.6V range, and used for 1.8V, 2.5V, and 3.3V bus voltages.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.


## TYPICAL PERFORMANCE CHARACTERISTICS

**Performance waveforms are tested on the evaluation board.**
**VIN = 12V, VOUT = 1V, L = 1.5µH, $F_S$ = 500kHz, auto PFM/PWM mode, $T_A$ = 25°C, unless otherwise noted.**


### Enabled Supply Current vs. Input Voltage

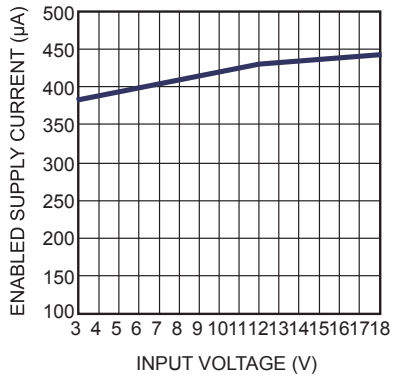



### Disabled Supply Current vs. Input Voltage

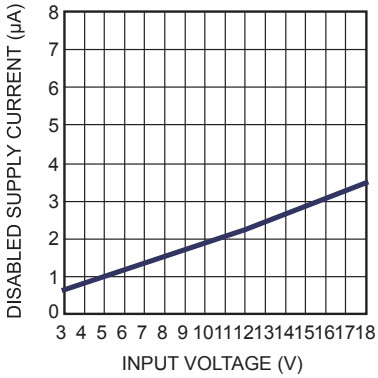



### EN Rising Threshold vs. Temperature

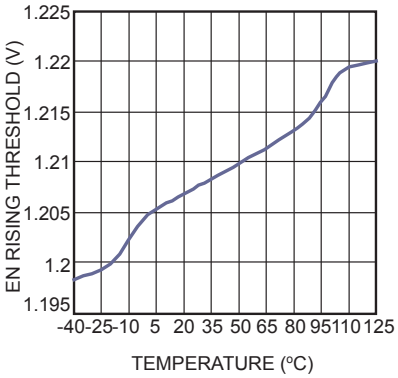


### Reference Voltage vs. Temperature

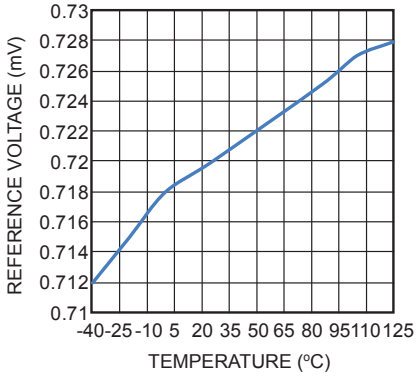



### Line Regulation vs. Input Voltage

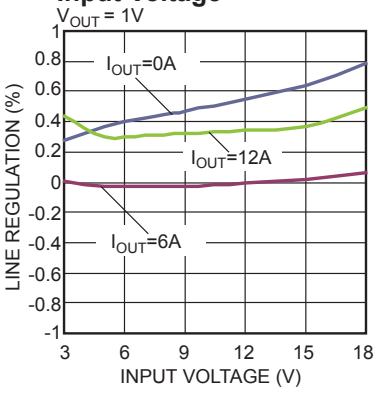



### Efficiency vs. Output Current

$V_{OUT}$ = 1V, L = 1.5µH, DCR = 2.1mΩ

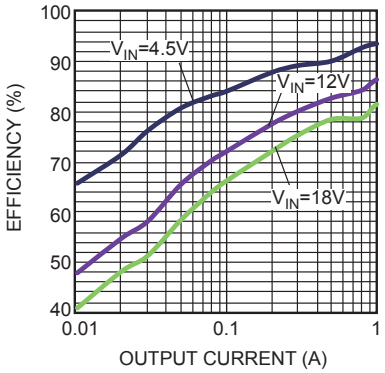



### Efficiency vs. Output Current

$V_{OUT}$ = 1V, L = 1.5µH, DCR = 2.1mΩ

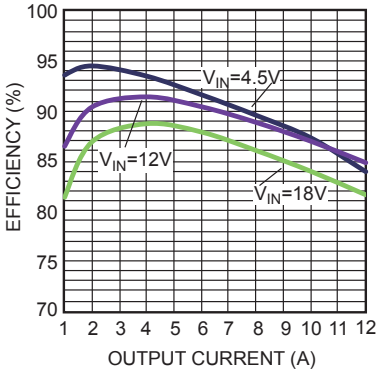



### Efficiency vs. Output Current

$V_{OUT}$ = 1.2V, L = 1.5µH, DCR = 2.1mΩ

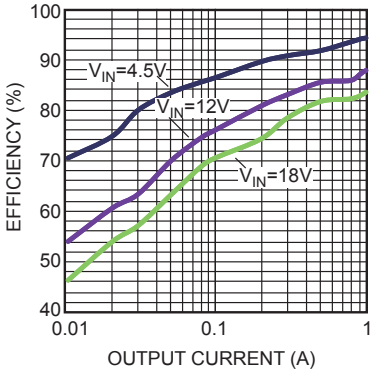


### Efficiency vs. Output Current

$V_{OUT}$ = 1.2V, L = 1.5µH, DCR = 2.1mΩ

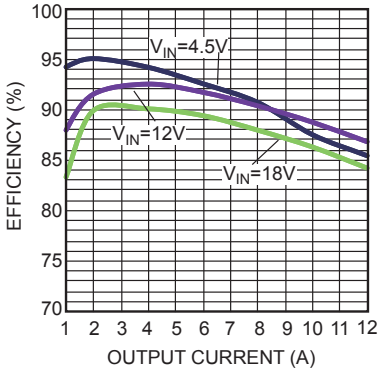




MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.


## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

**Performance waveforms are tested on the evaluation board.**
**VIN = 12V, VOUT = 1V, L = 1.5µH, $F_S$ = 500kHz, auto PFM/PWM mode, $T_A$ = 25°C, unless otherwise noted.**


**Efficiency vs. Output Current**
$V_{OUT}$ = 1.5V, L = 1.5µH, DCR = 2.1mΩ

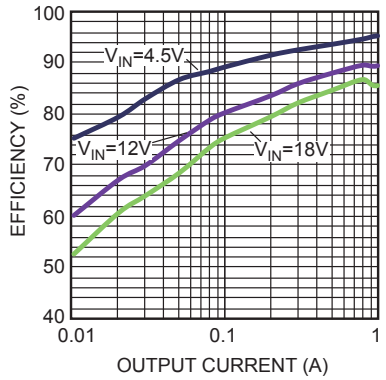



**Efficiency vs. Output Current**
$V_{OUT}$ = 1.5V, L = 1.5µH, DCR = 2.1mΩ

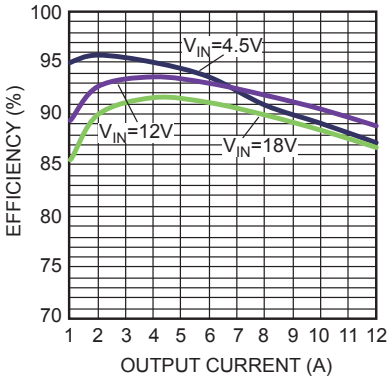



**Efficiency vs. Output Current**
$V_{OUT}$ = 1.8V, L = 1.5µH, DCR = 2.1mΩ

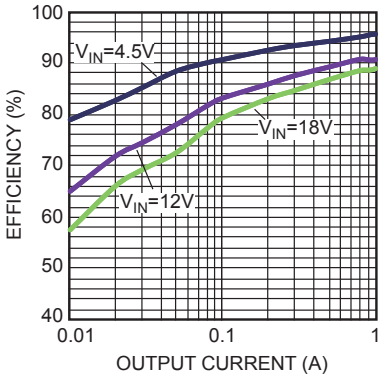



**Efficiency vs. Output Current**
$V_{OUT}$ = 1.8V, L = 1.5µH, DCR = 2.1mΩ

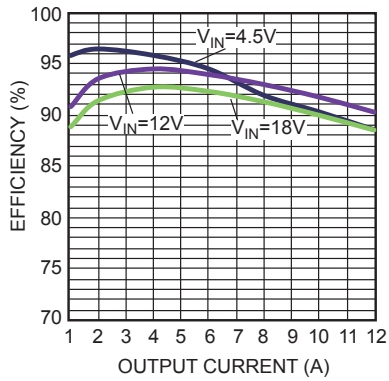



**Efficiency vs. Output Current**
$V_{OUT}$ = 2.5V, L = 2.2µH, DCR = 3mΩ

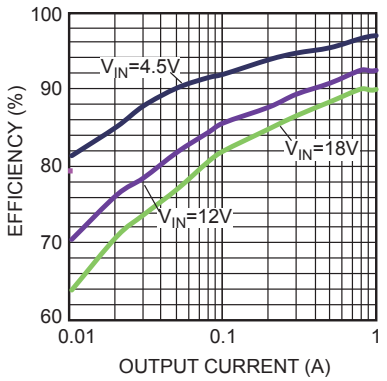



**Efficiency vs. Output Current**
$V_{OUT}$ = 2.5V, L = 2.2µH, DCR = 3mΩ

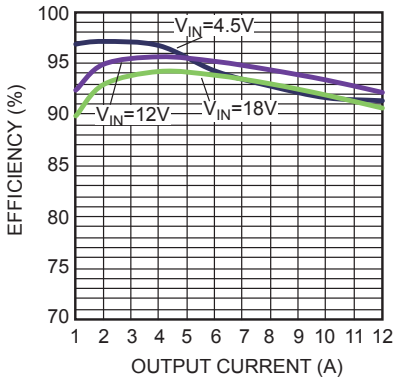



**Efficiency vs. Output Current**
$V_{OUT}$ = 3.3V, L = 2.2µH, DCR = 3mΩ

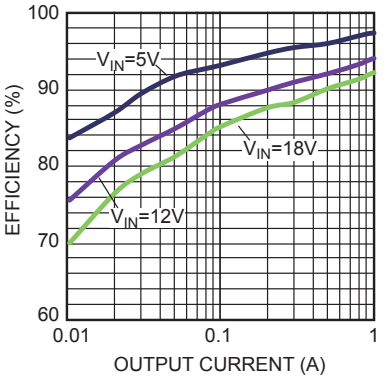


**Efficiency vs. Output Current**
$V_{OUT}$ = 3.3V, L = 2.2µH, DCR = 3mΩ

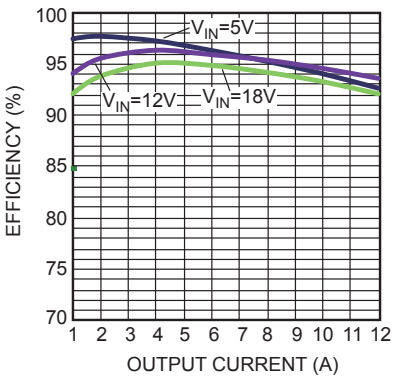


**Efficiency vs. Output Current**
$V_{OUT}$ = 5V, L = 3.3µH, DCR = 4.4mΩ

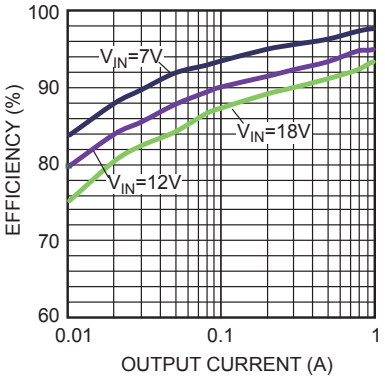




MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.


## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

**Performance waveforms are tested on the evaluation board.**
**VIN = 12V, VOUT = 1V, L = 1.5µH, $F_S$ = 500kHz, auto PFM/PWM mode, $T_A$ = 25°C, unless otherwise noted.**


**Efficiency vs. Output Current**
$V_{OUT}$ = 5V, L = 3.3µH, DCR = 4.4mΩ

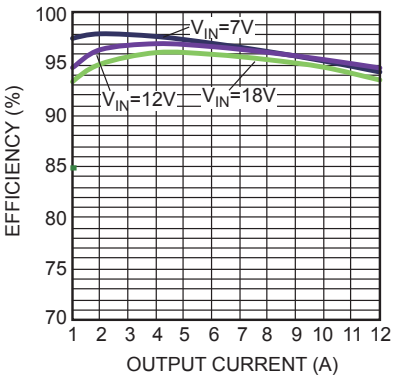



**Load Regulation vs. Output Current**
$V_{OUT}$ = 1V

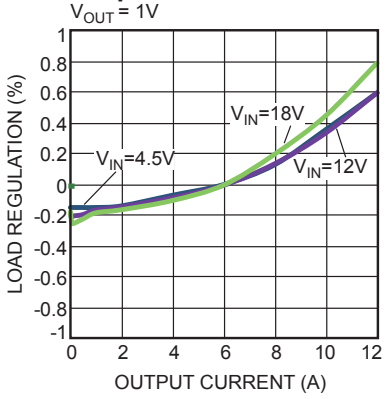



**Load Regulation vs. Output Current**
$V_{OUT}$ = 1.2V

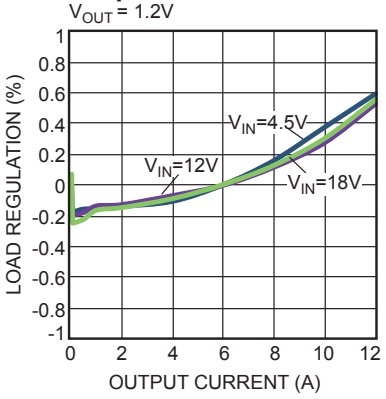



**Load Regulation vs. Output Current**
$V_{OUT}$ = 1.5V

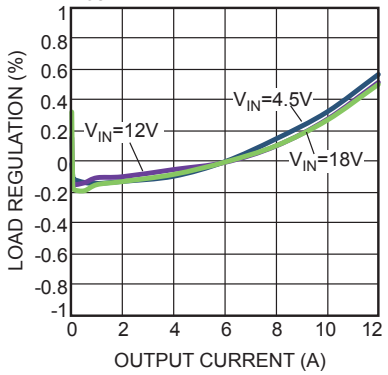



**Load Regulation vs. Output Current**
$V_{OUT}$ = 1.8V

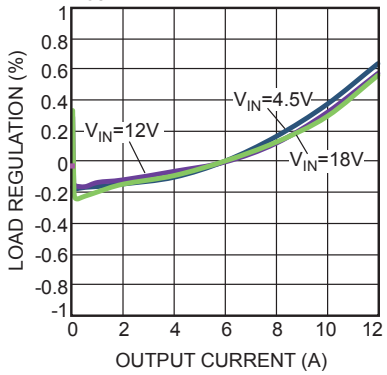



**Load Regulation vs. Output Current**
$V_{OUT}$ = 2.5V

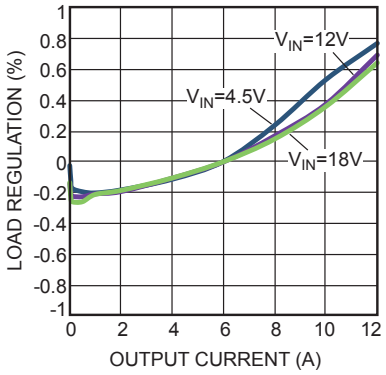



**Load Regulation vs. Output Current**
$V_{OUT}$ = 3.3V

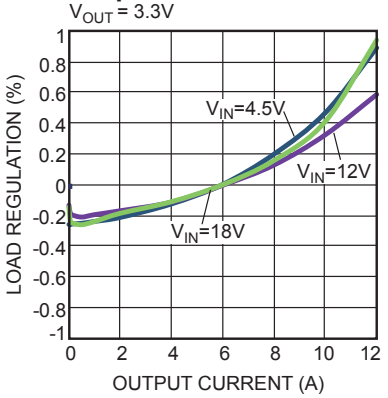


**Load Regulation vs. Output Current**
$V_{OUT}$ = 5V

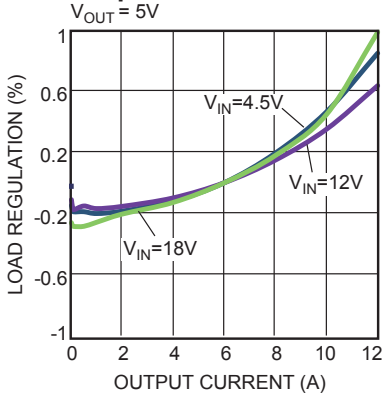


**Case Temperature Rise vs. Output Current**

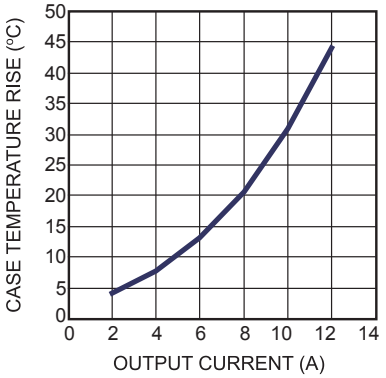




MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

**Performance waveforms are tested on the evaluation board.**
**VIN = 12V, VOUT = 1V, L = 1.5µH, $F_S$ = 500kHz, auto PFM/PWM mode, $T_A$ = 25°C, unless otherwise noted.**


### Output Current Derating vs. Frequency and Output Voltage

$V_{IN}$ = 12V, 4 Layer PCB Board, 8.5cmx8.5cm

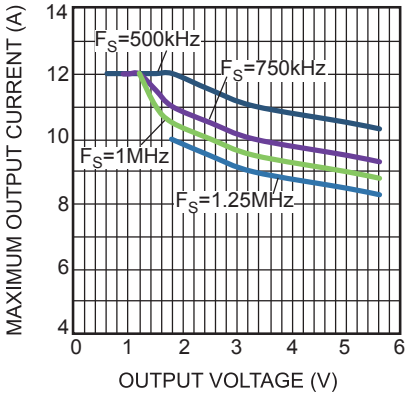



### Load Regulation

$V_{IN}$ = 3V, $V_{OUT}$ = 0.9V

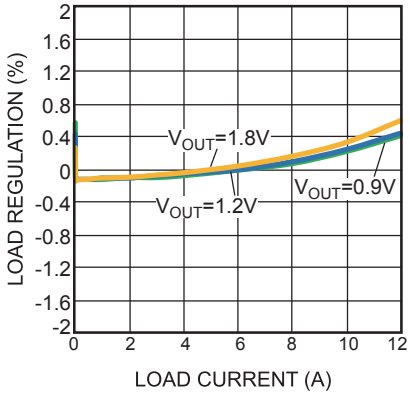



### Case Temperature Rise vs. Output Current

$V_{IN}$ = 3V, $V_{OUT}$ = 0.9V

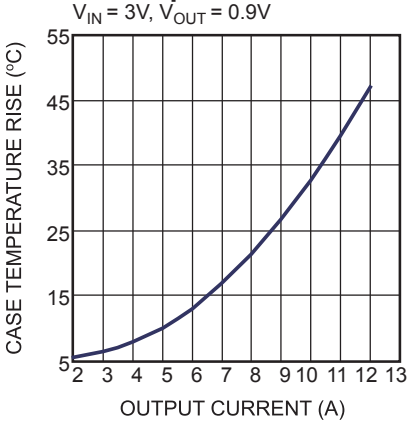



### Efficiency Curve

$V_{IN}$ = 3V, $V_{OUT}$ = 0.9V

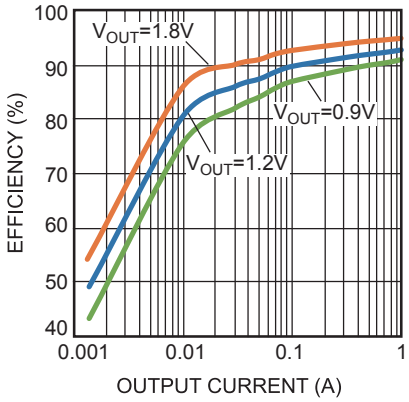


### Efficiency Curve

$V_{IN}$ = 3V, $V_{OUT}$ = 0.9V

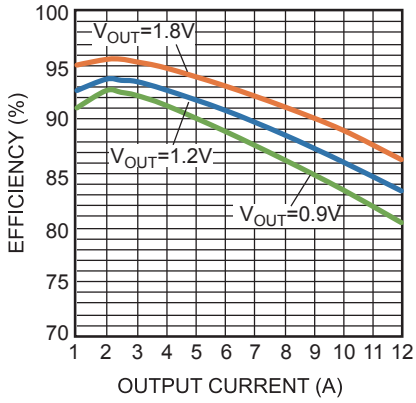




MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.


## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

**Performance waveforms are tested on the evaluation board.**
**VIN = 12V, VOUT = 1V, L = 1.5µH, $F_S$ = 500kHz, auto PFM/PWM mode, $T_A$ = 25°C, unless otherwise noted.**


### Input/Output Ripple
$I_{OUT}$ = 0A

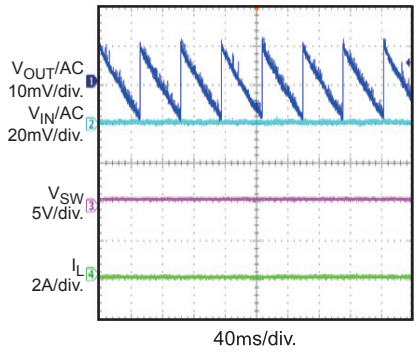



### Input/Output Ripple
$I_{OUT}$ = 0A

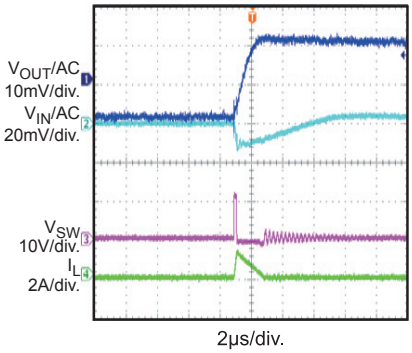



### Input/Output Ripple
$I_{OUT}$ = 0A, Forced PWM Mode

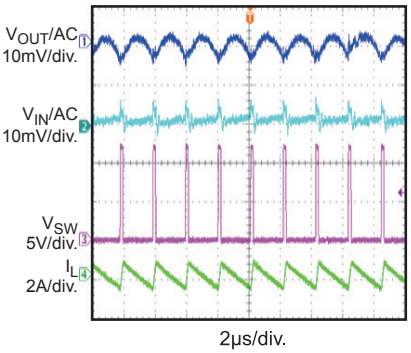



### Input/Output Ripple
$I_{OUT}$ = 12A

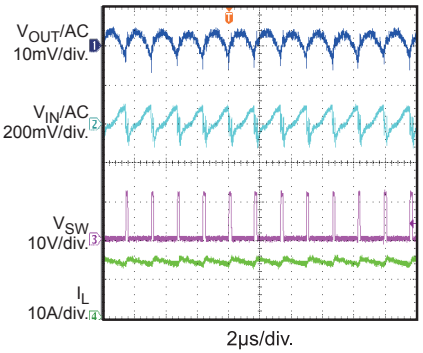



### Start-Up through Input Voltage
$I_{OUT}$ = 0A

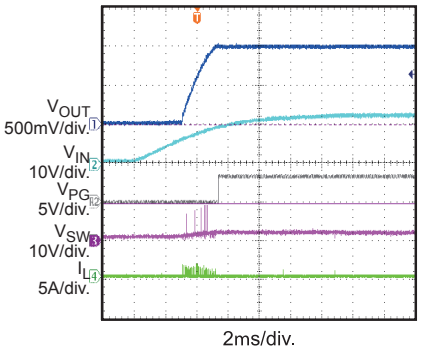



### Start-Up through Input Voltage
$I_{OUT}$ = 12A

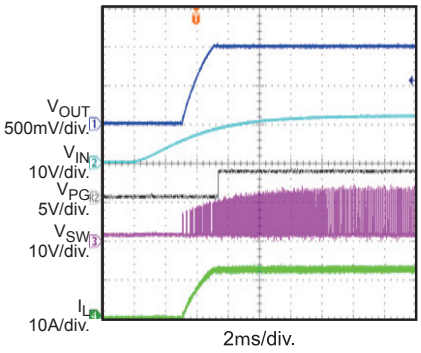



### Shutdown through Input Voltage
$I_{OUT}$ = 0A

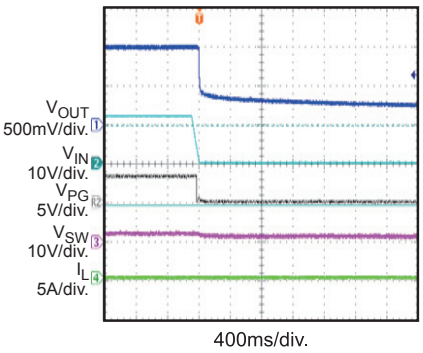


### Shutdown through Input Voltage
$I_{OUT}$ = 12A

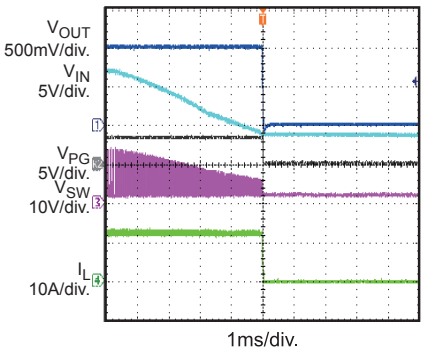


### Start-Up through EN
$I_{OUT}$ = 0A

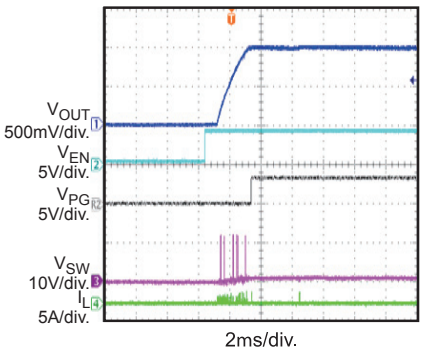




MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.


## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

**Performance waveforms are tested on the evaluation board.**
**VIN = 12V, VOUT = 1V, L = 1.5µH, $F_S$ = 500kHz, auto PFM/PWM mode, $T_A$ = 25°C, unless otherwise noted.**


### Start-Up through EN
$I_{OUT}$ = 12A

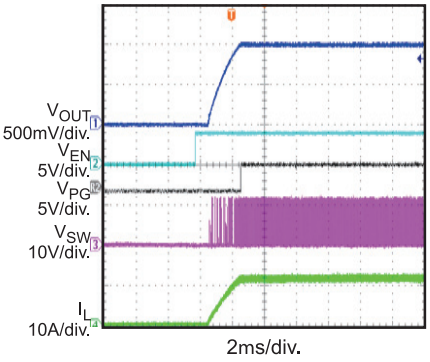



### Shutdown through EN
$I_{OUT}$ = 0A

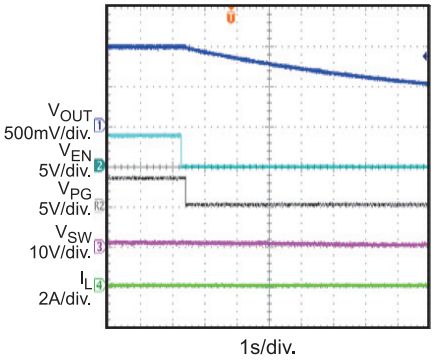



### Shutdown through EN
$I_{OUT}$ = 12A

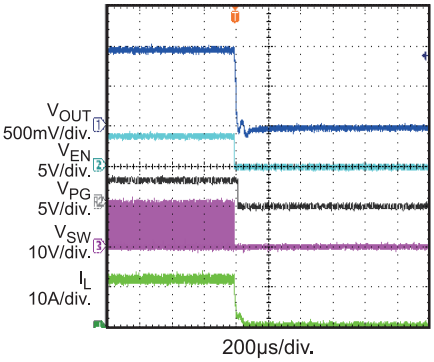



### Load Transient
$I_{OUT}$ = 6A-12A

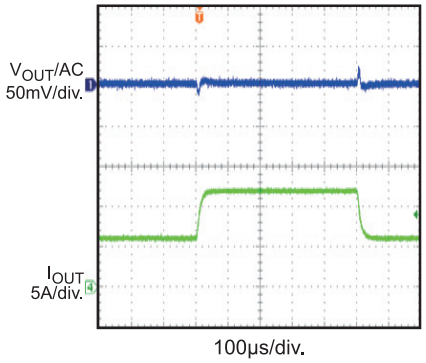



### Short-Circuit Protection Entry
$I_{OUT}$ = 0A

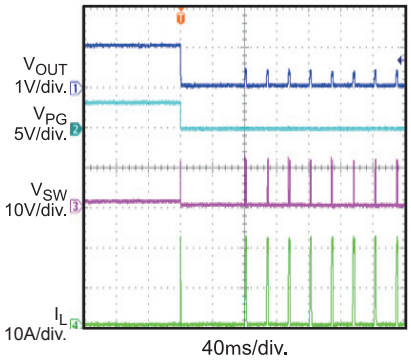



### Short-Circuit Protection Recovery
$I_{OUT}$ = 0A

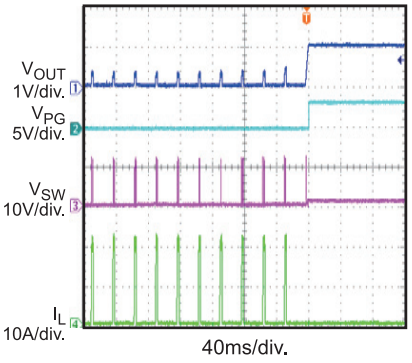


### Short-Circuit Protection Steady State
Short Output to GND

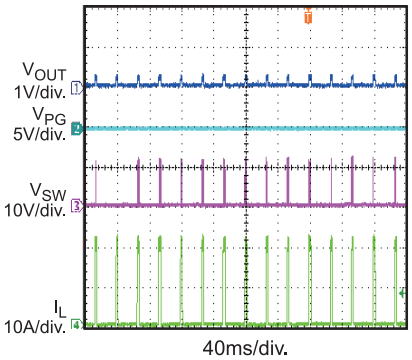


### Short-Circuit Protection Entry, Latch Off Mode
$I_{OUT}$=0A

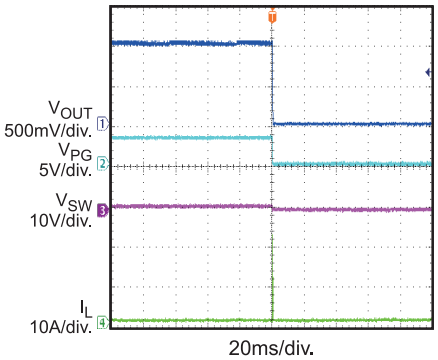




MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.


## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

**Performance waveforms are tested on the evaluation board.**
**VIN = 3V, VOUT = 0.9V, L = 0.47µH, $F_S$ = 500kHz, auto PFM/PWM mode, $T_A$ = 25°C, unless otherwise noted.**


### Input/Output Ripple
$I_{OUT}$ = 0A

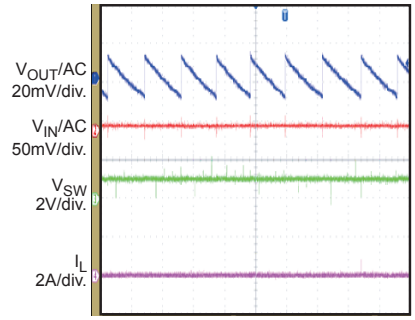



### Input/Output Ripple
$I_{OUT}$ = 0A

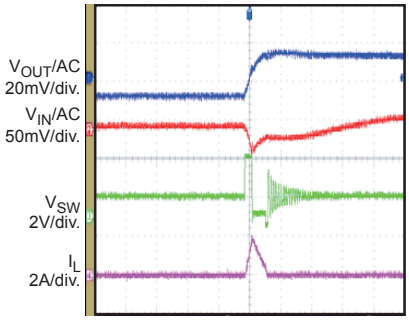



### Input/Output Ripple
$I_{OUT}$ = 0A, Forced PWM Mode

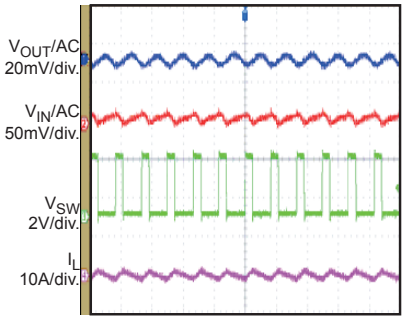



### Input/Output Ripple
$I_{OUT}$ = 12A

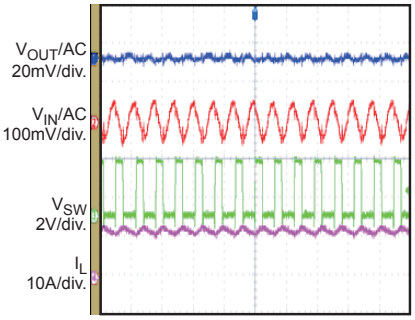



### Start-Up through Input Voltage
$I_{OUT}$ = 0A

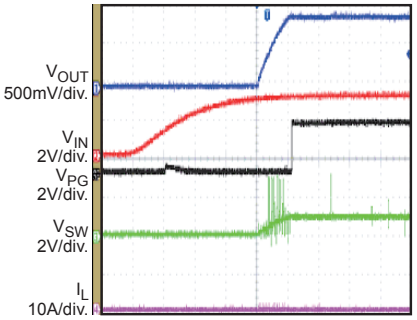



### Start-Up through Input Voltage
$I_{OUT}$ = 12A

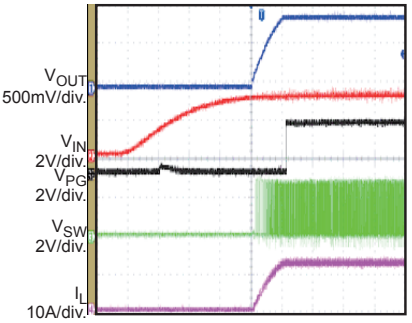



### Shutdown through Input Voltage
$I_{OUT}$ = 0A

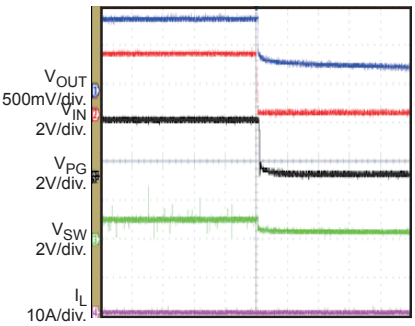


### Shutdown through Input Voltage
$I_{OUT}$ = 12A

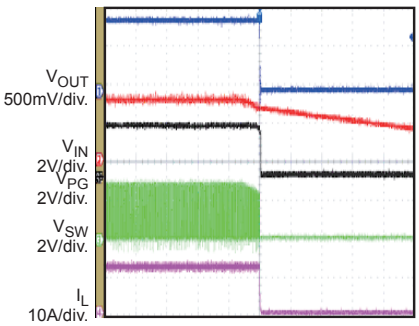


### Start-Up through EN
$I_{OUT}$ = 0A

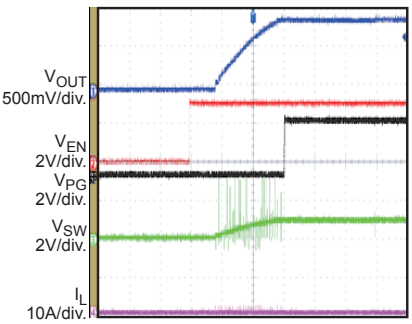




MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.


## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

**Performance waveforms are tested on the evaluation board.**
**VIN = 3V, VOUT = 0.9V, L = 0.47µH, $F_S$ = 500kHz, auto PFM/PWM mode, $T_A$ = 25°C, unless otherwise noted.**


### Start-Up through EN
$I_{OUT}$ = 12A

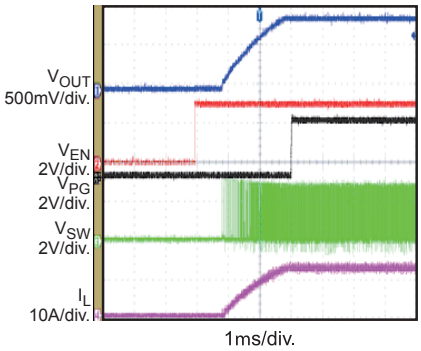



### Shutdown through EN
$I_{OUT}$ = 0A

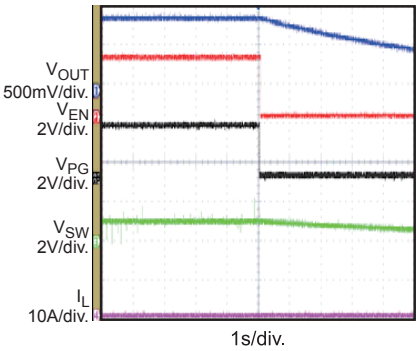



### Shutdown through EN
$I_{OUT}$ = 12A

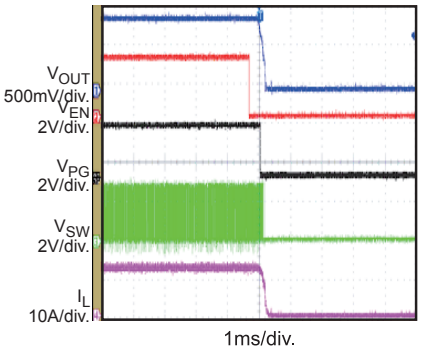



### Load Transient
$I_{OUT}$ = 6A-12A

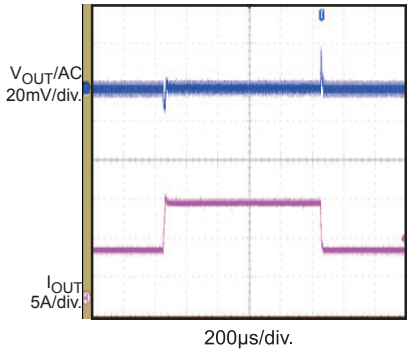



### Short-Circuit Protection Entry
$I_{OUT}$ = 0A

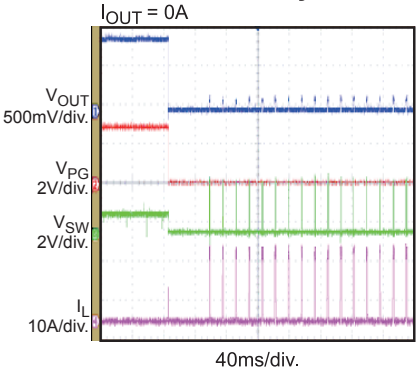



### Short-Circuit Protection Recovery
$I_{OUT}$ = 0A

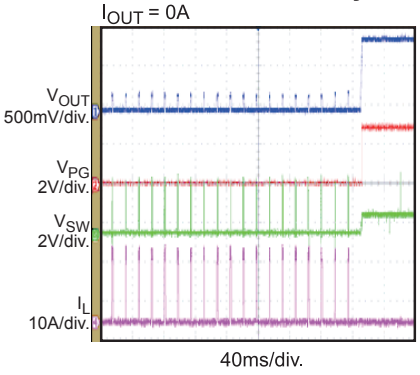


### Short-Circuit Protection Steady State
Short Output to GND

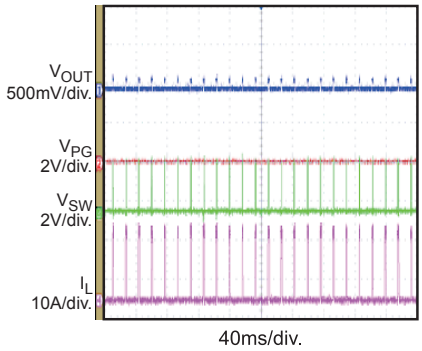


### Short-Circuit Protection Entry, Latch Off Mode
$I_{OUT}$=0A

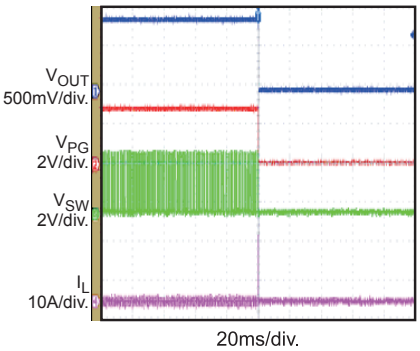



MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## PIN FUNCTIONS

| QFN-14 Pin# | Name | Description |
|---|---|---|
| 1 | BST | **Bootstrap.** A capacitor is required between SW and BST to form a floating supply across the high-side switch driver. |
| 2 | SW | **Switch output.** Connect SW using a wide PCB trace. |
| 3 | SCL | **I²C serial clock.** |
| 4 | SDA | **I²C serial data.** |
| 5 | EN | **Enable.** Drive EN high to enable the MP8869S. EN has a 1.5MΩ internal pull-down resistor to GND. EN is a high-voltage pin, so it can be connected to VIN directly for auto start-up. |
| 6 | A0 | **I²C address set-up.** Connect a resistor divider from VCC to A0 to set different I²C addresses. |
| 7 | PG | **Power good indication.** PG is an open-drain structure. PG is de-asserted if the output voltage is out of the regulation window. |
| 8 | PGND | **System power ground.** PGND is the reference ground of the regulated output voltage. PGND requires special consideration during the PCB layout. Connect PGND to the ground plane with copper traces and vias. |
| 9 | VIN | **Supply voltage.** The MP8869S operates from a 2.85V to 18V input rail. Decouple the input rail with a ceramic capacitor. Connect VIN using a wide PCB trace. |
| 10 | VOUT | **Output voltage sense.** Connect VOUT to the positive terminal of the load. |
| 11 | FB | **Feedback.** Connect FB to the tap of an external resistor divider from the output to GND to set the output voltage. |
| 12 | SS | **Soft-start set-up.** Connect a capacitor from SS to ground to set the soft-start time. |
| 13 | VCC | **Internal LDO regulator output.** Decouple VCC with a 0.47μF capacitor. |
| 14 | AGND | **Signal ground.** If AGND is not connected to PGND internally, ensure that AGND is connected to PGND during the PCB layout. |


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## BLOCK DIAGRAM

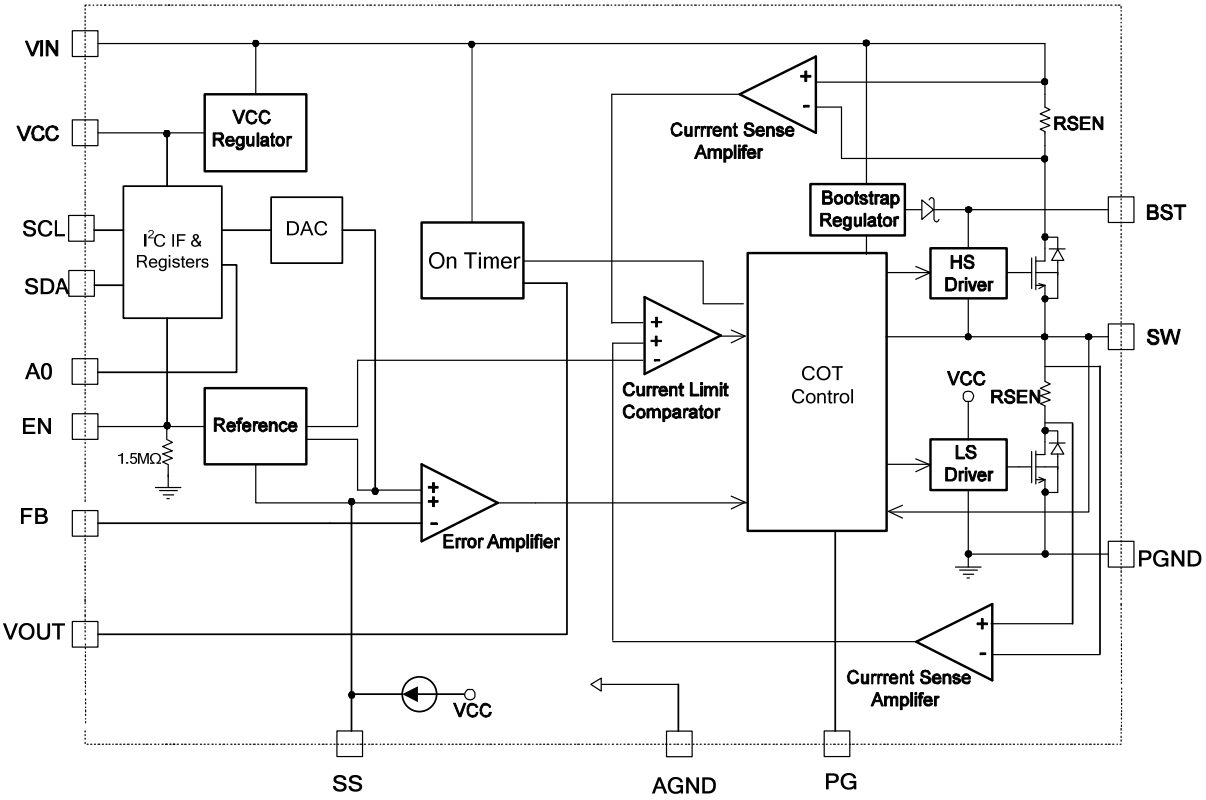



**Figure 2: Functional Block Diagram**


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

# OPERATION

## Pulse-Width Modulation (PWM) Operation

The MP8869S is a fully integrated, synchronous, rectified, step-down, switch-mode converter. The MP8869S uses constant-on-time (COT) control to provide fast transient response and ease loop stabilization. Figure 3 shows the simplified ramp compensation block.

At the beginning of each cycle, the high-side MOSFET (HS-FET) turns on whenever the ramp voltage ($V_{Ramp}$) is below the error amplifier output voltage ($V_{EAO}$), which indicates an insufficient output voltage. The on period is determined by both the output voltage and input voltage to make the switching frequency fairly constant over the input voltage range.

After the on period elapses, the HS-FET enters the off state. By cycling the HS-FET between the on and off states, the converter regulates the output voltage. The integrated low-side MOSFET (LS-FET) turns on when the HS-FET is in its off state to minimize conduction loss.

Shoot-through occurs when both the HS-FET and LS-FET are on at the same time, causing a dead short between input and GND, reducing efficiency dramatically. The MP8869S prevents shoot-through by generating a dead-time (DT) internally between the HS-FET off and LS-FET on period and the LS-FET off and HS-FET on period. The MP8869S enters either heavy-load operation or light-load operation depending on the amplitude of the output current.

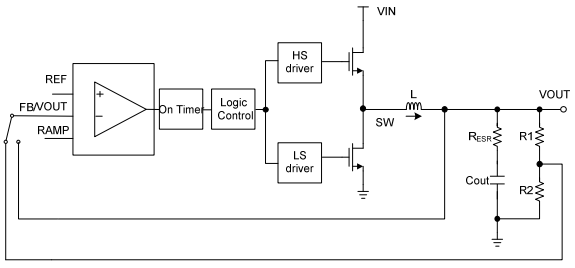



**Figure 3: Simplified Compensation Block**

## Switching Frequency

The MP8869S uses constant-on-time (COT) control, and there is no dedicated oscillator in the IC. The input voltage is fed into the one-shot on-timer through the internal frequency resistor. The duty ratio is VOUT/VIN, and the switching frequency is fairly constant over the input voltage range.

The MP8869S's switching frequency can be adjusted by setting the two bits D[5:4] in register 02 through I²C communication. When the output voltage setting is low and the input voltage is high, the switching on-time may be limited by the internal minimum on-time limit, and switching frequency decreases. Table 1 shows the maximum switching frequency vs. the output voltage when VIN = 12V and VIN = 5V.

**Table 1: Maximum Frequency Selecting vs. Output Voltage**

| | Maximum Frequency Selecting | |
|---|---|---|
| Vo (V) | VIN = 12V | VIN = 5V |
| 5 | 1.25MHz | / |
| 3.3 | 1.25MHz | 1.25MHz |
| 2.5 | 1.25MHz | 1.25MHz |
| 1.8 | 1.25MHz | 1.25MHz |
| 1.5 | 1.25MHz | 1.25MHz |
| 1.2 | 1MHz | 1.25MHz |
| 1 | 750kHz | 1.25MHz |
| 0.9 | 750kHz | 1.25MHz |
| 0.6 | 500kHz | 1.25MHz |

## Forced PWM Operation

When the MP8869S works in forced pulse-width modulation (PWM) mode, the MP8869S enters continuous conduction mode (CCM), where the HS-FET and LS-FET repeat the on/off operation, even if the inductor current is zero or a negative value. The switching frequency ($f_{SW}$) is fairly constant (see Figure 4).

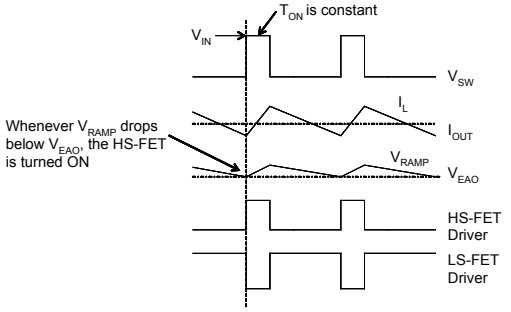



**Figure 4: Forced PWM Operation**


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

### Light-Load Operation

When the MP8869S works in auto-PWM, auto-pulse-frequency modulation (PFM) mode, or light-load operation, the MP8869S reduces the switching frequency automatically to maintain high efficiency, and the inductor current drops almost to zero. When the inductor current reaches zero, the LS-FET driver goes into tri-state (Hi-Z) (see Figure 5). The output capacitors discharge slowly to GND through R1 and R2. This operation improves device efficiency greatly when the output current is low.

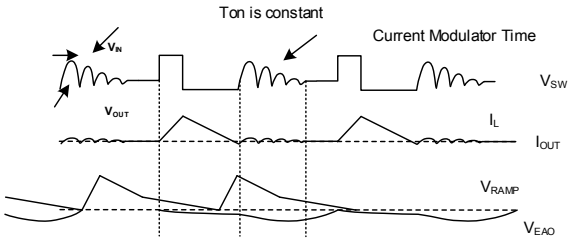



**Figure 5: Light-Load Operation**

Light-load operation is also called skip mode since the HS-FET does not turn on as frequently as it does during heavy-load condition. The frequency at which the HS-FET turns on is a function of the output current. As the output current increases, the current modulator regulation time period becomes shorter, the HS-FET turns on more frequently, and the switching frequency increases. The output current reaches critical levels when the current modulator time is zero and can be determined with Equation (1):

$$I_{OUT} = \frac{(V_{IN} - V_{OUT}) \times V_{OUT}}{2 \times L \times F_{SW} \times V_{IN}} \quad (1)$$

The MP8869S reverts to PWM mode once the output current exceeds the critical level. The switching frequency then remains fairly constant over the output current range.

The MP8869S can operate in PFM mode under light load to improve efficiency (low-power mode). The MP8869S can also operate in forced PWM mode at any load condition. This mode is selectable through the I²C control. To enable low-power mode, set the mode bit to 0. To disable low-power mode, set the mode bit to 1, and the converter will work in forced PWM mode. The mode bit is set to 0 (PFM) by default.

### Operating without an External Ramp

The traditional COT control scheme is intrinsically unstable if the output capacitor's ESR is not large enough to be an effective current-sense resistor. Ceramic capacitors cannot be used as output capacitors, typically. The MP8869S has built-in, internal ramp compensation to ensure that the system is stable, even without the help of the output capacitor's ESR. The pure ceramic capacitor solution can reduce the output ripple, total BOM cost, and board area significantly.

### VCC Regulator

A 3.5V internal regulator powers most of the internal circuitries. A 470nF decoupling capacitor is needed to stabilize the regulator and reduce ripple. This regulator takes the VIN input and operates in the full VIN range. After EN is pulled high and VIN is greater than 3.5V, the output of the regulator is in full regulation. When VIN is lower than 3.5V, the output voltage decreases and follows the input voltage. A 0.47µF ceramic capacitor is required for decoupling.

### Error Amplifier (EA)

The error amplifier (EA) compares the FB voltage against the internal reference voltage and outputs a PWM signal. The reference voltage can be programmed from 0.6V to 1.108V via the I²C. The optimized internal ramp compensation minimizes the external component count and simplifies the control loop design.

### Enable (EN)

EN is a digital control pin that turns the regulator, including the I²C block, on and off. Drive EN high to turn on the regulator; drive EN low to turn off the regulator. An internal 1.5MΩ resistor is connected from EN to ground. EN can operate with an 18V input voltage, which allows EN to be connected to VIN directly for automatic start-up. When the external EN is high, set the EN bit to 0 in register 01 to stop the HS-FET and LS-FET from switching. The MP8869S resumes switching by setting the EN bit to 1.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

### Under-Voltage Lockout (UVLO)

Under-voltage lockout (UVLO) protects the chip from operating at an insufficient supply voltage. The MP8869S UVLO comparator monitors the input voltage, VIN, and output voltage of the VCC regulator. The MP8869S is active when the voltages exceed the UVLO rising threshold.

### Soft-Start (SS) and Pre-Bias Start-Up

Soft start (SS) prevents the converter output voltage from overshooting during start-up. When the chip starts up, the internal circuitry generates a soft-start voltage that ramps up from 0V to VCC. When SS is lower than REF, the error amplifier uses SS as the reference. When SS is higher than REF, the error amplifier uses REF as the reference.

The approximate typical soft-start time can be calculated with Equation (2):

$$t_{ss}(ms) = \frac{V_{ref}(V) \times C_{ss}(nF)}{7\mu A} \quad (2)$$

Where $V_{ref}$ is reference voltage.

If the output of the MP8869S is pre-biased to a certain voltage during start-up, the IC disables the switching of both the HS-FET and LS-FET until the voltage on the internal SS capacitor exceeds the sensed output voltage at FB.

The MP8869S also provides a selectable soft-stop function which defines the output discharge behavior after an EN shutdown. By default, the output is not controlled after EN shutdown. If setting the soft-stop control bit D[3] to 1 in register 02 via the $I^2C$, the output is discharged linearly to zero in a quarter of the soft-start time.

### Over-Current Protection (OCP)

The MP8869S has a default, hiccup, cycle-by-cycle, over-current limiting control. The current-limit circuit employs both a high-side current limit and a low-side valley current-sensing algorithm. The MP8869S uses the $R_{DS(ON)}$ of the LS-FET as a current-sensing element for the valley current limit. If the magnitude of the high-side current-sense signal is above the current-limit threshold, the PWM on pulse is terminated, and the LS-FET is turned on. Afterward, the inductor current is monitored by the voltage between GND and SW. GND is used as the positive current sensing node, so GND should be connected to the source terminal of the bottom MOSFET. PWM is not allowed to initiate a new cycle before the inductor current falls to the valley threshold.

After the cycle-by-cycle over-current limit occurs, the output voltage drops until VOUT is below the under-voltage (UV) threshold (typically 60% below the reference). Once UV is triggered, the MP8869S enters hiccup mode to restart the part periodically. This protection mode is especially useful when the output is dead shorted to ground. The average short-circuit current is reduced greatly to alleviate thermal issues and protect the regulator. The MP8869S exits hiccup mode once the over-current condition is removed.

Short the output to ground first, and then power on the part. The MP8869S's $I^2C$ is disabled in this condition. The $I^2C$ resumes operation after the short circuit is removed. When the hiccup over-current protection (OCP) bit D[1] in register 01 is set to 0 by the $I^2C$, a latch-off occurs if OCP is triggered, and FB under-voltage protection (UVP) is triggered.

### Power Good (PG)

The power good (PG) pin indicates whether the output voltage is in the normal range compared to the internal reference voltage. PG is an open-drain structure. An external pull-up supply is required. During power-up, the PG output is pulled low. This indicates to the system to remain off and keep the load on the output to a minimum. This helps reduce in-rush current at start-up.

When the output voltage is higher than 90% and lower than 115% of the internal reference voltage, and the soft start is finished, then the PG signal is pulled high. When the output voltage is lower than 85% after the soft start finishes, the PG signal remains low. When the output voltage is higher than 115% of the internal reference, PG is switched low. The PG signal rises back to high after the output voltage drops below 105% of the internal reference voltage.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

PG implements an adjustable deglitch time via the I²C whenever VOUT crosses the under-voltage and over-voltage (UV, OV) rising and falling threshold. This guarantees the correct indication when the output voltage is scaled through the I²C.

The PG output is pulled low immediately when EN UVLO, input UVLO, OCP, or over-temperature protection (OTP) are triggered.

### Input Over-Voltage Protection (VIN OVP)

The MP8869S monitors VIN to detect an input over-voltage event. This function is active only when the output is in OV or a soft-stop condition. When the output is in the over-voltage protection (OVP) state or soft stop is enabled, output discharge is enabled to charge the input voltage high. When the input voltage exceeds the input OVP threshold, both the HS-FET and LS-FET stop switching.

### Output Over-Voltage Protection (OVP)

The MP8869S monitors both FB and VOUT to detect an over-voltage event. When the FB voltage becomes higher than 125% of the internal reference voltage, an internal comparator monitors FB, and the controller enters dynamic regulation mode. The input voltage may be charged up during this time. When input OVP is triggered, the IC stops switching. If OVP mode is set to auto retry in the I²C, the IC begins switching once the input voltage drops below the VIN OVP recover threshold. Otherwise, the MP8869S latches off. OVP auto-retry mode or latch-off mode occurs only if the soft start has finished.

Dynamic regulation mode can be operated by turning on the low side until the low-side negative current limit is triggered. Then the body diode of the HS-FET free-wheels the current.

The output power charges the input, which may trigger the VIN OVP function. In VIN OVP, neither the HS-FET or LS-FET turn on and stop charging VIN. If the output is still over-voltage and the input voltage drops below the VIN OVP threshold, repeat the operation. If the output voltage is below 110% of the internal reference voltage, then output OVP is exited.

### Output Absolute Over-Voltage Protection (OVP_ABS)

The MP8869S's VOUT can be adjusted by the feedback reference voltage and the external resistor dividers. But MP8869S's output voltage must be set lower than the absolute OVP threshold (typically 6.5V).

The MP8869S monitors VOUT to detect absolute OVP. When VOUT is larger than 6.5V, the controller enters dynamic regulation mode if the OVP retry bit is set to 1 in the I²C register 01. Otherwise, the MP8869S latches off when output OVP and input OVP are both triggered. Absolute OVP works once both the input voltage and EN are higher than their rising thresholds. This means that this function can work even during a soft start.

### Thermal Shutdown

Thermal shutdown prevents the chip from operating at exceedingly high temperatures. When the silicon die reaches temperatures that exceed 160°C, the entire chip shuts down. When the temperature is less than its lower threshold (typically 140°C), the chip is enabled again.

The D[1] and D[2] bits can be monitored in register 06 for more information about the IC silicon temperature.

### Floating Driver and Bootstrap Charging

An external bootstrap capacitor powers the floating power MOSFET driver. This floating driver has its own UVLO protection. This UVLO's rising threshold is 2.4V with a 150mV hysteresis. The bootstrap capacitor voltage is regulated by VIN internally through D1, M1, C4, L1, and C2 (see Figure 6). If $V_{BST}$ - $V_{SW}$ exceeds 3.3V, U1 regulates M1 to maintain a 3.3V BST voltage across C4.

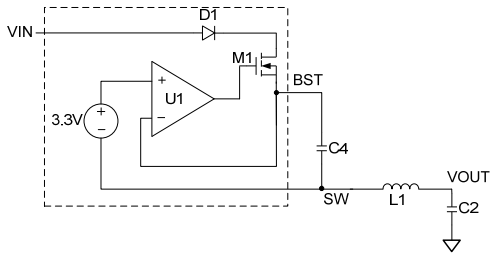



**Figure 6: Internal Bootstrap Charging Circuit**


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

### Start-Up and Shutdown

If VIN, VCC, and EN exceed their respective thresholds, the chip starts up. The reference block starts first, generating stable reference voltages and currents, and then the internal regulator is enabled. The regulator provides a stable supply for the remaining circuitries.

Several events can shut down the chip: EN low, VIN low, VCC low, thermal shutdown, OVP latch, and OCP latch. In the shutdown procedure, the signaling path is blocked first to avoid any fault triggering. $V_{EAO}$ and the internal supply rail are then pulled down.

### I²C Control and Default Output Voltage

When the MP8869S is enabled, the output voltage is determined by the FB resistors with a programmed soft-start time. After that, the I²C bus can communicate with the master. If the chip does not receive an I²C communication signal continuously, it can work well through FB and perform behavior similar to a traditional non-I²C part. The output voltage is determined by the resistor dividers R1, R2, and FB reference voltage. $V_{OUT}$ can be calculated using Equation (3):

$$V_{OUT} = V_{REF} \times (\frac{R1+R2}{R2}) \quad (3)$$

Note that the output voltage cannot be set higher than an absolute OVP threshold (typically 6.5V).

### I²C Slave Address

To support multiple devices used on the same I²C bus, A0 can be used to select four different addresses. A resistor divider from VCC to GND can achieve an accurate reference voltage. Connect A0 to this reference voltage to set a different I²C slave address (see Figure 7). The internal circuit changes the I²C address accordingly. When the master sends an 8-bit address value, the 7-bit I²C address should be followed by 0/1 to indicate a write/read operation. Table 2 shows the recommended I²C address selection by the A0 voltage.





**Figure 7: I²C Slave Address Selection Set-Up**

**Table 2: Recommended I²C Slave Address Selection by A0 Resistor Divider**

| A0 Upper Resistor $R_{A0_up}$(kΩ) | A0 Lower Resistor $R_{A0_down}$(kΩ) | I²C Slave Address | |
|---|---|---|---|
| | | Binary | Hex |
| No connect | No connect | 110 0001 | 61H |
| 500 | 300 | 110 0011 | 63H |
| 300 | 500 | 110 0101 | 65H |
| 100 | No connect | 110 0111 | 67H |


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

# I²C INTERFACE

## I²C Serial Interface Description

The I²C is a 2-wire, bidirectional, serial interface consisting of a data line (SDA) and a clock line (SCL). The lines are pulled to a bus voltage externally when they are idle. When connecting to the line, a master device generates the SCL signal and device address and arranges the communication sequence. The MP8869S interface is an I²C slave. The I²C interface adds flexibility to the power supply solution. The output voltage, transition slew rate, and other parameters can be controlled by the I²C interface instantaneously.

## Data Validity

One clock pulse is generated for each data bit transferred. The data on the SDA line must be stable during the high period of the clock. The high or low state of the data line can only change when the clock signal on the SCL line is low (see Figure 8).

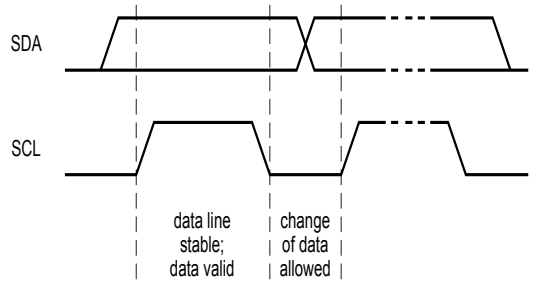



**Figure 8: Bit Transfer on the I²C Bus**

Start and stop are signaled by the master device, which signifies the beginning and the end of the I²C transfer. The start condition is defined as the SDA signal transitioning from high to low while the SCL is high. The stop condition is defined as the SDA signal transitioning from low to high while the SCL is high (see Figure 9).

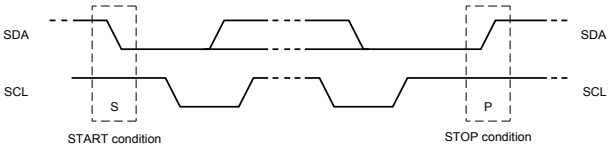



**Figure 9: Start and Stop Conditions**

Start (S) and stop (P) conditions are always generated by the master. The bus is considered to be busy after the start condition and is considered to be free again after a minimum of 4.7μs after the stop condition. The bus remains busy if a repeated start (Sr) is generated instead of a stop condition. The start and repeated start conditions are identical functionally.

## Transfer Data

Every byte put on the SDA line must be eight bits long. Each byte must be followed by an acknowledge bit. The acknowledge-related clock pulse is generated by the master. The transmitter releases the SDA line (high) during the acknowledge clock pulse. The receiver must pull down the SDA line during the acknowledge clock pulse so that it remains at stable low during the high period of this clock pulse.

Data transfers follow the format shown in Figure 10. After the start condition, a slave address is sent. This address is seven bits long followed by an eighth bit data direction bit (r/w). A zero indicates a transmission (write), and a one indicates a request for data (read). A data transfer is always terminated by a stop condition generated by the master. However, if a master still wishes to communicate on the bus, it can generate a repeated start condition and address another slave without first generating a stop condition.


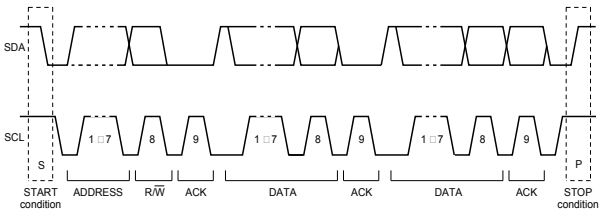



**Figure 10: Complete Data Transfer**


The MP8869S requires a start condition, a valid I²C address, a register address byte, and a data byte for a single data update. After receiving each byte, the MP8869S acknowledges by pulling the SDA line low during the high period of a single clock pulse. A valid I²C address selects the MP8869S. The MP8869S performs an update on the falling edge of the LSB byte.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## I²C WRITE AND READ SEQUENCE EXAMPLE

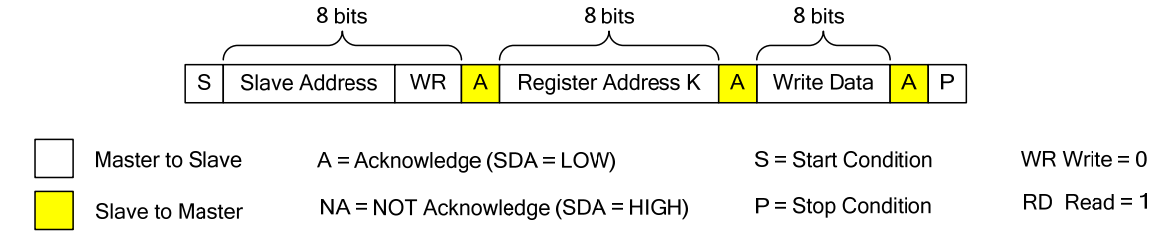


**I²C Write Example–Write Single Register**

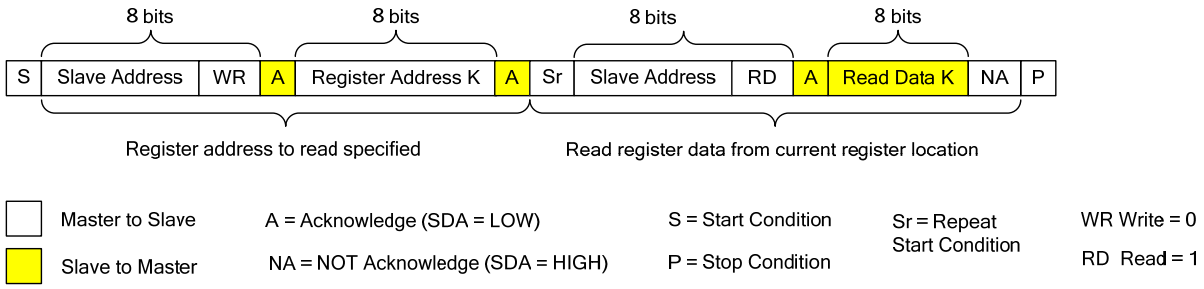


**I²C Read Example–Read Single Register**


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

# REGISER DESCRIPTION

### Register Map

The MP8869S contains seven write or read registers. Register 00 is the feedback reference voltage selection register. Register 01 is the first system control register and can be used to set the slew rate, hiccup OCP, etc. Register 02 is the second system control register and can be used to set the switching frequency, current limit, etc.

Register 03 and register 04 are output current and output voltage indicating registers. Register 05 is the IC ID register. Register 06 is the IC status indication register and can be used to check if the IC is in over-current protection, over-temperature protection status, etc. The register map is shown below.

| ADD | NAME | R/W | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|---|---|---|---|---|---|---|---|---|---|---|
| 00 | VSEL | r/w | Reserved | Feedback reference | | | | | | |
| 01 | SysCntlreg1 | r/w | EN | GO_BIT | Slew rate | | | Retry OVP | Hiccup OCP | Mode |
| 02 | SysCntlreg2 | r/w | PG deglitch time | | Switching frequency | | Soft stop | Current limit adjust | | |
| 03 | Output current | r | Output current | | | | | | | |
| 04 | Output voltage | r | Output voltage | | | | | | | |
| 05 | ID1 | r | Vendor ID | | | | Die ID | | | |
| 06 | Status | r | Reserved | | | | OC | OTEW | OT | PG |

### 1) Reg00 VSEL

Register 00 is the feedback reference voltage selection register. The MP8869S default feedback reference voltage is 0.72V, so the MP8869S's default output voltage is determined by the FB resistor divider and 0.72V default reference after power start-up or EN start-up. The reference voltage is adjustable from 0.6V to 1.108V. Before adjusting the feedback reference voltage, the bit GO_BIT of the first system control register 01 should be set to 1, and then the reference voltage can be adjusted by the lower seven bits of register 00.

When the feedback reference voltage setting command is finished, GO_BIT auto-resets to 0 to prevent false operation of the VOUT scaling. GO_BIT should be set to 1 before adjusting the feedback reference voltage via the $I^2C$.

Table 3 shows the feedback reference voltage selection chart from 0.6V to 1.108V via the $I^2C$.

| NAME | BITS | DEFAULT | DESCRIPTION |
|---|---|---|---|
| Reserved | D[7] | 0 | Reserved for further use. |
| Feedback reference | D[6:0] | 001 1110 | Set the feedback reference voltage from 0.6V to 1.108V (see Table 3). The default value is 0.72V. |


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

**Table 3: Feedback Reference Voltage Selection Chart**

| D[6:0] | VREF(V) | D[6:0] | VREF (V) | D[6:0] | VREF (V) | D[6:0] | VREF(V) |
|---|---|---|---|---|---|---|---|
| 000 0000 | 0.6 | 010 0000 | 0.728 | 100 0000 | 0.856 | 110 0000 | 0.984 |
| 000 0001 | 0.604 | 010 0001 | 0.732 | 100 0001 | 0.86 | 110 0001 | 0.988 |
| 000 0010 | 0.608 | 010 0010 | 0.736 | 100 0010 | 0.864 | 110 0010 | 0.992 |
| 000 0011 | 0.612 | 010 0011 | 0.74 | 100 0011 | 0.868 | 110 0011 | 0.996 |
| 000 0100 | 0.616 | 010 0100 | 0.744 | 100 0100 | 0.872 | 110 0100 | 1 |
| 000 0101 | 0.62 | 010 0101 | 0.748 | 100 0101 | 0.876 | 110 0101 | 1.004 |
| 000 0110 | 0.624 | 010 0110 | 0.752 | 100 0110 | 0.88 | 110 0110 | 1.008 |
| 000 0111 | 0.628 | 010 0111 | 0.756 | 100 0111 | 0.884 | 110 0111 | 1.012 |
| 000 1000 | 0.632 | 010 1000 | 0.76 | 100 1000 | 0.888 | 110 1000 | 1.016 |
| 000 1001 | 0.636 | 010 1001 | 0.764 | 100 1001 | 0.892 | 110 1001 | 1.02 |
| 000 1010 | 0.64 | 010 1010 | 0.768 | 100 1010 | 0.896 | 110 1010 | 1.024 |
| 000 1011 | 0.644 | 010 1011 | 0.772 | 100 1011 | 0.9 | 110 1011 | 1.028 |
| 000 1100 | 0.648 | 010 1100 | 0.776 | 100 1100 | 0.904 | 110 1100 | 1.032 |
| 000 1101 | 0.652 | 010 1101 | 0.78 | 100 1101 | 0.908 | 110 1101 | 1.036 |
| 000 1110 | 0.656 | 010 1110 | 0.784 | 100 1110 | 0.912 | 110 1110 | 1.04 |
| 000 1111 | 0.66 | 010 1111 | 0.788 | 100 1111 | 0.916 | 110 1111 | 1.044 |
| 001 0000 | 0.664 | 011 0000 | 0.792 | 101 0000 | 0.92 | 111 0000 | 1.048 |
| 001 0001 | 0.668 | 011 0001 | 0.796 | 101 0001 | 0.924 | 111 0001 | 1.052 |
| 001 0010 | 0.672 | 011 0010 | 0.8 | 101 0010 | 0.928 | 111 0010 | 1.056 |
| 001 0011 | 0.676 | 011 0011 | 0.804 | 101 0011 | 0.932 | 111 0011 | 1.06 |
| 001 0100 | 0.68 | 011 0100 | 0.808 | 101 0100 | 0.936 | 111 0100 | 1.064 |
| 001 0101 | 0.684 | 011 0101 | 0.812 | 101 0101 | 0.94 | 111 0101 | 1.068 |
| 001 0110 | 0.688 | 011 0110 | 0.816 | 101 0110 | 0.944 | 111 0110 | 1.072 |
| 001 0111 | 0.692 | 011 0111 | 0.82 | 101 0111 | 0.948 | 111 0111 | 1.076 |
| 001 1000 | 0.696 | 011 1000 | 0.824 | 101 1000 | 0.952 | 111 1000 | 1.08 |
| 001 1001 | 0.7 | 011 1001 | 0.828 | 101 1001 | 0.956 | 111 1001 | 1.084 |
| 001 1010 | 0.704 | 011 1010 | 0.832 | 101 1010 | 0.96 | 111 1010 | 1.088 |
| 001 1011 | 0.708 | 011 1011 | 0.836 | 101 1011 | 0.964 | 111 1011 | 1.092 |
| 001 1100 | 0.712 | 011 1100 | 0.84 | 101 1100 | 0.968 | 111 1100 | 1.096 |
| 001 1101 | 0.716 | 011 1101 | 0.844 | 101 1101 | 0.972 | 111 1101 | 1.1 |
| 001 1110 | 0.72 | 011 1110 | 0.848 | 101 1110 | 0.976 | 111 1110 | 1.104 |
| 001 1111 | 0.724 | 011 1111 | 0.852 | 101 1111 | 0.98 | 111 1111 | 1.108 |

### 2) Reg01 SysCntlreg1

Register 01 is the first system control register.

The highest bit, EN, can be used to turn the part on or off when the external EN is high. When the external EN is high, the MP8869S shuts down by setting the EN bit to 0, and then the HS-FET and LS-FET stop switching. The MP8869S resumes switching by setting the EN bit to 1 again. When the external EN is low, the converter is off, and the $I^2C$ shuts down.

Set GO_BIT to 1 to enable the $I^2C$'s authority to write the feedback reference. When the command is finished, GO_BIT auto-resets to 0 to prevent false operation of the VOUT scaling.

The IC switches to forced PWM mode when GO_BIT is set to 1 to achieve a smooth output waveform during the output dynamic scaling. After the output scaling is complete, GO_BIT is set to 0 automatically, and the IC operation mode switches to the original mode set by the Mode bit.

The 3-bit slew rate D[5:3] is used for slew rate selection during the output voltage dynamic scaling. A proper slew rate reduces the inrush current, as well as voltage overshoot and undershoot. Eight different slew rate levels can be selected.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

The bit retry OVP defines the protection mode when OVP is triggered. When retry OVP is set to 1, the part enters auto-recovery when OVP is removed. When retry OVP is set to 0, the MP8869S latches off once output OVP occurs, and VIN OVP is triggered until VIN or EN are toggled.

The bit hiccup OCP defines the OCP mode. When hiccup OCP is set to 1, the MP8869S enters hiccup mode when OCP and UVP are both triggered. When hiccup OCP is set to 0, the MP8869S enters latch-off when OCP and UVP are both triggered.

The lowest bit, mode, is used for selecting forced PWM or auto PFM/PWM mode at light load. When mode is set to 0, auto-PFM/PWM mode is enabled at light load. When mode is set to 1, forced PWM mode is enabled at light load.

<table>
<tr><th>NAME</th><th>BITS</th><th>DEFAULT</th><th>DESCRIPTION</th></tr>
<tr><td>EN</td><td>D[7]</td><td>1</td><td>I²C controlled turn-on or turn-off of the part. When the external EN is low, the converter is off, and the I²C shuts down. When EN is high, the EN bit takes over. The default EN bit is 1.</td></tr>
<tr><td>GO_BIT</td><td>D[6]</td><td>0</td><td>Switch bit of the I²C writing authority for the feedback reference command only. Set GO_BIT = 1 to enable the I²C's authority to write the feedback reference. When the command is finished, GO_BIT auto-resets to 0 to prevent false operation of the Vref scaling.<br>Voltage scaling examples:<br>1) Set GO_BIT = 1.<br>2) Write register 00: set the feedback reference.<br>3) Read back the GO_BIT value to see if the output scaling is finished. If GO_BIT = 0, the voltage scaling is done. Otherwise, Vref is still in adjustment.<br>4) Set GO_BIT = 1 if the output voltage scaling is needed a second time.<br>5) Write register 00: set the feedback reference.</td></tr>
<tr><td>Slew rate</td><td>D[5:3]</td><td>100</td><td>The slew rate during the I²C-controlled voltage changing is defined by three bits. The output voltage changes linearly from the previous voltage to the new set voltage with a slew rate (see below). This helps reduce inrush current, voltage overshoot, and voltage undershoot greatly.
<table>
<tr><th>D[5:3]</th><th>Slew Rate</th><th>D[5:3]</th><th>Slew Rate</th></tr>
<tr><td>000</td><td>40mV/µs</td><td>100</td><td>5mV/µs</td></tr>
<tr><td>001</td><td>30mV/µs</td><td>101</td><td>2.5mV/µs</td></tr>
<tr><td>010</td><td>20mV/µs</td><td>110</td><td>1.25mV/µs</td></tr>
<tr><td>011</td><td>10mV/µs</td><td>111</td><td>0.625mV/µs</td></tr>
</table></td></tr>
<tr><td>Retry OVP</td><td>D[2]</td><td>1</td><td>FB or Vref OVP mode selection bit. 1 means the part auto-recovers when OVP is removed. 0 means the part latches off once output OVP and VIN OVP are both triggered until VIN or EN is power reset.</td></tr>
<tr><td>Hiccup OCP</td><td>D[1]</td><td>1</td><td>Over-current protection mode selection. 1 means hiccup mode OCP. 0 means latch-off type OCP.</td></tr>
<tr><td>Mode</td><td>D[0]</td><td>0</td><td>Set mode to 0 to enable PFM mode; set mode to 1 to disable auto-PFM/PWM mode. Default is auto-PFM/PWM mode for light load.</td></tr>
</table>


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

### 3) Reg02 SysCntlreg2

Register 02 is the second system control register.

The highest two bits of the PG deglitch time D[7:6] defines the PG signal rising and falling edge delay times. When output OVP or UVP is triggered, the PG signal turns low or high after a delay time. There are four levels of PG delay time that can be programmed by the I²C in different conditions.

The two switching frequency bits D[5:4] are used for switching frequency selection. The MP8869S supports up to 1.25MHz of switching frequency by setting the two bits to 11. The MP8869S maximum programmable switching frequency is limited by internal minimum on-time (see Table 1).

| NAME | BITS | DEFAULT | DESCRIPTION | | | |
|---|---|---|---|---|---|---|
| PG Deglitch Time | D[7:6] | 11 | Power good signal rising and falling edges' delay time. When FB or VOUT is out of regulation window, the PG comparator is triggered, but needs a delay time before the PG signal can turn high or low. | | | |
| | | | D[7:6] | PG Deglitch | D[7:6] | PG Deglitch |
| | | | 00 | <1μs | 10 | 12μs |
| | | | 01 | 6μs | 11 | 30μs |
| Switching Frequency | D[5:4] | 00 | Switching frequency set bit. There is no dedicated frequency oscillator inside the part. The switching frequency is fairly fixed by controlling the $T_{ON}$ timer. | | | |
| | | | D[5:4] | Frequency | D[5:4] | Frequency |
| | | | 00 | 500kHz | 10 | 1MHz |
| | | | 01 | 750kHz | 11 | 1.25MHz |
| Soft Stop | D[3] | 0 | This bit defines the VOUT discharge behavior after EN shutdown. 0 means VOUT is not controlled after EN shutdown. 1 means VOUT is discharged linearly to zero with the set soft-stop time. | | | |
| Current Limit Adjust | D[2:0] | 001 | D[2:0] | Valley Current Limit (A) | D[2:0] | Valley Current Limit (A) |
| | | | 000 | 16 | 100 | 8.5 |
| | | | 001 | 14 | 101 | 7 |
| | | | 010 | 12 | 110 | 6 |
| | | | 011 | 10 | 111 | 5 |

The bit soft stop defines the output voltage discharge behavior after EN shutdown. When soft stop is set to 0, the output voltage is not controlled after EN shutdown. When soft stop is set to 1, the output voltage is discharged linearly to zero with the set soft-stop time.

The lowest three bits, current limit adjust D[2:0], are used for peak and valley current-limit selection. There are eight levels of current limit that can be selected for different application conditions.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

### 4) Reg03 Output Current

Register 03 is an output current-indicating register. After the MP8869S starts up, the DC output current information can be read through the I²C communication.

When the inductor current is in discontinuous conduction mode (DCM), the output current sense is not very accurate. The Mode bit can be set to 1 (PWM mode) for good current sensing accuracy at light load.

When the inductor current enters CCM, the output current sense accuracy is excellent (typical accuracy is 5% when the output current is higher than 2A).

Table 4 shows the output current chart from 0A to 12.75A.

| NAME | BITS | DEFAULT | DESCRIPTION |
|---|---|---|---|
| Output Current | D[7:0] | 0000 0000 | Output current monitor bits. Table 4 shows the output current monitor chart. |

**Table 4: Output Current Chart**

| D[7:0] | $I_{OUT}$(A) | D[7:0] | $I_{OUT}$(A) | D[7:0] | $I_{OUT}$(A) | D[7:0] | $I_{OUT}$(A) | D[7:0] | $I_{OUT}$(A) | D[7:0] | $I_{OUT}$(A) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0000 0000 | 0 | 0010 1011 | 2.15 | 0101 0110 | 4.3 | 1000 0001 | 6.45 | 1010 1100 | 8.6 | 1101 0111 | 10.75 |
| 0000 0001 | 0.05 | 0010 1100 | 2.2 | 0101 0111 | 4.35 | 1000 0010 | 6.5 | 1010 1101 | 8.65 | 1101 1000 | 10.8 |
| 0000 0010 | 0.1 | 0010 1101 | 2.25 | 0101 1000 | 4.4 | 1000 0011 | 6.55 | 1010 1110 | 8.7 | 1101 1001 | 10.85 |
| 0000 0011 | 0.15 | 0010 1110 | 2.3 | 0101 1001 | 4.45 | 1000 0100 | 6.6 | 1010 1111 | 8.75 | 1101 1010 | 10.9 |
| 0000 0100 | 0.2 | 0010 1111 | 2.35 | 0101 1010 | 4.5 | 1000 0101 | 6.65 | 1011 0000 | 8.8 | 1101 1011 | 10.95 |
| 0000 0101 | 0.25 | 0011 0000 | 2.4 | 0101 1011 | 4.55 | 1000 0110 | 6.7 | 1011 0001 | 8.85 | 1101 1100 | 11 |
| 0000 0110 | 0.3 | 0011 0001 | 2.45 | 0101 1100 | 4.6 | 1000 0111 | 6.75 | 1011 0010 | 8.9 | 1101 1101 | 11.05 |
| 0000 0111 | 0.35 | 0011 0010 | 2.5 | 0101 1101 | 4.65 | 1000 1000 | 6.8 | 1011 0011 | 8.95 | 1101 1110 | 11.1 |
| 0000 1000 | 0.4 | 0011 0011 | 2.55 | 0101 1110 | 4.7 | 1000 1001 | 6.85 | 1011 0100 | 9 | 1101 1111 | 11.15 |
| 0000 1001 | 0.45 | 0011 0100 | 2.6 | 0101 1111 | 4.75 | 1000 1010 | 6.9 | 1011 0101 | 9.05 | 1110 0000 | 11.2 |
| 0000 1010 | 0.5 | 0011 0101 | 2.65 | 0110 0000 | 4.8 | 1000 1011 | 6.95 | 1011 0110 | 9.1 | 1110 0001 | 11.25 |
| 0000 1011 | 0.55 | 0011 0110 | 2.7 | 0110 0001 | 4.85 | 1000 1100 | 7 | 1011 0111 | 9.15 | 1110 0010 | 11.3 |
| 0000 1100 | 0.6 | 0011 0111 | 2.75 | 0110 0010 | 4.9 | 1000 1101 | 7.05 | 1011 1000 | 9.2 | 1110 0011 | 11.35 |
| 0000 1101 | 0.65 | 0011 1000 | 2.8 | 0110 0011 | 4.95 | 1000 1110 | 7.1 | 1011 1001 | 9.25 | 1110 0100 | 11.4 |
| 0000 1110 | 0.7 | 0011 1001 | 2.85 | 0110 0100 | 5 | 1000 1111 | 7.15 | 1011 1010 | 9.3 | 1110 0101 | 11.45 |
| 0000 1111 | 0.75 | 0011 1010 | 2.9 | 0110 0101 | 5.05 | 1001 0000 | 7.2 | 1011 1011 | 9.35 | 1110 0110 | 11.5 |
| 0001 0000 | 0.8 | 0011 1011 | 2.95 | 0110 0110 | 5.1 | 1001 0001 | 7.25 | 1011 1100 | 9.4 | 1110 0111 | 11.55 |
| 0001 0001 | 0.85 | 0011 1100 | 3 | 0110 0111 | 5.15 | 1001 0010 | 7.3 | 1011 1101 | 9.45 | 1110 1000 | 11.6 |
| 0001 0010 | 0.9 | 0011 1101 | 3.05 | 0110 1000 | 5.2 | 1001 0011 | 7.35 | 1011 1110 | 9.5 | 1110 1001 | 11.65 |
| 0001 0011 | 0.95 | 0011 1110 | 3.1 | 0110 1001 | 5.25 | 1001 0100 | 7.4 | 1011 1111 | 9.55 | 1110 1010 | 11.7 |
| 0001 0100 | 1 | 0011 1111 | 3.15 | 0110 1010 | 5.3 | 1001 0101 | 7.45 | 1100 0000 | 9.6 | 1110 1011 | 11.75 |
| 0001 0101 | 1.05 | 0100 0000 | 3.2 | 0110 1011 | 5.35 | 1001 0110 | 7.5 | 1100 0001 | 9.65 | 1110 1100 | 11.8 |
| 0001 0110 | 1.1 | 0100 0001 | 3.25 | 0110 1100 | 5.4 | 1001 0111 | 7.55 | 1100 0010 | 9.7 | 1110 1101 | 11.85 |
| 0001 0111 | 1.15 | 0100 0010 | 3.3 | 0110 1101 | 5.45 | 1001 1000 | 7.6 | 1100 0011 | 9.75 | 1110 1110 | 11.9 |
| 0001 1000 | 1.2 | 0100 0011 | 3.35 | 0110 1110 | 5.5 | 1001 1001 | 7.65 | 1100 0100 | 9.8 | 1110 1111 | 11.95 |
| 0001 1001 | 1.25 | 0100 0100 | 3.4 | 0110 1111 | 5.55 | 1001 1010 | 7.7 | 1100 0101 | 9.85 | 1111 0000 | 12 |
| 0001 1010 | 1.3 | 0100 0101 | 3.45 | 0111 0000 | 5.6 | 1001 1011 | 7.75 | 1100 0110 | 9.9 | 1111 0001 | 12.05 |
| 0001 1011 | 1.35 | 0100 0110 | 3.5 | 0111 0001 | 5.65 | 1001 1100 | 7.8 | 1100 0111 | 9.95 | 1111 0010 | 12.1 |
| 0001 1100 | 1.4 | 0100 0111 | 3.55 | 0111 0010 | 5.7 | 1001 1101 | 7.85 | 1100 1000 | 10 | 1111 0011 | 12.15 |
| 0001 1101 | 1.45 | 0100 1000 | 3.6 | 0111 0011 | 5.75 | 1001 1110 | 7.9 | 1100 1001 | 10.05 | 1111 0100 | 12.2 |
| 0001 1110 | 1.5 | 0100 1001 | 3.65 | 0111 0100 | 5.8 | 1001 1111 | 7.95 | 1100 1010 | 10.1 | 1111 0101 | 12.25 |
| 0001 1111 | 1.55 | 0100 1010 | 3.7 | 0111 0101 | 5.85 | 1010 0000 | 8 | 1100 1011 | 10.15 | 1111 0110 | 12.3 |
| 0010 0000 | 1.6 | 0100 1011 | 3.75 | 0111 0110 | 5.9 | 1010 0001 | 8.05 | 1100 1100 | 10.2 | 1111 0111 | 12.35 |
| 0010 0001 | 1.65 | 0100 1100 | 3.8 | 0111 0111 | 5.95 | 1010 0010 | 8.1 | 1100 1101 | 10.25 | 1111 1000 | 12.4 |
| 0010 0010 | 1.7 | 0100 1101 | 3.85 | 0111 1000 | 6 | 1010 0011 | 8.15 | 1100 1110 | 10.3 | 1111 1001 | 12.45 |
| 0010 0011 | 1.75 | 0100 1110 | 3.9 | 0111 1001 | 6.05 | 1010 0100 | 8.2 | 1100 1111 | 10.35 | 1111 1010 | 12.5 |
| 0010 0100 | 1.8 | 0100 1111 | 3.95 | 0111 1010 | 6.1 | 1010 0101 | 8.25 | 1101 0000 | 10.4 | 1111 1011 | 12.55 |
| 0010 0101 | 1.85 | 0101 0000 | 4 | 0111 1011 | 6.15 | 1010 0110 | 8.3 | 1101 0001 | 10.45 | 1111 1100 | 12.6 |
| 0010 0110 | 1.9 | 0101 0001 | 4.05 | 0111 1100 | 6.2 | 1010 0111 | 8.35 | 1101 0010 | 10.5 | 1111 1101 | 12.65 |
| 0010 0111 | 1.95 | 0101 0010 | 4.1 | 0111 1101 | 6.25 | 1010 1000 | 8.4 | 1101 0011 | 10.55 | 1111 1110 | 12.7 |
| 0010 1000 | 2 | 0101 0011 | 4.15 | 0111 1110 | 6.3 | 1010 1001 | 8.45 | 1101 0100 | 10.6 | 1111 1111 | 12.75 |
| 0010 1001 | 2.05 | 0101 0100 | 4.2 | 0111 1111 | 6.35 | 1010 1010 | 8.5 | 1101 0101 | 10.65 | | |
| 0010 1010 | 2.1 | 0101 0101 | 4.25 | 1000 0000 | 6.4 | 1010 1011 | 8.55 | 1101 0110 | 10.7 | | |


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

### 5) Reg04 Output Voltage

**R**egister 04 is an output voltage-indicating register. After part starts up, the output voltage can be read through the I²C communication. In light load, if the mode bit is set to 0, the MP8869S works in PFM mode. At extremely light-load or no-load condition, the ADC only works when the first pulse comes, and then the MP8869S refreshes the output voltage register before it enters sleep mode.

At this moment, the sensed output voltage is the maximum value, not the average output voltage. So the I²C readback voltage is slightly higher than the set point When taking some load to the part, it will get higher sense accuracy. The mode bit can be set to 1 (PWM mode) for good voltage sensing accuracy at light load. Table 5 shows the output voltage chart from 0.5V to 5.643V.

| NAME | BITS | DEFAULT | DESCRIPTION |
|---|---|---|---|
| Output voltage | D[7:0] | 0000 0000 | Output voltage monitor bits. Table 5 shows the output voltage monitor chart. |

**Table 5: Output Voltage Chart**

| D[7:0] | $V_{OUT}$ (V) | D[7:0] | $V_{OUT}$ (V) | D[7:0] | $V_{OUT}$ (V) | D[7:0] | $V_{OUT}$ (V) | D[7:0] | $V_{OUT}$ (V) | D[7:0] | $V_{OUT}$ (V) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0000 0000 | 0.500 | 0010 1011 | 1.367 | 0101 0110 | 2.235 | 1000 0001 | 3.102 | 1010 1100 | 3.969 | 1101 0111 | 4.837 |
| 0000 0001 | 0.520 | 0010 1100 | 1.387 | 0101 0111 | 2.255 | 1000 0010 | 3.122 | 1010 1101 | 3.989 | 1101 1000 | 4.857 |
| 0000 0010 | 0.540 | 0010 1101 | 1.408 | 0101 1000 | 2.275 | 1000 0011 | 3.142 | 1010 1110 | 4.010 | 1101 1001 | 4.877 |
| 0000 0011 | 0.561 | 0010 1110 | 1.428 | 0101 1001 | 2.295 | 1000 0100 | 3.162 | 1010 1111 | 4.030 | 1101 1010 | 4.897 |
| 0000 0100 | 0.581 | 0010 1111 | 1.448 | 0101 1010 | 2.315 | 1000 0101 | 3.183 | 1011 0000 | 4.050 | 1101 1011 | 4.917 |
| 0000 0101 | 0.601 | 0011 0000 | 1.468 | 0101 1011 | 2.335 | 1000 0110 | 3.203 | 1011 0001 | 4.070 | 1101 1100 | 4.937 |
| 0000 0110 | 0.621 | 0011 0001 | 1.488 | 0101 1100 | 2.356 | 1000 0111 | 3.223 | 1011 0010 | 4.090 | 1101 1101 | 4.958 |
| 0000 0111 | 0.641 | 0011 0010 | 1.509 | 0101 1101 | 2.376 | 1000 1000 | 3.243 | 1011 0011 | 4.110 | 1101 1110 | 4.978 |
| 0000 1000 | 0.661 | 0011 0011 | 1.529 | 0101 1110 | 2.396 | 1000 1001 | 3.263 | 1011 0100 | 4.131 | 1101 1111 | 4.998 |
| 0000 1001 | 0.682 | 0011 0100 | 1.549 | 0101 1111 | 2.416 | 1000 1010 | 3.283 | 1011 0101 | 4.151 | 1110 0000 | 5.018 |
| 0000 1010 | 0.702 | 0011 0101 | 1.569 | 0110 0000 | 2.436 | 1000 1011 | 3.304 | 1011 0110 | 4.171 | 1110 0001 | 5.038 |
| 0000 1011 | 0.722 | 0011 0110 | 1.589 | 0110 0001 | 2.456 | 1000 1100 | 3.324 | 1011 0111 | 4.191 | 1110 0010 | 5.058 |
| 0000 1100 | 0.742 | 0011 0111 | 1.609 | 0110 0010 | 2.477 | 1000 1101 | 3.344 | 1011 1000 | 4.211 | 1110 0011 | 5.079 |
| 0000 1101 | 0.762 | 0011 1000 | 1.630 | 0110 0011 | 2.497 | 1000 1110 | 3.364 | 1011 1001 | 4.231 | 1110 0100 | 5.099 |
| 0000 1110 | 0.782 | 0011 1001 | 1.650 | 0110 0100 | 2.517 | 1000 1111 | 3.384 | 1011 1010 | 4.252 | 1110 0101 | 5.119 |
| 0000 1111 | 0.803 | 0011 1010 | 1.670 | 0110 0101 | 2.537 | 1001 0000 | 3.404 | 1011 1011 | 4.272 | 1110 0110 | 5.139 |
| 0001 0000 | 0.823 | 0011 1011 | 1.690 | 0110 0110 | 2.557 | 1001 0001 | 3.425 | 1011 1100 | 4.292 | 1110 0111 | 5.159 |
| 0001 0001 | 0.843 | 0011 1100 | 1.710 | 0110 0111 | 2.578 | 1001 0010 | 3.445 | 1011 1101 | 4.312 | 1110 1000 | 5.179 |
| 0001 0010 | 0.863 | 0011 1101 | 1.730 | 0110 1000 | 2.598 | 1001 0011 | 3.465 | 1011 1110 | 4.332 | 1110 1001 | 5.200 |
| 0001 0011 | 0.883 | 0011 1110 | 1.751 | 0110 1001 | 2.618 | 1001 0100 | 3.485 | 1011 1111 | 4.352 | 1110 1010 | 5.220 |
| 0001 0100 | 0.903 | 0011 1111 | 1.771 | 0110 1010 | 2.638 | 1001 0101 | 3.505 | 1100 0000 | 4.373 | 1110 1011 | 5.240 |
| 0001 0101 | 0.924 | 0100 0000 | 1.791 | 0110 1011 | 2.658 | 1001 0110 | 3.526 | 1100 0001 | 4.393 | 1110 1100 | 5.260 |
| 0001 0110 | 0.944 | 0100 0001 | 1.811 | 0110 1100 | 2.678 | 1001 0111 | 3.546 | 1100 0010 | 4.413 | 1110 1101 | 5.280 |
| 0001 0111 | 0.964 | 0100 0010 | 1.831 | 0110 1101 | 2.699 | 1001 1000 | 3.566 | 1100 0011 | 4.433 | 1110 1110 | 5.300 |
| 0001 1000 | 0.984 | 0100 0011 | 1.851 | 0110 1110 | 2.719 | 1001 1001 | 3.586 | 1100 0100 | 4.453 | 1110 1111 | 5.321 |
| 0001 1001 | 1.004 | 0100 0100 | 1.872 | 0110 1111 | 2.739 | 1001 1010 | 3.606 | 1100 0101 | 4.473 | 1111 0000 | 5.341 |
| 0001 1010 | 1.024 | 0100 0101 | 1.892 | 0111 0000 | 2.759 | 1001 1011 | 3.626 | 1100 0110 | 4.494 | 1111 0001 | 5.361 |
| 0001 1011 | 1.045 | 0100 0110 | 1.912 | 0111 0001 | 2.779 | 1001 1100 | 3.647 | 1100 0111 | 4.514 | 1111 0010 | 5.381 |
| 0001 1100 | 1.065 | 0100 0111 | 1.932 | 0111 0010 | 2.799 | 1001 1101 | 3.667 | 1100 1000 | 4.534 | 1111 0011 | 5.401 |
| 0001 1101 | 1.085 | 0100 1000 | 1.952 | 0111 0011 | 2.820 | 1001 1110 | 3.687 | 1100 1001 | 4.554 | 1111 0100 | 5.421 |
| 0001 1110 | 1.105 | 0100 1001 | 1.972 | 0111 0100 | 2.840 | 1001 1111 | 3.707 | 1100 1010 | 4.574 | 1111 0101 | 5.442 |
| 0001 1111 | 1.125 | 0100 1010 | 1.993 | 0111 0101 | 2.860 | 1010 0000 | 3.727 | 1100 1011 | 4.595 | 1111 0110 | 5.462 |
| 0010 0000 | 1.145 | 0100 1011 | 2.013 | 0111 0110 | 2.880 | 1010 0001 | 3.747 | 1100 1100 | 4.615 | 1111 0111 | 5.482 |
| 0010 0001 | 1.166 | 0100 1100 | 2.033 | 0111 0111 | 2.900 | 1010 0010 | 3.768 | 1100 1101 | 4.635 | 1111 1000 | 5.502 |
| 0010 0010 | 1.186 | 0100 1101 | 2.053 | 0111 1000 | 2.920 | 1010 0011 | 3.788 | 1100 1110 | 4.655 | 1111 1001 | 5.522 |
| 0010 0011 | 1.206 | 0100 1110 | 2.073 | 0111 1001 | 2.941 | 1010 0100 | 3.808 | 1100 1111 | 4.675 | 1111 1010 | 5.543 |
| 0010 0100 | 1.226 | 0100 1111 | 2.093 | 0111 1010 | 2.961 | 1010 0101 | 3.828 | 1101 0000 | 4.695 | 1111 1011 | 5.563 |
| 0010 0101 | 1.246 | 0101 0000 | 2.114 | 0111 1011 | 2.981 | 1010 0110 | 3.848 | 1101 0001 | 4.716 | 1111 1100 | 5.583 |
| 0010 0110 | 1.266 | 0101 0001 | 2.134 | 0111 1100 | 3.001 | 1010 0111 | 3.868 | 1101 0010 | 4.736 | 1111 1101 | 5.603 |
| 0010 0111 | 1.287 | 0101 0010 | 2.154 | 0111 1101 | 3.021 | 1010 1000 | 3.889 | 1101 0011 | 4.756 | 1111 1110 | 5.623 |
| 0010 1000 | 1.307 | 0101 0011 | 2.174 | 0111 1110 | 3.041 | 1010 1001 | 3.909 | 1101 0100 | 4.776 | 1111 1111 | 5.643 |
| 0010 1001 | 1.327 | 0101 0100 | 2.194 | 0111 1111 | 3.062 | 1010 1010 | 3.929 | 1101 0101 | 4.796 | | |
| 0010 1010 | 1.347 | 0101 0101 | 2.214 | 1000 0000 | 3.082 | 1010 1011 | 3.949 | 1101 0110 | 4.816 | | |


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

**5) Reg06 ID1**

Register 05 is the IC information indicating register. The highest four bits, vendor ID D[7:4], are set to 1000 internally.

The lowest four bits, IC Revision ID D[3:0], indicates IC revision information.

| NAME | BITS | DESCRIPTION |
|---|---|---|
| Vendor ID | D[7:4] | 1000. |
| IC Revision ID | D[3:0] | IC revision. |

**7) Reg06 Status**

Register 06 is a fault condition indicating register. The highest four bits, D[7:4], are reserved for future use.

The bit OC is the output over-current indication. When the bit is set to 1, the IC is in hiccup mode or OC latch-off.

The bit OTEW is the die temperature early warning indication. When the bit is set to 1, the IC die temperature is higher than 120°C.

The bit PG is output power good indication. When the bit is set to 1, the output power is normal.

| NAME | BITS | DESCRIPTION |
|---|---|---|
| Reserved | D[7:4] | Reserved for future use. |
| OC | D[3] | Output over-current indication. When this bit is high, the IC is in hiccup mode or trips OC latch off. |
| OTEW | D[2] | Die temperature early warning bit. When the bit is high, the die temperature is higher than 120˚C. |
| OT | D[1] | Over-temperature indication. When the bit is high the IC is in thermal shutdown |
| PG | D[0] | Output power good indication. When the bit is high the VOUT power is normal. This means VOUT is higher than 95% and lower than 115% of the designed regulation voltage. PG compares FB/VOUT with REF. |


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

# APPLICATION INFORMATION

### Setting the Output Voltage in a FB Control Loop

The MP8869S can be controlled by the FB loop. The output voltage can be set by the external resistor dividers. The FB loop reference voltage is a default value (0.72V) and can be programmed by the I²C. The MP8869S's output voltage must be below the absolute OVP threshold (typically 6.5V).

The FB loop network is shown in Figure 11.





**Figure 11: FB Loop Network**

Calculate R1 and R2 with Equation (4):

$$R2 = \frac{R1}{\frac{V_{OUT}}{0.72V} - 1} \quad (4)$$

Table 6 lists the recommended feedback resistors value for common output voltages.

**Table 6: Resistor Selection for Common Output Voltages (8)**

| $V_{OUT}$ (V) | R1 (kΩ) | R2 (kΩ) | Rt(kΩ) | L(μH) |
|---|---|---|---|---|
| 1.0 | 80.6 | 205 | 10 | 1.5 |
| 1.2 | 80.6 | 121 | 10 | 1.5 |
| 1.5 | 80.6 | 74.4 | 10 | 1.5 |
| 1.8 | 80.6 | 53.6 | 10 | 1.5 |
| 2.5 | 80.6 | 32.4 | 10 | 2.2 |
| 3.3 | 80.6 | 22.6 | 10 | 2.2 |
| 5 | 80.6 | 13.7 | 10 | 3.3 |

**NOTE:**

8) The recommended parameters are based on a 12V input voltage and 22μFx4 output capacitor. Different input voltage and output capacitor values may affect the selection of R1 and R2. For other components' parameters, please refer to the Typical Application Circuits on page 37 to page 39.

### Output Voltage Dynamic Scale

The output voltage dynamic scaling can be done only via the I²C. Refer to Figure 11 and follow the steps below.

1) Write GO_BIT (Reg01[6]) to 1.
2) Write Reg00 to set the reference voltage by feedback reference (Reg00 [6:0]) simultaneously. When the command is finished, GO_BIT auto-resets to 0 to prevent false operation of the VOUT scaling.

Repeat the above two steps if the output voltage must be changed to a different voltage.

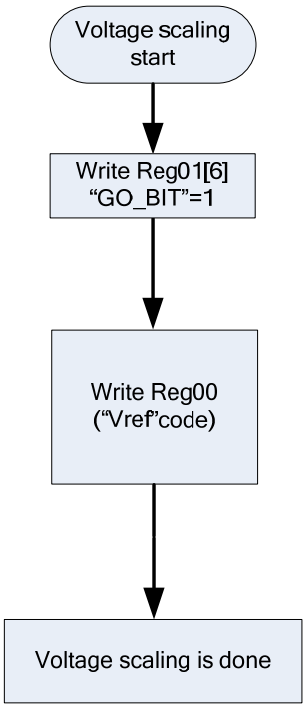



**Figure 12: Output Voltage Dynamic Scale Flow Chart**

### Selecting the Inductor

Use a 0.47μH to 5μH inductor with a DC current rating at least 25% higher than the maximum load current for most applications. For the highest efficiency, use an inductor with a DC resistance less than 5mΩ. For most designs, the inductance value can be derived from Equation (5):

$$L_1 = \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times \Delta I_L \times f_{OSC}} \quad (5)$$

Where $\Delta I_L$ is the inductor ripple current.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

Choose the inductor ripple current to be approximately 30% of the maximum load current. The maximum inductor peak current can be calculated with Equation (6):

$$I_{L(MAX)} = I_{LOAD} + \frac{\Delta I_L}{2} \quad (6)$$

Use a larger inductor for improved efficiency under light-load conditions below 100mA.

**Selecting the Input Capacitor**

The input current to the step-down converter is discontinuous and therefore requires a capacitor to supply AC current to the step-down converter while maintaining the DC input voltage. Use low ESR capacitors for the best performance. Ceramic capacitors with X5R or X7R dielectrics are recommended because of their low ESR and small temperature coefficients. For most applications, use two 22µF capacitors.

Since C1 absorbs the input switching current, it requires an adequate ripple current rating. The RMS current in the input capacitor can be estimated with Equation (7):

$$I_{C1} = I_{LOAD} \times \sqrt{\frac{V_{OUT}}{V_{IN}} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right)} \quad (7)$$

The worst-case condition occurs at VIN = 2VOUT, shown in Equation (8):

$$I_{C1} = \frac{I_{LOAD}}{2} \quad (8)$$

For simplification, choose an input capacitor with an RMS current rating greater than half of the maximum load current.

The input capacitor can be electrolytic, tantalum, or ceramic. When using electrolytic or tantalum capacitors, add a small, high-quality ceramic capacitor (e.g.: 0.1µF) placed as close to the IC as possible. When using ceramic capacitors, ensure that they have enough capacitance to provide a sufficient charge to prevent excessive voltage ripple at the input.
The input voltage ripple caused by the capacitance can be estimated with Equation (9):

$$\Delta V_{IN} = \frac{I_{LOAD}}{f_S \times C1} \times \frac{V_{OUT}}{V_{IN}} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right) \quad (9)$$

**Selecting the Output Capacitor**

The output capacitor (C2) maintains the DC output voltage. Use ceramic, tantalum, or low-ESR electrolytic capacitors. For best results, use low ESR capacitors to keep the output voltage ripple low. The output voltage ripple can be estimated with Equation (10):

$$\Delta V_{OUT} = \frac{V_{OUT}}{f_S \times L_1} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right) \times \left(R_{ESR} + \frac{1}{8 \times f_S \times C2}\right) \quad (10)$$

Where $L_1$ is the inductor value, and $R_{ESR}$ is the equivalent series resistance (ESR) value of the output capacitor.

For ceramic capacitors, the capacitance dominates the impedance at the switching frequency and causes the majority of the output voltage ripple. For simplification, the output voltage ripple can be estimated with Equation (11):

$$\Delta V_{OUT} = \frac{V_{OUT}}{8 \times f_S^2 \times L_1 \times C2} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right) \quad (11)$$

For tantalum or electrolytic capacitors, the ESR dominates the impedance at the switching frequency. For simplification, the output ripple can be approximated with Equation (12):

$$\Delta V_{OUT} = \frac{V_{OUT}}{f_S \times L_1} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right) \times R_{ESR} \quad (12)$$

The characteristics of the output capacitor also affect the stability of the regulation system. The MP8869S can be optimized for a wide range of capacitance and ESR values.

**Selecting the Bootstrap Capacitor and Resistor**

The bootstrap capacitor powers the floating power MOSFET driver. It is recommended to use 0.1µF ceramic capacitor.

The value of Bootstrap resistor generally is recommended to be in the range from 0 to 10Ω. BST resistor determines the turning on speed of the high side MOSFET. For the design where the VCC decoupling capacitor layout could not be optimized and follow the recommended layout, the 10Ω BST resistor is recommended to be used to in series with the BST capacitor.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

### External Bootstrap Diode

An external bootstrap diode can enhance the efficiency of the regulator given the following conditions:

- VOUT is 5V or 3.3V
- Duty cycle is high: D > 50%

In these cases, add an external BST diode from VCC to BST (see Figure 13).

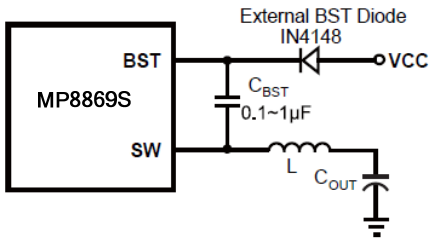



**Figure 13: Optional External Bootstrap Diode to Enhance Efficiency**

The recommended external BST diode is IN4148, and the recommended BST capacitor value is 0.1µF to 1µF.

### Connect VCC to VIN at a Low Input Voltage

VCC can be connected to VIN directly when VIN is lower than 3.5V. This helps improve the MP8869S's low input voltage efficiency performance. To use this application set-up, the VIN spike voltage must be limited below 4V, otherwise VCC may be damaged.

### PCB Layout Guidelines [9]

Efficient PCB layout is critical for stable operation. A four-layer layout is strongly recommended to achieve better thermal performance. For best results, refer to Figure 14 and follow the guidelines below.

1. Place the high-current paths (PGND, VIN, and SW) very close to the device with short, direct, and wide traces.
2. Keep the VIN and PGND pads connected with large copper planes.
3. Use at least two layers for the VIN and PGND trace to achieve better thermal performance.
4. Add several vias close to the VIN and PGND pads to help with thermal dissipation.
5. Place the input capacitors as close to VIN and PGND as possible.
6. Place the decoupling capacitor as close to VCC and PGND as possible.
7. Place the external feedback resistors next to FB.
8. Ensure that there is no via on the FB trace.
9. Keep the switching node SW short and away from the feedback network.
10. Keep the BST voltage path (BST, C3, and SW) as short as possible.

**NOTE:**

9) The recommended layout is based on the Typical Application circuit on page 37 to page 39.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

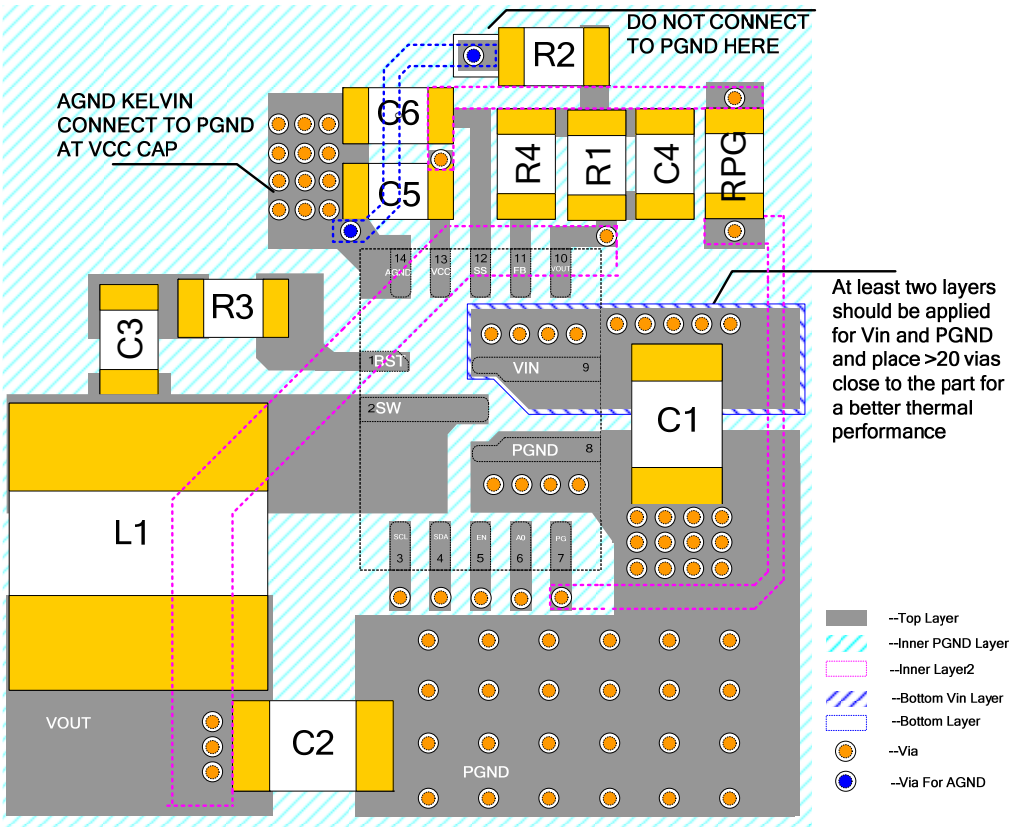



**Figure 14: Recommended Layout**

## Design Example

Table 7 is a design example following the application guidelines for the specifications below.

**Table 7: Design Example**

| | |
|---|---|
| $V_{IN}$ | 5V |
| $V_{OUT}$ | 1.8V |
| $I_O$ | 12A |

The detailed application schematics are shown in Figure 15 through Figure 21. The typical performance and circuit waveforms are shown in the Typical Performance Characteristics section. For more device applications, please refer to the related evaluation board datasheets.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

# TYPICAL APPLICATION CIRCUITS (10)

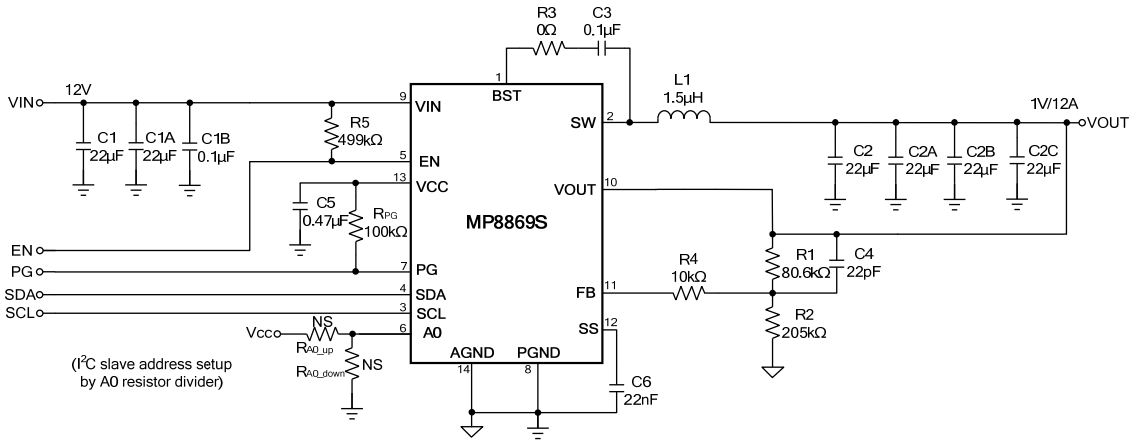



**Figure 15: VIN = 12V, VOUT = 1V, $I_{OUT}$ = 12A**

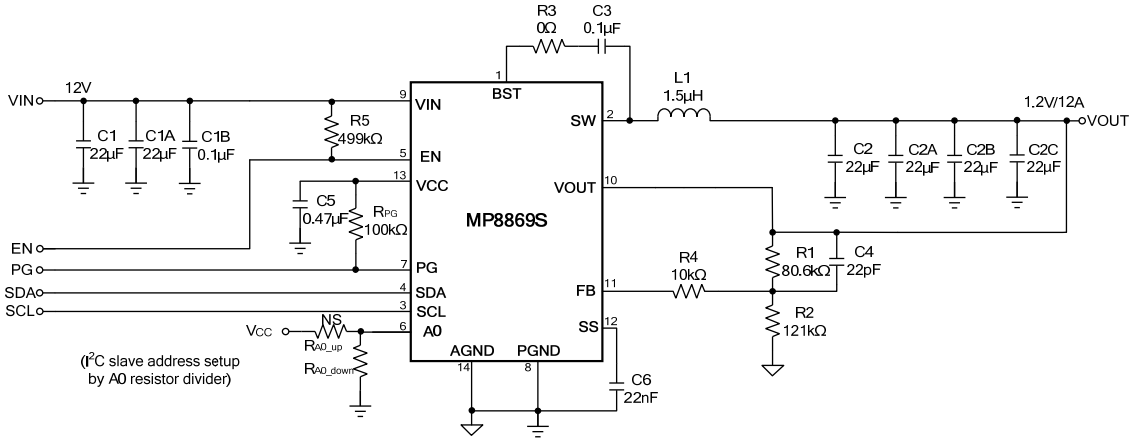



**Figure 16: VIN = 12V, VOUT = 1.2V, $I_{OUT}$ = 12A**

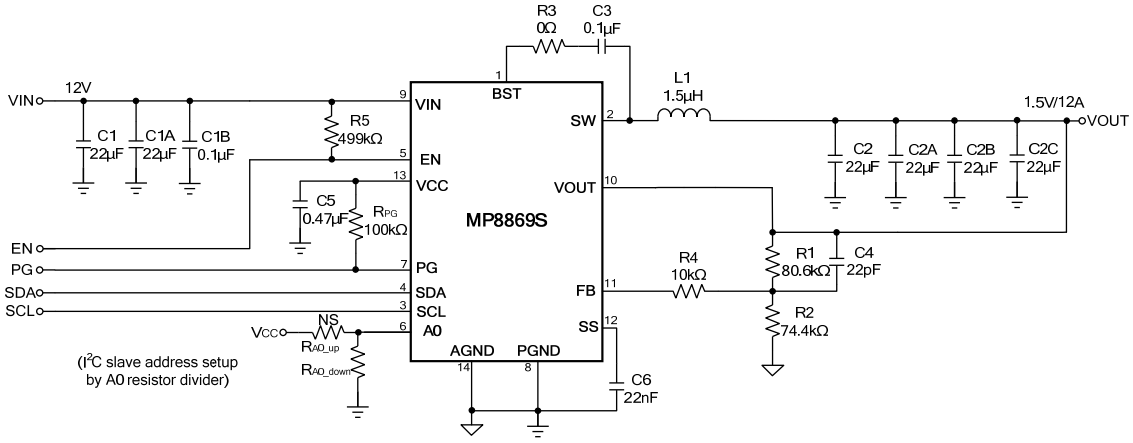



**Figure 17: VIN = 12V, VOUT = 1.5V, $I_{OUT}$ = 12A**


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## TYPICAL APPLICATION CIRCUITS *(continued)*

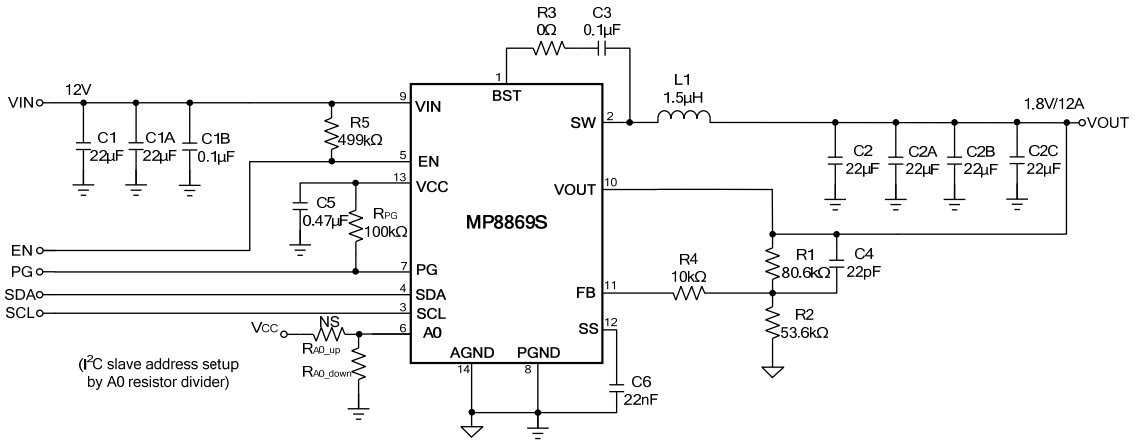



**Figure 18: VIN = 12V, VOUT = 1.8V, $I_{OUT}$ = 12A**

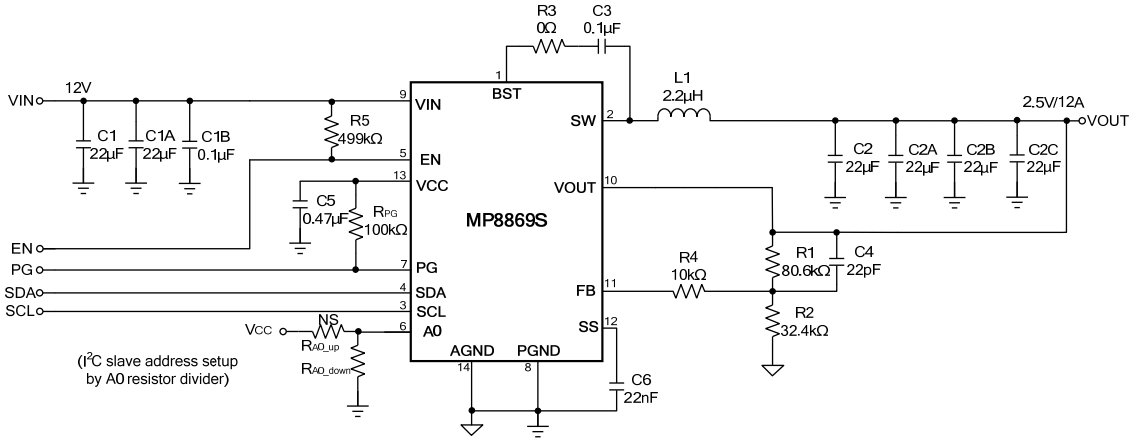



**Figure 19: VIN = 12V, VOUT = 2.5V, $I_{OUT}$ = 12A**

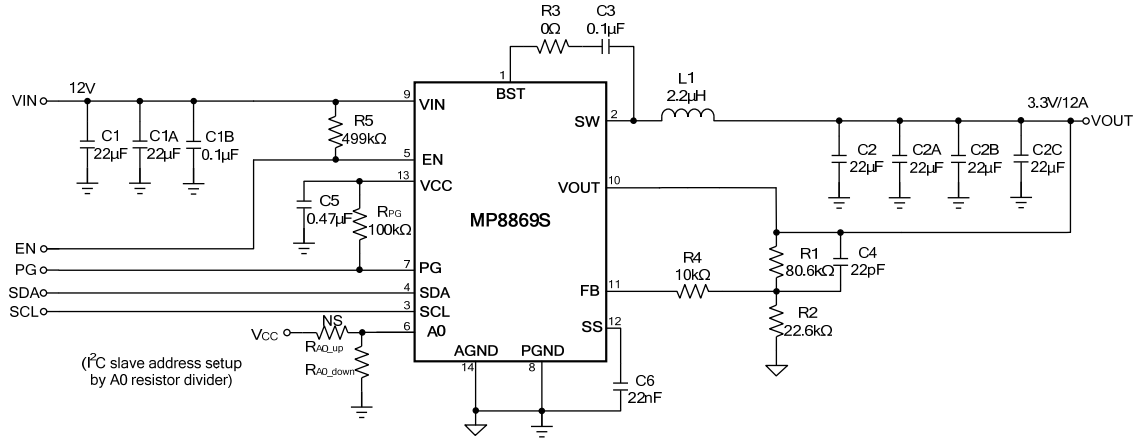



**Figure 20: VIN = 12V, VOUT = 3.3V, $I_{OUT}$ = 12A**


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## TYPICAL APPLICATION CIRCUITS *(continued)*

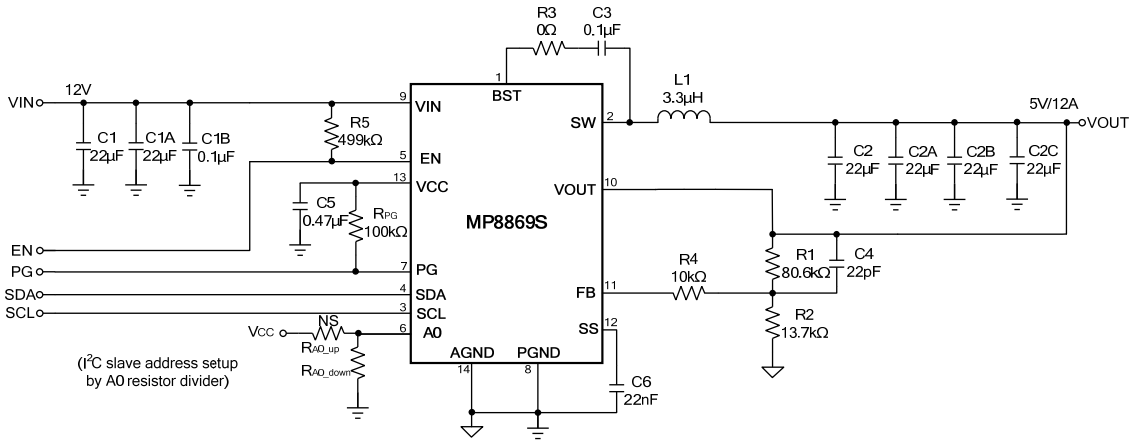



**Figure 21: VIN = 12V, VOUT = 5V, $I_{OUT}$ = 12A**


**NOTE**:

10) All circuits are based on a 0.72V default reference voltage. The MP8869S's output voltage can be adjusted by the feedback reference voltage and external resistor dividers. However, the MP8869S's output voltage must be set lower than the absolute over-voltage protection threshold (typically 6.5V).



MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

# PACKAGE INFORMATION


## QFN-14 (3mmx4mm)

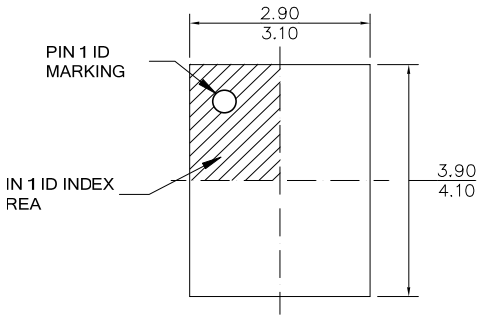



TOP VIEW

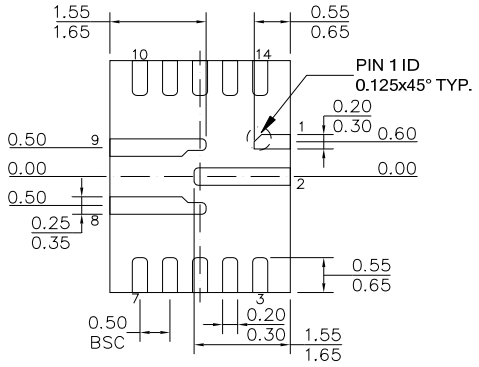


BOTTOM VIEW




SIDE VIEW

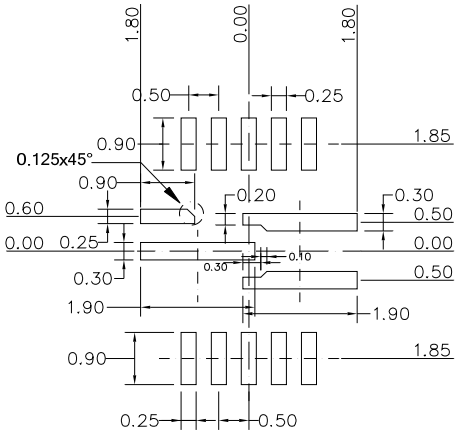


RECOMMENDED LAND PATTERN

NOTE:

1) ALL DIMENSIONS ARE IN MILLIMETERS.
2) EXPOSED PADDLE SIZE DOES NOT INCLUDE MOLD FLASH.
3) LEAD COPLANARITY SHALL BE 0.10 MILLIMET MAX.
4) JEDEC REFERENCE IS MO-220.
5) DRAWING IS NOT TO SCALE.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.

## Revision History

| Revision # | Revision Date | Description | Pages Updated |
|---|---|---|---|
| 1.05 | 08/04/2020 | Update the page4 for EC table, add 2.3 to $INUV_{Vth_f}$ min. | Page 4 |

**NOTICE:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2020 MPS. All Rights Reserved.