

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0445200005

Status:


Active

Overview:

Magnetic and Modular Jacks and Plugs

Description:

Modular Jack, Right Angle, Shielded, Stacked, 8/8, 12 Ports

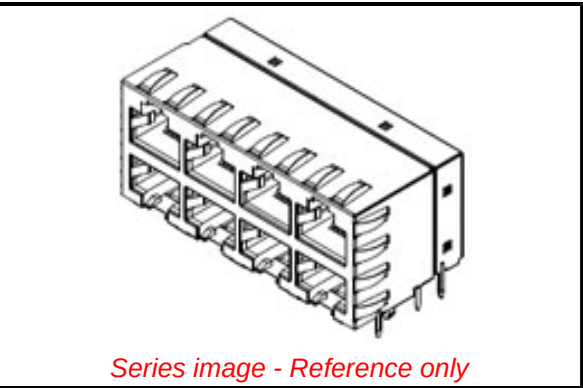

Series image - Reference only

Documents:	
3D Model	Product Specification TS-44170-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-44520-003-001 (PDF)
Product Specification PS-44050-003 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E107635
General	
Product Family	Modular Jacks/Plugs
Series	44520
Comments	High Speed Multi-Port
Component Type	PCB Jack
Data Load Status	Data Bulk Loaded from Saqqara
Made From	0442120005, 0443050002, 0445201005
Magnetic	No
Overview	Magnetic and Modular Jacks and Plugs
Performance Category	5, 5e
Power over Ethernet (PoE)	N/A
Product Name	Modular Jack 8/8, RJ45
UPC	800753265257
Physical	
Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Inverted / Top Latch	Yes
Jack Height	25.41mm
Lightpipes/LEDs	None
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	66.536/g
Orientation	Right Angle (Side Entry)
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	1.02mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	1.270µm
Plating min - Termination	2.540µm
Ports	12
Positions / Loaded Contacts	8/8
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +80°C
Termination Interface: Style	Through Hole
Wire/Cable Type	N/A
Electrical	
Current - Maximum per Contact	1.5A

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/30/2017 (7 July

2017)

Halogen-Free

Status

Not Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

44520 Series

Mates With

FCC 68 Plugs

Shielded	Yes
Voltage - Maximum	125V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-44520-003-001
Product Specification	PS-44050-003, TS-44170-001-001
Sales Drawing	SD-44520-001

This document was generated on 02/26/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION