The RF Line

NPN Silicon RF Power Transistor

MRF455

. . . designed for power amplifier applications in industrial, commercial and amateur radio equipment to 30 MHz.


- Specified 12.5 Volt, 30 MHz Characteristics —
  Output Power = 60 Watts
  Minimum Gain = 13 dB
  Efficiency = 55%

60 W, 30 MHz
RF POWER
TRANSISTOR
NPN SILICON

MATCHING PROCEDURE

In the push–pull circuit configuration it is preferred that the transistors are used as matched pairs to obtain optimum performance.

The matching procedure used by Motorola consists of measuring h_{FE} at the data sheet conditions and color coding the device to predetermined h_{FE} ranges within the normal h_{FE} limits. A color dot is added to the marking on top of the cap. Any two devices with the same color dot can be paired together to form a matched set of units.



CASE 211–07, STYLE 1

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CEO}	18	Vdc
Collector–Emitter Voltage	V_{CES}	36	Vdc
Emitter–Base Voltage	V_{EBO}	4.0	Vdc
Collector Current — Continuous	I_C	15	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	175 1.0	Watts W/°C
Storage Temperature Range	T_{stg}	–65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)


Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage (I_C = 100 mAdc, I_B = 0)	$V_{(BR)CEO}$	18	—	—	Vdc
Collector–Emitter Breakdown Voltage (I_C = 50 mAdc, V_{BE} = 0)	$V_{(BR)CES}$	36	—	—	Vdc
Emitter–Base Breakdown Voltage (I_E = 10 mAdc, I_C = 0)	$V_{(BR)EBO}$	4.0	—	—	Vdc
ON CHARACTERISTICS					
DC Current Gain (I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	10	—	150	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 12.5 Vdc, I_E = 0, f = 1.0 MHz)	C_{ob}	—	—	250	pF

(continued)

© Motorola, Inc. 1994

ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
FUNCTIONAL TESTS (Figure 1)					
Common–Emitter Amplifier Power Gain (V_{CC} = 12.5 Vdc, P_{out} = 60 W, f = 30 MHz)	G_{pe}	13	—	—	dB
Collector Efficiency (V_{CC} = 12.5 Vdc, P_{out} = 60 W, f = 30 MHz)	η	55	—	—	%
Series Equivalent Input Impedance (V_{CC} = 12.5 Vdc, P_{out} = 60 W, f = 30 MHz)	Z_{in}	—	1.66–j.844	—	Ohms
Series Equivalent Output Impedance (V_{CC} = 12.5 Vdc, P_{out} = 60 W, f = 30 MHz)	Z_{out}	—	1.73–j.188	—	Ohms
Parallel Equivalent Input Impedance (V_{CC} = 12.5 Vdc, P_{out} = 60 W, f = 30 MHz)	Z_{in}	—	2.09/1030	—	Ω/pF
Parallel Equivalent Output Impedance (V_{CC} = 12.5 Vdc, P_{out} = 60 W, f = 30 MHz)	Z_{out}	—	1.75/330	—	Ω/pF

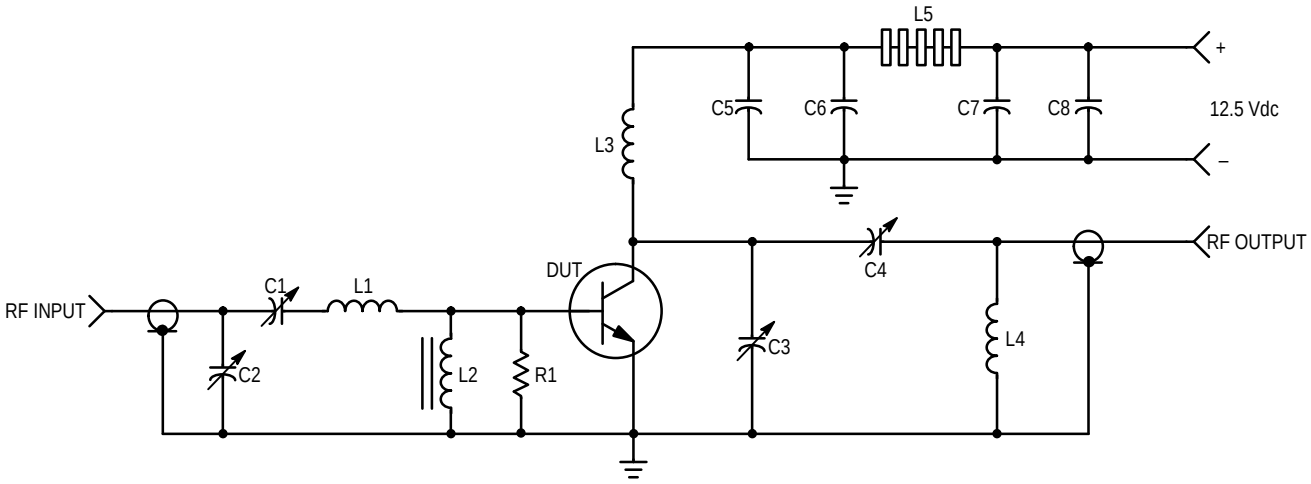

C1, C2, C4 — ARCO 469
C3 — ARCO 466
C5 — 1000 pF, UNELCO
C6, C7 — 0.1 µF Disc Ceramic
C8 — 1000 µF/15 V Electrolytic
R1 — 10 Ohm/1.0 Watt, Carbon

L1 — 3 Turns, #18 AWG, 5/16″ I.D., 5/16″ Long
L2 — VK200–20/4B, FERROXCUBE
L3 — 12 Turns, #18 AWG Enameled Wire, 1/4″ I.D., Close Wound
L4 — 3 Turns 1/8″ O.D. Copper Tubing, 3/8″ I.D., 3/4″ Long
L5 — 7 FERRITE Beads, FERROXCUBE #56–590–65/3B

Figure 1. 30 MHz Test Circuit Schematic

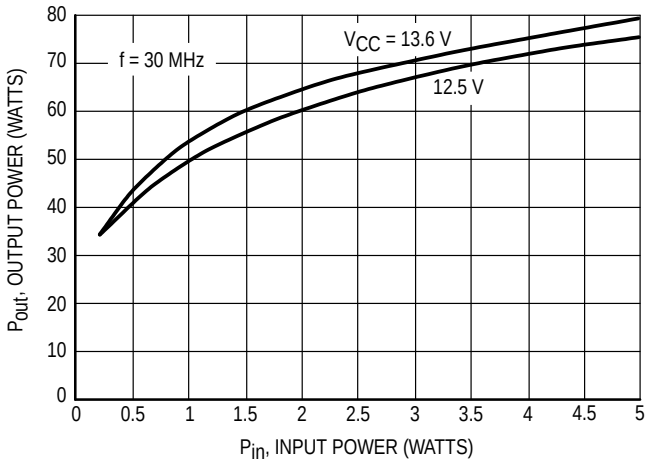


Figure 2. Output Power versus Input Power


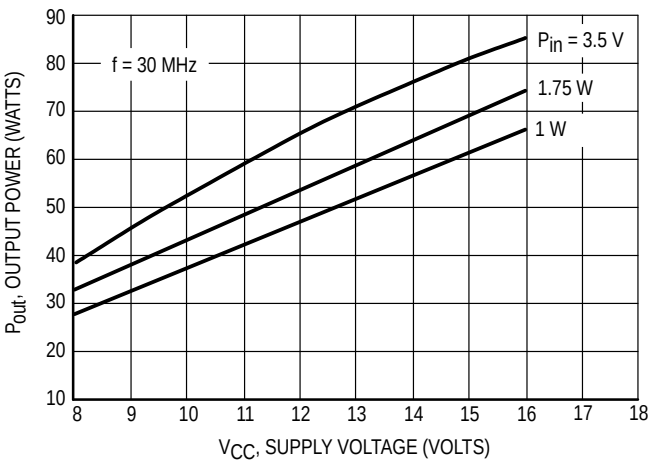


Figure 3. Output Power versus Supply Voltage

PACKAGE DIMENSIONS

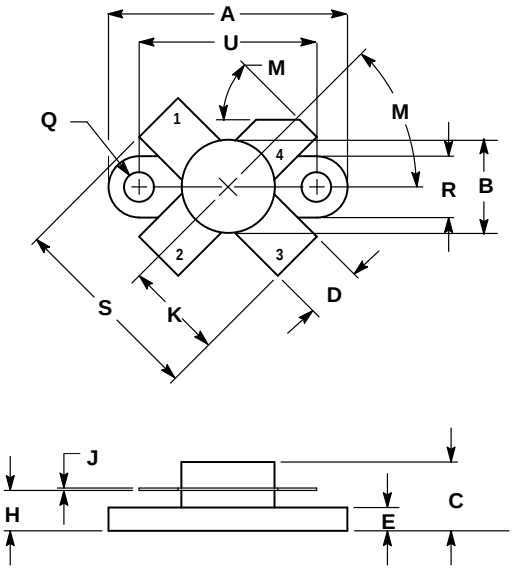

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.960	0.990	24.39	25.14
B	0.370	0.390	9.40	9.90
C	0.229	0.281	5.82	7.13
D	0.215	0.235	5.47	5.96
E	0.085	0.105	2.16	2.66
H	0.150	0.108	3.81	4.57
J	0.004	0.006	0.11	0.15
K	0.395	0.405	10.04	10.28
M	40°	50°	40°	50°
Q	0.113	0.130	2.88	3.30
R	0.245	0.255	6.23	6.47
S	0.790	0.810	20.07	20.57
U	0.720	0.730	18.29	18.54

STYLE 1:
PIN 1. EMITTER
2. BASE
3. EMITTER
4. COLLECTOR

CASE 211–07
ISSUE N

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters can and do vary in different applications. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:
USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.
EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.
JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan.
ASIA PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.