

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0510896005](#)
Status: **Active**
Description: 2.00mm (.079") Pitch Mi II™ System Wire-to-Board Crimp Housing, Dual Row, 60 Circuits

Documents:

[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-51089-001 \(PDF\)](#)
[Product Specification PS-51089-005 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family Crimp Housings
Series [51089](#)
Product Name Mi II™


Physical

Circuits (maximum) 60
Color - Resin Gray
Flammability 94V-0
Gender Female
Glow-Wire Compliant No
Material - Resin Polyester
Number of Rows 2
Packaging Type Bag
Panel Mount No
Pitch - Mating Interface (in) 0.079 In
Pitch - Mating Interface (mm) 2.00 mm
Stackable No
Temperature Range - Operating -40°C to +105°C

Material Info

Reference - Drawing Numbers

Product Specification PS-51089-001, PS-51089-005, RPS-51089-005
Sales Drawing SD-51089-**05

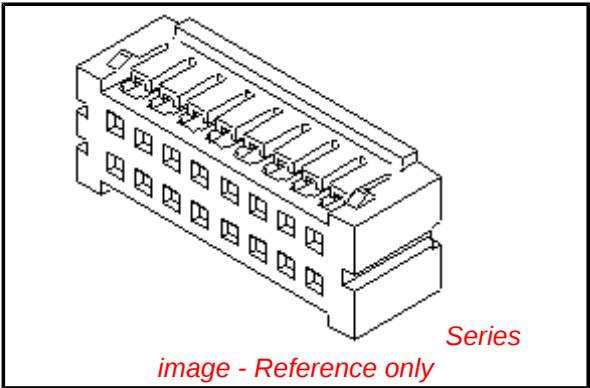

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No**
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[51089Series](#)





Mates With
[53313](#) , [53314](#)

Use With
[50212](#) Crimp Terminals

MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

EDP NO.

ENG. NO.
SD-51089-**-05

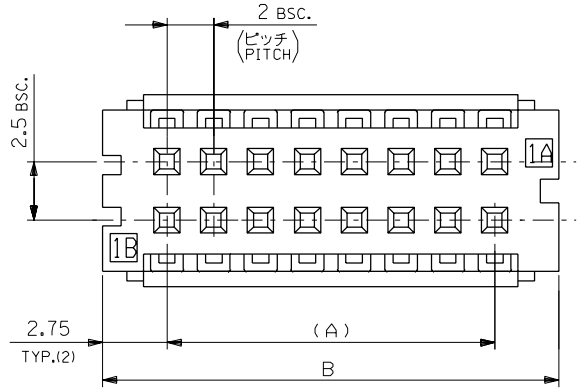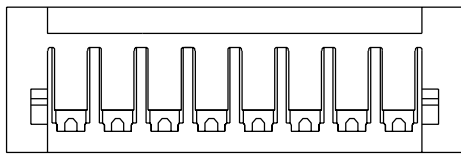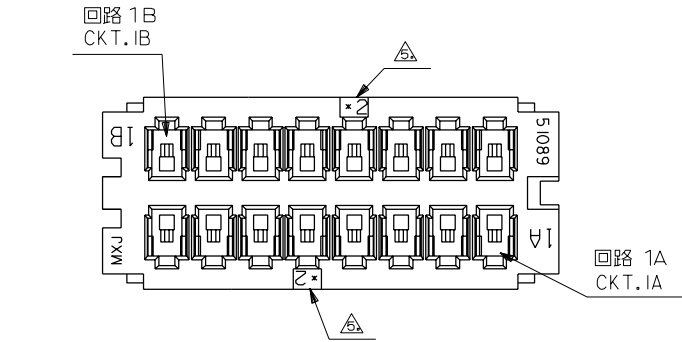

注記
NOTES

- 材料:
MATERIALS:
ハウジング: ガラス入りポリエステル 灰色
HOUSING: G.F. POLYESTER, UL94V-0, GRAY
ターミナル: 燐青銅
TERMINAL: PHOSPHOR BRONZE, MOLEX P/N 50212-8*00
 - 仕上げ: 鍍メッキ
FINISH: PRE-PLATED TIN - 0.9μm MIN.
 - 適合ヘッダー:
MATING HEADERS: 53313-**-15 (全極数)
(30数以上)
53314-**-15 (OVER 28 CKT.S)
- △ LOCK部: 表参照
LOCK: REFER TO CHART
- △ *2は5の倍数の回路番号を表示する。
数える方向は回路表示 1 A, 1 B側からとする。
*2 DENOTES CKT. NO. MULTIPLES OF 5,
COUNTED FROM 1A, 1B.

4 無し NONE 7	63.5	58	51089-6005	60
	53.5	48	4 -5005	50
	43.5	38	-4005	40
	37.5	32	-3405	34
	33.5	28	-3005	30
4 有り PLC.S 7	31.5	26	-2805	28
	29.5	24	-2605	26
	27.5	22	-2405	24
	25.5	20	-2205	22
	23.5	18	-2005	20
	21.5	16	-1805	18
	19.5	14	-1605	16
	17.5	12	7 -1405	14
	15.5	10	-1205	12
	13.5	8	51089-1005	10
LOCK部	B	(A)	ENG. NO.	CKT.

						材料 MATERIAL 注記参照 SEE NOTES		MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社		
						仕上げ FINISH 注記参照 SEE NOTES		EDP. NO. //		
		A RELEASED		GMS H.1	92/2/21	適用電線範囲 WIRE RANGE		ENG. NO. SD-51089-**05		REV A
角度 ANGLE		+3°	2 REVISIONS	GMS H.1	91/7/30	被覆外径 INS. RANGE				
30以上 OVER		+0.3	1 REVISIONS	GMS H.1	91/3/5	DRAWN BY		CHK'D BY		
10以上 30未満 OVER UNDER		+0.25	0 新規作成	GMS H.1	90/9/20	APPR'D BY		尺度 SCALE		
10未満 UNDER		+0.2	記号 LTR	変更内容 REVISION RECORD	DR. CHK. DATE	5-1		TITLE 名称		
一般公差 GENERAL TOLERANCES			REVISE ONLY ON CAD SYSTEM					2mm W-to-B DUAL ROW CRIMP RECEPTACLE HOUSING		