


Voltage Variable Attenuator

RVA-6000+

50 Ω 2000 to 6000 MHz



CASE STYLE: DV874

The Big Deal

- Broad band, 2000 to 6000 MHz
- IP3 +43 dBm typ.
- Well matched in/out ports, return loss 20 dB typ.
- Minimal phase deviation over attenuation range
- Drop-in, no external matching circuits required

Product Overview

The RVA-6000+ is a Voltage Variable 50 Ω matched Attenuator built into a shielded (0.5" x 0.5" x 0.195") case. The model utilizes well matched PIN diodes, carefully biased in order to enable over 30 dB attenuation range control while maintaining very good input & output port matching.

Key Features

Feature	Advantages
IP3 +40 dBm typ.	Low distortion enabling improved system performance.
Minimal phase deviation over attenuation range	Can provide low signal distortion over attenuation range

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Voltage Variable Attenuator

RVA-6000+

50Ω 2000 to 6000 MHz

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 85°C
Absolute Max. Supply Voltage(V+)	6V
Absolute Max. Control Voltage(Vctrl)	14V
Absolute Max. RF Input Level	+20dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

RF IN	2
RF OUT	10
V CONTROL	6
V+	14
GROUND	1,3,4,5,7,8,9,11,12,13,15,16


Outline Drawing

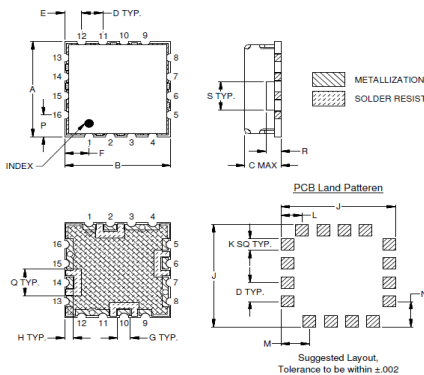

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
.500	.500	.195	.100	.080	.115	.060	.040	.540	.060
12.7	12.7	4.95	2.54	2.03	2.92	1.52	1.02	13.72	1.52
L	M	N	P	Q	R	S	Wt.		
.100	.135	.135	.115	.140	.070	.150	grams		
2.54	3.43	3.43	2.92	3.56	1.78	3.81	grams		

Demo Board MCL P/N: TB-686 Suggested PCB Layout (PL-374)

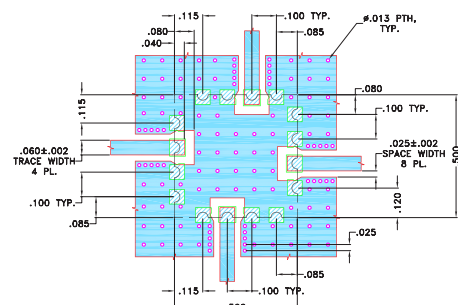

NOTES:


- TRACE WIDTH IS SHOWN FOR ROGERS (RO4350B) WITH DIELECTRIC THICKNESS .050" ±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- Broadband, 2000-6000 MHz
- Good VSWR at IN/OUT ports over attenuation range
- Fast Raising/Fall Time, 6.8μSec/3.5μSec Typ.
- Minimal phase deviation over attenuation range
- No external bias and RF matching network required
- Shielded case
- Aqueous washable

Applications

- Power level control
- Feed forward amplifier



CASE STYLE: DV874

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications (T_{AMB} = 25°C)

FREQ. (MHz)		MIN. INSERTION LOSS, dB (+12V)		MAX. ATTEN. dB (0V)		INPUT POWER (dBm)	CONTROL Voltage Current (V) (mA)		IP3* (dBm)	RETURN LOSS (dB)	POWER SUPPLY Voltage Current (V) (mA)	
Min.	Max.	Typ.	Max.	Typ.	Min.	Max.	Max.		Typ.	Typ.	Max.	
2000- 4000		3.3	4.0	37.7	30	+20	0 - 12	10	41	20	+5	5
4000- 6000		3.5	4.5	32.7	25	+20	0 - 12	10	43	20	+5	5


Notes:

Rise/Fall time: 6.8 / 3.8 μSec Typ.


Switching Time & turn on/off time: 8.8 / 3.8 μSec. Typ.

* Typical IP3 @ Vc = 5V

Equivalent Schematic

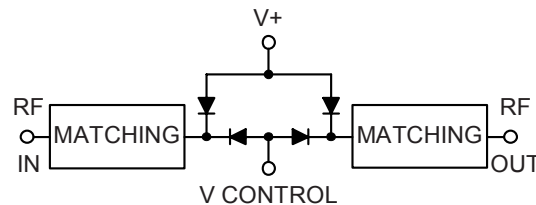

RVA-6000+ TYPICAL ATTENUATION AT 4000 MHz

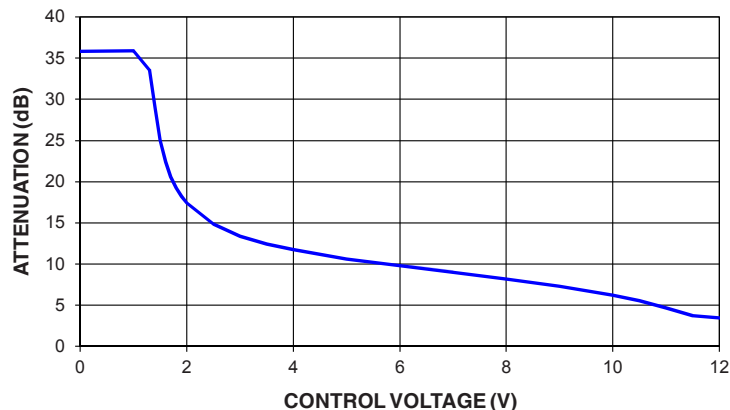

Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M153512
EDU1800/1
RVA-6000+
URJ
160727
Page 2 of 3


**RVA-6000+
ATTENUATION Vs. FREQUENCY
OVER CONTROL VOLTAGES**

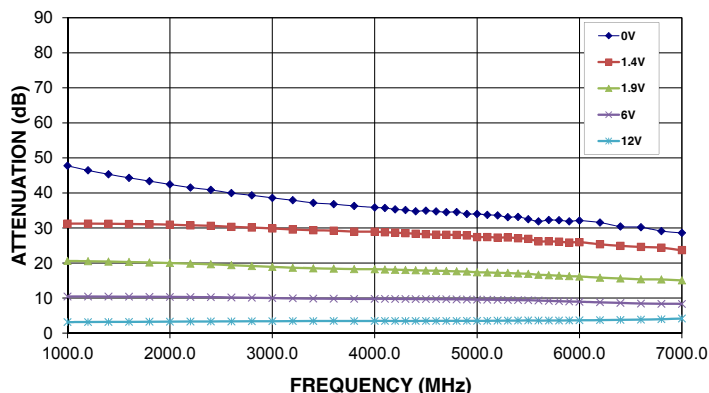


**RVA-6000+
ATTENUATION Vs. INPUT POWER
OVER CONTROL VOLTAGES AT 4000 MHz**

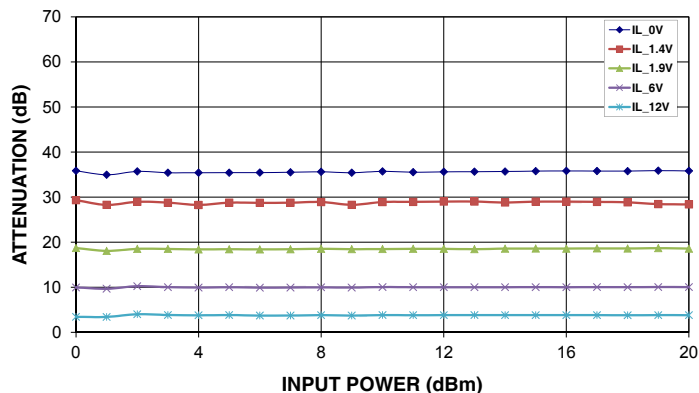


**RVA-6000+
INPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES**

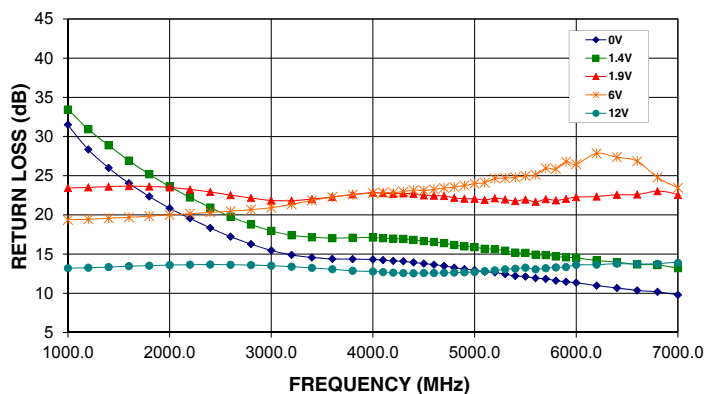


**RVA-6000+
OUTPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES**

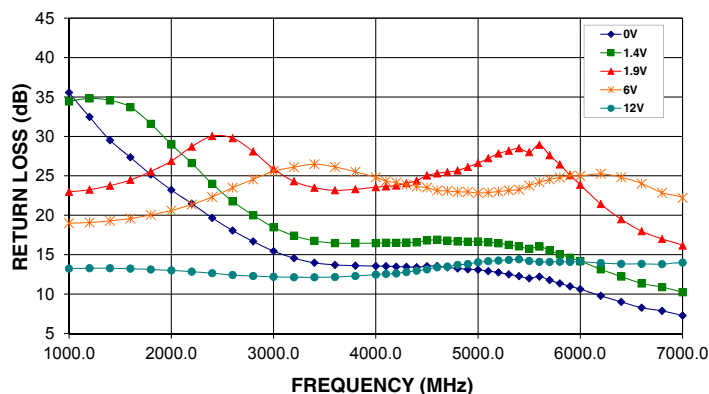

**RVA-6000+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES**

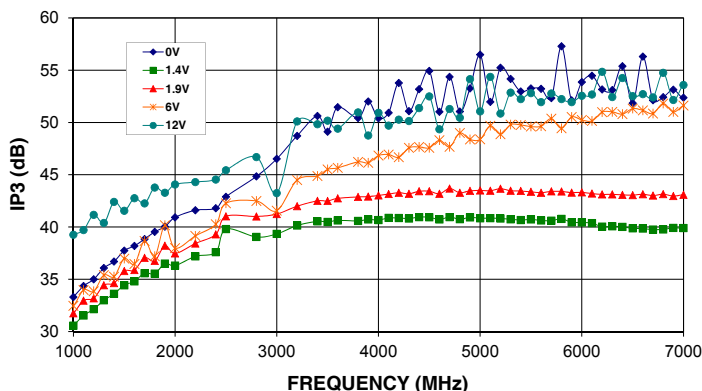

**RVA-6000+
PHASE SHIFT Vs. FREQUENCY
OVER CONTROL VOLTAGES**

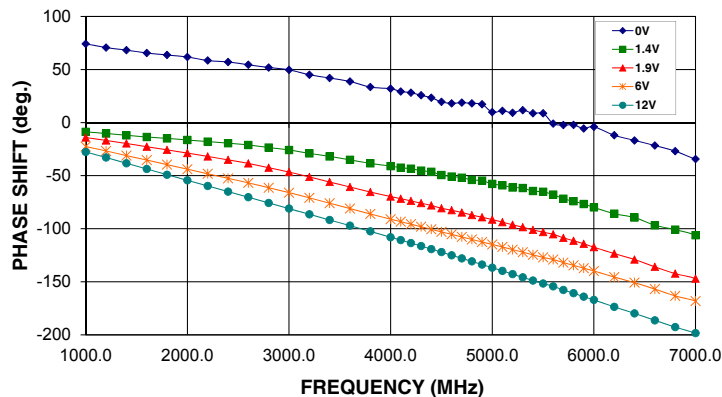

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

