

POWER MANAGEMENT SOLUTIONS

Selector Guide



World's First Programmable Power Modules


PROGRAM.



SIMULATE.



RECEIVE.

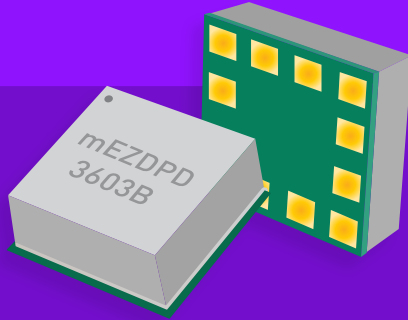

mEZDPD3603A **NEW**

The new way of designing power electronics

Yeah, it's that easy.

START DESIGNING NOW





IN THIS GUIDE

1000+ Additional Solutions at [MonolithicPower.com](https://www.monolithicpower.com)

DC/DC Power Converters

4 - 17

Switching Regulators

- CPU Core (Controllers)
- CPU Core Power (Intelli-Phase)
- Step-Down Converters (Buck)
- Step-Down Controllers
- Step-Up Charge Pump
- Step-Up Controllers
- Step-Up Converters (Boost)
- Step-Up Energy Storage (Dying GASP) / Power
- Back-Up Manager PMICs
- Step-Up LNB
- Buck/Boost

LDO

- High-Performance Low-Dropout Linear Regulators

Supervisory

MOSFET Drivers

- Half-Bridge Gate Drivers

Flybacks

PMIC & Multiple Outputs

Fully Integrated PoE PD Solutions

PoE PD Controllers

PoE PD Identity

Digital Regulators

- Synchronous Step-Down Converters with I²C Interface

MPM Power Modules

18 - 19

mEZ Programmable Power Modules

20 - 23

Automotive

24 - 32

AC/DC Power Converters

33 - 37

LED Lighting

38 - 41

Battery Management

42 - 45

Display Backlighting Power

46 - 48

Class-D Audio

49

Motor Drivers

50 - 51

Position Sensors

52

Precision Analog

53

E-Fuse, USB & Load Switches

54 - 55

Ultrasound MUX

56

EV Kits & EV Boards

57

Contact & Ordering

58 - 59

SWITCHING REGULATORS | DC/DC POWER CONVERTERS

CPU Core (Controllers)

Maximum Operating Input Voltage < 55V

	Part Number	V_{CC} (Min) (V)	V_{CC} (Max) (V)	I_Q (Typ) (mA)	Shut. Current (Typ) (mA)	F_{SW} (MHz)	Soft Start	Regulated Output Phase	Package	Notes
	MP2953B	4.75	5.25	18	1	0.2 to 1	Int	6	QFN-40 (5x5)	PMBus interface, VR12.5
	MP2935	4.5	5.25	8	0.05	0.2 to 2	Int	4	QFN-40 (6x6)	VR12.5
	MP2939	3.2	3.4	8	0.05	0.3 to 3	Int	4	QFN-48 (6x6)	1+2+1 phase, IMVP8
NEW	MP2949A	3.15	3.4	13	0.07	0.01 to 2	Int	6	TQFN-48 (6x6)	3+2+1 phase for V_{CCGT} , V_{core} , and V_{CCSA} , IMVP8/9

CPU Core Power (Intelli-Phase)

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_{OUT} (Max) (A)	I_{SW} Limit (Typ) (A)	Shutdown Current (Typ) (mA)	F_{SW} (MHz)	PWM Logic (V)	Package
	MP86901A	4.5	22	12	25	0.03	0.1 to 2	3.5	TQFN-13 (3x3)
	MP86901B	4.5	22	20	42	0.03	0.1 to 2	3.5	TQFN-21 (3x4)
	MP86901C	4.5	22	30	60	0.03	0.1 to 2	3.5	TQFN-21 (3x4)
NEW	MP86903C	4.5	22	30	60	0.03	0.1 to 1.2	3.5	TQFN-21 (3x4)
NEW	MP86902B	3.3	12	35	75	0.03	0.1 to 2	3.5	TQFN-21 (3x4)
	MP86905	4.5	16	50	75	0.08	0.1 to 2	3.3	QFN-23 (4x4)

SWITCHING REGULATORS | DC/DC POWER CONVERTERS

Step-Down Converters (Buck)

Maximum Operating Input Voltage $1.5V \leq V_{IN} \leq 6V$

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_{OUT} (Max) (A)	I_Q (Typ) (μ A)	V_{FB} (Typ) (V)	F_{SW} (MHz)	Power Good	Light-Load Efficiency	Constant-On-Time (COT)	100% Duty Cycle	Package	Notes
	MP28200	2	5.5	0.2	0.5	1.5	✓	✓	✓	✓	✓	QFN-12 (2x2)	Ultra-low I_Q
Sampling	MP28310	2	5.5	0.3	0.5	1.5	✓	✓	✓	✓	✓	CSP-12 (1.2x1.6)	Ultra-low I_Q , ultra-small package, 300mA buck + 100mA LDO, prog V_{OUT} by CTRL, COT, PG. Functionally equivalent to TPS62743
	MP21600	2.3	5.5	0.6	11	0.6	2.4	✓	✓	✓	✓	QFN-6 (1x1.5)	High switching frequency, ultra-small package
	MP28301	2	5.5	0.7	0.5	0.6	1.5	✓	✓	✓	✓	QFN-12 (2x2)	Ultra-low I_Q , 700mA buck + 100mA LDO, prog V_{OUT} by CTRL, COT, PG
	MP2141N	2.3	5.5	1	11	0.6	2.2	✓	✓	✓	✓	SOT563 (1.6x1.6)	Output discharge, power good only for fixed V_{OUT} version

CONTINUE NEXT PAGE >

SWITCHING REGULATORS | DC/DC POWER CONVERTERS

Step-Down Converters (Buck)

Maximum Operating Input Voltage $1.5V \leq V_{IN} \leq 6V$

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_{OUT} (Max) (A)	I_Q (Typ) (μ A)	V_{FB} (Typ) (V)	F_{SW} (MHz)	Power Good	External Soft Start	Light-Load Efficiency	Constant-On-Time (COT)	100% Duty Cycle	Industrial	Package	Notes
	MP2148	2.3	5.5	1	10	0.6	2.2	✓	✓	✓	✓			QFN-6 (1x1.5)	High switching frequency, ultra-small package
	MP21148	2.3	5.5	1	500	0.6	2.4	✓			✓	✓		QFN-6 (1x1.5)	Forced CCM, low ripple across entire load range
	MP2149	2.7	6	1 (2x)	45	0.608	1		✓					TSOT23-8	Dual-channel
	MP2151	2.5	5.5	1	25	0.6	1.1	✓		✓	✓	✓		SOT563 (1.6x1.6) UTQFN (1.2x1.6)	1% V_{FB} accuracy, output discharge, adj and fixed V_{OUT} versions
Sampling	MP2181	2.5	5.5	1	21	0.6	1.2	✓		✓	✓	✓		SOT583 (1.6x2.1)	1% V_{FB} accuracy, output discharge, ext soft start
	MP2160	2.7	6	1.2	20	0.6	3.5	✓		✓	✓	✓		QFN-8 (2x1.5)	3.5MHz switching frequency
	MP2141Q	2.3	5.5	1.5	20		2.2			✓	✓	✓		SOT563 (1.6x1.6)	Fixed 1.8V V_{OUT} output discharge, VSEL for PFM/PWM
	MP2152	2.5	5.5	2	25	0.6	1.1	✓		✓	✓	✓		SOT563 (1.6x1.6) UTQFN (1.2x1.6)	1% V_{FB} accuracy, output discharge, adj & fixed V_{OUT} versions
Sampling	MP2182	2.5	5.5	2	21	0.6	1.2	✓		✓	✓	✓		SOT583 (1.6x2.1)	1% V_{FB} accuracy, output discharge, ext soft start
	MP2122	2.7	6	2 (2x)	45	0.608	1		✓			✓	✓	TSOT23-8	Dual-channel
	MP2166 MPQ2166	2.7	6	2 (2x)	60	0.6	3	✓		✓		✓	✓	QFN-18 (2x3) QFN-18 (2.5x3.5)	Dual-channel, ext soft start
	MP2153	2.5	5.5	3	25	0.6	1.1	✓		✓	✓	✓		SOT563 (1.6x1.6) UTQFN (1.2x1.6)	1% V_{FB} accuracy, output discharge, adj & fixed V_{OUT} versions
Sampling	MP2183	2.5	5.5	3	21	0.6	1.2	✓	✓	✓	✓	✓		SOT583 (1.6x2.1)	1% V_{FB} accuracy, output discharge
	MP2187	2.5	5.5	3 (2x)	80	0.6	1.2	✓		✓	✓	✓		QFN-16 (2.2x2.6)	Input voltage failure indicator, dual-output, out. dis.
	MP2188	2.5	5.5	3 (2x)	80	0.6	1.2	✓		✓	✓	✓		QFN-16 (2.2x2.6)	Dual-output, output discharge
	MP2131	2.7	5.5	4	19	0.6	1.2	✓		✓	✓	✓		QFN-12 (2x2)	Output discharge
Sampling	MP2184	2.5	5.5	4	21	0.6	1.2	✓	✓	✓	✓	✓		SOT583 (1.6x2.1)	1% V_{FB} accuracy, output discharge
	MP2145	2.8	5.5	6	40	0.6	1.2	✓		✓	✓			QFN-12 (2x3)	Output discharge, PWM / PFM mode, dynamic voltage scaling
	MPQ8616-6	1.5	6	6	1050	0.61	Prog	✓	✓		✓		✓	QFN-14 (3x4)	CCM, non-latch OVP, and OCP
Sampling	MP8770C	3	17	8	100	0.6	0.7	✓	✓	✓	✓			QFN-16 (3x3)	Forced CCM, wide V_{IN} range, fast load transient response
	MPQ8616-12	1.5	6	12	1050	0.61	Prog	✓	✓		✓		✓	QFN-14 (3x4)	CCM, non-latch OVP, and OCP
NEW	MP8774	3	18	12	100	0.6	0.7	✓	✓	✓	✓			QFN-16 (3x3)	Wide V_{IN} range, fast load transient response, SCP, UVP, OCP & hiccup
	MPQ8612-16	1.5	6	16	1000	0.61	Prog	✓	✓	✓	✓		✓	QFN-17 (4x4)	DCM, non-latch OVP, and OCP
	MPQ8612-20	1.5	6	20	1000	0.61	Prog	✓	✓	✓	✓		✓	QFN-17 (4x4)	DCM, non-latch OVP, and OCP

SWITCHING REGULATORS | DC/DC POWER CONVERTERS

Step-Down Converters (Buck)

Maximum Operating Input Voltage $\leq 28V$

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{out} (Max) (A)	I_o (Typ) (mA)	V_{FB} (Typ) (V)	F_{sw} (MHz)	Power Good	External Soft Start	Light-Load Efficiency	Constant-On-Time (COT)	Package	Notes
NEW	MP1479	4.2	18	1	0.19	0.805	0.8			✓	✓	SOT563 (1.6x1.6)	Low UVLO
	MP2313	4.5	24	1	0.2	0.8	2			✓		TSOT23-8	High frequency, light-load mode (AAM pin)
	MP2388	4.5	21	1	0.2	0.798	2			✓		QFN-8 (1.5x2.5)	Small package, ultra-thin profile option
	MP2317	7.5	26	1	0.15	0.791	0.6			✓		TSOT23-8	Low current limit version of MP2314, optimized EMI
NEW	MP2322	3	22	1	0.005	0.6	1.25	✓		✓	✓	QFN-8 (1.5x2)	Ultra-low I_o , small package, output discharge
	MP1476	4.2	18	2	0.19	0.805	0.8			✓	✓	SOT563 (1.6x1.6)	Fast load transient response, OCP, and hiccup
	MP2318	4.5	24	2	0.2	0.8	2			✓		TSOT23-8	High frequency, light-load mode (AAM pin)
	MPQ2314	4.5	24	2	0.18	0.791	0.5			✓	✓	TSOT23-8	AAM power-save mode, industrial grade
	MP2321	4	19	2	0.04	0.6	Prog	✓	✓	✓		QFN-14 (2x3)	Forced PWM or auto-PFM / PWM mode selectable, 100% duty cycle
NEW	MP2392	4.2	24	2	0.2	0.805	0.65	✓	✓	✓	✓	SOT583 (1.6x2.1)	Good regulation, SCP/OVP/UVF function
NEW	MP2331H	4.2	24	2	0.2	0.802	1.2	✓	✓	✓	✓	SOT583 (1.6x2.1)	High frequency, good regulation, SCP/OVP/UVF function
Sampling	MP2344	7.5	26	2	0.17	0.791	0.6			✓		TSOT23-6	P2P with MP2317/MP2345, optimized EMI
Sampling	MP2345	7.5	26	2.5	0.17	0.791	0.6			✓		TSOT23-6	P2P with MP2317/MP2344, optimized EMI
NEW	MP2393	4.2	24	3	0.2	0.802	0.65	✓	✓	✓	✓	SOT583 (1.6x2.1)	Good regulation, SCP/OVP/UVF function
NEW	MP2330H	4.2	24	3	0.2	0.802	1.2	✓	✓	✓	✓	SOT583 (1.6x2.1)	High frequency, good regulation, SCP/OVP/UVF function
	MP2319	4.5	18	3	0.27	0.8	0.65	✓		✓	✓	TSOT23-8	Output discharge, auto-retry OVP
	MP1477	4.2	17	3	0.2	0.805	0.8			✓	✓	SOT563 (1.6x1.6)	Fast load transient response, OCP, and hiccup
NEW	MP1477H	4.2	17	3	0.2	0.805	1.2			✓	✓	SOT563 (1.6x1.6)	High frequency
	MP2223	4.5	18	3/2	1	0.8	0.54			✓		TSOT23-8	Dual 3A/2A Buck, 180° out-of-phase operation

CONTINUE NEXT PAGE >

SWITCHING REGULATORS | DC/DC POWER CONVERTERS

Step-Down Converters (Buck)

Maximum Operating Input Voltage $\leq 28V$

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{out} (Max) (A)	I_o (Typ) (mA)	V_{FB} (Typ) (V)	F_{sw} (MHz)	Power Good	External Soft Start	Light-Load Efficiency	Constant-On-Time (COT)	Industrial	Package	Notes
	MP2316	4	19	3	0.04	0.6	Prog	✓	✓	✓	✓		QFN-14 (2x3)	High efficiency, 100% duty cycle
	MP2326	3.9	19	4	0.04	0.6	Prog	✓	✓	✓	✓		QFN-14 (2x3)	Selectable PFM / PWM mode, 100% duty cycle
	MP8715	4.5	21	4	0.66	0.805	0.5	✓	✓				QFN-14 (3x4) SOIC-8E	100% duty cycle, ext freq sync
	MP1499	4.5	16	4	0.6	0.807	0.5		✓	✓			QFN-10 (2x3)	Ext freq sync
NEW	MP2384	4.5	24	4	0.105	0.6	0.7	✓		✓	✓		QFN-11 (2x2)	Output discharge, OCP, OVP, UVP, ther. shut. with auto-retry. P2P with MP2329/MP2386
NEW	MPQ8636-4	4.5	18	4	0.86	0.611	Prog	✓	✓		✓	✓	QFN-16 (3x4)	CCM, non-latch OVP, prop. switching loss red, pre-bias start-up, stable w/ zero ESR out cap
	MP2225	4.5	18	5	0.32	0.6	0.5			✓			TSOT23-8	High-efficiency, 5A peak, ext freq sync
NEW	MPQ8623	4	16	6	0.65	0.9	0.6/1.1/2.2	✓	✓	✓	✓		QFN-14 (2x3)	Prog cur limit, prop switching loss red, pre-bias start-up, stable w/ zero ESR out cap, excel load reg
	MP2229	4.5	21	6	0.4	0.6	Prog		✓	✓	✓		QFN-14 (3x3)	Current mode, external frequency sync
Sampling	MP2236	3	18	6	0.15	0.6	0.6			✓	✓		TSOT23-8	Pin-to-pin with MP2225
NEW	MP2329	4.5	24	6.5	0.105	0.6	0.7	✓		✓	✓		QFN-11 (2x2)	Out. dis., OCP, OVP, UVP, thermal shutdown with Auto-Retry. P2P with MP2384/MP2386
NEW	MP2329C	4.5	24	6.5	0.105	0.6	0.7	✓			✓		QFN-11 (2x2)	Forced CCM version of MP2329
NEW	MP2386	4.5	24	8	0.105	0.6	0.7	✓		✓	✓		QFN-11 (2x2)	Out. dis, OCP, OVP, UVP, & thermal shut. with auto-retry. P2P with MP2384/MP2329
	MP2276	2.7	16	8	0.6	0.8	0.6/1.1/2	✓	✓	✓	✓		QFN-14 (2x3)	Prog current limit, selectable mode of op. forced CCM or pulse-skip op. at light load
NEW	MP8770	4.5	17	8	0.1	0.6	0.7	✓	✓	✓	✓		QFN-16 (3x3)	Fast load transient response, SCP, UVP, OCP, and hiccup
Sampling	MP8770C	3	17	8	0.1	0.6	0.7	✓	✓	✓	✓		QFN-16 (3x3)	Forced CCM, wide V_{in} range, fast load transient response
	MP8759	4.5	26	8	0.117	0.6	0.7	✓		✓	✓		QFN-12 (2x3)	USM, PFM/PWM selection, hiccup mode OCP and UVP, output discharge
Sampling	MP2238	3	18	8	0.15	0.6	0.6			✓	✓		QFN-12 (2x3)	1% V_{FB} accuracy, hiccup OCP
NEW	MP8771	4.5	17	10	0.1	0.6	0.7	✓	✓	✓	✓		QFN-16 (3x3)	Fast load transient response, SCP, UVP, OCP, and hiccup
	MPQ8636A-10	4.5	18	10	0.86	0.611	Prog	✓	✓			✓	QFN-16 (3x4)	CCM, latch-off OVP/OCP
	MP8758H	4.5	22	10	0.19	0.604	0.5	✓		✓	✓		QFN-21 (3x4)	Thermal auto-retry, hiccup mode OCP and UVP, PFM/PWM mode
	MP8714	4.5	17	10	0.56	0.6	Prog	✓	✓	✓	✓		QFN-14 (3x4)	External frequency sync, current mode
	MP8720	4.5	26	10	0.14	0.6	0.7	✓		✓	✓		QFN-16 (3x3)	Output discharge, adj current limit, forced CCM or PSM selection over-current limit, latch-off reset
NEW	MP8772	4.5	17	12	0.1	0.6	0.7	✓	✓	✓	✓		QFN-16 (3x3)	Fast load transient response, SCP, UVP, OCP, and hiccup
NEW	MP8774	3	18	12	0.1	0.6	0.7	✓	✓	✓			QFN-16 (3x3)	Wide V_{in} range, fast load transient response, SCP, UVP, OCP, and hiccup
	MP8719	4.5	26	12	0.135	0.6	0.5/0.7	✓		✓	✓		QFN-16 (3x3)	Output discharge, USM, buck converter with $\pm 1A$ LDO and buffered reference
	MP38876	4.5	28	15	1	0.81	0.4	✓	✓				QFN-20 (3x4)	Synchronous gate driver, OCP latch-off, external frequency sync
	MPQ8636H-20	4.5	18	20	1	0.611	Prog	✓	✓			✓	QFN-29 (5x4)	CCM, hiccup OVP

SWITCHING REGULATORS | DC/DC POWER CONVERTERS

Step-Down Converters (Buck)

Maximum Operating Input Voltage < 55V

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{out} (Max) (A)	I_o (Typ) (mA)	V_{FB} (Typ) (V)	F_{sw} (kHz)	Power Good	External Soft Start	Light-Load Eff.	Sync Rect.	Industrial	Package	Notes
MP4410	4.5	36	0.1	0.02	1	Prog	✓		✓			QFN-10 (3x3)	Low I_o
MP4568	4.5	45	0.1	0.02	1	Prog		✓	✓	✓		QFN-10 (3x3)	Programmable peak-current limit
MP4569	4.5	75	0.3	0.02	1	1000	✓	✓	✓	✓		QFN-10 (3x3) SOIC-8E	Integrated high-side/low-side
MP2420	4.5	75	0.3	0.02	1	Prog	✓	✓		✓	✓	TSSOP-16	Watchdog+step-down
MPQ2459	4.5	55	0.5	0.73	0.812	480					✓	TSOT23-6	Built-in power MOSFET
MPQ2456	4.5	50	0.5	0.73	0.85	1200			✓		✓	TSOT23-6	OCP
MP4566	4.5	36	0.6	0.035	1	1000			✓			QFN-8 (2x3)	
MPQ2451	3.3	36	0.6	0.13	0.794	2000			✓		✓	TSOT23-6L QFN-6L	
MP2454	3.3	36	0.6	0.06	0.8	2300	✓	✓			✓	QFN-10 (3x3)	External frequency sync
MPQ4458	3.8	36	1	0.12	0.8	Prog			✓			TQFN-10 (3x3)	Integrated high-side MOSFET
MPQ4558	3.8	55	1	0.14	0.8	Prog			✓		✓	QFN-10 (3x3) SOIC-8E	Current-mode control
NEW MP4431 MPQ4431	3.3	36	1	0.01	0.8	Prog	✓	✓	✓	✓	✓	QFN-16 (3x4)	Selectable forced CCM or AAM, prog soft-start time, good EMI, and low-dropout mode
MP2269	3.3	30	1	0.012	0.8	Prog	✓	✓	✓	✓		QFN-15 (2x3)	Current-mode control, low I_o , forced PWM and auto-PFM/PWM sel., low dropout mode
MPQ4459	3.8	36	1.5	0.12	0.8	Prog			✓		✓	TQFN-10 (3x3)	Current-mode control
MPQ2490	4.5	36	1.5	0.5	0.805	700	✓	✓			✓	SOIC-8	Programmable output-current limit
MPQ4561	3.8	55	1.5	0.14	0.795	Prog		✓	✓			QFN-10 (3x3)	Internal high-side MOSFET
NEW MP4425M MPQ4425M	4	36	1.5	0.5	0.2	2200					✓	QFN-13 (2.5x3)	PWM dimming and OCP/SCP, external frequency sync
MP9942 MP9942A	4	30	2	0.5	0.792	410	✓		✓	✓		TSOT23-8	Forced CCM, consumer grade, external frequency sync
MP4420H MPQ4420H	4	36	2	0.5	0.792	410	✓			✓	✓	TSOT23-8	External frequency sync
MPQ4560	3.8	55	2	0.14	0.797	Prog			✓		✓	QFN-10 (3x3) SOIC-8E	AEC-Q
MP2499	4.5	55	2	0.5	0.8	100		✓				SOIC-16	Programmable output current
NEW MP4432 MPQ4432	3.3	36	2.2	0.01	0.8	Prog	✓	✓	✓	✓	✓	QFN-16 (3x4)	Select. forced CCM or AAM, prog soft-start time, good EMI, and low-dropout mode
MPQ4460	3.8	36	2.5	0.12	0.8	Prog			✓			QFN-10 (3x3)	Programmable output current
MP2560	4.5	42	2.5	0.12	0.8	Prog			✓			QFN-10 (3x3) SOIC-8E	Current-mode control
MP2565	4.5	50	2.5	0.12	0.8	Prog			✓			QFN-10 (3x3) SOIC-8E	Integrated internal high-side
MP2496	7	36	2.5	1.6	350/250/150							QFN-26 (4x4)	Integrated smart USB charging port, auto-detect, cable compensation
MP2499A	5	36	3	0.7	0.792	270			✓	✓		QFN-13 (2.5x3)	Current-mode control, ext frequency sync, output line drop compensation
MP4423H MPQ4423H	4	36	3	0.5	0.79	410	✓			✓	✓	QFN-8 (3x3)	External frequency sync
MP9943/A	4	30	3	0.5	0.79	410	✓		✓	✓		QFN-8 (3x3)	Consumer grade, 36V max, ext frequency sync

CONTINUE NEXT PAGE >

SWITCHING REGULATORS | DC/DC POWER CONVERTERS

Step-Down Converters (Buck)

Maximum Operating Input Voltage < 55V

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{out} (Max) (A)	I_o (Typ) (mA)	V_{FB} (Typ) (V)	F_{sw} (kHz)	Power Good	Ext Soft Start	Light-Load Eff	Sync Rect	Industrial	Package	Notes
NEW	MP4433 MPQ4433	3.3	36	3	0.01	0.8	Prog	✓	✓	✓	✓	✓	QFN-16 (3x4)	Sel. forced CCM or AAM, prog soft-start time, good EMI, and low-dropout mode
	MP4570 MPQ4570	4.5	55	3	0.45	1	Prog	✓	✓	✓	✓	✓	TSSOP20 EP	External frequency sync
	MP2263	3.3	30	3	0.012	0.8	Prog	✓	✓	✓	✓		QFN-15 (2x3)	Current-mode control, low I_o , forced PWM & auto PFM/PWM selection, low dropout mode
	MP4462 MPQ4462	3.8	36	3.5	0.12	0.792	Prog				✓	✓	QFN-10 (3x3) SOIC-8E	AEC-Q
	MP4473	4.5	36	3.5	0.5	0.815	Prog	✓	✓	✓	✓	✓	QFN-20 (3x4)	High frequency
NEW	MP4430 MPQ4430	3.3	36	3.5	0.01	0.8	Prog	✓	✓	✓	✓	✓	QFN-16 (3x4)	Selectable forced CCM or AAM, programmable soft-start time, good EMI, and low-dropout mode
Sampling	MP2491C	4	32	6	0.45	0.5	480	✓		✓	✓		QFN-13 (2.5x3)	Adjustable current limit, V_{out} scaling control
Sampling	MPQ4480 -AEC1	4.2	36	6	1	1	Prog			✓	✓	✓	QFN-25 (4x5)	CC output-current limit adj: 2.75A/3.75A/7.5A, ext sync, AEC-Q100 qualified
	MP8675	4.5	42	6	0.9	0.808	420				✓		SOIC-8E	Synchronizable gate driver, ext frequency sync

Step-Down Controllers

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_o (Typ) (mA)	V_{FB} (V)	F_{sw} (kHz)	Soft Start	Package	Notes
MP2910	5	12	0.6	0.8	300	Int	SOIC-14 SOIC-8E	Synchronous PWM DC/DC linear, specific power good Indicator for Intel, Grantsdale FSB_VTT power sequence
MP2905	3	28	0.6	0.6	Adj 200 to 500	Ext	MSOP-10	Ideal for applications greater than 15A
MP2908A	4	60	0.75	0.8	Adj 100 to 1000	Ext	TSSOP20 EP QFN-20 (3x4)	Industrial grade, power good, programmable CCM, AAM, pulse-skipping mode

Step-Up Charge Pump

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{out} (A)	I_o (Typ) (mA)	F_{sw} (kHz)	Industrial	Package	Notes
MP9361	2.8	5	0.11	2	1350	✓	TSOT23-6	Fixed 5V _{OUT} , high-performance, regulated, internal soft start, OCP, SCP, inrush current limit
MP9218	2.8	5	0.11	2	1350		QFN-6 (2x2)	Fixed 5V _{OUT} , high-performance, regulated

Step-Up Controllers

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{out} (A)	F_{sw} (kHz)	I_o (Typ) (mA)	V_{FB} (Typ) (V)	Soft Start	Package	Notes
MP3910	5	35	1	Adj 30 to 400	0.288	1.237	Ext	MSOP-10	Supports pulse-skipping mode at light load, 0.95 max duty cycle
MP3910A	9	14	1	Adj 30 to 400	0.288	1.237	Ext	SOIC-8E	Supports pulse-skipping mode at light load, 0.95 max duty cycle
MP6002	10	100	3	550	1	1.21	Int	SOIC-8E	Flyback / forward DC/DC converter, 30W, integrated 150V power switch
MP6001	10	100	2	550	1	1.21	Int	SOIC-8E	Flyback / forward DC/DC Converter, 15W, integrated 150V power switch
MP6003	10	100		550	1	1.21	Int	SOIC-8E	Monolithic flyback / sepic DC/DC converter

SWITCHING REGULATORS | DC/DC POWER CONVERTERS

Step-Up Converters (Boost)

Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_{SW} Limit (Typ) (A)	I_o (Typ) (mA)	V_{OUT} Range (V)	F_{SW} (kHz)	Package	Notes
MP3209	2.5	6	0.35	0.64	3 to 22	1400	TSOT23-5 UTQFN-8 (2x2)	Int comp, tiny inductors and capacitors (+J168:J192) can be used
MP3217	2.5	6	0.5	0.46	V_{IN} to 36	670	TSOT23-6	Cycle-by-cycle OCP, UVLO, thermal shutdown, P2P with MAX5025-5028
MP1400	2.7	7	0.6	0.2	-0.9 to -6	1500	CSP-8 (0.8x1.6)	Output adj from -0.9V to -6V, very small size
MP3416	0.8	5.5	1	0.0085	1.8 to 5.5	1500	TSOT23-8 QFN-8 (1.5x2.2)	Output disconnect, down mode, sync
MP3120	0.8	5	1.2	0.47	2.5 to 5	1100	TSOT23-6	Output disconnect, LDO mode, sync
MP3430	2.7	5.5	1.2	0.3	2.7 to 90	1300	QFN-16 (3x3)	APD current monitoring (1:10 or 1:2 ratio) with 5% accuracy & 50ns response time, prog APD current limit and protection, int comp and SS
MP3410	1.8	6	1.3	0.36	2.5 to 6	550	TSOT23-5	Output disconnect, sync
MP3414	0.6	4	1.8	0.035	1.8 to 4	1000	TSOT23-8	Output disconnect, sync
MP1541	2.5	6	1.9	0.64	3 to 22	1300	TSOT23-5	Int current limit
MP1542	2.5	22	2.6	0.7	3 to 22	700 / 1300	MSOP-8	Prog soft start
MP3414A	1.8	5.5	3	0.022	1.908 to 5.5	1000	TSOT23-8	Wider input version of MP3414, sync
MP3213	2.5	22	3.5	0.7	3 to 22	700 / 1300	MSOP-8E	Prog soft start
MP1530	2.7	5.5	3.6	1.3	2.7 to 22	1400	QFN-16 (3x3) TSSOP-16	Triple output charge pump, LDO for TFT bias
MPQ1530	2.7	5.5	3.6	1.3	2.7 to 22	1400	QFN-16 (3x3)	Triple output charge pump, LDO for TFT bias, indust. grade
MP3415	1.8	5.5	4.2	0.022	1.98 to 5.5	1000	QFN-12 (2x2)	Output disconnect, sync
MP3425	3.1	22	5	0.65	3.1 to 55	Prog 300 to 2000	QFN-14 (3x4)	Prog UVLO and EN hysteresis, industrial grade
MP3421	1.9	5.5	5.5	0.043	2.5 to 5.5	600	QFN-14 (2x2)	Output disconnect, sync
MP3422	1.9	5.5	6.5	0.043	2.5 to 5.5	Prog 300 to 2000	QFN-14 (3x4)	Output disconnect, sync
MP3426	3.2	22	8.5	0.65	3.2 to 35	Prog 300 to 2000	QFN-14 (3x4)	Prog, UVLO, soft start, UVLO hysteresis, industrial grade
MP3423	1.9	5.5	9	0.043	2.5 to 5.5	600	QFN-14 (2x2)	Output disconnect, sync
NEW MP3424	2	5.5	9.5	0.32	3 to 5.5	580	QFN-14 (2x2)	Current prog, output disconnect, sync
MP3429	0.8	13	21.5	0.45	1 to 16	600	QFN-13 (3x4)	Selectable PSM/USM/FCCM, prog UVLO and hysteresis, sync
MP3431	2.7	13	21.5	0.45	1 to 16	600	QFN-13 (3x4)	Selectable PSM/USM/FCCM, prog input current limit, prog UVLO and hysteresis, sync
Sampling MP3432	2.7	13	21.5	0.45	V_{IN} to 16	600	QFN-13 (3x4)	Selectable PSM/USM/FCCM, prog switch peak current limit, auto pass-through mode in PSM when $V_{IN} > V_{OUT}$, sync
MP3428A	3	20	25	0.65	3 to 22	600	QFN-22 (3x4)	Input disconnect function, ext soft start, prog UVLO and hysteresis, sync

SWITCHING REGULATORS | DC/DC POWER CONVERTERS

Step-Up Energy Storage (Dying GASP) / Power Back-Up Manager PMICs

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{STRG} (Max) (V)	I_{LIMF} Charging (A)	I_{LIMF} Dumping (A)	I_Q (Typ) (mA)	V_{FB} (V)	Package	Notes
	MP5505A	2.7	7	30	0.5	5	2 (Max)	0.79	QFN-20 (3x4)	Prog storage, release voltage, hot-swap management unit, for SATA/M.2 PCIe
	MP5455	2.7	7	30	0.5	5	2 (Max)	0.79	QFN-20 (3x4)	For USB Type-C HDMI dongle reference design
	MP5507E	2.7	7	30	0.5	5	2 (Max)	0.79	QFN-16 (2.5x3.2)	Bus power good indicator, adj dV/dt slew rate for VB start-up, 1.2MHz buck release mode switching frequency, smaller package version of MP5505A
	MP5512	4	18	40	0.96	5	1	0.8	QFN-28 (4x5)	Prog storage and release voltage, hot-swap management unit for PCIe
NEW	MP5515	2.7	18	32	0.5 to 2	6.5	3 (Max)	0.8	QFN-30 (5x5)	Prog, high-efficiency, lossless energy storage and power back-up management unit for solid-state and hard-disk drive applications

Step-Up LNB

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	Standard	I_{OUT} (Max) (A)	22kHz Tone Signal Generated	Package	Notes
	MP8124	8	14	DiSEqC™ 1.x	0.5	Internal	QFN-14 (2x3)	Boost converter with internal switch, low-noise LDO output, line drop compensation, selectable V_{OUT} compensation, adjustable output SS
Sampling	MP8128	8	14	DiSEqC™ 1.x & DiSEqC™ 2.x	1	Selectable Int or Ext	QFN-20 (3x3)	With I ² C interface, low-noise LDO output, selectable output voltage

BUCK/BOOST

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_{SW} Limit (Typ) (A)	I_Q (Typ) (mA)	V_{FB} (V)	F_{SW} (kHz)	Sync	Package	Notes
	MP2155	2	5.5	2.2	0.08	0.496	1000	✓	QFN-10 (3x3)	Power-save mode, load disconnect
Sampling	MP28160	2.7	5.5	2.5	0.2		1800	✓	CSP-12 (1.4x1.8)	0.5A I_{OUT} , buck-boost converter, 3.3V fixed output voltage
	MP28163	2	5.5	2.9	0.07	0.496	1100	✓	QFN-10 (3x3)	Power-save mode, load disconnect
	MP28164	1.2	5.5	4.2	0.025	0.5	2000	✓	QFN-11 (2x3)	Power-save mode, load disconnect
Sampling	MP28167	2.8	22	Prog	3		500	✓	QFN-16 (3x3)	3A I_{OUT} , 4-switch buck-boost converter, fixed output voltage options available
Sampling	MP8860	2.8	22	Prog	1		500	✓	QFN-16 (3x3)	1A I_{OUT} , 4-switch buck-boost converter, with I ² C interface
Sampling	MP8862	2.8	22	Prog	1		500	✓	QFN-16 (3x3)	2A I_{OUT} , 4-switch buck-boost converter, with I ² C interface
Sampling	MP8859	2.8	22	Prog	1		500	✓	QFN-16 (3x3)	3A I_{OUT} , 4-switch buck-boost converter, with I ² C interface
Sampling	MP2980	4.5	24	Prog	0.8 / 0.02	0.5 / 2.047	Selectable: 200/300/400/600	✓	QFN-32 (4x4)	4-switch buck-boost controller, with I ² C interface
Sampling	MP2984	4.5	24	Prog	0.8 / 0.02	0.5 / 2.047	Selectable: 200/300/400/600	✓	QFN-32 (4x4)	4-switch buck-boost controller, with I ² C int., <50mA steps cur. limit adj through IPWM Pin
Sampling	MP4245	4	36	17	0.18	0.1 / 0.4 / 0.72 / 1.6	Selectable: 250/350/420	✓	QFN-21 (4x5)	4-switch buck-boost converter, spread spec. sel., I ² C interface and 2 times prog. MTP

LDO | DC/DC POWER CONVERTERS

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{out} (mA)	I_o (Typ) (μ A)	Load Regulation (%)	PSRR @ 1kHz (dB)	V_{FB} (V)	Dropout Voltage (mV)	Package	Notes
MP2000	1.35	6	150	65	0.001	50	0.5	250 (IO: 100mA) 300 (IO: 150mA)	TSOT23-5	Low-voltage input (1.35V to 6V)
MP8801	2.7	6.5	150	125	0.001	70	1.22	150 (IO: 150mA)	TSOT23-5	Low noise, excellent for RF app, lower cost
MP8802	2.7	6.5	250	125	0.001	70	1.22	230 (IO: 250mA)	TSOT23-5	Excellent for RF applications, lower cost
MP20041	2.5	6	300 (2x)	114	0.003	65		75 (IO: 100mA) 220 (IO: 300mA)	QFN-8 (2x2)	Dual fixed output, P2P with RT9012
MP2002	1.35	6.5	500	100	0.001	26	0.5	290 (IO: 500mA)	QFN-8 (2x3)	Low-voltage input, power good
MP8904	2.5	6.5	500	100	0.001	26	0.496	300 (IO: 500mA)	QFN-8 (2x3)	Power good output, industrial grade
MP20045	2.5	5.5	1000	110	0.0003	56	1.5	140 (IO: 1000mA)	QFN-8 (3x3) SOIC-8E	High input/output current with fast response, fixed and adjustable +O252 output voltages
MP20051	2.5	5.5	1000	110	0.0003	63	0.8	140 (IO: 1000mA)	QFN-8 (3x3)	Industrial grade
MP20046	2.7	5.5	2000	75	0.0003	70		210 (IO: 2000mA)	SOIC-8E QFN-10 (3x3)	High input/output current with fast response
MP20073	1.3	6	2000						MSOP-8E	DDR2/3 termination regulator
MP20075	1.3	3.6	3000						MSOP-8E	DDR2/3/L4 termination regulator, VDRV=3.3V

High-Performance Low-Dropout Linear Regulators

Sampling	MP2016	4	42	30	12	0.003	50	1.23	700 (IO:30mA)	QFN-8 (2x3) TSOT23-5	Ideal for automotive
	MP2015A	2.5	24	150	3.3	0.005	41	1.215	700 (IO:150mA)	TSOT23-4 QFN-6 (2x2) QFN-8 (3x3)	EN pin
	MP2019	3	40	300	10	0.04	45	1.25	420 (IO:300mA)	SOIC-8 EP	Industrial grade
	MP2014	3	40	500	10	0.03	45		750 (IO:500mA)	TO252-5	Low I_o
	MP2018	3	16	500	10	0.03	45		750 (IO:500mA)	TO252-5	Low I_o , fixed output voltage, power good
	MP2005	1	5.5	800	100	0.0005	65	0.5	70 (IO:800mA)	QFN-8 (2x3)	Fast transient, 48dB PSRR @1MHz
	MP2030	1.1	5	3000	220	0.001	32	0.5	150 (IO:3000mA)	QFN-10 (3x3) QFN-32 (5x5)	Dual supply, fast transient, bias supply, power good, current limit, int thermal prot.

SUPERVISORY | DC/DC POWER CONVERTERS

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_o (Typ) (μ A)	Threshold Accuracy (%)	Reset Threshold Accuracy (%)	Delay Time (ms)	Package	Notes
	MP6400	1.8	6	1.6	± 1	1	2.1 to 10000	QFN-10 (3x3)	Power-save mode, load disconnect
	MPQ6411	4.8	5.2				N/A	QFN-10 (3x3)	Power-save mode, load disconnect
Sampling	MP6420	3.6	18	3	0.5		3000 to 4600	TSOT23-8	Battery protection IC for 2-3-series cell li-ion with integrated protective MOSFET and PTC interface
Sampling	MP6422	3.6	24	6	0.3		3000 to 4600	QFN-10 (1.5x2.0)	Battery protection IC for 2-4 series cell Li-Ion with protective MOSFET and PTC interface
Sampling	MP6412	2.2	12	1				QFN-10 (1.4x1.8)	Ultra-low I_o load switch controller with RESET timer

MOSFET DRIVERS

Half-Bridge Gate Drivers

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	Bootstrap Supply (Max) (V)	Peak Pull-Up Current (A)	Peak Pull-Down Current (A)	Rise Time (ns)	Fall Time (ns)	Turn-On Delay (ns)	Turn-Off Delay (ns)	Package	Notes
	MP18024	9	16	100	3	4.5	15	9	20	20	SOIC-8E	4A, high frequency
	MP1906	10	16	80	0.35	1	50	30	80	80	SOIC-8	High performance
	MP1907	4.5	18	100	1.5	2.5	12	9	18	20	QFN-10 (3x3)	2.5A, high frequency
	MP18021A	9	18	100	1.5	2.5	12	9	16	16	SOIC-8E QFN-8 (3x3)	2.5A, high frequency, industrial grade
	MP18021	9	18	100	1.5	2.5	12	9	16	16	SOIC-8E QFN-8 (3x3)	High frequency, N-channel MOSFET with 1ns matching delay

FLYBACKS

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{sw} Limit (Typ) (A)	I_o (Typ) (mA)	V_{FB} (V)	F_{sw} (kHz)	Package	Notes
	MP6004	14	80	2.05	0.38	1.99	10 to 200	QFN-14 (3x3)	13W, integrated 180V power switch
Sampling	MP6005	8	80	0.8V*160mV / RSENSE	0.45	2	250	MSOP-10	Flyback/forward controller with PSR or SSR, 2A gate and 0.8A sync drivers

PMIC & MULTIPLE OUTPUTS

DC/DC POWER CONVERTERS

CSP-12 (1.2x1.6)

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (V)	I_{SW} Limit (Typ) (A)	F_{SW} (kHz)	Notes
Sampling	MP28310	2	5.5	Buck: 1.2 / 1.5 / 1.8 / 2.5 / 2.8 / 3.0 / 3.3 LDO: 1.8 / 2.8 / 3.0	0.6	1500	Ultra-low I_{OQ} , ultra-small package, 300mA buck + 100mA LDO, programmable V_{OUT} by CTRL, COT, PG

CSP-12 (1.4x1.8)

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (V)	I_{SW} Limit (Typ) (A)	F_{SW} (kHz)	Notes
Sampling	MP5461	V_{IN1} : 4V V_{IN2} : 2.4V	V_{IN1} : 22V V_{IN2} : 5.5V	3.3	2.6	2000	Dual-input O-ring switches, power path sel, input/indication, fast SCP on OR_OUT, fast reverse block within 2 μ s on OR_OUT, output OVP for buck-boost converter

QFN-10 (1.4x1.8)

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (V)	I_{SW} Limit (Typ) (A)	F_{SW} (kHz)	Notes
Sampling	MP5418	2.3	5	V_{OUT1} : -VIN V_{OUT2} : 0V to -CTL	1	30 to 550	Negative charge pump + an adjustable negative regulator

QFN-12 (2x2)

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (V)	I_{SW} Limit (Typ) (A)	F_{SW} (kHz)	Notes
	MP28300	2	5.5	Buck: 0.8 / 1.0 / 1.2 / 1.5 / 1.8 / 2.5 / 3.3 LDO: 1.3 / 1.8 / 3.3	0.6	1500	Ultra-low I_{OQ} , 300mA buck + 100mA LDO, programmable V_{OUT} by CTRL, COT, PG
	MP28301	2	5.5	Buck: 0.8 / 1.0 / 1.2 / 1.5 / 1.8 / 2.5 / 3.3 LDO: 1.2 / 2.5 / 3.0	1.2	1500	Ultra-low I_{OQ} , 700mA buck + 100mA LDO, programmable V_{OUT} by CTRL, COT, PG

QFN-22 (3x4)

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (V)	V_{FB} (V)	I_{SW} Limit (Typ) (A)	F_{SW} (kHz)	Notes
Sampling	MP5470	4	16	0.55 - 7	Prog	Prog	Prog	I ² C interface, four buck converters (3A/3A/2A/2A), parallel mode for higher current, 1 GPIO pin

CONTINUE NEXT PAGE >

PMIC & MULTIPLE OUTPUTS

DC/DC POWER CONVERTERS

QFN-26 (5x5)

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (V)	V_{FB} (V)	I_{SW} Limit (Typ) (A)	F_{SW} (kHz)	Notes
Sampling	MP5408	6	36	5.1/5.17/5.3		Converter: 13 USB SW1: 3.45 USB SW2: 2.75	Prog	Integrated, smart, dual USB charging ports, auto-detect, supports USB Type-C 5V at 3A DFP mode

QFN-28 (4x4)

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (V)	V_{FB} (V)	I_{SW} Limit (Typ) (A)	F_{SW} (kHz)	Notes
	MP5416	2.8	5.5	Prog	Prog	Prog	Prog	I ² C bus and one-time programmable (OTP) function, programmable $V_{OUT}/F_{SW}/I_{SW}$ via I ² C/OTP, configurable mini PMIC, four buck converters (4.5A/4A/2.5A/2A) + five LDOs (3A)
Sampling	MP5417	2.8	5.5	Prog	Prog	Prog	Prog	I ² C bus and one-time programmable (OTP) function, programmable $V_{OUT}/F_{SW}/I_{SW}$ via I ² C/OTP, four buck converters ((4A/2A/4A/2A) + two LDOs (300mA) + two GPIO pins

SOIC8-EP

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (V)	I_{SW} Limit (Typ) (A)	F_{SW} (kHz)	Notes
Sampling	MP5423	25	100	14/5/3.3	0.65	200	One 300mA buck converter + two LDOs (100mA/40mA)

UTQFN-20 (2.5x3)

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (V)	V_{FB} (V)	I_{SW} Limit (Typ) (A)	F_{SW} (kHz)	Notes
	MP5403	2.7	6	Ch 1: 0.9V, 1.1V, 2.5V, 2.85V Ch 2: 0.9V, 1.2V, 1.8V, 2.5V	0.6	Ch 1: 5.6 Ch 2: 4.7	1500	Configurable mini PMIC, two buck converters (2.5A/3.5A) + one load switch (3A)
NEW	MP5403B	2.7	6	0.6V to 6V	0.6	Ch 1: 8.5 Ch 2: 7	1500	Mini PMIC, dual peak buck (4A/5A) + one load switch (3A)

WLCSP-38 (2.7x3.1)

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (V)	V_{FB} (V)	I_{SW} Limit (Typ) (A)	F_{SW} (kHz)	Notes
Sampling	MP5413	2.8	5.5	Prog	Prog	Prog	Prog	Ultra-small package, sleep mode control, I ² C bus and one-time programmable (OTP) function, programmable $V_{OUT}/F_{SW}/I_{SW}$ via I ² C/OTP, four buck converters (3A/2A/3A/2A) + two LDOs (300mA) + two GPIO pins

FULLY INTEGRATED PoE PD SOLUTIONS | DC/DC POWER CONVERTERS

	Part Number	Pass Device	Current Limit (mA)	Thermal Protection	IEEE Detection & Classification	Package	Notes
	MP8004	100V, 1Ω DMOS	420	Yes	802.3af	QFN-20 (4x6)	13W PoE PD interface and PWM converter
	MP8007	100V, 0.48Ω DMOS	840	Yes	802.3af	QFN-28 (4x5)	13W primary-side regulated flyback without optocoupler feedback
	MP8008	100V, 0.48Ω DMOS	840	Yes	802.3af/at	QFN-28 (4x5)	25.5W PoE PD interface and peak-current mode SSR flyback controller
Sampling	MP8009	100V, 0.48Ω DMOS	840	Yes	802.3af/at	QFN-28 (4x5)	PD interface and PSR/SSR controller

PoE PD CONTROLLERS

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_{SW} Limit (Typ) (A)	I_o (Typ) (mA)	V_{FB} (V)	F_{SW} (kHz)	Package	Notes
	MP3900	8.6	12	0.2V/RSENSE	0.18	0.816	330	MSOP-8	Boost controller, 10V gate driver
	MP6001	4.5	100	2			55 to 550	SOIC-8E	15W, integrated 150V power switch
	MP6002	10	100	4	1	1.21	55 to 550	SOIC-8E	30W, integrated 150V power switch
	MP6004	14	80	2.05	0.38	1.99	10 to 200	QFN-14 (3x3)	13W PSR flyback, integrated 180V power switch
Sampling	MP6005	8	80	0.8V*160mV / RSENSE	0.45	2	250	MSOP-10	Flyback/forward controller with PSR or SSR, 2A gate and 0.8A sync drivers

PoE PD IDENTITY

	Part Number	Pass Device	Current Limit (mA)	Thermal Protection	IEEE Detection & Classification	Package	Notes
	MP8003A	100V, 0.48Ω DMOS	840	Yes	802.3af/at	QFN-10 (3x3)	25.5W PoE PD controller
	MP8001	100V, 0.8Ω DMOS	420	Yes	802.3af	SOIC-8	15W PoE PD controller

DIGITAL REGULATOR | DC/DC POWER CONVERTERS

Synchronous Step-Down Converters with I²C Interface

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_{OUT} (Max) (A)	I_O (Typ) (mA)	V_{FB} (Typ) (V)	F_{SW} (kHz)	Power Good	External Soft Start	Light-Load Efficiency	Sync Rectification (COT)	Package	Notes
	MP8843	2.6	6	3	0.06	0.6	1000 to 2000	✓	✓	✓	✓	QFN-12 (2x2)	Prog V_{OUT} , power-save mode
	MP8864	4.5	21	4	0.5	0.6	1600	✓	✓	✓	✓	QFN-15 (3x3)	Prog V_{OUT} , power-save mode
	MP8845	2.8	6	5	18	0.6	2200		✓	✓		WLCSP (1.6x2)	Slew rate, selectable power-save mode
NEW	MP8861	2.85	18	6	0.42	0.72	500 to 1250	✓	✓	✓	✓	QFN-14 (3x4)	I ² C prog FB range, integrated telemetry, accurate output voltage/current, readback via I ² C
	MP8846	4.5	8	6	0.5	0.6	1600	✓	✓	✓	✓	QFN-15 (3x3)	Prog V_{OUT} , power-save mode
	MP8847	2.7	6	6	0.3	0.6	850 to 2200	✓		✓	✓	QFN-14 (2x3)	Prog V_{OUT} , power-save mode
	MP8865	4.5	21	6	0.5	0.6	1600	✓	✓	✓	✓	QFN-15 (3x3)	Prog V_{OUT} , power-save mode
	MP8867	4.5	17	8	0.56	0.6	1500	✓	✓	✓	✓	QFN-14 (3x4)	Prog V_{OUT} , power-save mode
	MP8868	4.5	17	10	0.56	0.6	1500	✓	✓	✓	✓	QFN-14 (3x4)	Prog V_{OUT} , power-save mode
	MP8869S	2.85	18	12	0.42	0.72	500 to 1250	✓	✓	✓	✓	QFN-14 (3x4)	V_{OUT} adj up to 5.5V with FB pin, integrated telemetry, accurate output voltage/current, readback via I ² C
	MP8869W	3	18	12	0.42	0.6	500 to 1250	✓	✓	✓	✓	QFN-14 (3x4)	I ² C prog output range, support FB loop or I ² C V_{OUT} loop, int telemetry, accurate out. volt./current, readback via I ² C

STEP-DOWN CONVERTERS WITH INTEGRATED INDUCTOR | POWER MODULES

Synchronous ($V_{IN} (Max) \leq 6V$)

	Part Number	$I_{OUT} (A)$	$V_{IN} (V)$	$I_O (\mu A)$	Light-Load Efficiency	Power Good	Soft Start	Protection Features OCP/SCP/UVLO/OTP	Package	Solution Size	Notes
NEW	MPM3804	0.6	2.3 to 5.5	11	✓	✓	Int	✓	QFN-10 (2x2x0.9)	3.6x3.6mm	5.5V/0.6A, adj V_{OUT} , excellent load and line regulation
Sampling	MPM3804-12	0.6	2.3 to 5.5	11	✓	✓	Int	✓	QFN-10 (2x2x0.9)	3.6x3.6mm	5.5V/0.6A, 1.2V fixed V_{OUT} , sync, ultra-small QFN package
Sampling	MPM3804-18	0.6	2.3 to 5.5	11	✓	✓	Int	✓	QFN-10 (2x2x0.9)	3.6x3.6mm	5.5V/0.6A, 1.8V fixed V_{OUT} , sync, ultra-small QFN package
Sampling	MPM3804-25	0.6	2.3 to 5.5	11	✓	✓	Int	✓	QFN-10 (2x2x0.9)	3.6x3.6mm	5.5V/0.6A, 2.5V fixed V_{OUT} , sync, ultra-small QFN package
Sampling	MPM3804-33	0.6	2.3 to 5.5	11	✓	✓	Int	✓	QFN-10 (2x2x0.9)	3.6x3.6mm	5.5V/0.6A, 3.3V fixed V_{OUT} , sync, ultra-small QFN package
	MPM3805	0.6	2.5 to 6	17	✓	✓	Int	✓	QFN-12 (3x2.5x0.9)	3.81x5.97mm	6V/0.6A, ultra-low I_Q , adj V_{OUT}
	MPM3805-12	0.6	2.5 to 6	17	✓	✓	Int	✓	QFN-12 (3x2.5x0.9)	3.81x5.97mm	6V/0.6A, ultra-low I_Q , 1.2V fixed V_{OUT}
	MPM3805-18	0.6	2.5 to 6	17	✓	✓	Int	✓	QFN-12 (3x2.5x0.9)	3.81x5.97mm	6V/0.6A, ultra-low I_Q , 1.8V fixed V_{OUT}
	MPM3805-25	0.6	2.5 to 6	17	✓	✓	Int	✓	QFN-12 (3x2.5x0.9)	3.81x5.97mm	6V/0.6A, ultra-low I_Q , 2.5V fixed V_{OUT}
	MPM3805-33	0.6	2.5 to 6	17	✓	✓	Int	✓	QFN-12 (3x2.5x0.9)	3.81x5.97mm	6V/0.6A, ultra-low I_Q , 3.3V fixed V_{OUT}
Sampling	MPM3811	1	2.3 to 5.5	340	✓		Int	✓	QFN-10 (2x2x1.6)	3.6x3.6mm	5.5V/1A, peak 1.2A, sync, ultra-small QFN package, excellent load & line reg.
	MPM3810	1.2	2.5 to 6	17	✓	✓	Int	✓	QFN-12 (3x2.5x0.9)	3.81x5.97mm	6V/1.2A, ultra-low I_Q , adj V_{OUT}
	MPM3810-12	1.2	2.5 to 6	17	✓	✓	Int	✓	QFN-12 (3x2.5x0.9)	3.81x5.97mm	6V/1.2A, ultra-low I_Q , 1.2V fixed V_{OUT}
	MPM3810-18	1.2	2.5 to 6	17	✓	✓	Int	✓	QFN-12 (3x2.5x0.9)	3.81x5.97mm	6V/1.2A, ultra-low I_Q , 1.8V fixed V_{OUT}
	MPM3810-25	1.2	2.5 to 6	17	✓	✓	Int	✓	QFN-12 (3x2.5x0.9)	3.81x5.97mm	6V/1.2A, ultra-low I_Q , 2.5V fixed V_{OUT}
	MPM3810-33	1.2	2.5 to 6	17	✓	✓	Int	✓	QFN-12 (3x2.5x0.9)	3.81x5.97mm	6V/1.2A, ultra-low I_Q , 3.3V fixed V_{OUT}
NEW	MPM38111	Dual 1A	2.7 to 6	45	✓		Int	✓	QFN-14 (4x4x1.6)	7x8.5mm	2.7 to 6V, dual 1A I_{OUT} , ultra-low I_Q
Sampling	MPM3822C	2	2.7 to 6	500		✓	Int	✓	QFN-18 (2.5x3.5x1.6)	3.5x5.2mm	6V/2A, sync, adj output from 0.6, ultra-small module, forced CCM
	MPM3820	2	2.7 to 6	40	✓	✓	Int	✓	QFN-20 (3x5)	8.5x4.5mm	6V/2A, adjustable output from 0.6V, ultra-low I_Q
	MPM3830	3	2.7 to 6	40	✓	✓	Int	✓	QFN-20 (3x5x1.6)	8.5x4.5mm	6V/3A, high light-load efficiency
Sampling	MPM3833C	3	2.7 to 6	500		✓	Int	✓	QFN-18 (2.5x3.5x1.6)	3.5x5.2mm	6V/3A, sync, adj output from 0.6V, ultra-small module, forced CCM
NEW	MPM38222	Dual 2A	2.7 to 6	45	✓		Int	✓	QFN-14 (4x4x1.6)	7x8.5mm	2.7 to 6V, dual 2A I_{OUT} , ultra-low I_Q
	MPM3840	4	2.8 to 5.5	40	✓	✓	Int		QFN-20 (3x5x1.6)	8.5x4.5mm	5.5V/4A, light-load efficiency, 100% duty cycle, low I_Q

STEP-DOWN CONVERTERS WITH INTEGRATED INDUCTOR | POWER MODULES

Synchronous ($6V < V_{IN} (Max) \leq 24V$)

	Part Number	$I_{OUT} (A)$	$V_{IN} (V)$	$I_O (\mu A)$	Light Load Efficiency	Power Good	I ² C Interface	Soft Start	Protection Features OCP/SCP/UVLO/OTP	Package	Solution Size	Notes
	MPM3606	0.6	4.5 to 21	200	✓			Int	✓	QFN-20 (3x5x1.6)	8.5x4.5mm	21V/0.6A, output adj from 0.8V
	MPM3606A	0.6	4.5 to 21	300	✓	✓		Int	✓	QFN-20 (3x5x1.6)	8.5x4.5mm	21V/0.6A, power good, power-save mode at light load, output adj from 0.8V
	MPM3610	1.2	4.5 to 21	200	✓			Int	✓	QFN-20 (3x5x1.6)	8.5x4.5mm	21V/1.2A, output adj from 0.8V, low I_O
	MPM3610A	1.2	4.5 to 21	200	✓	✓		Int	✓	QFN-20 (3x5x1.6)	8.5x4.5mm	21V/1.2A, output adj from 0.8V, low I_O , power good
	MPM3620	2	4.5 to 24	200	✓			Int	✓	QFN-20 (3x5x1.6)	8.5x4.5mm	24V/1.2A, output adj from 0.8V, low I_O
	MPM3620A	2	4.5 to 24	200	✓	✓		Int	✓	QFN-20 (3x5x1.6)	8.5x4.5mm	Power good, 24/2A, adj output from 0.8V
NEW	MPM3632C	3	4 to 18	1200		✓		Int	✓	QFN-20 (3x5x1.6)	7x7.9mm	18V/3A, sync, output adj from 0.8V, forced CCM
NEW	MPM3630	3	4.5 to 24	320	✓	✓		Int	✓	QFN-20 (3x5x1.6)	8.5x4.5mm	18V/3A, sync, int power save mode for light load
	MPM3680	6	2.5 to 18	860	✓	✓		Int / Ext	✓	QFN-57 (12x12x4)	16x16mm	18V/6A, prog F_{SW} , output adj from 0.65V to 5V
Sampling	MPM3683-7	7	2.7 to 16	650	✓	✓		Int	✓	QFN-28 (7x7x4)	12x11mm	16V/7A, peak 10A, with ext 3.3V bias, 4V to 16V with int bias or ext 3.3V bias
Sampling	MPM3695-10	10	3.3 to 14			✓	✓	Int	✓	QFN-45 (8x8x1.6)	14.5x15.8mm	7A cont. I_{OUT} , peak 10A, 0.5V to 3.3V output, parallel up to 60A peak, ultra-thin
Sampling	MPM3695A-10	10	3.3 to 14			✓	✓	Int	✓	QFN-45 (8x8x1.6)	14.5x15.8mm	10A, 0.5V to 1.8V V_{OUT} , parallel up to 60A
	MPM3682	10	2.5 to 18	860	✓	✓		Int / Ext	✓	QFN-57 (12x12x4)	16x16mm	18V/10A, prog F_{SW} , output adj from 0.65V to 5V
	MPM3684	15	2.5 to 18	860	✓	✓		Int / Ext	✓	QFN-65 (12x15x4)	16x17.5mm	18V/15A, prog F_{SW}
Sampling	MPM3695-25	20	3 to 16			✓	✓	Int	✓	QFN-45 (12x12x4)	15x16mm	20A continuous I_{OUT} , peak 25A, 0.5V to 5.5V output, parallel up to 200 peak
	MPM3686	20	2.5 to 18	860	✓	✓		Int / Ext	✓	QFN-65 (12x15x4)	16x17.5mm	18V/20A, prog F_{SW}

Synchronous ($24V < V_{IN} (Max) \leq 36V$)

	MPM3506A	0.6	4.5 to 36	580		✓		Int	✓	QFN-19 (3x5x1.6)	8.5x4.5mm	36V/0.6A, output adj from 0.8V
	MPM3510A	1.2	4.5 to 36	580		✓		Int	✓	QFN-19 (3x5x1.6)	8.5x4.5mm	36V/1.2A, high voltage, output adj from 0.8V
Sampling	MPM3520E	2	4 to 36	700		✓		Int	✓	LGA-8 (10x10x4.2)	14.0x16.4mm	36V/2A, metal can, ultra-low EMI, output adj from 1.0V to 5.0V
Sampling	MPM3550E	5	4.5 to 36	450	✓	✓		Int	✓	LGA-18 (12x12x4.2)	14.2x18.2mm	36V/5A, metal can, ultra-low EMI, output adj from 1.0V to 5.0V

Synchronous ($V_{IN} (Max) > 36V$)

Sampling	MPM3570E	0.3	4.5 to 75	30	✓	✓		Int	✓	LGA-8 (10x10x4.2)	16.2x12.4mm	75V/0.3A, metal can, ultra-low EMI, V_{OUT} adj from 1.0V to 5.0V
Sampling	MPM3593	3	3.5 to 45	11	✓	✓	✓	Int	✓	QFN-41 (6x8x1.6)	15.3x12.4mm	45V/3A, high-efficiency, I ² C interface sync buck with OTP
Sampling	MPM3530	3	4.5 to 55	450	✓	✓		Ext	✓	QFN-44 (12x10x4)	20x18mm	55V/3A continuous output, programmable F_{SW} with ext sync function

Web

Field

Factory

MEZDPD3603A Module with Default Configuration

USB to I2C Communication Interface Device

MEZDPD3603A Evaluation Board

3-pin Ribbon Cable

10-pin Ribbon Cable

USB Thumb Drive
Stores GUI installation file and supplemental documents

USB Male A to B Cable

Note: This cable not needed for EV5416 board, but for boards with 19Pin interface or those with 10-pin connectors

Adjust at our factory to meet your unique specifications. Work with our engineering team for the optimal solution.

BOOST | mEZ PROGRAMMABLE POWER MODULES

	Part Number	I_{OUT} (A)	V_{IN} (V)	V_{OUT} (V)	Light-Load Efficiency	Power Good	Soft Start	Protection Features OCP/SCP/UVLO/OTP	Package	Notes
NEW	mEZD41501A-A	1	2.7 to 4.2	5	No	No	Int	OTP	SIP 27X20-6	Step-up, 600kHz, high efficiency
NEW	mEZD41501A-B	1	2.7 to 10	12	No	No	Int	OTP	SIP 27X20-6	Step-up, 600kHz, high efficiency
NEW	mEZD41501A-C	1	2.7 to 13	15	No	No	Int	OTP	SIP 27X20-6	Step-up, 600kHz, high efficiency
NEW	mEZD41502A-A	2	2.7 to 4.2	5	No	No	Int	OTP	SIP 27X20-6	Step-up, high efficiency
NEW	mEZD41502A-B	2	2.7 to 10	12	No	No	Int	OTP	SIP 27X20-6	Step-up, 600kHz, high efficiency
NEW	mEZD41502A-C	2	3.4 to 13	15	No	No	Int	OTP	SIP 27X20-6	Step-up, 600kHz, high efficiency
NEW	mEZD41503A-A	3	2.7 to 4.2	5	No	No	Int	OTP	SIP 27X20-6	Step-up, high efficiency
NEW	mEZD41503A-B	3	2.7 to 10	12	No	No	Int	OTP	SIP 27X20-6	Step-up, 600kHz, high efficiency

BUCK

	Part Number	I_{OUT} (A)	V_{IN} (V)	V_{OUT} (V)	Light-Load Efficiency	Power Good	Soft Start	Protection Features OCP/SCP/UVLO/OTP	Package	Notes
NEW	mEZD74800A-A	0.3	4.5 to 75	3.3	No	No	Int	✓	SIP 23X16-12	Power supply, with hiccup
NEW	mEZD74800A-B	0.3	4.5 to 75	5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD71201A-A	1	4.5 to 24	1	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD71201A-B	1	4.5 to 24	1.2	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD71201A-C	1	4.5 to 24	1.5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD71201A-D	1	4.5 to 24	1.8	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD71201A-E	1	4.5 to 24	2.5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD71201A-F	1	4.5 to 24	3.3	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD71201A-G	1	6.5 to 24	5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD72401A-A	1	4.5 to 36	1	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD72401A-B	1	4.5 to 36	1.2	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD72401A-C	1	4.5 to 36	1.5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD72401A-D	1	4.5 to 36	1.8	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD72401A-E	1	4.5 to 36	2.5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup
NEW	mEZD72401A-F	1	4.5 to 36	3.3	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW}^* with hiccup

BUCK | mEZ PROGRAMMABLE POWER MODULES

	Part Number	I_{OUT} (A)	V_{IN} (V)	V_{OUT} (V)	Light-Load Efficiency	Power Good	Soft Start	Protection Features OCP/SCP/UVLO/OTP	Package	Notes
NEW	mEZD72401A-G	1	4.5 to 36	5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD72401A-H	1	6.5 to 36	12	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD72402A-A	2	4.5 to 36	1	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD72402A-B	2	4.5 to 36	1.2	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD72402A-C	2	4.5 to 36	1.5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD72402A-D	2	4.5 to 36	1.8	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD72402A-E	2	4.5 to 36	2.5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD72402A-F	2	4.5 to 36	3.3	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD72402A-G	2	6.5 to 36	5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71202A-A	2	4.5 to 24	1	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71202A-B	2	4.5 to 24	1.2	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71202A-C	2	4.5 to 24	1.5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71202A-D	2	4.5 to 24	1.8	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71202A-E	2	4.5 to 24	2.5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71202A-F	2	4.5 to 24	3.3	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71202A-G	2	6.5 to 24	5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZS91202A	2.5	7 to 36	5	No	No	Int	OCP, OTP	SIP 13x45-4	USB charger, efficiency up to 95%
Sampling	mEZDPD3603A-0001	3	4.5 to 36	3.3	No	Yes	Int	OTP, SCP	SIP 23X16-12	Programmable DC/DC power supply
In Dev.	mEZD74003L-ADJ	3	5 to 40	1.23 to 15	No	No	Int	✓	LGA 11x15	Adj V_{OUT} with integrated inductor
In Dev.	mEZD94003A-ADJ	3	5 to 40	1.23 to 15	No	No	Int	✓	LGA 11x15	Sync, adj V_{OUT} power supply

BUCK | mEZ PROGRAMMABLE POWER MODULES

	Part Number	I_{OUT} (A)	V_{IN} (V)	V_{OUT} (V)	Light-Load Efficiency	Power Good	Soft Start	Protection Features OCP/SCP/UVLO/OTP	Package	Notes
NEW	mEZD71203A-A	3	5 to 16	1	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71203A-B	3	5 to 16	1.2	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71203A-C	3	5 to 16	1.5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71203A-D	3	5 to 16	1.8	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71203A-E	3	5 to 16	2.5	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71203A-F	3	5 to 16	3.3	No	No	Int	✓	SIP 10X20-3	Step-down, 400kHz F_{SW} , with hiccup
NEW	mEZD71210A-A	10	4.5 to 17	1	No	Yes	Int	OCP, OTP, SCP	SIP 27X20-10	Step-down, 400kHz F_{SW} , with hiccup
Sampling	mEZD81260A	60	5 to 16	6.5	No	Yes	Int	✓	LGA 25X15.5-28	Digital sync, step-down, open-frame

PoE

	Part Number	I_{OUT} (A)	V_{IN} (V)	V_{OUT} (V)	Light-Load Efficiency	Power Good	Soft Start	Protection Features OCP/SCP/UVLO/OTP	Package	Notes
NEW	mEzs84801A	1	37 to 57	12	No	Yes	Int	OCP, OTP, OVP	SIP 45X39-20	12W, IEEE 802.3af-compliant PoE powered device

BUCK REGULATORS | AUTOMOTIVE

5-6V Secondary Synchronous

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_{OUT} (A)	I_{SW} Limit (Typ) (A)	I_O (Typ) (μ A)	V_{FB} (V)	F_{SW} (kHz)	$R_{DS(ON)}$ (m Ω)	Fixed Output Versions (V)	Soft Start	Ext Sync	Forced CCM	AAM	COT Control	Fixed Frequency	Package	Notes	
NEW	MPM3805A-AEC1	2.6	6	0.6	1	17	0.6	3500	120 / 70	1.2, 1.8	Int	✓	✓			QFN-12 (2.5x3.0x0.9)	Module with integrated inductor		+WF
NEW	MPQ2171-AEC1	2.5	5.5	1	4.5		0.6	2800	80 / 40		Int	✓	✓			TSOT23-8	Output discharge, 100% duty cycle		
NEW	MPM3810A-AEC1	2.6	6	1.2	2.1	17	0.6	3500	120 / 70	1.2, 1.8	Int	✓	✓			QFN-12 (2.5x3.0x0.9)	Module with integrated inductor		+WF
NEW	MPQ2172-AEC1	2.5	5.5	2	4.5		0.6	2800	80 / 40		Int	✓	✓			TSOT23-8	Output discharge, 100% duty cycle		
NEW	MPQ2169-AEC1	2.7	6	1.4+1.4	2	60	0.6	350 to 3000	55 / 20		Ext	✓	✓	✓	✓	QFN-18 (2.5x3.5)	Dual outputs of 1.4A/1.4A or 0.8A/2A, 100% duty cycle op.		+WF
	MPQ2143-AEC1	2.5	5.5	3	4.8	40	0.6	1200	80 / 40		Int	✓		✓	✓	TSOT23-8	Output discharge, 100% duty cycle		
	MPQ2166-AEC1	2.7	6	2+2	2	60	0.6	350 to 3000	55 / 20		Ext	✓	✓	✓	✓	QFN-18 (2.5x3.5) QFN-18 (2x3)	Dual outputs of 2A/2A or 1A/3A, 100% duty cycle operation		+WF
Sampling	MPQ2167-AEC1	2.7	6	4	6.7	42	0.6	300 to 2200	35 / 30		Ext		✓	✓	✓	QFN-11 (2x3)	100% duty cycle		+WF
Sampling	MPQ2167B-AEC1	2.7	6	4	6.7	42	0.6	300 to 2200	35 / 30		Ext	✓	✓	✓	✓	QFN-11 (2x3)	100% duty cycle		+WF

36-45V Primary Synchronous

	Part Number	V_{IN} (Min) (V)	V_{IN} (ABS Max) (V)	I_{OUT} (A)	I_{SW} Limit (Typ) (A)	I_O (Typ) (μ A)	V_{FB} (V)	F_{SW} (kHz)	$R_{DS(ON)}$ (m Ω)	Fixed Output Versions (V)	Soft Start	Ext Sync	Spread Spectrum	Forced CCM	AAM	Fixed Frequency	Package	Notes	
Sampling	MPQ4300-AEC1	3.5	50	0.5	2			470 / 2200	95 / 50	5, 3.8, 3.3	Int	✓	✓	✓	✓	QFN-16 (4x3) QFN-16 (3x3)	MPQ4430 spread spectrum family, low component count	+WF	
Sampling	MPM3509B-AEC1	4	40	0.6	5	600	0.8	410	90 / 50		Int	✓		✓	✓	QFN-17 (3x5x1.6)	Ultra-compact module, integrated inductor, BST/VCC capacitors	+WF	
NEW	MPM3509-AEC1	4	40	0.9	3	600	0.8	2200	90 / 50		Int	✓		✓	✓	QFN-17 (3x5x1.6)	Ultra-compact module, integrated inductor, BST/VCC capacitors	+WF	
Sampling	MPQ4301-AEC1	3.5	50	1	3			470 / 2200	95 / 50	5, 3.8, 3.3	Int	✓	✓	✓	✓	QFN-16 (4x3) QFN-16 (3x3)	MPQ4430 spread spectrum family, low component count	+WF	
NEW	MPQ4431-AEC1	3.3	40	1	2.5	10	0.8	350 to 2500	90 / 80		Ext	✓		✓	✓	QFN-16 (3x4)	Low I_O , good EMI, and low dropout mode	+WF	
	MPM3515-AEC1	4	40	1.5	4	600	0.8	2200	90 / 50		Int	✓		✓	✓	QFN-17 (3x5x1.6)	Ultra-compact module, integrated inductor, BST/VCC capacitors	+WF	
NEW	MPQ4415A-AEC1	4	40	1.5	4	600	0.8	450 to 2200	90 / 50		Int	✓		✓	✓	QFN-13 (2.5x3)		+WF	
Sampling	MPQ4302-AEC1	3.5	50	2	5			470 / 2200	95 / 50	5, 3.8, 3.3	Int	✓	✓	✓	✓	QFN-16 (4x3) QFN-16 (3x3)	MPQ4430 spread spectrum family, low component count	+WF	
Sampling	MPQ4312-AEC1	3.3	50	2	5.5	10	0.8	350 to 2500	40 / 17	5, 3.3	Ext	✓	✓	✓	✓	QFN-20 (4x4)	MPQ4312 low I_O spread spectrum family	+WF	
	MPQ4420H-AEC1	4	40	2	4.2	500	0.8	410	90 / 55		Int	✓			✓	✓	TSOT23-8		+WF
	MPQ4420A-AEC1	4	40	2	5.6	500	0.8	410	90 / 55		Int	✓		✓	✓	✓	TSOT23-8	MPQ4312 low I_O spread spectrum family	
NEW	MPQ4432-AEC1	3.3	40	2.2	5.2	10	0.8	350 to 2500	90 / 40		Ext	✓		✓	✓	✓	QFN-16 (3x4)	Low I_O , good EMI, and low dropout mode	+WF

Note: +WF+ Available with Wettable Flank

CONTINUE NEXT PAGE >

BUCK REGULATORS | AUTOMOTIVE

36-45V Primary Synchronous

	Part Number	V_{IN} (Min) (V)	V_{IN} (ABS Max) (V)	I_{OUT} (Max) (A)	I_{SW} Limit (Typ) (A)	I_O (Typ) (μ A)	V_{FB} (V)	F_{SW} (kHz)	$R_{DS(ON)}$ (m Ω)	Fixed Output Versions (V)	Soft Start	Ext Sync	Spread Spectrum	Forced CCM	AAM	Fixed Frequency Package	Notes	
Sampling	MPQ4303-AEC1	3.5	50	3	6			470 / 2200	95 / 50	5, 3.8, 3.3	Int	✓	✓	✓	✓	QFN-16 (4x3) QFN-16 (3x3)	MPQ4430 spread spectrum family, low component count	+WF
Sampling	MPQ4313-AEC1	3.3	50	3	5.5	10	0.8	350 to 2500	40 / 17	5, 3.8, 3.3	Ext	✓	✓	✓	✓	QFN-20 (4x4)	MPQ4312 low I_O spread spectrum family	+WF
NEW	MPQ4433-AEC1	3.3	40	3	5.8	10	0.8	350 to 2500	90 / 40		Ext	✓		✓	✓	QFN-16 (3x4)	Low I_O , good EMI, and low dropout mode	+WF
	MPQ4423H-AEC1	4	40	3	4.4	500	0.8	410	85 / 55		Int	✓			✓	QFN-8 (3x3)		+WF
	MPQ4423A-AEC1	4	40	3	5.7	600	0.8	410	85 / 55		Int	✓		✓	✓	QFN-8 (3x3)		
Sampling	MPQ8883-AEC1	3.5	50	3	1 to 8			250 to 2500	95 / 50	1.8 to 12	Int	✓	✓	✓	✓	QFN-16 (3x3)	I ² C interface, OTP, digitally prog. output voltage, frequency, comp., protection, slew rate, & more	
	MPQ4473-AEC1	4.5	40	3.5	6.6	500	0.8	200 to 1000	40 / 20		Ext					QFN-8 (3x3)	COT control	
NEW	MPQ4430-AEC1	3.3	40	3.5	5.8	10	0.8	350 to 2500	90 / 40	3.3, 3.8	Ext	✓		✓	✓	QFN-16 (3x4)	Low I_O , good EMI, and low dropout mode	+WF
Sampling	MPQ4314-AEC1	3.3	50	4	8	10	0.8	350 to 2500	40 / 17	5, 3.3	Ext	✓	✓	✓	✓	QFN-20 (4x4)	MPQ4312 low I_O spread spectrum family	+WF
	MPQ4470-AEC1	4.5	40	5	8	500	0.8	100 to 1000	40 / 20		Ext					QFN-20 (3x4)	Prog. soft-start time, SCP, OCP, OVP latch, COT control	
	MPQ4470A-AEC1	4.5	40	5	8	500	0.8	100 to 1000	40 / 20		Ext					QFN-20 (3x4)	Prog. soft-start time, SCP, OCP, COT control	
Sampling	MPQ4315-AEC1	3.3	50	5	8	10	0.8	350 to 2500	40 / 17	5, 3.3	Ext	✓	✓	✓	✓	QFN-20 (4x4)	MPQ4312 low I_O spread spectrum family	+WF
Sampling	MPQ4316-AEC1	3.3	50	6	13	10	0.8	350 to 2500	40 / 17	5, 3.3	Ext	✓	✓	✓	✓	QFN-20 (4x4)	MPQ4312 low I_O spread spectrum family	+WF
Sampling	MPQ4436-AEC1	3.3	50	6	13	10	0.8	350 to 2500	40 / 17		Ext	✓	✓	✓	✓	QFN-20 (4x4)	Multiphase, low I_O	+WF
Sampling	MPQ4317-AEC1	3.3	50	7	13	10	0.8	350 to 2500	40 / 17	5, 3.3	Ext	✓	✓	✓	✓	QFN-20 (4x4)	MPQ4312 low I_O spread spectrum family	+WF
NEW	MPQ2918-AEC1	4	40	Controller	750	0.8		100 to 1000			Ext	✓		✓	✓	TSSOP-20 EP QFN-20 (3x4)	High max duty cycle (99.5%)	

DDR MEMORY POWER

	Part Number	V_{IN} (Min) (V)	V_{IN} (ABS Max) (V)	I_{OUT} (A)	Accuracy for VTT _{Ref}	V_{Driver} (V)	Package	Notes
NEW	MPQ20073-AEC1	1.3	6	2	30	3.3	MSOP-8E	DDR2/3 termination regulator

Note: +WF+ Available with Wettable Flank

BUCK REGULATORS

AUTOMOTIVE

HV Synchronous

	Part Number	V_{in} (Min) (V)	V_{in} (ABS Max) (V)	I_{out} (Max) (A)	I_{sw} Limit (Typ) (A)	I_o (Typ) (μ A)	V_{FB} (V)	F_{sw} (kHz)	$R_{DS(on)}$ (m Ω)	Soft Start	Ext Sync	Forced CCM	A4M	Hysteric Control	Fixed Frequency	Package	Notes
	MPQ4569-AEC1	4.5	80	0.3	0.72	20	1		1200 / 450	Ext			✓	✓		QFN-10 (3x3) SOIC-8E	Programmable soft start
NEW	MPQ4569A-AEC1	4.5	80	0.3	0.72	20	1		1200 / 500	Ext			✓	✓		QFN-10 (3x3)	Programmable soft start
	MPQ2420-AEC1	4.5	80	0.3	0.72	20	1		1200 / 450	Ext			✓	✓		TSSOP16	Integrated separate windowed watchdog die
NEW	MPQ2420A-AEC1	4.5	80	0.3	0.72	20	1		1200 / 450	Ext			✓	✓		TSSOP16	Integrated separate windowed watchdog die, default enable on
NEW	MPQ4590-AEC1	7.5	700	0.4	0.66	200	1.7		13.5	Int	✓		✓			SOIC-8E	Primary-side CV control, supporting buck, buck-boost, boost & flyback topologies
Sampling	MPQ4571-AEC1	4.5	65	1	1.9	30	0.8	200 to 2200	200 / 45	Int	✓	✓	✓	✓		QFN-12 (2.5x3)	Low I_o , compact
Sampling	MPQ4572-AEC1	4.5	65	2	3.5	30	0.8	200 to 2200	200 / 45	Int	✓	✓	✓	✓		QFN-12 (2.5x3)	Low I_o , compact
	MPQ4570-AEC1	4.5	60	3	5.7	520	1	100 to 1000	90 / 70	Ext	✓		✓	✓		TSSOP20 EP	Programmable soft-start time
NEW	MPQ2908A-AEC1	4	60	Controller		750	0.8	100 to 1000		Ext	✓	✓	✓	✓		TSSOP20 EP QFN-20 (3x4)	High max duty cycle (99.5%)

Controllers

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_o (Typ) (μ A)	I_{sp} (Typ) (μ A)	V_{FB} (V)	F_{sw} (kHz)	Soft Start	Ext Sync	Forced CCM	A4M	Fixed Frequency	Package	Notes
NEW	MPQ2908A-AEC1	4	60	750	0.5	0.8	100 to 1000	Ext	✓	✓	✓	✓	TSSOP20 EP QFN-20 (3x4)	High max duty cycle (99.5%) +WF
NEW	MPQ2918-AEC1	4	40	750	0.5	0.8	100 to 1000	Ext	✓	✓	✓	✓	TSSOP20 EP QFN-20 (3x4)	High max duty cycle (99.5%) +WF

Modules

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{out} (A)	I_{sw} Limit (Typ) (A)	I_o (Typ) (μ A)	V_{FB} (V)	F_{sw} (kHz)	$R_{DS(on)}$ (m Ω)	Fixed Output Versions (V)	Soft Start	Ext Sync	Forced CCM	Package	Notes
NEW	MPM3805A-AEC1	2.6	6	0.6	1	17	0.6	3500	120 / 70	1.2, 1.8	Int		✓	QFN-12 (2.5x3.0x0.9)	Module with integrated inductor +WF
NEW	MPM3810A-AEC1	2.6	6	1.2	2.1	17	0.6	3500	120 / 70	1.2, 1.8	Int		✓	QFN-12 (2.5x3.0x0.9)	Module with integrated inductor +WF
Sampling	MPM3509B-AEC1	4	40	0.6	5	600	0.8	410	90 / 50		Int	✓	✓	QFN-17 (3x5x1.6)	Ultra-compact module with integrated inductor, BST/VCC capacitors +WF
NEW	MPM3509-AEC1	4	40	0.9	3	600	0.8	2200	90 / 50		Int	✓	✓	QFN-17 (3x5x1.6)	Ultra-compact module with integrated inductor, BST/VCC capacitors +WF
	MPM3515-AEC1	4	40	1.5	4	600	0.8	2200	90 / 50		Int	✓	✓	QFN-17 (3x5x1.6)	Ultra-compact module with integrated inductor, BST/VCC capacitors +WF

Note: +WF+ Available with Wettable Flank

BUCK REGULATORS

AUTOMOTIVE

Non-Synchronous

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_{OUT} (Max) (A)	I_{SW} Limit (Typ) (A)	I_O (Typ) (μ A)	V_{FB} (V)	F_{SW} (kHz)	$R_{DS(ON)}$ (m Ω)	Soft Start	Ext Sync	Forced CCM	Fixed Frequency	Package	Notes
	MPQ2459-AEC1	4.5	60	0.5	1.25	730	0.8	480	1000	Int		✓	✓	TSOT23-6	Superior light-load efficiency
	MPQ2451-AEC1	3.3	40	0.6	1	130	0.8	2000	500	Int		✓	✓	TSOT23-6L QFN-6L	Internal comp and SS, programmable, fixed output versions: 3.3V, 5V
	MPQ2454-AEC1	4.5	40	0.6	1.8	60	0.8	350 to 2300	200	Ext	✓	✓	✓	QFN-10 (3x3) MSOP-10 EP	Superior light-load efficiency
	MPQ4558-AEC1	3.8	60	1	1.9	140	0.8	200 to 2000	250	Int		✓	✓	QFN-10 (3x3) SOIC-8E	Superior light-load efficiency
	MPQ4559-AEC1	3.8	60	1.5	2.3	140	0.8	200 to 2000	250	Int		✓	✓	QFN-10 (3x3)	Superior light-load efficiency
	MPQ4561-AEC1	3.8	60	1.5	2.5	140	0.8	250 to 2000	300	Ext		✓	✓	QFN-10 (3x3)	Superior light-load efficiency
	MPQ4560-AEC1	3.8	60	2	3.2	140	0.8	250 to 2000	250	Int		✓	✓	QFN-10 (3x3) SOIC-8E	Superior light-load efficiency
	MPQ4462-AEC1	3.8	60	3.5	5.5	120	0.8	250 to 4000	150	Int		✓	✓	QFN-10 (3x3) SOIC-8E	Superior light-load efficiency
Sampling	MPQ4467-AEC1	3.3	40	2.5	5.6	10	0.8	250 to 2500	95	Ext	✓	✓	✓	QFN-16 (3x4)	Low dropout, selectable in-phase or 180° out-of-phase
NEW	MPQ4468-AEC1	3.3	40	3	5.8	10	0.8	350 to 2500	90	Ext	✓	✓	✓	QFN-16 (3x4)	Low dropout, selectable in-phase or 180° out-of-phase
Sampling	MPQ4469-AEC1	3.3	40	5	7.7	10	0.8	350 to 2500	90	Ext	✓	✓	✓	QFN-20 (4x5)	Low dropout, selectable in-phase or 180° out-of-phase
	MPQ2362-AEC1	4.75	25	Dual 2	3.4	2000	1.222	380	180	Int	✓	✓	✓	TSSOP20F	Dual output

BOOST REGULATORS

Synchronous

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	V_{OUT} (Max) (V)	I_{SW} Limit (Typ) (A)	I_O (Typ) (μ A)	V_{FB} (V)	F_{SW} (kHz)	$R_{DS(ON)}$ (m Ω)	Fixed Frequency	Package	Notes
	MPQ3410-AEC1	1.8	6	6	1.3	360	1.19	550	530 / 300	✓	TSOT23-5	Output disconnect
NEW	MPQ3428A-AEC1	3	20	22	19	110	1.2	600	18	✓	QFN-22 (3x4)	Input disconnect function, external high-side gate drive

Controllers

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_O (Typ) (μ A)	I_{30} (Typ) (μ A)	V_{FB} (V)	F_{SW} (kHz)	Soft Start	Sync	Package	Notes
NEW	MPQ3910-AEC1	5	35	290	1	1.5	30 to 400	Ext	✓	MSOP-10	Peak current mode, light load operation, supports >10A, OVP, SCP, OTP

Non-Synchronous

	Part Number	V_{IN} (Min) (V)	V_{SW} (Max) (V)	V_{OUT} (Max) (V)	I_{SW} Limit (Typ) (A)	I_O (Typ) (μ A)	V_{FB} (V)	F_{SW} (kHz)	$R_{DS(ON)}$ (m Ω)	Fixed Frequency	Package	Notes
	MPQ3425-AEC1	3.1	55	55	5	650	1.23	300 to 2000	90	✓	QFN-14 (3x4)	Programmable UVLO and EN hysteresis
	MPQ3426-AEC1	3.2	45	35	8.5	650	1.23	300 to 2000	90	✓	QFN-14 (3x4)	Programmable UVLO and EN hysteresis

SUPERVISOR CIRCUITS | AUTOMOTIVE

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	Reset Threshold (V)	Threshold Accuracy (%)	I_o (Typ) (μ A)	Package	Notes
	MPQ6400-33-AEC1	1.8	5.5	3.07	± 1.0	1.6	QFN-6 (2x2)	Voltage supervisor, 3.3V
Sampling	MPQ6400-01-AEC1	0.9	5.5	0.4	± 1.0	1.6	QFN-6 (2x2)	Voltage supervisor, adjustable
	MPQ6411-AEC1	4.8	5	4.5		16	SOIC-8E	5V VDD, windowed watchdog, power-on reset
	MPQ6411-33-AEC1	3.1	3.3	2.9		10	SOIC-8E	3.3V VDD, windowed watchdog, power-on reset

AUDIO PRODUCTS (CLASS-D AUDIO AMPLIFIERS)

Stereo

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	P_{OUT} (W)	Efficiency (%)	THD+N (%)	PSRR (dB)	Package	Notes
Sampling	MPQ7790-AEC1	5	18	10	93	0.79 @ 1W	20	TSSOP20 EP	Low EMI, analog input Class D for mono speaker in bridge-tied load configuration

ANALOG SWITCH

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	Switcher Current (A)	T_{ON} (ns)	T_{OFF} (ns)	Power Supply Current (μ A)	Bandwidth (MHz)	$R_{DS(ON)}$ (Ω)	Package	Notes
Sampling	MPQ2735-AEC1	1.65	5.5	0.1	29	23	1	50	0.25	QFN-10 (1.4x1.8)	Low-voltage 0.45 Ω dual SPDT analog switches, separate control inputs

LOAD SWITCH

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	Load Current	I_o (Typ) (mA)	$R_{DS(ON)}$ ($m\Omega$)	Package	Notes
	MPQ5073-AEC1	0.5	5.5	2	0.18	50	QFN-12 (2x2)	Adjustable current limit
Sampling	MPQ5069-AEC1	4.5	28	10	1.5	7	QFN-22 (3x5)	Adjustable current limit
Sampling	MPQ5060-AEC1	7.5	36	2	5	400	QFN-22 (3x5)	Quad-channel smart switch, 55V load dump, independent fault indication pins for open load, short to GND/VIN, overload

Note: +WF+ Available with Wettable Flank

USB CHARGERS

AUTOMOTIVE

	Part Number	V_{in} (Min) (V)		V_{in} (ABS Max) (V)	Dual / Single Ports	I_{out} (A)	I_q (Typ) (mA)	F_{SW} (kHz)	DCP Schemes for BC1.2, Divider Mode, 1.2V/1.2V Mode	Spread Spectrum	Package	Notes	
NEW	MPQ4491-AEC1	7	40		Single	2.5	1.6	Selectable	✓		QFN-25 (4x4)	Auto-detect, cable compensation	
NEW	MPQ4475-AEC1	7	40		Single	2.5	1.6	Selectable	✓	✓	QFN-25 (4x4)	Programmable line drop compensation	
	MPQ4481-AEC1	6	40		Single	3	0.7	Selectable	✓		QFN-26 (5x5)	Selectable V_{OUT} : 5.1V / 5.17V / 5.3V, low dropout mode	
	MPQ4485-AEC1	6	40		Dual	3(x2)	1	450	✓		QFN-26 (5x5)	USB2 supports CDP mode, Type-C 5V @ 3A DFP mode, load shedding versus temperature, forced CCM operation	
	MPQ4487-AEC1	6	40		Dual	3(x2)	1	Selectable		✓	QFN-26 (5x5)	EN control for USB, fault indication, support Type-C 5V @ 3A DFP mode, forced CCM operation, load shedding versus temperature	
	MPQ4488-AEC1	6	40		Dual	3(x2)	1	Selectable	✓	✓	QFN-26 (5x5)	Supporting Type-C 5V @ 3A DFP mode, selectable V_{OUT} : 5.1V / 5.17V / 5.3V	
Sampling	MPQ4480-AEC1	4.2	40			6	1	Selectable			QFN-25 (4x5)	2.75A/3.75A/7.5A CC output current limit, battery short protection, adjustable line drop compensation, forced PWM mode, low dropout mode, 1V to 20V output adj	+WF
Sampling	MPQ4483-AEC1	4.2	40		Single	3	1	Selectable	✓	✓	QFN-25 (4x5)	Supporting BC1.2 DCP and CDP mode, supporting bidirectional USB 2.0 high-speed data switch, low dropout mode, 3.55A/3.75A CC output current limit	+WF
Sampling	MPQ4210-AEC1	4	40				0.8	Selectable		✓	QFN-27 (5x5)	USB Type-C PD sync buck-boost controller with I ² C, selectable PSM and FCCM	+WF
Sampling	MPQ4230	4	40			5	0.18	Selectable		✓	QFN-21 (4x5)	Sync buck-boost converter, line drop compensation, I ² C interface and two times programmable, battery short-to-ground protection driver, load shedding alert	
Sampling	MPQ5029	2.7	24		Single	3	0.25		✓		QFN-14 (2x3)	Selectable QC 3.0 (3.6V - 12V _{OUT}), support Type-C 5V @ 3A DFP mode, support short-to-battery protection, NTC pin for thermal management, adjustable OVP threshold, input over-voltage shutdown protection	+WF
Sampling	MPQ5029-C	2.7	24		Single	3	0.25		✓		QFN-14 (2x3)	Support CDP mode, selectable QC 3.0 (3.6V - 12V _{OUT}), Type-C 5V @ 3A DFP mode, Support short to battery protection, Type-C load shedding versus temperature feature, line drop compensation for 5V output, fault indication	+WF
Sampling	MPQ4214-AEC1	4.5	40			Prog	0.8	Selectable			QFN-27 (5x5)	USB Type-C PD, synchronous buck-boost controller with FC	
Sampling	MPQ4490-AEC1	6	36			3	0.2	Selectable			QFN-26 (5x5)	Low I _q buck converter with single USB charging port with selectable output voltage	

Note: +WF+ Available with Wetable Flank

MOTOR DRIVERS

AUTOMOTIVE

Half-Bridge Gate Driver

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	V_{sw} (Max) (V)	HS Gate Drive (Max) (V)	# of Channels	Peak Pull-Up Current (A)	Peak Pull-Down Current (A)	Rise Time	Fall Time	Turn Off/On Delay	Package	Notes	
NEW	MPQ18021-A-AEC1	9	18	100	18	1	2.5	3.5	12ns	9ns	5ns	SOIC-8E	100V half-bridge gate driver	+WF
NEW	MPQ18024-AEC1	9	18	100	18	1	4	5.9	15ns	12ns	20ns	SOIC-8E	100V half-bridge gate driver	+WF
	MPQ1922-AEC1	4	15	100	15	1			20μs	20μs	20μs	SOIC-8E QFN-10 (4x4)	Integrated current sense amp 9-15ns rise/fall (2.2nF load)	+WF

Half-Bridge Driver (Integrated MOSFET)

	Part Number	V_{in} (Min) (V)	V_{in} (ABS Max) (V)	BST to SW (Max) (V)	# of Channels	$R_{DS(on)}$ (mΩ)	Standby I_o (Typ) (μA)	Peak Output Current (A)	Rise Time	Fall Time	Turn Off/On Delay	Open-Load Detect	Serial Interface	Package	Notes	
	MPQ8039-AEC1	7.5	28	6	1	100	2.5	9	20ns	20ns	70ns			SOIC-8E	General-purpose, high-frequency, half bridge for audio amplifier, wireless charging, and more	+WF
	MPQ6523-AEC1	7	40	1	3	1100	6	0.9	20μs	20μs	60μs	✓	✓	QFN-24 (4x4)	Independent control, comp. protections, daisy chainable, serial data interface up to 3MHz	+WF
	MPQ6526-AEC1	7	40	1	6	650	6	0.9	20μs	20μs	50μs	✓	✓	QFN-24 (4x4) QFN-24 (5x5)	Independent control, comp. protections, daisy chainable, serial data interface	+WF
Sampling	MPQ6527-AEC1	5.5	40	1	10	1300	6	0.8	2μs			✓	✓	TSSOP28 EP	Independent control, comp. protections, daisy chainable, SPI interface up to 5MHz	+WF

POSITION SENSORS

End-of-Shaft, Side-Shaft

	Part Number	V_{in} (Min) (V)		V_{in} (Max) (V)	Supply Current (mA)	Resolution (bits)	Output Format	ABZ Resolution (bit)	PWM Freq (Hz)	Latency (μs)	Start-Up Time (ms)	Refresh Rate (kHz)	Filter Cut-Off Frequency (Hz)	Magnetic Field Detection	Magnetic Field Range (mT)	Package
Sampling	MAQ430-AEC1	3	3.6	11.7	12	SPI, ABZ, UVW	10		10	12	980	390	✓	30 - 150	QFN-16 (3x3)	+WF
Sampling	MAQ470-AEC1	3	3.6	11.7	12	SPI, ABZ, UVW	10	240	10	12	980	390	✓	30 - 150	QFN-16 (3x3)	+WF

Note: +WF+ Available with Wettable Flank

LED LIGHTING

AUTOMOTIVE

Backlight

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	Topology	# of Channels	I_{out} Per Channel (mA)	F_{sw} (kHz)	PWM, Analog Dimming Modes	Open, Short LED Protection	Channel Current Matching (%)	Interface	Package	Notes
	MPQ3386-AEC1	4.5	25	Boost	6	30	625 or 1250	✓	✓	3		QFN-24 (4x4)	3% current matching accuracy
	MPQ3387L-AEC1	3	25	Boost	6	45	500 or 1250	✓	✓	3		QFN-24 (4x4)	3% current matching accuracy
Sampling	MPQ3367-AEC1	3.5	36	Boost	6	100	200, 400, 1000, 2200	✓	✓	2.5	I ² C	QFN-24 (4x4) TSSOP28 EP	Spread spectrum, thermal derating, fault pin, rich protection features

Telltale

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	Topology	# of Channels	I_{out} Per Channel (mA)	F_{sw} (kHz)	PWM, Analog Dimming Modes	Open, Short LED Protection	Channel Current Matching (%)	Interface	Package	Notes
Sampling	MPQ3326-AEC1	2.7	18	Boost	16	25	Selec.	✓	✓	2	I ² C	QFN-24 (4x4) TSSOP28 EP	Independent channel control, can be daisy chained, digital configuration
Sampling	MPQ3324-AEC1	2.7	18	Boost	8	25	Selec.	✓	✓	2	I ² C	QFN-24 (4x4) TSSOP28 EP	Independent channel control, can be daisy chained, digital configuration

Illumination & Signaling LED Drivers

	Part Number	V_{in} (Min) (V)	V_{in} (ABS Max) (V)	LED Power (W)	Max LEDs in Series	Current Limit (Typ) (A)	$R_{DS(on)}$ (mΩ)	Dimming Modes	Topology	Max Continuous Current (A)	F_{sw} (kHz)	LED Protection	Package	Notes
	MPQ2489-AEC1	6	55	4	10	Adj	500	PWM, Analog	Low-Side Buck	1.4	200 to 600	Open	QFN-6 (3x3)	Stop, turning light applications
	MPQ2483A-AEC1	4.5	55	10	10	3	280	PWM, Analog	Buck, Buck-Boost	2.5	250 to 1350	Open	QFN-10 (3x3) SOIC-8E	Daytime-running, fog applications
NEW	MPQ24833B-AEC1	4.5	55	12	10	3	150	PWM, Analog	Buck, Buck-Boost	3	250 to 1350	Open	QFN-10 (3x3) SOIC-8E	Output short-circuit protection, daytime-running, fog applications
NEW	MPM6010-AEC1	4	40	12	2	0.2	85/50	PWM	Buck	1.5	2200	Open, Short	QFN-17 (3x5x1.6)	Module int. AEC-Q200 2.2μH inductor, BST/VCC caps., sync. op., output over-current protection, fault pin, rear & puddle apps.
NEW	MPQ4425A-AEC1	4	40	12	2	4	85/50	PWM	Buck	1.5	2200	Open, Short	QFN-13 (2.5x3)	Synchronous operation, output over-current protection, fault pin, rear & puddle apps. +WF
NEW	MPQ4425B-AEC1	4	40	12	2	4	85/50	PWM	Buck	1.5	410	Open, Short	QFN-13 (2.5x3)	Synchronous operation, output over-current protection, fault pin, rear & puddle apps. +WF
Sampling	MPQ7200-AEC1	4.5	50	20	7	6	40/38	PWM, Analog	Buck, Buck-Boost	3 Buck / 1.2A Buck-Boost	2200 Buck 1000 Buck-Boost	Open, Short	QFN-18 (3x4)	Int current sense, config., 5% LED current acc., fast transient op., thermal derating, 2-step dim., spread spectrum, multiphase, fault pin, daytime-running, fog, low & high beam apps +WF

Note: +WF+ Available with Wettable Flank

LINEAR REGULATORS

AUTOMOTIVE

5V Secondary LDO

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{out} (mA)	Load Reg (%/mA)	PSRR @ 1kHz (dB)	V_{FB} (V)	I_Q (Typ) (μ A)	Enable Pin	Adjustable Option (V)	Power Good	Package	Notes
MPQ20056-AEC1	2.5	5.5	250	0.0003	63	0.8	10	✓	0.8 to 5		QFN-8 (2x2) TSOT23-5	Fixed output versions: 1.8V, 2.5V, 3.3V
MPQ8904-AEC1	2.7	6.5	500	0.001	26	0.5		✓	0.5 to 5	✓	QFN-8 (2x3)	
MPQ20051-AEC1	2.5	5.5	1000	0.0003	63	0.8	30	✓	0.8 to 5		QFN-8 (3x3)	

40V Primary LDO

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	I_{out} (mA)	Load Reg (%/mA)	PSRR @ 1kHz (dB)	V_{FB} (V)	I_Q (Typ) (μ A)	Enable Pin	Adjustable Option (V)	Package	Notes
MPQ2016-AEC1	4	42	30	0.0003	50	1.23	12	✓	1.2 to 20	QFN-8 (2x3)	
MPQ2013AGJE -C672-AEC1	2.5	40	100	0.005	41	1.215	3.2	✓	1.215 to 15	TSOT23-4	Fixed output versions: 3.3V, 2.5V, 5V
MPQ2013A-AEC1	2.5	40	150	0.005	41	1.215	3.3	✓	1.215 to 15	QFN-6 (2x2) QFN-8 (3x3)	Fixed output versions: QFN-8: 3.3V, 2.5V, 5V, 1.8V QFN-6: 3.3V, 5V
MPQ2019-AEC1	3	40	300	0.04	45	1.25	10	✓	1.2 to 15	SOIC-8 EP	Fixed output versions: 3.3V, 5V, power good
MPQ2029-AEC1	3	40	450	0.04	45	1.25	10	✓	1.2 to 15	SOIC-8 EP	

HV BUCK REGULATORS | AC/DC POWER CONVERTERS

500V Single Output

Part Number	Typ Max Power (W)	V_{in} (Min) (V)	V_{in} (Max) (V)	$R_{DS(on)}$ (Ω)	Breakdown Voltage (V)	No-Load Power (mW)	Package	Notes
MP150	2	20 (AC/DC)	265 (AC/DC)	30	500	150	TSOT23-5 SOIC-8	Offline regulator, up to 200mA output current
MP153	6	20 (AC/DC)	265 (AC/DC)	15	500	150	TSOT23-5 SOIC-8	Offline regulator, up to 360mA output current
MP155	4	20 (AC/DC)	265 (AC/DC)	20	500	100	TSOT23-5 SOIC-8	Offline regulator, up to 220mA output current
MP156	4	20 (AC/DC)	265 (AC/DC)	20	500	30	TSOT23-5 SOIC-8	Offline regulator, up to 220mA output current
MP157	6	20 (AC/DC)	265 (AC/DC)	10	500	100	TSOT23-5 SOIC-8	Offline regulator, up to 360mA output current
MP158	2	20 (AC/DC)	265 (AC/DC)	20	500	30	TSOT23-5 SOIC-8	Offline regulator, up to 70mA output current

700V Single Output

NEW

MP171	2	20 (AC/DC)	305 (AC/DC)	20	700	30	TSOT23-5 SOIC-8	Offline regulator, up to 60mA output current
MP172	3	20 (AC/DC)	305 (AC/DC)	16	700	30	TSOT23-5 SOIC-8	Offline regulator, up to 120mA output current
MP173	4	20 (AC/DC)	305 (AC/DC)	14	700	30	TSOT23-5 SOIC-8	Offline regulator, up to 280mA output current
MP174	5	20 (AC/DC)	305 (AC/DC)	13.5	700	30	TSOT23-5 SOIC-8	Offline regulator, up to 400mA output current
MP175	10	30 (AC/DC)	305 (AC/DC)	4.5	700	30	SOIC-8 PDIP8-7B	Offline regulator, up to 600mA output current

700V Dual Output

	Part Number	Typ Max Power (W)	V_{in} (Min) (V)	V_{in} (Max) (V)	LDO V_{out} (V)	Relay Driver	$R_{DS(on)}$ (Ω)	Breakdown Voltage (V)	No-Load Power (mW)	Package	Notes
NEW	MP161A	2	85 (AC/DC)	305 (AC/DC)	3.3/5	✓	17	700	10	SOIC-16	Ultra-low standby power, integrated 240mA current-limited switching regulator, linear regulator, and relay driver
NEW	MP161B	3	85 (AC/DC)	305 (AC/DC)	3.3/5	✓	14	700	10	SOIC-16	Ultra-low standby power, integrated 420mA current-limited switching regulator, linear regulator, and relay driver
NEW	MP161C	4	85 (AC/DC)	305 (AC/DC)	3.3/5	✓	13.5	700	10	SOIC-16	Ultra-low standby power, integrated 660mA current-limited switching regulator, linear regulator, and relay driver
NEW	MP163A	2	20 (AC/DC)	305 (AC/DC)	3.3/5		16	700	30	SOIC8-7B SOIC-16	700V, non-isolated, offline regulator with integrated LDO
NEW	MP163B	3	20 (AC/DC)	305 (AC/DC)	3.3/5		14	700	30	SOIC8-7B SOIC-16	700V, non-isolated, offline regulator with integrated LDO
NEW	MP163C	4	20 (AC/DC)	305 (AC/DC)	3.3/5		13.5	700	30	SOIC8-7B SOIC-16	700V, non-isolated, offline regulator with integrated LDO

FLYBACK | AC/DC POWER CONVERTERS

Secondary-Side Regulation

	Part Number	Typ Max Power (W)	V _{in} (Min) (V)	V _{in} (Max) (V)	Type	F _{sw} (Max) (kHz)	Control Method	Breakdown Voltage (V)	R _{DS(on)} (Ω)	Package	Notes
	HFC0100	Ext FET	85AC	305AC	Controller		Quasi-Resonant	700		SOIC-8	Quasi-resonant
	HFC0300	Ext FET	85AC	305AC	Controller		Variable Freq	700		SOIC-7	Variable off-time
	HFC0310	Ext FET	85AC	305AC	Controller	600	Fixed Freq			SOIC-8	Programmable fixed frequency
	HFC0400	Ext FET	85AC	305AC	Controller	65	Fixed Freq	700		SOIC8-7A	Not recommended for new design - use HFC0500
	HFC0500	Ext FET	85AC	305AC	Controller	65	Fixed Freq	700		SOIC8-7A	HV start-up, X-cap discharge, brown in/out
	HFC0511	Ext FET	85AC	305AC	Controller	130	Fixed Freq	700		SOIC8-7A	130kHz fixed frequency, ultra-low no-load power consumption
	HF900	10	85AC	440AC	Regulator	300	Peak Current	900	13	PDIP8-7 EP SOIC14-11	Integrated 900V MOSFET
NEW	HF920	10	85AC	440AC	Regulator	150	Peak Current	900	15	PDIP8-7 EP SOIC14-11 SOIC8-7A	Integrated 900V MOSFET
NEW	HF500-7	7	85AC	305AC	Regulator	65	Fixed Freq	700	12	SOIC8-7B	Integrated 700V MOSFET
NEW	HF500-15	15	85AC	305AC	Regulator	65	Fixed Freq	700	4.5	SOIC8-7B	Integrated 700V MOSFET
NEW	HF500-30	30	85AC	305AC	Regulator	65	Fixed Freq	700	1.4	PDIP8-7B	Integrated 700V MOSFET
Preview	HF500-40	40	85AC	305AC	Regulator	65	Fixed Freq	700	0.9	PDIP8-7B	Integrated 700V MOSFET

Primary-Side Regulation

	Part Number	Typ Max Power (W)	V _{in} (Min) (V)	V _{in} (Max) (V)	Type	Breakdown Voltage (V)	R _{DS(on)} (Ω)	Package	Notes
	MP020-5	7	85AC	305AC	Regulator	700	10	SOIC8-7A	Not recommended for new design
NEW	MP020A-5	7	85AC	305AC	Regulator	700	10	SOIC8-7A	CV/CC control
	MP023	Ext FET	85AC	305AC	Controller	700		SOIC8-7A	CV/CC control
NEW	MP024-10	10	85AC	305AC	Regulator	700	4.5	SOIC8-7B	CV/CC control

All-in-One Flyback with Primary and Secondary Controller

	Part Number	Typ Max Power (W)	V _{in} (Min) (V)	V _{in} (Max) (V)	Type	Breakdown Voltage (V)	F _{sw} (Max) (kHz)	Package	Notes
NEW	MPX2001	Ext FET	85AC	305AC	Controller	650	85	SOICW-20	Integrated SR driver with capacitive isolation

LLC WITH 600V HALF-BRIDGE DRIVERS | AC/DC POWER CONVERTERS

	Part Number	Control Method	Capacitive Mode Protection	Adaptive Deadtime Control	High-Voltage Start-Up	Package	Notes
	HR1000	Analog	No	No	No	SOIC-16	Not recommended for new design – use HR1000A
	HR1000A	Analog	No	No	No	SOIC-16	Variable frequency, high-power applications
NEW	HR1001B	Analog	Yes	Yes	No	SOIC-16	Variable frequency, two-level OCP (1st level auto-restart, 2nd level latch)
NEW	HR1001A	Analog	Yes	Yes	No	SOIC-16	Two-level OCP via frequency shift and auto-restart, other features same as HR1001B
NEW	HR1001L	Analog	Yes	Yes	No	SOIC-16	Two-level OCP via frequency shift and latch, other features same as HR1001B
NEW	HR1001C	Analog	Yes	Yes	No	SOIC-16	Improved surge performance compared to HR1001B

PFC + LLC COMBO CONTROLLER

	Part Number	LLC Control Method	PFC Control Method	Topology	High-Voltage Start-Up	Package	Notes
	HR1200	Analog	Digital CCM/DCM	PFC+LLC	Yes	TSSOP28 SOIC-28	Digital PFC + analog LLC with graphic user interface
	HR1201	Analog	Digital CCM/DCM	PFC+LLC	No	TSSOP28 SOIC-28	Digital PFC + analog LLC with graphic user interface
Preview	HR1203	Analog	Digital CCM/DCM	PFC+LLC	Yes	TSSOP28 SOIC-28	Digital PFC + analog LLC with graphic user interface, replaces HR1200
Preview	HR1204	Analog	Digital CCM/DCM	PFC+LLC	No	TSSOP28 SOIC-28	Digital PFC + analog LLC with graphic user interface, replaces HR1201

PFC

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	$I_{GATE_SRC} / I_{GATE_SINK}$ (mA)	Control Method	Topology	High-Voltage Start-Up	Package	Notes
MP44010	85AC	305AC	-350 / 600	Boundary Mode	Boost, Buck-Boost	No	SOIC-8 DIP8	Controller, ultra-low start-up current (15µA)
MP44011	85AC	305AC	-350 / 600	Boundary Mode	Boost, Buck-Boost	No	SOIC-8	Harmonic injection function (reduced capacitor value and inductor size compared with MP44010)
MP44014	85AC	305AC	-750 / 800	Boundary Mode	Boost, Buck-Boost	No	SOIC-8	Controller (BOM to BOM with L6562)
MP44014A	85AC	305AC	-750 / 800	Boundary Mode	Boost Buck-Boost	No	SOIC-8	Controller (BOM to BOM with L6562A)

SYNCHRONOUS RECTIFIERS | AC/DC POWER CONVERTERS

Flyback Technology (Fast Turn-Off, Intelligent)

	Part Number	Type	V_{DD} (Min) (V)	V_{DD} (Max) (V)	F_{SW} (Max) (kHz)	Drain Rating (V)	Regulation Voltage (mV)	Total $R_{DS(ON)}$ (mΩ)	Package	Notes
	MP6900	Controller	6	27	400	180	70	Ext FET	QFN-6 (3x3)	
	MP6902	Controller	6	27	400	180	70	Ext FET	SOIC-8	
	MP6905	Controller	8	24	400	180	30	Ext FET	SOIC-8	Light-load management, not recommended for new design – use MP6906
	MP6906	Controller	4.2	35	400	180	30	Ext FET	SOIC-8 TSOT23-6	VCC down to 4.5V, light-load management, turn-off blanking and SYNC feature
	MP6907	Controller	4.2	35	400	180	50	Ext FET	SOIC-8 TSOT23-6	VCC down to 4.5V, light-load management, turn-off blanking and SYNC feature, better efficiency than MP6902
NEW	MP6908	Controller	4	13	400	180	40	Ext FET	TSOT23-6	Fast turn-off intelligent rectifier, slew rate detection, self-biased (no need for auxiliary winding)
Preview	MP6908A	Controller	4	13	600	180	40	Ext FET	TSOT23-6	Very high frequency, fast turn-off intelligent rectifier, slew rate detection, self-biased (no need for auxiliary winding)
NEW	MP6909	Controller	4	13	400	180	40	Ext FET	TSOT23-6	Fast turn-off intelligent rectifier, slew rate detection
	MP6960	Regulator	8	24	400	180	70	Ext FET	SOIC-8	Integrated CC/CV controller
NEW	MP6910A	Ideal diode	8	24	250	100	15		SOIC-8 TO220-3	MP6902 integrated 12mΩ, 100V power switch
Preview	MP9988	Ideal diode	4.2	35	250	100	11.5		SOIC-8 PDIP8 EP	MP6907 integrated 9mΩ, 100V power switch
Preview	MP6919	Ideal diode	4	13	400	180	15		SOIC-8	MP6908 integrated 12mΩ, 100V power switch
Preview	MP9989	Ideal diode	4	13	400	180	11.5		SOIC-8 QFN-14 (4x5)	MP6907 integrated 10mohm, 100V power switch
Preview	MP9989A	Ideal diode	4	13	600	180	11.5		SOIC-8 QFN-14 (4x5)	MP6908 integrated 10mΩ, 100V power switch

LLC Topology (Fast Turn-Off, Intelligent)

	Part Number	Type	F_{SW} (Max) (kHz)	Drain Rating (V)	Regulation Voltage (mV)	Single / Dual	Package	Notes
	MP6903	Controller	300	180	70	Single	SOIC-8E	High-noise immunity, light-load management
	MP6922	Controller	300	180	70	Dual	SOIC-8E SOIC-14	V_{FWD} 70mV for LLC
	MP6922A	Controller	300	180	30	Dual	SOIC-8E SOIC-14	High efficiency, V_{FWD} 30mV for LLC, light-load management
	MP6922L	Controller	300	180	70	Dual	SOIC-8	V_{FWD} 70mV for LLC comparing to MP6922, shorten LL mode entry T_{ON} threshold, disable light-load entry when no gate pulse
	MP6923	Controller	300	180	15	Dual	SOIC-14	High-power optimized
NEW	MP6924	Controller	500	180	45	Dual	SOIC-8	CCM / DCM compatible, dual LLC synchronous rectifier, low sleep mode current, 175μA low quiescent current in light-load mode
NEW	MP6924A	Controller	500	180	29	Dual	SOIC-8	Improved noise immunity (1.75μs vs. 210ns), EMI performance, and efficiency (29mV vs. 45mV) compared to MP6924


ISOLATED CURRENT SENSOR

AC/DC POWER CONVERTERS

Industrial / Automotive

	Part Number	Sensed Current Range (V)	V_{cc} (V)	Isolation Voltage (kVRMS)	Temperature Range (°C)	Bandwidth (kHz)	Primary Conductor Resistance (mΩ)	Bidirectional	Package
Preview	MP1800-3	±5	3.3	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1800-5	±5	5	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1801-3	±10	3.3	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1801-5	±10	5	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1802-3	±20	3.3	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1802-5	±20	5	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1803-3	±30	3.3	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1803-5	±30	5	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1804-3	±40	3.3	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1804-5	±40	5	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1805-3	±50	3.3	2.4	-40 to +150	80	0.65	✓	SOIC-8
Preview	MP1805-5	±50	5	2.4	-40 to +150	80	0.65	✓	SOIC-8

Higher Precision, Better Results

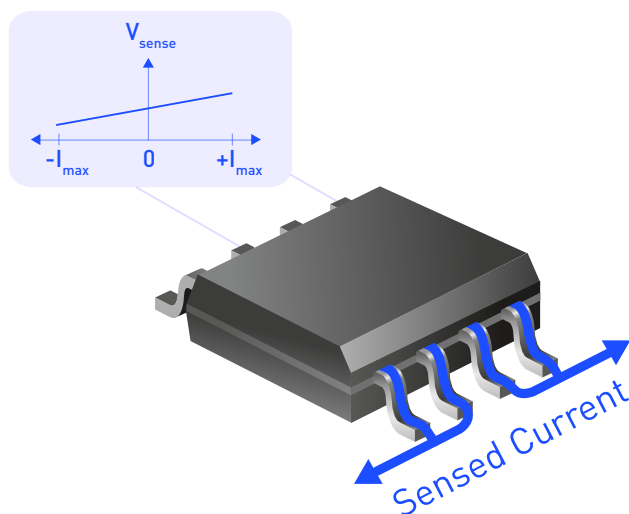

AC/DC ISOLATED | LED LIGHTING

Controllers

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	Power (W)	Topology	Package	Notes
MP4026	85AC	305AC	Ext FET	Flyback	SOT23-6	Primary-side control, active PFC
MP4027	85AC	305AC	Ext FET	Flyback	SOT23-8	Primary-side control, PFC, NTC, and PWM dimming
MP4030A	85AC	305AC	Ext FET	Flyback	SOIC-8	TRIAC dimmable, primary-side control, active PFC (for better trailing-edge dimmer compatibility, use MP4033)
MP4031	85AC	305AC	Ext FET	Flyback	SOIC-8	TRIAC and analog dimmable, deep dimming, primary-side control, active PFC
MP4033	85AC	305AC	Ext FET	Flyback	SOIC-8 MSOP-10 SOIC-14	Enhanced TRIAC dimmable, primary-side control, active PFC
HR1001A	85AC	305AC	Ext FET	LLC Resonant	SOIC-16	Resonant half-bridge, variable frequency, high-power application, auto-restart at over-current for street lighting applications
HR1001B	85AC	305AC	Ext FET	LLC Resonant	SOIC-16	Resonant half-bridge, variable frequency, high-power application, two-level OCP
MP44010	85AC	305AC	Ext FET	PFC Boost, Buck-Boost	SOIC-8 DIP8	Offline PFC, boundary conduction, ultra-low start-up current (15 μ A)
MP44011	85AC	305AC	Ext FET	PFC Boost, Buck-Boost	SOIC-8	Offline PFC, boundary conduction, harmonic injection function (reduced capacitor value and inductor size compared with MP44010)
MP44014	85AC	305AC	Ext FET	PFC Boost, Buck-Boost	SOIC-8	Controller (BOM to BOM with L6562)

Regulators

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	Power (W)	Topology	Package	Notes
MP4032-1	85AC	265AC	7	Flyback	SOIC8-7A	Integrated 500V MOSFET, TRIAC-dimmable, deep dimming, primary-side control, active PFC
MP4034	85AC	305AC	7	Flyback	SOIC-8 MSOP-10 SOIC-14	Integrated 700V MOSFET, primary-side control, no dimming or PFC

AC/DC NON-ISOLATED | LED LIGHTING

Controllers

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	Power (W)	Configuration	Package	Notes
	MP4000	85AC	305AC	Ext FET	Low-Side Buck	SOIC-8	WLED driver controller for low-cost LED lamps, analog and PWM dimming
	MP4001	85AC	305AC	Ext FET	Low-Side Buck	SOIC-8	Offline LED controller, integrated high-voltage LDO, analog and PWM dimming
	MP4054	85AC	305AC	Ext FET	Buck-Boost	SOT23-8	Offline LED controller, active PFC
	MP4054A	85AC	305AC	Ext FET	Buck-Boost	SOT23-8	Offline LED controller, active PFC, NTC, PWM dimming
	MP4056	85AC	305AC	Ext FET	Buck-Boost	SOIC-8 MSOP-10 SOIC-14	TRIAC dimmable, offline LED controller, active PFC
NEW	MP4057	85AC	305AC	Ext FET	Buck-Boost	MSOP-10 SOIC-14	Single-chip solution for smart lighting with integrated CC and CV control
NEW	MP4059	85AC	305AC	Ext FET	Buck-Boost	SOIC-8	Single stage AC/DC LED driver with down to 1% dimming
	MP4060	85AC	305AC	Ext FET	Buck-Boost	MSOP-10 SOIC-14	Improved trailing-edge dimmer performance at high line over MP4056

Regulators

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	Power (W)	Configuration	Package	Notes
	MP4050A	85AC	265AC	8	Buck	SOIC-8 SOT23-5	Integrated 500V MOSFET, offline driver, enhanced thermal, no PFC or dimming
	MP4068	85AC	305AC (recommend low line only)	10	Buck, Buck-Boost	SOIC8-7A SOIC-8 EP	Integrated 700V FET, PFC driver with TRIAC dimming
	MP4088	85AC (recommend high line only)	305AC	8.5	Buck, Buck-Boost	SOIC8-7A SOIC-8 EP TSOT23-5	Integrated 700V FET, PFC driver with TRIAC dimming

DC/DC LIGHTING | LED LIGHTING

Regulators

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	Configuration	I_{out} (A)	Max Efficiency (%)	Typ Frequency	Package	Notes
Sampling	MP2341	4.2	24	Buck	2	97	1MHz	SOT583	LED driver, force PWM mode, OVP with auto recovery
	MP3412	0.8	4.4	Boost	1.1	96	1MHz	TSOT23-6	Synchronous boost, no dimming
	MP2480	5	36	Buck	3	95	2MHz	SOIC-8E	Hysteretic control, PWM dimming
	MP2481	4.5	36	Buck, Buck-Boost	1.2	95	1.4MHz	MSOP-8	Analog and PWM dimming
	MP24892	6	45	Low-Side Buck	1	95	600kHz	TSOT23-5	Hysteretic control, analog and PWM dimming, lower-cost version of MP2489
	MP24893	6	36	Low-Side Buck	1	95	600kHz	QFN-6 (3x3) TSOT23-5	Hysteretic control, analog and PWM dimming, lower-cost version of MP2489
	MP2483	4.5	55	Buck, Buck-Boost	2.5	95	1.35MHz	QFN-10 (3x3) SOIC-14	Analog and PWM dimming, consumer grade
	MP24183	4.5	55	Buck, Buck-Boost	1	95	1.35MHz	QFN-10 (3x3)	Analog and PWM dimming
	MP2488	4.5	55	Buck	2	97.5	200kHz	QFN-10 (3x3) SOIC-8E	PWM dimming
	MP2487	4.5	55	Buck	1	97.5	200kHz	SOIC-8E	PWM dimming
NEW	MP24833A	4.5	55	Buck, Buck-Boost	3	90	210kHz	SOIC-8E	Analog and PWM dimming
	MP24895	6	36	Low-Side Buck	1	95	600kHz	TSOT23-5 QFN6	Hysteretic control, analog and PWM dimming
	MP24895A	6	36	Low-Side Buck				MSOP-8 EP	Analog and PWM dimming
	MP4688	4.5	80	Buck	1	95	2MHz	SOIC-8E	Hysteretic control, PWM dimming
	MP4689	4.5	95	Buck	1	95	1MHz	SOIC-8E	Hysteretic control, PWM dimming (NRFND - replace with MP4689A)
	MP4689A	4.5	100	Buck	1	95	1MHz	SOIC-8E	Hysteretic control, improved PWM dimming
NEW	MP2410	4.2	24	Buck	2	97	1MHz	TSOT23-6 TSOT23-8	Synchronous buck, analog dimming only
NEW	MP2410A	4.2	24	Buck	2	97	1MHz	TSOT23-6 TSOT23-8	Synchronous buck, analog and PWM dimming
	MP2489	6	60	Low-Side Buck	1	95	600kHz	QFN-6 (3x3) TSOT23-5 SOIC-8E	Hysteretic control

Controllers

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	Power (W)	Configuration	Max Efficiency (%)	Package	Notes
MP4012	8	55	Ext FET	Buck, Boost Buck-Boost, Sepic		SOIC-16	HV9912 pin comp, for backlight (i.e.: $V_{out} > 200V$) and lighting (high-output power)
MP24894	6	60	Ext FET	3	95	TSOT6	Buck controller. hvsteresis control

PHOTO FLASH | LED LIGHTING

Part Number	Charge Type	$V_{in} (Min) (V)$	$V_{in} (Max) (V)$	$V_{sw} (Max) (V)$	$I_{out} (Max) (A)$	$I_{out} (Min) (A)$	Package	Notes
MP3331	WLED	2.7	5.5	6	2		WLCSP (1.7x1.7)	Single-channel boost WLED driver for smartphone camera flash
MP3361	Xenon Flash	2.5	6	60	1.2	1.0 (Typ)	MSOP-10	Highly integrated xenon photo flash charger and IGBT driver
MP3360	Xenon Flash	2.5	6	60	1.7	0.4	QFN-10 (2x2)	Programmable peak current, highly integrated xenon photo flash charger and IGBT driver for mobile phones
MP3356	Xenon Flash	2.8	6	50	1.7	1.5	QFN-10 (2x2)	Highly integrated xenon photo flash charger and IGBT driver for DSC
MP3351	Xenon Flash	3	6	60	2	0.3	QFN-16 (3x3)	Integrated photo flash charger with IGBT driver
MP3352	Xenon Flash	3	6	60	2.5	0.3	QFN-16 (3x3)	Integrated photo flash charger with IGBT driver and quench

SPECIAL

Part Number	Control Method	Package	Notes
HF81	X-Cap Bleeder	SOIC-8	Discharge the X-capacitor when AC voltage is unplugged
MP4690	Shunt	SOD123	Smart bypass for LED protection, 6V threshold voltage protects one LED

SINGLE-CELL SWITCHING CHARGERS

BATTERY MANAGEMENT

Li-Ion, Li-Polymer

	Part Number	Operating V_{in} (Min) (V)	Operating V_{in} (Max) (V)	Absolute V_{in} (Max) (V)	Charge Current (Max) (A)	Battery Charge Voltage (V)	OTG Current (Max) (A)	F_{sw} (kHz)	Control Interface	Package	Notes
	MP2611	3.95	6	7.5	2	4.2		1500	Standalone	QFN-14 (3x4)	Dual inputs, NTC battery temp monitor
	MP2626	4.2	6.5	20	2	4.2 / 4.35	1.5	1200 / 600	Standalone	QFN-24 (4x4)	NTC battery temp monitor
	MP2624	3.6	7	20	4.5	3.48 to 4.425	1.3	1700	I ² C	QFN-22 (3x4)	NVDC power-path mgmt, JEITA battery NTC monitor, BC1.2 detection, shipping mode, OTG OCP hiccup function
	MP2624A	3.6	7	20	4.5	3.48 to 4.425	1.3	1700	I ² C	QFN-22 (3x4)	NVDC power-path mgmt, JEITA battery NTC monitor, BC1.2 detection, shipping mode, OTG OCP latch function
Sampling	MP2695	3.28	10	16	3.6	3.6 to 4.45		600/1200	I ² C	QFN-21 (3x3)	JEITA battery NTC monitor, OTP programmable charging parameters, battery current monitor
	MP2625B	4	10	20	2	4.2		1600	Standalone	QFN-20 (3x4)	NVDC power-path mgmt, NTC battery temp monitor
	MP2617A	4	10	20	3	4.35		1600	Standalone	QFN-20 (3x4)	NVDC power-path mgmt, NTC battery temp monitor
	MP2617B	4	10	20	3	4.2		1600	Standalone	QFN-20 (3x4)	NVDC power-path mgmt, NTC battery temp monitor
	MP2617H	4	14	20	3	4.2		1600	Standalone	QFN-20 (3x4)	NVDC power-path mgmt, NTC battery temp monitor
NEW	MP2639B	3.6	16	20	5	4.35	3	1200	Standalone	QFN-26 (4x4)	JEITA battery NTC monitor, LED fuel gauge, battery current monitor
	MP2615B	3.95	18	23	2	3.93 / 4.03		600	Standalone	QFN-16 (3x3)	NTC battery temp monitor

PROTECTION

	Part Number	Operating V_{in} (Min) (V)	Operating V_{in} (Max) (V)	Absolute V_{in} (Max) (V)	Charge Type	Package	Notes
	MP2671	3	5.55	30	Battery Protection	QFN-10 (3x3)	Li-ion battery charger, protection circuit
	MP2670	2.7	5.65	30	Battery Protection	QFN-12 (3x4)	Li-ion battery charger, protection circuit

LINEAR CHARGERS

BATTERY MANAGEMENT

Li-Ion, Li-Polymer

	Part Number	Operating V_{IN} (Min) (V)	Operating V_{IN} (Max) (V)	Absolute V_{IN} (Max) (V)	Charge Current (mA)	Battery Charge Voltage (V)	Control Interface	Package	Notes
	MP2603	2.8	5.25	25	50 to 150	4.2	Standalone	TSOT23-5	Charging indication
	MP2602	3.2	5.8	28	85 to 1000	4.2	Standalone	QFN-10 (3x3)	NTC battery temp monitor, adapter present and charging indication, programmable termination current
	MP2608	4.25	5.8	28	100 to 1000	4.2	Standalone	QFN-10 (3x3)	Dual inputs, fault and charging indication, programmable termination current
	MP2660	4	5.85	13	8 to 500	3.6 to 4.5	I ² C	WLCSP-9 (1.55x1.55)	Power-path mgmt, ship. mode, int battery pack protection, OTP prog charging parameters, NTC battery temp monitor
NEW	MP2661	4	5.85	13	8 to 500	3.6 to 4.565	I ² C	WLCSP-9 (1.55x1.55)	Power-path mgmt, ship. mode, int battery pack protection, OTP prog charging parameters, NTC battery temp monitor
Sampling	MP2662	3.83	5.85	21	8 to 456	3.6 to 4.5	I ² C	WLCSP-9 (1.75x1.75)	Power-path mgmt, ship. mode, int battery pack protection, 1 μ A batt. leakage current, low $R_{DS(ON)}$, OTP prog charging parameters, NTC battery temp monitor
NEW	MP2663	4	5.85	13	8 to 500	3.6 to 4.5	I ² C	WLCSP-9 (1.55x1.55)	Power-path mgmt, ship. mode, int battery pack protection, OTP prog charging parameters, NTC battery temp monitor
Sampling	MP2664	4	5.85	13	8 to 500	3.6 to 4.5	I ² C	QFN-10 (2x2)	Power-path mgmt, ship. mode, int battery pack protection, OTP prog charging parameters, NTC battery temp monitor
	MPQ5480	4	6	7	7.8 to 127	4.1	Standalone	WLCSP-16 (1.7x1.7)	Int charger with 5V / 100mA DC/DC, sync regulator
	MP2607	4.51	6.27	13	300 to 1500	4.2	Standalone	QFN-14 (3x4)	Power-path mgmt, dual-mode USB & AC adj current limits, low $R_{DS(ON)}$, adapter present & char. ind., NTC battery temp monitor
	MP26121	2.5	6.7	28	200 to 1000	4.2	Standalone	QFN-10 (3x3)	Adapter present and charging ind., NTC battery temp monitor
	MP2631	2.5	6.7	28	200 to 1000	4.2	Standalone	QFN-10 (3x3)	Int 10mA LDO, adapter present and charging indication
	MP2604	3.2	6.7	28	85 to 1000	4.2	Standalone	QFN-10 (3x3)	Adapter present and charging indication, programmable termination current, NTC battery temp monitor
	MP2605	2.5	6.7	28	200 to 1000	4.2	Standalone	QFN-10 (3x3)	Adapter present and charging indication, NTC battery temp monitor
	MP26053	2.5	6.7	28	200 to 1000	4.2	Standalone	QFN-10 (3x3)	Adapter present and charging indication, NTC battery temp monitor
	MP26058	2.8	6.7	28	200 to 1000	4.2	Standalone	QFN-10 (3x3)	Adapter present and charging indication, programmable termination current, NTC battery temp monitor
	MP26028	3.2	6.8	20	85 to 1000	4.2	Standalone	QFN-10 (3x3)	Adapter present and charging indication, programmable termination current
	MP26056	2.5	6.8	28	200 to 1000	4.2	Standalone	QFN-10 (3x3)	Dual-mode USB and AC adapter current limits, adapter present and charging indication, prog termination current
	MP26057	3.5	6.8	28	200 to 1000	4.2	Standalone	QFN-10 (3x3)	Adapter present and charging indication, programmable termination current, NTC battery temp monitor
	MP2606	3.2	6.8	28	85 to 1000	4.2	Standalone	QFN-10 (3x3)	Adapter present and charging indication, programmable termination current, NTC battery temp monitor
	MP26060	2.8	6.8	24	85 to 1000	4.15	Standalone	QFN-10 (3x3)	Adapter present and charging indication, programmable termination current
NEW	MP26029	3.9	6.25 or 10.6	13	30 to 1000	3.6 to 4.4	Standalone	SOT563 SOIC-8E QFN-10 (3x3)	NTC battery temp monitor, OTP programmable charging parameters, die temperature regulation, P2P with MP2602

POWER BANK MANAGEMENT

BATTERY MANAGEMENT

Li-Ion, Li-Polymer

	Part Number	Operating V_{IN} (Min) (V)	Operating V_{IN} (Max) (V)	Absolute V_{IN} (Max) (V)	Charge Current (Max) (A)	Battery Charge Voltage (V)	OTG Voltage (V)	OTG Current (Max) (A)	F_{SW} (kHz)	Control Interface	Package	Notes
NEW	MP2639A	4.05	5.75	16	2.5	8.4	4.5 to 5.5	5	1300	Standalone	QFN-26 (4x4)	2 series cell boost charger, JEITA battery NTC monitor, LED fuel gauge, batt. current monitor, int cell balancing
NEW	MP2639C	4.05	5.75	16	2.5	8.4	4.5 to 5.5	5	1300	Standalone	QFN-26 (4x4)	2 series cell boost charger, JEITA batt. NTC mon., LED fuel gauge, batt. curr.mon., enhanced cell balancing, audible noise reduction
	MP2632B	3.6	5.8	20	3	4.2 / 4.35 / 4.45	5.1	3	600	Standalone	QFN-26 (4x4)	Power-path mgmt, BC1.2 detection, LED fuel gauge, NTC battery temp monitor, all-in-one autonomous mode
	MP2690	3.6	5.8	14	2.5	4.2 / 4.35 / 4.45	5.1	2.1	600	Standalone	QFN-26 (4x4)	Power-path mgmt, BC1.2 detection, LED fuel gauge, NTC battery temp monitor, all-in-one autonomous mode
NEW	MP2698	3.6	6	24	5	3.1 to 4.675	5	3.6	550	I ² C	QFN-28 (4x4)	JEITA battery NTC monitor, power-path mgmt, int ADC, BC1.2 detection, LED fuel gauge
	MP2635B	4.2	6.5	20	2	4.2 / 4.35	4.2 to 5.6	1.5	1200 / 600	Standalone	QFN-24 (4x4)	Power-path mgmt, NTC battery temp monitor, adj boost output voltage
	MP2636	4.5	6.5	20	3	4.2 / 4.3 / 4.35	4.2 to 6	3	600	Standalone	QFN-30 (4x4)	Power-path mgmt, NTC battery temp monitor, adj boost output voltage
	MP2637	4.5	6.5	20	2.5	4.2 / 4.35	4.2 to 5.6	2.4	600	Standalone	QFN-24 (4x4)	Power-path mgmt, NTC battery temp monitor, adj boost output voltage
	MP2637A	4.5	6.5	20	2.5	4.055 / 4.2	4.2 to 5.6	2.4	620	Standalone	QFN-24 (4x4)	Power-path mgmt, NTC battery temp monitor, adj boost output voltage
	MP2633A	4.2	6.5	20	1.5	4.2 / 3.6	4.2 to 6	1.5	1200 / 600	Standalone	QFN-24 (4x4)	Power-path management NTC battery temp monitor, adj boost output voltage
Sampling	MP2696	3.28	10	16	3.6	3.6 to 4.45	5.05 to 5.225	3.6	600 / 1200	I ² C	QFN-21 (3x3)	JEITA batt. NTC monitor, power-path mgmt, OTP prog. charging par., batt. current monitor, prog boost output voltage
NEW	MP2638	3.27	14	24	5	3.1 to 4.675	5 / 9 / 12	3	550	I ² C	QFN-28 (4x4)	JEITA battery NTC monitor, power-path mgmt, int ADC, BC1.2 detection, QC2.0 output detection, LED fuel gauge
NEW	MP2638A	3.27	14	24	5	3.1 to 4.675	5 / 9 / 12	3.6	550	I ² C	QFN-28 (4x4)	JEITA battery NTC monitor, power-path mgmt, int ADC, BC1.2 detection, QC2.0 output detection, LED fuel gauge
NEW	MP2669	3.6	14	24	5	3.1 to 4.675	5 to 12	3	550	I ² C	QFN-28 (4x4)	JEITA battery NTC monitor, power-path mgmt, int ADC, BC1.2 detection, QC3.0 output voltage, LED fuel gauge
NEW	MP2673	3.6	14	24	5	3.1 to 4.675	5 to 12	3.6	550	I ² C	QFN-28 (4x4)	JEITA battery NTC monitor, power-path mgmt, BC1.2 detection, QC3.0 output voltage, LED fuel gauge
NEW	MP2639B	3.6	16	20	5	4.35	5 to 15	3	1200	Standalone	QFN-26 (4x4)	JEITA battery NTC monitor, LED fuel gauge, batt. current monitor, adj boost output voltage
Li-Ion, Li-Polymer, LiFePO ₄												
	MP2635A	4.2	6.5	20	2	4.2 / 3.6	4.2 to 5.6	1.5	1200 / 600	Standalone	QFN-24 (4x4)	Power-path management, NTC battery temp monitor, adj boost output voltage

MULTI-CELL SWITCHING CHARGERS

BATTERY MANAGEMENT

Li-Ion, Li-Polymer

	Part Number	Operating V_{in} (Min) (V)	Operating V_{in} (Max) (V)	Absolute V_{in} (Max) (V)	Charge Current (Max) (A)	Battery Charge Voltage (V)	F_{sw} (kHz)	# of Series Cells	Control Interface	Topology	Package	Notes
NEW	MP2639A	4.05	5.5	20	2.5	8.4	1300	2	Standalone	Sync Boost	QFN-26 (4x4)	JEITA battery NTC monitor, LED fuel gauge, batt current monitor, int cell-balancing, USB OTG
NEW	MP2639C	4.05	5.75	16	2.5	8.4	4.5 to 5.5	5	Standalone	Sync Boost	QFN-26 (4x4)	2 series cell boost charger, JEITA batt. NTC mon., LED fuel gauge, batt. current mon., enhanced cell balancing, audible noise reduction
Sampling	MP2672	3.75	5.75	14	2	8.3 to 9.0	600 / 1200	2	I ² C / Standalone	Sync Boost	QFN-18 (2x3)	NVDC power-path mgmt, JEITA batt NTC monitor, OTP prog. charging parameters, int cell-balancing
	MP2615	3.95	18	23	2	4.1 / 4.2 / 8.2 / 8.4	600	1 to 2	Standalone	Sync Buck	QFN-16 (3x3)	NTC battery temp monitor
	MP2615A	3.95	18	23	2	4.2 / 4.35 / 8.4 / 8.7	600	1 to 2	Standalone	Sync Buck	QFN-16 (3x3)	NTC battery temp monitor
	MP2619	3.4	24	26	2	8.4 / 12.6	600	2 to 3	Standalone	Non-Sync Buck	QFN-28 (4x5)	Power-path management, NTC battery temp monitor
NEW	MP26124	3.45	24	28	2	16.8	600	4	Standalone	Non-Sync Buck	QFN-16 (4x4)	NTC battery temp monitor
	MP2610	3.4	24	26	2	4.2 / 8.4	1100	1 to 2	Standalone	Non-Sync Buck	QFN-16 (4x4)	NTC battery temp monitor
	MP26101	3.4	24	26	2	4.1 / 8.2	1100	1 to 2	Standalone	Non-Sync Buck	QFN-16 (4x4)	NTC battery temp monitor
	MP26123	3.4	24	26	2	8.4 / 12.6	600	2 to 3	Standalone	Non-Sync Buck	QFN-16 (4x4)	Power-path management, NTC battery temp monitor
Sampling	MP2659	4.2	36	40	3	10.8 to 26.4	350 / 700	3 to 6	Standalone	Sync Buck	QFN-19 (3x3)	Fully integrated power FETs, power-path mgmt, no external sense resistor, NTC battery temp monitor
LiFePO4												
	MP2623	3.5	24	26	2	3.6 / 7.2	1100	1 to 2	Standalone	Non-Sync Buck	QFN-16 (4x4)	NTC battery temp monitor

CRADLE CHARGERS

	Part Number	Operating V_{in} (Min) (V)	Operating V_{in} (Max) (V)	Absolute V_{in} (Max) (V)	Charge Current (Max) (A)	Charge Status	Charge Type	Battery Charge Voltage (V)	Package	Notes
	MP26075	2.5	6.1	28	1	✓	CV/CC Linear	4.05 to 4.2	QFN-10 (3x3)	Pre-charge function, thermal foldback, voltage control function for flyback controller
	MP26085	7	20	22	20		CV/CC Controller	Prog	SOT23-8	CC/CV controller with 1.223V voltage reference
	MP2681	4.9	30	36	4	✓	CV/CC Controller	4.15	SOIC-16	Full protection and indication, one-chip solution for power tool applications
	MP2681B	4.9	30	36	5	✓	CV/CC Controller	4.15	SOIC-16	Full protection and indication, one-chip solution for power tool applications

WHITE LED DRIVERS | DISPLAY BACKLIGHTING POWER

Inductors & Charge Pumps

Part Number	V _{IN} (Min) (V)	V _{IN} (Max) (V)	V _{OUT} (Max) (V)	# of Channels	Current Limit (Typ) (A)	V _{FB} (V)	F _{SW} (kHz)	Open LED Protection	Type	Package	Notes
MP3412	0.8	4.4	5	1	1.1	0.2	1000	✓	Boost	TSOT23-6	High efficiency
MP9361	2.8	5	5	1			1350	✓	Reg.Charge Pump	TSOT23-6	Internal SS
MPQ9361	2.8	5	5	1			1350		Reg.Charge Pump	TSOT23-6	Internal SS, industrial grade
MP1519	2.5	5.5	10	4			1300		Charge Pump	QFN-16 (3x3)	Common cathode
MP1529	2.7	5.5	25	3	1.2		1200	✓	Boost	QFN-16 (4x4)	Integrated flash
MP3021	2.7	5.5	4	4			1250		Charge Pump	QFN-16 (3x3)	Single-wire brightness control, common anode
MP3307	2.7	5.5	35	1	1.6 (Min)	0.2	300 to 2200 Prog	✓	Boost	TSOT23-8	Up to 2.2MHz for automotive infotainment LCD
MP3309	2.7	5.5	35	1	1.5	0.2	300 to 2200 Prog	✓	Boost	QFN-10 (1.4x1.8)	Synchronous boost, 35V max output
MP3309A	2.7	5.5	35	1	1.5	0.2	300 to 2200 Prog	✓	Boost	QFN-10 (3x3)	Synchronous boost
MP3309C	2.7	5.5	35	1	1.5	0.2	300 to 2200 Prog	✓	Boost	QFN-10 (1.4x1.8)	Synchronous boost, I ² C interface
NEW MP3309L	2.7	5.5	24	1	1.6	0.2	300 to 2200 Prog	✓	Boost	QFN-10 (1.4x1.8)	Synchronous boost, 24V max output
MP3312	2.7	5.5	36	2	1.8	0.24	1200	✓	Boost	WLCSP-9 (1.3x1.3)	
NEW MP3313	2.7	5.5	38	3	1.5		250/500 /1000	✓	Boost	WLCSP-12	Linear/exponential dim., analog dim., 100mA LED current in flash mode, I ² C
NEW MP3318	2.7	5.5	38	3	1.5		250/500 /1000	✓	Boost	WLCSP-12	Linear/exponential dimming, 50mA LED current in flash mode, I ² C
MP1518	2.5	6	25	1	0.35	0.104	1300		Boost	QFN-8 (2x2) TSOT23-6	
MP3202	2.5	6	25	1	1.3	0.104	1300	✓	Boost	QFN-8 (2x2) TSOT23-5	UVLO, low EMI, thermal shutdown, 25V max output
MP3204	2.5	6	21	1	0.35	0.104	1300	✓	Boost	TSOT23-6	UVLO, low EMI, thermal shutdown
MP3205	2.5	6	21	1	0.35	0.104	1300		Boost	TSOT23-5	MP3204 without OV pin
MP3301	2.5	6	36	1	1		1300	✓	Boost	TSOT23-5	Up to 10-series LED

CONTINUE NEXT PAGE >

WHITE LED DRIVERS | DISPLAY BACKLIGHTING POWER

Inductors & Charge Pumps

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	V_{out} (Max) (V)	# of Channels	Current Limit (Typ) (A)	V_{FB} (V)	F_{sw} (kHz)	Open LED Protection	Type	Package	Notes
MP3302	2.5	6	36	1	1.3	0.2	1300	✓	Boost	QFN-8 (2x3) TSOT23-5	UVLO, low EMI, thermal shutdown, 36V max output
MP3305	3	6	36	1	1.33	0.2	2200	✓	Boost	QFN-8 (2x3)	High efficiency, true PWM dimming, adjustable OVP threshold
MP3308	3	6	36	1	1.3	0.2	2200	✓	Boost	QFN-14 (3x4)	Supporting CABC dimming
MP3304A	3	6	36	1	1.33	0.2	2200	✓	Boost	QFN-8 (2x3)	High efficiency, true PWM dimming
MP3304B	3	6	24	1	1.33	0.2	2200	✓	Boost	QFN-8 (2x3)	High efficiency, true PWM dimming
MP3304C	3	6	18	1	1.33	0.2	2200	✓	Boost	QFN-8 (2x3)	High efficiency, true PWM dimming
MP3306	3	12	30	1	1.8	0.2	700	✓	Boost	QFN-12 (2x2)	Synchronous boost, integrated disconnect FET
MP3378	5	24	55	4			300 to 500	✓	Boost	SOIC-28 TSSOP28 EP	Integrated boost controller, DC/DC buck converter
MP1517	2.6	25	25	1	4	0.7	1100	✓	Boost	QFN-16 (4x4)	UVLO, external comp
MP3310	4.5	25	50	1	1.3	0.5	1200 Prog	✓	Boost	QFN-10 (3x3)	Wide 4.5V to 25V input range
MP3366	3	25	50	6	2.5	0.5	600	✓	Boost	WLCSP-18 (1.3x2.5)	CSP package, smart dimming, tablet PC
MP3384L	3	25	50	4	1.3	0.6	1250 or 625	✓	Boost	QFN-16 (3x3)	3V min input
MPQ3386	4.5	25	50	6	2.5	0.6	1250	✓	Boost	QFN-24 (4x4)	6-string white LED driver, industrial and AECQ-Grade
MP3387L	3	25	50	6	2.5	0.6	500 to 1250	✓	Boost	TQFN-24 (4x4)	6-channel, 50V _{OUT} , boost, smart dimming
MP3388S	4.5	25	50	8	2	0.6	625 or 1250	✓	Boost	QFN-24 (4x4) SOIC-28	PWM/DC input burst PWM dimming
NEW MP3387A	3	26	50	6	2.5		500 to 1250	✓	Boost	TQFN-24 (4x4)	6-string, max 80mA/string, combined analog and PWM dimming
MP4013B	8	26	Ext FET	1	Ext FET	0.6	100 to 600	✓	Boost	SOIC-16	More features, better protection, replacing MP4012 and MP4013 in new designs
MP3394S	5	28	55	4	Ext FET	0.3	150 to 500	✓	Boost	TSSOP16 EP SOIC-16	Replacing MP3394
NEW MP3398D	5	28	55	4	Ext FET		100 to 500	✓	Boost	SOIC-16 SOIC-20	4-string, max 350mA/string, analog and PWM dimming
MP3389	5	28	Ext FET	12	Ext FET	0.6	100 to 500	✓	Boost	TSSOP28 EP SOIC-28	External MOSFET, PWM or DC input burst, PWM dimming
MP3398A	5	28	Ext FET	4	Ext FET	0.6	100 to 500	✓	Boost	TSSOP16 EP SOIC-16 SOIC-20	Inductor short protection, separate ADIM pin
MP3398L	4.5	28	Ext FET	4	Ext FET	0.6	100 to 500	✓	Boost	SOIC-16	Lower V_{in} (min) of MP3398A

WHITE LED DRIVERS | DISPLAY BACKLIGHTING POWER

Inductors & Charge Pumps

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	V_{out} (Max) (V)	# of Channels	Current Limit (Typ) (A)	V_{FB} (V)	F_{sw} (kHz)	Open LED Protection	Type	Package	Notes
NEW	MP3376	3	30	36	8	2.5		350 to 2400	✓	Boost	QFN-24 (4x4)	8-string, max 50 mA/string, I ² C interface, 36V max V_{out}
NEW	MP3376A	3	30	37.5	8	2.5		350 to 2400	✓	Boost	QFN-24 (4x4)	8-string, max 50 mA/string, I ² C interface, 37.5V max V_{out}
	MP3385	4.5	33	Ext FET	4	Ext FET	0.6	100 to 900	✓	Boost	QFN-20 (4x4)	I ² C digital interface, ABS 80V LED feedback voltage rating, max 300mA/channel
	MP3391	9	35	Ext FET	8	Ext FET	0.45	150 to 500	✓	Boost	SOIC-28 TSSOP28 EP	8-channel, 80mA/channel for 18-24" LCD panel/TV
	MP1528	2.7	36	36	1	0.95	0.4	Variable	✓	Boost	MSOP-8 QFN-6 (3x3) QFN-8 (2x3)	Drives up to 9-series white LED drivers
	MP3373	9	40	Ext FET	8	Ext FET	0.2	100 to 1000	✓	Boost	SOIC-28 TSSOP28	Phase-shift inductor-short protection, cost effective, replacing MP3393 in new designs
	MP4601	4.5	75	75	1	2.5	0.2	200 to 2000	✓	Buck-Boost	TSSOP16 EP SOIC-16	Novel power-leverage technology, regulates LED string up to 350V
	MP4653	Offline	Offline	Ext FET	1	Ext FET	0.2	20 to 250	✓	LLC	SOIC-20	LIPS CC/CV mode, low BOM cost, high efficiency
	MP4655	Offline	Offline	Ext FET	1	Ext FET	0.2	40 to 130	✓	LLC	SOIC-28	Single-stage LED driver and system voltage regulator
	MP4700	Offline	Offline	Ext FET	1	Ext FET	0.3	Up to 160	Ext Comp	Buck	SOIC-8E	BCM zero current and valley voltage switching >97% efficiency, low BOM, low-power stress
	MP24830 -C470	Offline	Offline	Ext FET	1	Ext FET	0.2	50 to 365	✓	Buck-Boost	SOIC-14 QFN-14	Power leverage in 2.5 power stage, low BOM cost and high efficiency

LED LIGHTING & ILLUMINATION

Photo Flash Drivers

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	V_{out} (Max) (V)	# of Channels	I_{out} (Max) (A)	F_{sw} (MHz)	Type	Package	Notes
	MP3214	2.7	5.5		1	0.5	1.35	Charge Pump	QFN-16 (3x3)	Charge pump
	MP3331	2.7	5.5		1	2	1 / 2 / 3 / 4	Boost	WLCSP-9 (1.7x1.7)	2A boost, I ² C, sync rectification output disconnect
	MP3332	2.7	5.5	5	2	3	1 / 2 / 3 / 4	Boost	WLCSP-16 (1.7x1.7)	3A boost, I ² C, sync rectification output disconnect

ANALOG INPUT | CLASS-D AUDIO

Mono

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	P_{out} (W)	Efficiency (%)	THD+N (%)	PSRR (dB)	Package	Notes
MP1720	2.5	5.5	2.7	90	0.11 @ 1W	60	QFN-10 (3x3) MSOP-10E	BTL, low EMI, high efficiency, flexible switching frequency setting
MP1740	2.5	5.5	3	90	0.11 @ 1W	62	9-Ball WLCSP-9 (1.5x1.5)	BTL, ultra-small for portable devices and mobile phones
MP7731	9.5	18	30	90	0.10 @ 1W	60	TSSOP20 F	30W amplifier, exposed pad
MPQ7731	9.5	18	30	90	0.10 @ 1W	60	TSSOP20 F	30W amplifier, exposed pad, industrial grade
MP7741	9.5	36	10	94	0.02 @ 1W	58	QFN-10 (3x3)	Single-ended, fully integrated audio amplifier
MP7740	9.5	36	15	90	0.018 @ 1W	60	SOIC-8	15W, single-ended amplifier
MP7747	9.5	36	20	91	0.02 @ 1W	59	QFN-10 (3x3)	Single-ended, fully integrated audio amplifier

Stereo

Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	P_{out} (W)	Efficiency (%)	THD+N (%)	PSRR (dB)	Package	Notes
MP7722	9.5	24	20 (2x)	93	0.06 @ 1W	60	TSSOP20 F	Single-ended audio amplifier, exposed pad
MP7745	9.5	26	20 (2x)	93	0.05 @ 1W	59	TSSOP20 F	Single-ended, fully integrated audio amplifier, P2P with MP7722, exposed pad
MP7742	9.5	28	15 (2x)	90	0.018 @ 1W	60	TSSOP20 F	Single-ended, fully integrated audio amplifier, P2P with MP7722, exposed pad
MP7748S	9.5	36	30 (2x)	94	0.02 @ 1W	59	TSSOP28 EP	2 x 30W SE or 1 x 60W BTL audio amplifier
MP7751	5	26	20 (2x)	92	0.06 @ 1W	60	TSSOP28 EP	5 - 26VDD, 2 x 20W BTL audio amplifier
MP7752	5	18	15 (2x)	90	0.06 @ 1W	60	TSSOP28 EP	5 - 18VDD, 2 x 15W filterless BTL audio amplifier
MP7770	9.5	36	45 (2x)	95	0.03 @ 1W	60	TSSOP28 F	2 x 45W SE or 1 x 90W BTL audio amplifier, 8.5A peak, exposed pad

BRUSHED DC SOLENOID DRIVERS | MOTOR DRIVERS

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	# of Half-Bridges	I_{out} (Max) (A)	Control Interface	Package	Notes
	MP6513L	2.5	5.5	2	0.6	PWM	TSOT23-6	H-bridge
NEW	MP6514	2.5	14	2	0.6	PWM	UTQFN-8 (2x2)	H-bridge with separate HS/LS control
	MP6507	2.7	15	4	0.7	PWM	TSSOP16 EP QFN-16 (3x3) QFN-16 (4x4)	Bipolar stepper
	MP6508	2.7	18	4	1.2	PWM	TSSOP16 EP QFN-16 (4x4)	Bipolar stepper
	MP6513	2.5	21	2	0.8	PWM	TSOT23-6	H-bridge
	MP8044	7.5	22	2	5	PWM	TSSOP20 F	Full-bridge driver
	MP8042	7.5	24	2	5	PWM	TSSOP20 E	Full-bridge driver
	MP8040	7.5	24	1	9	PWM	SOIC-8 EP	Half-bridge driver
	MP8049S	5	26	4	5.5	PWM	QFN-40 (5x5)	Dual full-bridge driver
NEW	MP6519	2.5	28	2	5	PWM	QFN-19 (3x3)	H-bridge current regulator
NEW	MPQ6523	7	28	3	0.9	PWM	QFN-24 (4x4)	Triple half-bridge driver for automotive HVAC
NEW	MPQ6526	7	28	6	0.9	PWM	QFN-24 (4x4) QFN-24 (5x5)	Hex half-bridge driver for automotive HVAC
	MP8046	7.5	28	2	5	PWM	TSSOP20 F	Full-bridge driver
NEW	MP6515	5.4	35	2	2.8	PWM	QFN-20 (3x4) TSSOP16 EP	H-bridge
NEW	MP6516	5.4	35	2	2.8	PWM	TSSOP16 EP	H-bridge with separate HS/LS control

INTEGRATED BLDC

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	# of Half-Bridges	I_{out} (Max) (A)	Hall Input	Package	Notes
	MP6505	4.5	16	2	0.4	Yes	QFN-16 (3x3) TSSOP16 EP	Single-phase brushless DC fan driver
	MP6510	4.5	16	2	1.2	Yes	SOIC-8 EP QFN-8 (3x3) QFN-9 (3x3)	Single-phase brushless DC fan driver
NEW	MP6517A	3.3	16	2	2	Yes	TSOT23-6 TSOT23-6-SL	Programmable single-phase, BLDC fan driver with integrated hall
NEW	MP6517	3.3	18	2	1.2	Yes	TSOT23-6 TSOT23-6-SL	Programmable single-phase, BLDC fan driver with integrated hall
	MP6536	5	26	3	5.5	No	QFN-16 (5x5)	3-channel half-bridge driver

BRUSHLESS DC PRE-DRIVERS | MOTOR DRIVERS

	Part Number	Supply Voltage (Min) (V)	Supply Voltage (Max) (V)	V_{SW} (Max) (V)	# of Half-Bridges	I_{SINK} / I_{SOURCE} (A)	Hall Input	Package	Notes
	MP1924A	8	15	100	1	4.5 / 2.6		QFN-10 (4x4) SOIC-8	Half-bridge gate driver
	MP1921A	9	18	100	1	2.5 / 1.5	No	SOIC-8 EP, QFN-8 (3x3) QFN-9 (3x3), QFN-10 (4x4)	Half-bridge gate driver
	MP6534	5	55	55	3	1 / 0.8	No	QFN-41 (5x5)	3-phase BLDC pre-driver with comm. logic and buck regulator
	MP6535	5	55	55	3	1 / 0.8	Yes	QFN-40 (5x5)	3-phase BLDC pre-driver with buck regulator
	MP6528	5	60		2	1 / 0.8		QFN-28 (4x4)	H-bridge pre-driver
	MP6530	5	60	60	3	1 / 0.8	No	QFN-28 (4x4) TSSOP28 EP	3-phase BLDC pre-driver
	MP6532	5	60	60	3	1 / 0.8	Yes	QFN-28 (4x4) TSSOP28 EP	3-phase BLDC pre-driver with commutation logic
NEW	MP6537	8	100		3	1 / 0.8	No	QFN-28 (4x5)	3-phase, BLDC pre-driver, PWM, and enable inputs
NEW	MP6538	8	100		3	1 / 0.8	Yes	QFN-28 (4x5)	3-phase, BLDC pre-driver with hall commutation logic
NEW	MP6539	8	100		3	1 / 0.8	No	QFN-28 (4x5) TSSOP28 EP	3-phase, BLDC pre-driver, and HS and LS inputs

STEPPER

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	I_{OUT} (Max) (A)	Step Mode	Control Interface	Package	Notes
	MP6507	2.7	15	0.7	1, ½	Parallel	TSSOP16 EP, QFN-16 (3x3) QFN-16 (4x4), TSSOP16	Bipolar stepper
	MP6508	2.7	18	1.2	1, ½	Parallel	TSSOP16 EP QFN-16 (4x4)	Bipolar stepper
	MP6509	2.7	18	1.2	1, ½	Parallel	TSSOP28 EP	Bipolar stepper, current attenuation
NEW	MP6504	8	32	2	1, ½, ¼, ⅙	Indexer	QFN-28 (4x5)	Bipolar stepper with micro-stepping
NEW	MP6500	4.5	35	2.5	1, ½, ¼, ⅙	Indexer	QFN-24 (5x5) TSSOP28	Bipolar stepper with micro-stepping and internal current sense
	MP6501A	8.5	35	2.5	1, ½, ¼, ⅙	Indexer	TSSOP28 EP	Bipolar stepper with micro-stepping
	MP6518	8.5	35	1.5	1, ½, ¼, ⅙	Indexer	TSSOP28 EP	Bipolar stepper with micro-stepping
NEW	MP6600	4.5	35	1.5	1, ½, ¼, ⅙	Indexer	QFN-24 (4x4)	Bipolar stepper with micro-stepping and internal current sense

MAGALPHA SERIES | POSITION SENSORS**Contactless Angle Sensors**

	Part Number	Resolution	Interface	Output	Supply Voltage (V)	Sensing Range	Field Strength Detection	Filter Cutoff Frequency (Hz)	Side-Shift Mounting Capability	Package	Notes
NEW	MA102	12-Bit	SPI	Digital, UVW	3 - 3.6	30mT - No Upper Limit	✓	390	✓	QFN-16 (3x3)	Motor block commutation
NEW	MA302	12-Bit	SPI	Digital, UVW, ABZ	3 - 3.6	30mT - No Upper Limit	✓	390	✓	QFN-16 (3x3)	Motor position control
NEW	MA310	12-Bit	SPI	Digital, ABZ	3 - 3.6	15mT - No Upper Limit	✓	93	✓	QFN-16 (3x3)	Motor position control at low field
NEW	MA702	12-Bit	SPI, SSI	Digital, PWM, ABZ	3 - 3.6	30mT - No Upper Limit	✓	390	✓	QFN-16 (3x3)	Multi-purpose encoder
NEW	MA704	10-Bit	SPI, SSI	Digital, PWM, ABZ	3 - 3.6	30mT - No Upper Limit	✓	2970	✓	QFN-16 (3x3)	High-dynamic encoder
NEW	MA710	12-Bit	SPI, SSI	Digital, PWM, ABZ	3 - 3.6	15mT - No Upper Limit	✓	93	✓	QFN-16 (3x3)	Low-field encoder
NEW	MA730	14-bit	SPI, SSI	Digital, PWM, ABZ	3 - 3.6	40mT - No Upper Limit	✓	23	✓	QFN-16 (3x3)	High-accuracy encoder
NEW	MA800	8-Bit	SPI, SSI	Digital	3 - 3.6	30mT - No Upper Limit	✓	200		QFN-16 (3x3)	Rotary knob
NEW	MA820	8-Bit	SPI	Digital, ABZ	3 - 3.6	30mT - No Upper Limit	✓	200		QFN-16 (3x3)	Rotary knob
NEW	MA850	8-Bit	SPI	Digital, PWM	3 - 3.6	30mT - No Upper Limit	✓	200		QFN-16 (3x3)	Rotary knob

ANALOG SWITCH | PRECISION ANALOG

Part Number	$V_{in} (Min) (V)$	$V_{in} (Max) (V)$	# of Channels	$T_{ON} (ns)$	$T_{OFF} (ns)$	$R_{DS(ON)} (Max) (\Omega)$	Package	Notes
MP2735	1.65	5.5	2	29	23	0.45	QFN-10 (1.4x1.8)	Low-voltage, dual SPDT
MP2736	1.65	5.5	2	29	23	0.45	QFN-10 (1.4x1.8)	Low-voltage, dual SPDT, EN function

OPERATIONAL AMPLIFIERS

Part Number	$V_{in} (Min) (V)$	$V_{in} (Max) (V)$	GBW (kHz)	$I_o (Typ) (\mu A)$	PSRR (dB)	Slew Rate (V/ μs)	Offset Voltage (mV)	Package	Notes
MP8102	1.8	5.5	200	7.5	80	0.1	1	TSOT23-5	Ultra-low power, 600kHz op amp
MP8101	1.8	5.5	400	11	80	0.2	1	TSOT23-5	Ultra-low power, 400kHz op amp
MP8103	1.8	5.5	200	14	80	0.1	1	MSOP-8	Dual ultra-low power, 600kHz op amp
MP8104	1.8	5.5	400	11	80	0.2	1	TSOT23-5	Ultra-low power, 400kHz, industry-standard pin out
MP8130	2.7	36	100	10	80	0.1	1	TSOT23-5	Ultra-low power, 200kHz, high-voltage op amp
MP8110	2.5	40	12	0.05	0.5			SOIC-8 MSOP-8	High-side current sense

VOLTAGE REFERENCE

Part Number	$V_{in} (Min) (V)$	$V_{in} (Max) (V)$	$V_{OUT} (V)$	Initial Accuracy (%)	Operating Current (mA)	$Z_{OUT} (\Omega)$	Package	Notes
MP8201	1.2	12	1.2 to 10	0.5	60 μA to 20mA	1	SOT23	Precision adjustable, shunt voltage regulator, 1.0V shunt reference
MP8200	1	12	1	1	100 μA to 10mA	0.5	SOT23	1.0V precision shunt reference

ELECTRONIC FUSES (INTEGRATED HOT-SWAP SWITCHES)

Active-High Enable Logic

	Part Number	V_{in} (Min) (V)	V_{in} (Max) (V)	Cont Current (Max) (A)	Short-Circuit Current (Max) (A)	Fault Flag	Output Discharge	Package	Notes
Sampling	MP5016-L	2.7	15	0.7 to 5			Yes	QFN-10 (1.5x2)	Has latch-off OCP, over-voltage clamp and reverse blocking
	MP5075L	3	5.5	1	7		Yes	SOT563 (1.6x1.6)	OCP, thermal protection, small package
	MP5073	0.5	5.5	2	2		Yes	QFN-12 (2x2)	Programmable current limit, power good, slew rate control
	MP5083	0.5	5.5	2	Prog		Yes	QFN-12 (2x2)	5% current monitoring (from 0.6A to full load), PG, slew rate control
	MP5075	3	5.5	2.4	7		Yes	SOT563 (1.6x1.6)	OCP, thermal protection, small package
	MP5095	0.5	5.5	2.3 (x2)	5		Yes	TSOT23-8	Dual channel, low I_{OL} , 30mΩ low $R_{DS(ON)}$, reverse-block connection
	MP5090	0.5	5.5	3 / 2	5		Yes	TQFN-8 (1.5x2) CSP (1.05x1.6)	Dual channel, low I_{OL} , 30mΩ low $R_{DS(ON)}$, reverse-block connection, small package
Sampling	MP5094	5 / 12	16 / 24	4 / 2.95	8		No	TSOT23-8	Dual-channel, over voltage clamp, OCP hiccup
	MP5010B	3	18	4.2	Prog	Thermal Fault = Tri-State	No	QFN-10 (3x3)	1 to 5A, 40mΩ $R_{DS(ON)}$, prog current limit, slew-rate control, 2.58ms soft-start time
	MP5013A	3	18	4.2	Prog	Short-/Over-Current, Under-Voltage, Over-Voltage, Thermal Shutdown	No	TSOT23-8	5V, 1 to 5A, 36mΩ $R_{DS(ON)}$, prog current limit, slew-rate control, 5A / 2.8A trip / hold current
	MP5000A	10	18	4.2	Prog	Thermal Fault = Tri-State	No	QFN-10 (3x3)	Inrush current performance improved version of MP5000S, P2P with NIS5132
	MP5014A	10	13.8	5	Prog	Short-/Over-Current, Under-Voltage, Over-Voltage, Thermal Shutdown	No	TSOT23-8	12V, 1 to 5A, 36mΩ $R_{DS(ON)}$, prog current limit, over-voltage clamp, slew-rate control
	MP5016	2.7	15	5	8	Thermal Fault = Tri-State	Yes	QFN-10 (1.5x2)	Over-voltage clamp, reverse-current blocking, thermal shutdown and auto-retry
	MP5016H	2.7	22	5	8	Short-/Over-Current, Under-Voltage, Over-Voltage, Thermal Shutdown	Yes	QFN-10 (1.5x2)	Over-voltage clamp, reverse-current blocking, thermal shutdown and auto retry
	MP5018	4.5	5.5	5	Prog	Thermal Fault = Tri-State	No	QFN-12 (2x3)	Reverse-current blocking, 1 to 5A, 45mΩ $R_{DS(ON)}$, prog current limit, OTP latch-off
	MP5017	3	5.5	5	Prog		Yes	QFN-12 (2x3)	1 to 5A current limit switch, over-voltage clamp, reverse block, OTP auto-retry
Sampling	MP5036	2.9	14	5	8		Yes	TSOT23-6	0.4 - 5A programmable current limit, fixed 15V over voltage clamp, fast output OVP response
Sampling	MP5036A	2.9	5.5	5	8		Yes	TSOT23-6	0.4 - 5A programmable current limit, fixed 5.75V over voltage clamp, fast output OVP response
	MP5077	0.5	5.5	7	7		Yes	TQFN-12 (2x2)	Programmable current limit, slew-rate control, fast-off protection
	MP5087	0.5	5.5	7	7		Yes	TQFN-12 (2x2)	5% current monitoring (from 1.5A to full load), PG slew rate control, fast-off protection
	MP5087A	0.5	5.5	7	7		Yes	TQFN-12 (2x2)	Programmable current limit, slew rate control, fast-off protection
	MP5086	2.3	5.5	7	7		Yes	TQFN-12 (2x2)	5% current monitoring (from 1.5 to full load), NTC comparator, open-drain OTP indicator
	MP5092	0.5	5.5	7.5 (x2)	7		Yes	TQFN-18 (2x3)	Dual-channel, programmable current limit, slew-rate control, fast-off protection
	MP5021B	4.8	16	10	Prog	Current Limit, Thermal Shutdown and Damaged MOSFET	Yes	QFN-22 (3x5)	12V, 7mΩ $R_{DS(ON)}$ hot-swap protection device with current monitoring
	MP5022A	8	16	15	Prog	Current Limit, Thermal Shutdown and Damaged MOSFET	Yes	QFN-22 (3x5)	12V, 3mΩ $R_{DS(ON)}$ hot-swap protection device, current monitoring and controlled R_{ON} mode
	NEW MP5022C	4.5	16	15	36		No	QFN-22 (3x5)	12V, 3mΩ $R_{DS(ON)}$ hot-swap protection, current monitoring
Sampling	MP5061	4.5	28	15	25	Yes	Yes	QFN-22 (3x5)	Enable blanking time set and 36V input transient before V_{OUT} start-up; with current monitoring

USB LOAD SWITCHES | E-FUSE, USB & LOAD SWITCHES

Single-Channel

	Part Number	V_{IN} (Min) (V)	V_{IN} (Max) (V)	Cont Current (Max) (A)	Short-Circuit Current (Max) (A)	Enable Logic	Fault Flag	Output Discharge	Package	Notes
	MP62055	2.7	5.5	0.5	1.1	Active-High	Over-Current, Active-High	No	TSOT23-5	Small package, P2P with TPS2051B
	MP6211	2.7	5.5	1	2.2	Active-High	Over-Current, Active-Low	No	SOIC-8E	P2P with TPS2051B
	MP6212	2.7	5.5	1	2.2	Active-Low	Over-Current, Active-Low	No	SOIC-8E	With 90 μ A I_o and 1.5A current limit
	MP62550 MP62551	2.5	5.5	1.5	1.7	Active-Low Active-High	Over-Current, Active-Low	No	TQFN-6 (2x2) TSOT23-6	Precise adj current limited power dist. switch 60mA-1.7A, 88/100m Ω @ 100mA, 1.5 μ A max shut. current
NEW	MP5032	3.6	14	3	6	Active-High		No	TSOT23-8	QC 3.0 controller with integrated current-limit switch
NEW	MP5034	3.6	14		6	Active-High		No	TSOT23-8	USB charging port controller integrating QC 3.0 protocol
NEW	MP5030C		14	3	6			No	QFN-10 (1.5x2)	USB charging port controller with current limit switch, supporting CDP, DCP, and QC 3.0 modes
Sampling	MP5030D		14	3	6	Active-High		No	QFN-10 (1.5x2)	Supports load detection feature

Dual-Channel

	MP62351	2.7	5.5	0.5 (x2)	0.75	Active-High	Over-Current, Active-Low	Yes	SOIC-8 MSOP-8	Reverse current blocking, UVLO, P2P with LM3526
	MP6231 MP6232	2.7	5.5	0.5 (x2)	1.1	Active-High Active-Low	Over-Current, Active-High	No	SOIC-8 SOIC-8E MSOP-8E	Reverse current blocking, UVLO, P2P with TPS2052B and TPS2042B
	MP62340 MP62341	2.7	5.5	1 (x2)	1.5	Active-Low Active-High	Over-Current, Active-Low	No	MSOP-8E SOIC-8	Reverse current blocking, UVLO, P2P with TPS2066/2
	MP62340-1	2.7	5.5	1 (x2)	1.5	Active-Low	Over-Current, Active-Low	Yes	MSOP-8E SOIC-8	Reverse current blocking, UVLO, P2P with TPS2066/2
	MP6233	2.7	5.5	1.5 (x2)	2.6	Active-High	Over-Current, Active-Low	No	MSOP-8E	Reverse current blocking, UVLO

HIGH-VOLTAGE ANALOG SWITCHES | ULTRASOUND MUX

	Part Number	# of Channels	V_{SIG} (Max) (V)	R_{SWITCH} (Ω)	Output Bleed Resistor	Switch Configuration	Bandwidth (MHz)	Package	Notes
NEW	MP4816A	16	± 90	12.5	✓	SPST	80	TQFP-48 (7x7)	16-bit serial shift register control
NEW	MP4816	16	± 90	12.5		SPST	80	TQFP-48 (7x7)	16-bit serial shift register control
NEW	MP4832A	32	± 90	14	✓	SPST	80	QFN-72 (10x10)	32-bit serial shift register control with bank switching
	MP4832	32	± 90	14		SPST	80	QFN-72 (10x10)	32-bit serial shift register control with bank switching

GET EV READY

We offer a wide variety of EV Kits & EV Boards to meet all of your power design needs (**over 500+** options).

Design Flexibility

Wide input voltage range

Superior Performance

Robust special features

Increased Reliability

Full protection features



This programming kit for configurable modules allows you to program, optimize, and update your design in a matter of hours.

**Go to [MonolithicPower.com](https://www.monolithicpower.com)
to order our 500+ products**

PART NUMBERING NOMENCLATURE

PART NUMBERING EXAMPLE: MP1234EK-LF-Z

MP	1234	E		K						-LF	-Z
Monolithic Power	Part Number	Temperature Grade (T _A)				Package				Lead Free	Tape & Reel
MP### MP#### MP##### MPQ##### HF#### NB###	Older Devices	C	0°C to +70°C	C	WLCSP	QM	QFN (6x7)	C	C-Spec	-LF	-Z
D		-40°C to +85°C	D	QFN (2x3)	QN	QFN (7x7)	E	Enhanced			
E		-20°C to +85°C	E	SC70	QP	QFN (7x8)	R	Reserve Lead Bend or Top Exposed Pad			
H		-40°C to +125°C	F	TSSOP w/ Exposed Pad	QQ	QFN (8x8)	S	Customer Specific			
K		-55°C to +125°C	FP	QFP	QV	QFN (3x5)	T	Thin Package			
			G	QFN (2x2)	QW	QFN (4x6)	U	Ultra-Thin Package			
			H	MSOP w/ Exposed Pad	QX	QFN (6x10)					
			J	TSOT23 (0.9mm Height)	QY	QFN (5x8)					
			K	MSOP	R	QFN (4x4)					
			L	QFN (3x4)	S	SOIC					
			M	TSSOP	SD	SOD123					
			N	SOIC w/ Exposed Pad	T	SOT23 (1.1mm Height)					
			P	PDIP (300 Mil)	U	QFN (5x5)					
			Q	QFN (3x3)	V	QFN (4x5)					
			QD	QFN (1x1.5)	W	SOIC - WB w/ Exposed Pad					
			QF	QFN (1.2x1.6)	X	Sorted Wafer					
			QG	QFN (1.4x1.8)	XN	Unsorted Wafer					
			QH	QFN (1.5x2)	Y	SOIC-WB (Wide Body)					
			QJ	QFN (5x6)	Z	TO220					
			QK	QFN (6x6)	ZF	TO263					
Parts introduced after July 2011											
MP### MP#### MP##### MPQ##### HF#### NB###	Newer Devices	G	Temperature Internal to Datasheet -40°C to +125°C (T _J) Standard	Same as Above				No LF Indicator	-Z		

CONTACT & ORDERING

Online Order Support:

1-408-826-0736
eOrder@monolithicpower.com



Regional Headquarters

MPS Seattle

4040 Lake Washington Blvd. NE
Suite 201
Kirkland, WA 98033, USA
Tel: +1 425-296-9956

MPS San Jose

79 Great Oaks Blvd,
San Jose, CA 95119, USA
Tel: +1 408-826-0600

MPS China-Chengdu

#8 Kexin Road West Park of Export
Processing Zone West Hi-Tech Zone
Chengdu, Sichuan, 611731
Tel: +86-28-8730-3000

MPS Switzerland

MPS Tech Switzerland Sàrl/Route de
Lully 5 A1131 Tolochenaz
Switzerland
Tel: +41-21-805-0100

MPS China Hangzhou

Floor 6, Building A2, Xixi Center,
No.588 West Wenyi Road, Xihu District
Hangzhou, Zhejiang, 310012
Tel: +86-571-8981-8588

MPS Investor Relations

Tel: +1 408-826-0777

Asia Sales Offices

MPS China Chengdu

#8 Kexin Road West Park of Export
Processing Zone West Hi-Tech Zone
Chengdu, Sichuan, 611731
Tel: +86-28-8730-3000

MPS China Hangzhou

Floor 6, Building A2, Xixi Center,
No.588 West Wenyi Road, Xihu District
Hangzhou, Zhejiang, 310012
Tel: +86-571-8981-8588

MPS Korea

B-609 Uspace 2 670, Daewangpangyo-ro
(Sampyeong-dong), Bunang-Gu, Seongnam-
City, Gyeonggi-do, 13494, Korea
Tel: +82-2-598-2307

MPS China Shanghai

Room 1606-1608, Magnolia Plaza,
No.777, Hongqiao Road,
Xuhui District Shanghai 20030
Tel: +86-21-2225-1700

MPS China Shenzhen

Room 1401, Kingkey Riverfront Times
Square Branch North,
Binhe Avenue South, Futian District
Shenzhen Guangdong, 518054
Tel: +86-755-3688-5818

MPS Taiwan

29 / F, 97, No. 1, Xintai 5th Rd
Xizhi District, New Taipei City
Tel: +886-2-86911600

MPS Singapore

60 Paya Lebar Road, Paya Lebar Square
#09-38, Singapore 409051
Tel: +65-66787665

MPS Japan

Shinjuku Mitsui Building II Room 903,
3-2-11 Nishishinjuku Shinjuku-ku,
Tokyo 160-0023, Japan
Tel: +81-3-5989-0885

MPS India

Unit G12, Prestige Towers,
No 99 / 100, Residency Road,
Bangalore 560025
Tel: +91 80 4124 0312 / 20

US Sales Offices

MPS US

79 Great Oaks Blvd,
San Jose, CA USA
Tel: +1 408-826-0600

MPS Detroit

37000 Grand River Ave., Suite 325,
Farmington Hills, MI 48335
Tel: +1 248-907-0222

EU Sales Offices

MPS Europe

Alte Landstr. 25
85521 Ottobrunn
Tel: +49 89 80913512-0

MPS Spain

C/Calabria 169 3th floor, 2nd door
008015 Barcelona
Spain
Tel: +34 93 1815400

Want to order?

Visit MonolithicPower.com

POWER MANAGEMENT SOLUTIONS

Selector Guide

...



MPS
MonolithicPower.com

© 2018 Monolithic Power Systems, Inc.
Patents Protected. All Rights Reserved.